


## Cisco 8-Port 100BASE-TX Fast Ethernet Shared Port Adapter

The Cisco® Interface Flexibility (I-Flex) design combines shared port adapters (SPAs) and SPA interface processors (SIPs), taking advantage of an extensible design that helps enable service prioritization for voice, video, and data services. Enterprise and service provider customers can take advantage of improved slot economics resulting from modular port adapters that are interchangeable across Cisco Systems® routing platforms. The Cisco I-Flex design maximizes connectivity options and offers superior service intelligence through programmable interface processors that deliver line-rate performance. Cisco I-Flex enhances speed-to-service revenue and provides a rich set of quality-of-service (QoS) features for premium service delivery while effectively reducing the overall cost of ownership. This data sheet contains the specifications for the Cisco 8-port Fast Ethernet SPA (refer to Figure 1).

**Figure 1**

Cisco 8-Port 100BASE-TX Fast Ethernet (FE) SPA

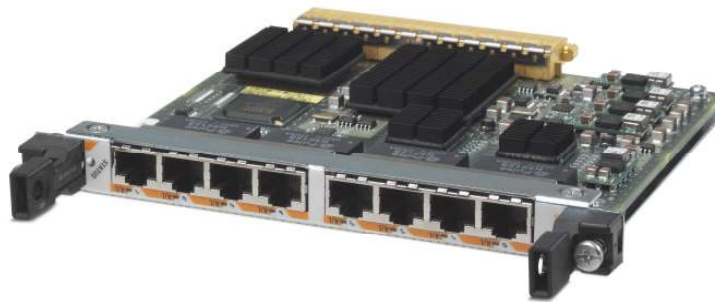

### Product Overview

The Cisco 8-port FE SPA is available on high-end Cisco routing platforms offering the benefits of network scalability with lower initial costs and ease of upgrades. The Cisco SPA/SIP portfolio continues the company's focus on investment protection along with consistent feature support, broad interface availability, and the latest technology. The Cisco SPA/SIP portfolio allows deployment of different interfaces (packet over SONET/SDH [POS], ATM, Ethernet, etc.) on the same interface processor.

Fast Ethernet interfaces are commonly used for interconnecting routers or other devices within a central office or data center or in a metropolitan-area network (MAN). With Fast Ethernet SPAs, users can mix-and-match SPA ports with other types of interfaces in the same slot. Each SPA provides standards-based Fast Ethernet implementation for compatibility and interoperability.

### Applications

The Cisco Fast Ethernet SPAs can be used in multiple applications, including:

- Inter- and intrapoint of presence (POP) aggregation
- Metro Ethernet
- Internet peering

## Key Features and Benefits

The Cisco SPA/SIP portfolio offers many advantages, including:

- Industry’s most modular, flexible, intelligent interface processors
  - Unmatched flexibility, providing mix-and-match capability of interface types on the same interface processor for consistent services, independent of access technology.
  - Pioneering programmable interface processors that provide flexibility for the service diversity required in next-generation networks.
  - Innovative design that provides intelligent delivery of services without compromising on performance.
- Increased speed-to-service revenue
  - The future proof programmable Cisco architecture extended to 10 Gbps dramatically improves customer density, increasing potential revenue per platform.
  - Interface breadth (copper, channelized, POS, ATM, and Ethernet) on a modular interface processor allows service providers to more quickly roll out new services, helping ensure that all customers, large and small, receive consistent, secure, and guaranteed services.
  - High-density Small Form-Factor Pluggable (SFP) interfaces are featured for high-port-count applications with reach flexibility. Future optical technology improvements can be adopted using existing SPAs.
- Dramatically improved financials of your routing purchase
  - Improved slot economics and increased density reduce capital expenditures (CapEx).
  - The ability to easily add new interfaces as they are needed helps enable a “pay-as-you-grow” business model while still offering a high-density solution.
  - SPAs are shared across multiple platforms, and can be easily moved from one to another, providing consistent feature support, accelerated product delivery, and a significant reduction in operating expenses (OpEx) through common sparing as service needs change.

## Product Specifications

Table 1 provides specifications of the Cisco Fast Ethernet SPA.

**Table 1.** Product Specifications

Features	Descriptions
Product compatibility	<ul style="list-style-type: none"> <li>• Cisco 12000 Series Router</li> <li>• Cisco XR 12000 Series Router</li> </ul>
Port density per SPA	8 ports of Fast Ethernet
Physical interfaces	RJ-45 with support up to 100 meters Cat-5 UTP or STP cable
LED indicators	<p>SPA status – Bicolor green and amber LEDs encode the SPA status as follows:</p> <ul style="list-style-type: none"> <li>• LED off – SPA is powered off</li> <li>• LED amber – SPA is powered on and initializing</li> <li>• LED green – SPA is powered on and operational</li> </ul> <p>In addition to the status LED, the SPAs also have a bicolor, surface-mount, right-angle LED dedicated to each port to indicate port status. The green and amber LEDs encode the port status as follows:</p> <ul style="list-style-type: none"> <li>• LED off – Port is not enabled by software</li> <li>• LED – Port is enabled by software, but there is a problem with the Ethernet link</li> <li>• LED amber – Port is powered on and initializing</li> <li>• LED green – Port is enabled by software, and there is a valid Ethernet link</li> </ul>

Features	Descriptions
Features and functions	<ul style="list-style-type: none"> <li>• Autonegotiation</li> <li>• Full-duplex operation</li> <li>• 802.1Q VLAN termination</li> <li>• Jumbo frames support (9188 bytes)</li> <li>• Support for command-line interface (CLI)-controlled online insertion and removal (OIR)</li> <li>• 802.3x flow control</li> <li>• Up to 4000 VLANs per SPA</li> <li>• Up to 5000 MAC accounting entries per SPA (source MAC accounting on the ingress and destination MAC accounting on the egress)</li> <li>• Up to 2000 MAC address entries for destination MAC address filtering per SPA, and up to 1000 MAC address filtering entries per port</li> <li>• Per-port byte and packet counters for policy drops; oversubscription drops; cyclic-redundancy-check (CRC) error drops; packet sizes; and unicast, multicast, and broadcast packets</li> <li>• Per-VLAN byte and packet counters for policy drops; oversubscription drops; and unicast, multicast, and broadcast packets</li> <li>• Per-port byte counters for good bytes and dropped bytes</li> </ul> <p>Other software features supported:</p> <ul style="list-style-type: none"> <li>• Ethernet over Multiprotocol Label Switching (EoMPLS)</li> <li>• QoS</li> <li>• Hot Standby Router Protocol (HSRP)</li> <li>• Virtual Router Redundancy Protocol (VRRP)</li> </ul>
Network management	<p>Network management using:</p> <ul style="list-style-type: none"> <li>• Host-system CLI</li> <li>• Simple Network Management Protocol (SNMP)</li> </ul> <p>Inventory- and asset management-related MIBs:</p> <ul style="list-style-type: none"> <li>• Entity-MIB (RFC 2737)</li> <li>• Cisco-entity-asset-MIB</li> </ul> <p>Fault management:</p> <ul style="list-style-type: none"> <li>• Cisco-entity-field-replaceable unit (FRU)-control-MIB</li> <li>• Cisco-entity-alarm-MIB</li> <li>• Cisco-entity-sensor-MIB</li> </ul> <p>Physical interface management:</p> <ul style="list-style-type: none"> <li>• IF-MIB</li> <li>• Etherlike-MIB (RFC 2665)</li> </ul> <p>Other MIBs:</p> <ul style="list-style-type: none"> <li>• Remote Monitoring (RMON)-MIB (RFC 1757)</li> <li>• Cisco-class-based-QoS-MIB</li> <li>• MPLS-related MIBs</li> <li>• Ethernet MIB/RMON</li> </ul>
Reliability and availability	<ul style="list-style-type: none"> <li>• OIR of the SPA within the SIP</li> </ul>

Features	Descriptions
Physical specifications	<ul style="list-style-type: none"> <li>• Weight: 0.75 lb (0.34 kg)</li> <li>• Height: 0.8 in. (2.03 cm) (single height)</li> <li>• Width: 6.75 in. (17.15 cm)</li> <li>• Depth: 7.28 in. (18.49 cm)</li> </ul>
Power	20W (max power consumption)
Environmental specifications	<ul style="list-style-type: none"> <li>• Storage temperature: –38 to 150°F (–40 to 70°C)</li> <li>• Operating temperature, nominal: 32 to 104°F (0 to 40°C)</li> <li>• Operating temperature, short term: 32 to 131°F (0 to 55°C)</li> <li>• Storage relative humidity: 5 to 95% relative humidity</li> <li>• Operating humidity, nominal: 5 to 85% relative humidity</li> <li>• Operating humidity, short term: 5 to 90% relative humidity</li> <li>• Operating altitude: –60 to 4000 meters</li> </ul>
Compliance and agency approvals	<p>Safety</p> <ul style="list-style-type: none"> <li>• UL 60950-1</li> <li>• CSA C22 No. 60950-1</li> <li>• EN 60950-1</li> <li>• IEC 60950-1</li> <li>• AS/NZS 60950</li> <li>• EN 60825-1</li> <li>• EN 60825-2</li> <li>• 21 CFR 1040</li> </ul> <p>EMC</p> <ul style="list-style-type: none"> <li>• FCC Part 15 – Class A</li> <li>• ICES 003 – Class A</li> <li>• CISPR 22 Class A</li> <li>• EN 55022 Class A</li> <li>• EN 300386 Class A</li> <li>• AS/NRZ Class A</li> <li>• VCCI – Class A</li> <li>• EN 50082-1/EN 6100-6-1</li> <li>• EN 55024</li> <li>• BSMI Class A</li> <li>• IEC/EN61000-3-2 Power Line Harmonics</li> <li>• IEC/EN61000-3-3 Voltage Fluctuations and Flicker</li> <li>• IEC/EN61000-4-2 Electrostatic Discharge Immunity (8-kV contact, 15-kV air)</li> <li>• IEC/EN61000-4-3 Radiated Immunity (10 V/m)</li> <li>• IEC/EN61000-4-4 Electrical Fast Transient Immunity (2-kV power, 1-kV signal)</li> <li>• IEC/EN61000-4-5 Surge AC Port (4-kV CM, 2-kV DM)</li> <li>• IEC/EN61000-4-5 Surge Signal Port (1-kV indoor, 2-kV outdoor)</li> <li>• IEC/EN61000-4-5 Surge DC Port (1 kV)</li> <li>• IEC/EN61000-4-6 Immunity to Conducted Disturbances (10 Vrms)</li> <li>• IEC/EN61000-4-8 Power Frequency Magnetic Field Immunity (30 A/m)</li> </ul>

Features	Descriptions
	<ul style="list-style-type: none"> <li>• IEC/EN61000-4-11 Voltage Dips, Short Interruptions, and Voltage Variations</li> </ul> Telecom <ul style="list-style-type: none"> <li>• IEEE 802.3</li> </ul> Industry Standards <p>The Cisco Fast Ethernet SPAs are designed to meet the following requirements (some qualifications are currently in progress):</p> <ul style="list-style-type: none"> <li>• SR-3580 – Network Equipment Building Standards (NEBS): criteria levels (Level 3 compliant)</li> <li>• GR-63-CORE – NEBS: Physical protection</li> <li>• GR-1089-CORE – NEBS EMC and safety</li> </ul>

## Ordering Information

To place an order, visit the [Cisco Ordering Home Page](#) or refer to Table 2.

**Table 2.** Ordering Information

Product Name	Part Number
Cisco 8-Port 100BASE-TX Fast Ethernet Shared Port Adapter	SPA-8XFE-TX
Cisco 8-Port 100BASE-TX Fast Ethernet Shared Port Adapter, spare	SPA-8XFE-TX=

## Service and Support

Cisco offers a wide range of services programs to accelerate customer success. These innovative services programs are delivered through a unique combination of people, processes, tools, and partners, resulting in high levels of customer satisfaction. Cisco services help you protect your network investment, optimize network operations, and prepare your network for new applications to extend network intelligence and the power of your business. For more information about Cisco Services, refer to [Cisco Technical Support Services](#) or [Cisco Advanced Services](#).

## For More Information

For more information about the Cisco SPA/SIP portfolio, visit <http://www.cisco.com/go/spa> or contact your local Cisco account representative.

**Corporate Headquarters**

Cisco Systems, Inc.  
170 West Tasman Drive  
San Jose, CA 95134-1706  
USA  
www.cisco.com  
Tel: 408 526-4000  
800 553-NETS (6387)  
Fax: 408 526-4100

**European Headquarters**

Cisco Systems International BV  
Haarlerbergpark  
Haarlerbergweg 13-19  
1101 CH Amsterdam  
The Netherlands  
www-europe.cisco.com  
Tel: 31 0 20 357 1000  
Fax: 31 0 20 357 1100

**Americas Headquarters**

Cisco Systems, Inc.  
170 West Tasman Drive  
San Jose, CA 95134-1706  
USA  
www.cisco.com  
Tel: 408 526-7660  
Fax: 408 527-0883

**Asia Pacific Headquarters**

Cisco Systems, Inc.  
168 Robinson Road  
#28-01 Capital Tower  
Singapore 068912  
www.cisco.com  
Tel: +65 6317 7777  
Fax: +65 6317 7799

Cisco Systems has more than 200 offices in the following countries and regions. Addresses, phone numbers, and fax numbers are listed on **the Cisco Website at [www.cisco.com/go/offices](http://www.cisco.com/go/offices).**

Argentina • Australia • Austria • Belgium • Brazil • Bulgaria • Canada • Chile • China PRC • Colombia • Costa Rica  
Croatia • Cyprus • Czech Republic • Denmark • Dubai, UAE • Finland • France • Germany • Greece • Hong Kong SAR  
Hungary • India • Indonesia • Ireland • Israel • Italy • Japan • Korea • Luxembourg • Malaysia • Mexico  
The Netherlands • New Zealand • Norway • Peru • Philippines • Poland • Portugal • Puerto Rico • Romania • Russia  
Saudi Arabia • Scotland • Singapore • Slovakia • Slovenia • South Africa • Spain • Sweden • Switzerland • Taiwan  
Thailand • Turkey • Ukraine • United Kingdom • United States • Venezuela • Vietnam • Zimbabwe

All contents are Copyright © 1992–2005 Cisco Systems, Inc. All rights reserved. Cisco, Cisco Systems, and the Cisco Systems logo are registered trademarks or trademark of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries.

All other trademarks mentioned in this document or Website are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (0502R) Pa/LW9349 10/05

