

DATA SHEET

CISCO 12000 SERIES PERFORMANCE ROUTER PROCESSOR-1

Service providers face the challenge of scaling their public and private packet infrastructure control planes to meet the ever-growing demands of global IP/Multiprotocol Label Switching (IP/MPLS) connectivity and service availability. The Cisco Performance Route Processor-1 is the next generation route processor for the Cisco 12000 Series. It delivers state-of-the-art technology to address the unique route processing requirements of carrier-grade IP and MPLS packet infrastructures.


PRODUCT OVERVIEW

The Cisco 12000 Series is the premier Internet routing platform for service provider backbone and high-speed edge applications. It features a unique modular, fully distributed system architecture. The Cisco Performance Route Processor (PRP-1) (Figure 1) is the main system processor for the Cisco 12000 Series Router, providing the following essential functions:

- Executes routing protocol stacks
- Performs all protocol communication with other routers
- Builds and distributes forwarding information to all line cards
- Uploads Cisco IOS[®] system images to all installed line cards at power up
- Provides out-of-band system console and auxiliary ports, two 10/100 Ethernet ports for router configuration, and maintenance
- Monitors and manages power and temperature of system components such as line cards, power supplies, and fans

Figure 1

Cisco 12000 Series Performance Route Processor-1

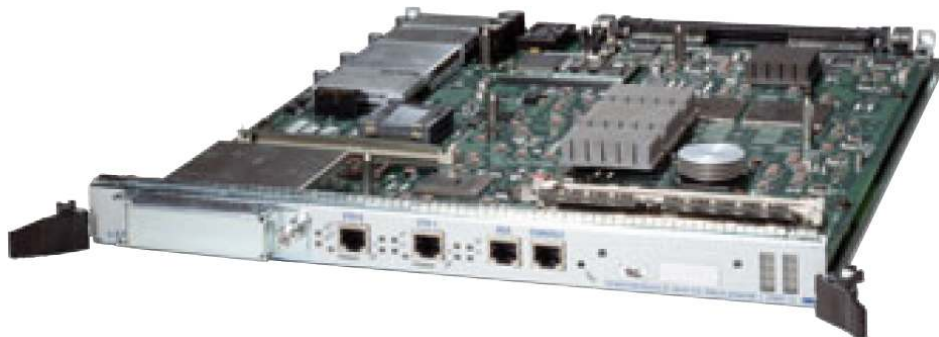


APPLICATIONS

Cisco 12000 Series High Availability

The Cisco 12000 Series delivers comprehensive solutions that enable service providers to deliver high service availability. When two Cisco PRP-1s are installed as shown in Figure 2, Cisco Nonstop Forwarding (NSF) and Stateful Switchover (SSO) provide full and automatic recovery from catastrophic route processor failures without impacting in-service traffic, enabling service providers to raise network availability for Cisco 12000 Series-based infrastructures to 99.999%. Service providers can seize new revenue opportunities by offering high service availability that customers demand for mission-critical applications.

Figure 2

Two Cisco PRP-1s enhance Cisco 12000 Series availability

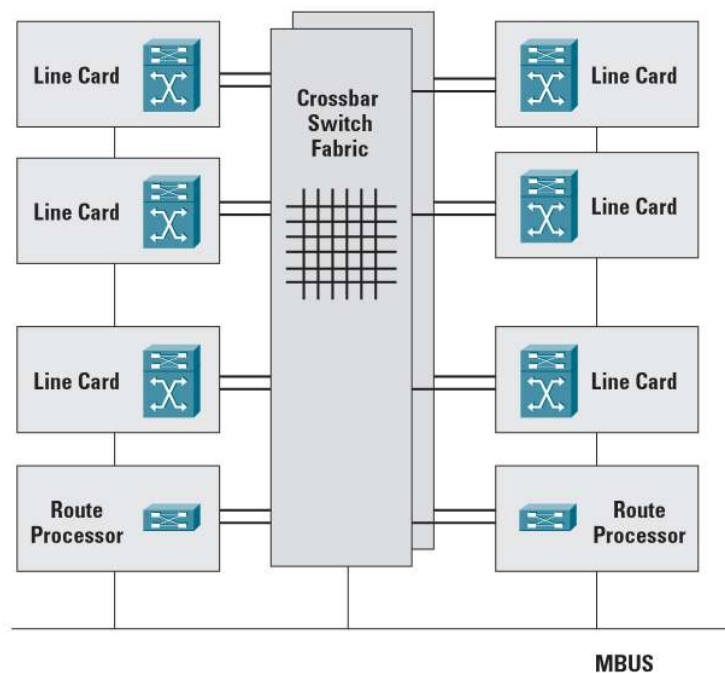

Scaling the Cisco 12000 Series to Support the Largest Network Infrastructures


The Cisco PRP-1 has the memory capacity to support more than 1 million routes, providing extensive headroom to address the largest public and private applications well into the future. The Cisco PRP-1, with its advanced Power PC processor, has the performance to support the fastest route convergence necessary for gigabit and terabit routing applications. The Cisco PRP-1 calculates and updates the routing table and all other control plane activities, including:

- Open Shortest Path First (OSPF), Intermediate System-to-Intermediate System (IS-IS), and Border Gateway Protocol (BGP) routing updates
- Layer 2 “keepalives”
- OSPF, IS-IS, and BGP calculations

- Automatic Protection Switching/Multiplex Section Protection (Packet over SONET [POS] line cards)
- High availability features such as Hot Standby Router Protocol/Virtual Router Redundancy Protocol (HSRP/VRRP), Route Processor Redundancy Plus, Cisco NSF, and Cisco SSO

Figure 3

PRP-1 enables Cisco 12000 Series to scale to support the largest network infrastructures

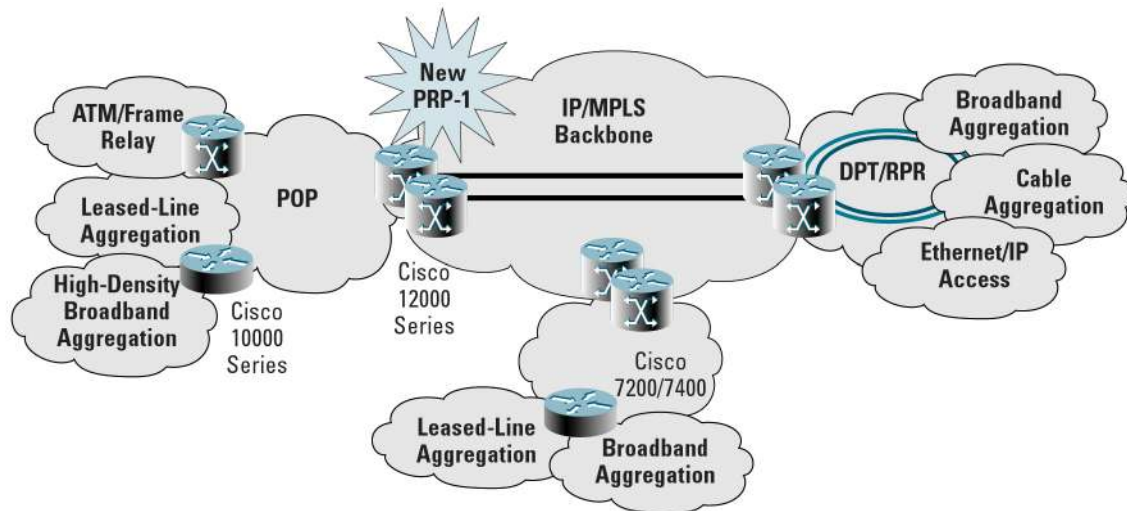

KEY FEATURES AND BENEFITS

The Cisco PRP-1 is the default route processor in Cisco's 12000 family of routers

- Establishing a new benchmark in IP routing convergence for gigabit and terabit routing applications.
- Supporting more than 1 million routes, providing extensive headroom to address the largest public and private applications of today and tomorrow.
- An enhanced switch fabric interface greatly increasing the rate at which BGP and Interior Gateway Protocol (IGP) updates are transmitted to neighboring routers.
- The industry's most complete high availability feature set ensures maximum service availability:
 - Cisco NSF
 - Cisco SSO
 - Redundant Route Processor Plus
 - HSRP/VRRP
 - Non-service impacting online insertion and removal (OIR)
 - MPLS-Fast reroute (MPLS-FRR)
 - Dynamic Packet Transport-Intelligent Protection Switching (DPT-IPS)
 - Synchronous Optical Network (SONET) Automatic Protection Switching (APS)
 - Synchronous Digital Hierarchy (SDH) Multiplex Section Protection (MSP)

Cisco Systems, Inc.

The Cisco 12000 Series Router is part of Cisco's family of multimillion packets-per-second (pps) IP and MPLS routing platforms for building profitable networks in today's communications economy. The Cisco 12000 Series is the premier high-end routing platform for service provider backbone and edge applications, enabling service providers to meet the challenge of building packet networks to satisfy services demand while increasing profitability. The Cisco 12000 Series offers the only portfolio of 10 Gbps per slot systems and interfaces (including POS, Dynamic Packet Transport/Resilient Packet Ring [DPT/RPR], and Gigabit Ethernet [GbE]), delivering 10G economies of scale anywhere in the network. The Cisco 12000 Series provides the highest reliability, the richest set of service enablers, the lowest total cost of ownership, and the only proven investment protection, including systems that can be upgraded in the field to increase switching capacity. This innovative combination of features and capabilities enables service providers to build the most competitive IP and MPLS networks.

SPECIFICATIONS

Table 1. Technical Specifications

Description	Specification
Chassis compatibility	Cisco 12816, 12810, 12416, 12410, 12406, 12404, 12016, 12012, and 12008 Routers
Software compatibility	12.0(22)S
Protocols	<ul style="list-style-type: none"> ▪ Cisco Discovery Protocol (CDP) ▪ Internet Control Message Protocol (ICMP) ▪ Layer 3 routing protocols, including BGPv4, OSPFv2, IS-IS, Enhanced Interior Gateway Routing Protocol (EIGRP), Routing Information Protocol (RIP), RIPv2, IPv4, and IPv6 ▪ Multicast forwarding with support for source-based and shared distribution trees and the following protocols: <ul style="list-style-type: none"> – Protocol Independent Multicast—dense mode (PIM-DM) – PIM—sparse mode (PIM-SM) – AutoRP – Internet Group Management Protocol (IGMP)v1/v2 – Cisco Group Management Protocol (CGMP) – Multiprotocol BGP (MBGP) – Multicast Source Discovery Protocol (MSDP) ▪ MPLS virtual private network (VPN) control plane ▪ MPLS Traffic Engineering control plane (RFCs 2702 and 2430)
Memory	<ul style="list-style-type: none"> ▪ 512 MB default route memory, configurable to 2 GB ▪ 64 MB Boot Flash ▪ 2 MB nonvolatile RAM (NVRAM) ▪ 64 MB Advanced Technology Attachment (ATA) PC Card (included), up to 1 GB ATA PC Card for each of two available slots
Options	<ul style="list-style-type: none"> ▪ Two 1 GB synchronous dynamic RAM (SDRAM) ▪ One 1 GB SDRAM ▪ 128 MB ATA PC Card ▪ 256 MB ATA PC Card ▪ 1 GB ATA PC Card
Main Processor	667 MHz PowerPC processor

Description	Specification
Connectivity	<ul style="list-style-type: none"> ▪ Console port (RJ-45 connector) ▪ Auxiliary port (RJ-45 connector) ▪ Two 10/100 Ethernet ports (RJ-45 connectors)
Reliability and availability	<ul style="list-style-type: none"> ▪ Cisco NSF ▪ Cisco SSO ▪ HSRP/VRRP ▪ Route Processor Redundancy Plus ▪ OIR ▪ MPLS-FRR ▪ DPT-IPS ▪ APS/MSP
Network management	<ul style="list-style-type: none"> ▪ Cisco IOS Software command-line interface (CLI) ▪ Simple Network Management Protocol (SNMP), including SONET/Synchronous Digital Hierarchy (SONET/SDH) Management Information Base (MIB) (RFC 2558) ▪ Cisco 12000 Manager
Indicators	Alphanumeric and LED status display

Table 2. Power Requirements

Description	Specification
Power	60 watts

Table 3. Physical and Environmental Specifications

Description	Specification
Temperature	Operating: 32° to 104°F (0° to 40°C) Storage: -4° to 149°F (-20° to 65°C)
Humidity	Operating (noncondensing): 10–90% Storage (noncondensing): 5–95%
Weight	6.0 lb (2.7 kg)
Dimensions (H x W x D)	14.5 x 1.25 x 18.5 in. (36.8 x 3.2 x 45.7 cm) Width (occupies single thin slot)

Table 4. Regulatory Approvals

Description	Specification
Safety	UL 60950 CSA 22.2-No. 60950 EN60950 IEC 60950 CB Scheme ACA TS001 AS/NZS 3260
EMI	FCC Class A ICES 003 Class A AS/NZS 3548 Class B CISPR 22 Class B EN55022/EN50082-1 Class B ETSI EN 300 386 (EN55022 Class B) VCCI Class B
Immunity	EN 61000-4-2, ESD Level 4 (15-kV air, 8-kV contact) EN 61000-4-3, radiated immunity Level 3 (10 V/m) EN 61000-4-4 EFT Level 4 EN 61000-4-5 surge EN 61000-4-6 conducted immunity Level 3 (10V) EN 61000-4-11 Voltage dips and sags EN 55024
ETSI	EN 300 386/EN 300 386-2 Class B
Network Equipment Building Systems (NEBS)	This product is designed to meet the following requirements (qualification in progress): SR-3580—NEBS: criteria levels (Level 3 compliant) GR-63-Core—NEBS: physical protection GR-1089-Core—NEBS: EMC and safety

ORDERING INFORMATION

Product description	Part number
Cisco 12000 Series Performance Router Processor-1, 512 MB SDRAM, 64 MB Boot Flash, 64 MB Flash disk	PRP-1
Cisco 12000 Series One 512 MB SDRAM, available as spare only	MEM-PRP-512M
Cisco 12000 Series One 1 GB SDRAM	MEM-PRP-1G
Cisco 12000 Series Two 1 GB SDRAM, available as factory upgrade only	2MEM-PRP-1G
Cisco 12000 Series 64 MB ATA PC Card (Flash disk), available as spare only	MEM-12KRP-FD64M
Cisco 12000 Series 128 MB ATA PC Card (Flash disk)	MEM-12KRP-FD128M
Cisco 12000 Series 256 MB ATA PC Card (Flash disk)	MEM-12KRP-FD256M
Cisco 12000 Series 1 GB ATA PC Card (Flash disk)	MEM-12KRP-FD1G



SERVICE AND SUPPORT

Cisco offers a wide range of service support offerings for its service provider customers. Cisco has earned the highest customer satisfaction ratings in the industry by providing the world-class service and support necessary to deploy, operate, and optimize service provider networks. Whether the goal is speed to market, maximizing network availability, or enhancing customer satisfaction and retention, Cisco is committed to the success of its service provider customers.

FOR MORE INFORMATION

For more information on Cisco service and support programs and benefits, go to <http://www.cisco.com/en/US/support/index.html>.

For more information about the Cisco 12000 Series and the Cisco family of next generation routers, visit Cisco at <http://www.cisco.com/go/12000>, or call Cisco.



Corporate Headquarters

Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
www.cisco.com
Tel: 408 526-4000
800 553-NETS (6387)
Fax: 408 526-4100

European Headquarters

Cisco Systems International BV
Haarlerbergpark
Haarlerbergweg 13-19
1101 CH Amsterdam
The Netherlands
www-europe.cisco.com
Tel: 31 0 20 357 1000
Fax: 31 0 20 357 1100

Americas Headquarters

Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
www.cisco.com
Tel: 408 526-7660
Fax: 408 527-0883

Asia Pacific Headquarters

Cisco Systems, Inc.
168 Robinson Road
#28-01 Capital Tower
Singapore 068912
www.cisco.com
Tel: +65 6317 7777
Fax: +65 6317 7799

Cisco Systems has more than 200 offices in the following countries and regions. Addresses, phone numbers, and fax numbers are listed on **the Cisco Web site at www.cisco.com/go/offices.**

Argentina • Australia • Austria • Belgium • Brazil • Bulgaria • Canada • Chile • China PRC • Colombia • Costa Rica
Croatia • Cyprus • Czech Republic • Denmark • Dubai, UAE • Finland • France • Germany • Greece • Hong Kong SAR
Hungary • India • Indonesia • Ireland • Israel • Italy • Japan • Korea • Luxembourg • Malaysia • Mexico
The Netherlands • New Zealand • Norway • Peru • Philippines • Poland • Portugal • Puerto Rico • Romania • Russia
Saudi Arabia • Scotland • Singapore • Slovakia • Slovenia • South Africa • Spain • Sweden • Switzerland • Taiwan
Thailand • Turkey • Ukraine • United Kingdom • United States • Venezuela • Vietnam • Zimbabwe

Copyright 2004 Cisco Systems, Inc. All rights reserved. CCSP, the Cisco Square Bridge logo, Cisco Unity, Follow Me Browsing, FormShare, and StackWise are trademarks of Cisco Systems, Inc.; Changing the Way We Work, Live, Play, and Learn, and iQuick Study are service marks of Cisco Systems, Inc.; and Aironet, ASIST, BPX, Catalyst, CCDA, CCDP, CCIE, CCIP, CCNA, CCNP, Cisco, the Cisco Certified Internetwork Expert logo, Cisco IOS, Cisco Press, Cisco Systems, Cisco Systems Capital, the Cisco Systems logo, Empowering the Internet Generation, Enterprise/Solver, EtherChannel, EtherFast, EtherSwitch, Fast Step, GigaDrive, GigaStack, HomeLink, Internet Quotient, IOS, IP/TV, iQ Expertise, the iQ logo, iQ Net Readiness Scorecard, LightStream, Linksys, MeetingPlace, MGX, the Networkers logo, Networking Academy, Network Registrar, Packet, PIX, Post-Routing, Pre-Routing, ProConnect, RateMUX, Registrar, ScriptShare, SlideCast, SMARTnet, StrataView Plus, SwitchProbe, TeleRouter, The Fastest Way to Increase Your Internet Quotient, TransPath, and VCO are registered trademarks of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries.

All other trademarks mentioned in this document or Website are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (0406R) Pa/LW7490 12/04