

Cisco 3201 802.11b/g Wireless Mobile Interface Card

The Cisco® 3201 Wireless Mobile Interface Card (WMIC) for the Cisco 3200 Series Rugged ISR provides integrated 802.11b/g wireless WAN or LAN capabilities. Designed in the same ruggedized, compact PC/104-Plus form factor as other Cisco 3200 Series interface cards, the Cisco 3201 WMIC is designed to be integrated as part of a Cisco 3200 Series rugged router solution, eliminating the need to use external 802.11b/g bridges or access points. The integrated WMIC provides access to a mobile network in vehicles or to outdoor wireless infrastructure.

The Cisco 3200 Series Rugged ISRs (see Figure 1) offer organizations such as public safety, homeland security, and transportation agencies the following key solution benefits:

- A rugged router in a modular compact design, suited to create mobile networks in and around vehicles
- Standards-based connectivity for a wide range of wireless technologies, including 802.11b/g, 4.9 GHz, third-generation (3G) cellular networks, and satellite, upgradable to future wireless technologies
- Always-on wireless access for vehicle networks, with easy mobility through Mobile IP regardless of location or movement
- Advanced IP services through standards-based Cisco IOS® Software, offering robust network security, reliability, quality of service (QoS), and remote management functions
- Rugged enclosure from Cisco or options for third-party enclosures

Refer to the Cisco 3200 Series Rugged ISR data sheets for more information about networking solutions using the Cisco 3200 Series routers:

http://www.cisco.com/en/US/products/hw/routers/ps272/products_data_sheets_list.html

Figure 1 shows a Cisco 3230 Rugged ISR card bundle with a Cisco 3201 WMIC.

Figure 1. Cisco 3200 Series Rugged ISR Interface Cards with an 802.11b/g WMIC

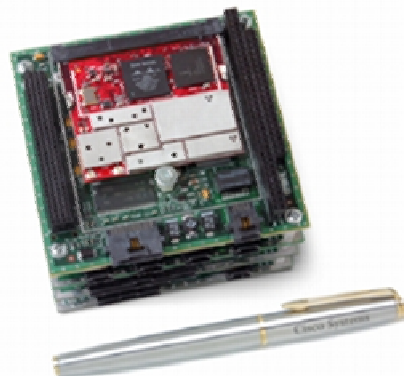


Table 1 provides features and benefits of the Cisco 3201 WMIC. Table 2 shows part numbers, and Table 3 provides product specifications.

Table 1. Features and Benefits of the Cisco 3201 WMIC

Feature	Benefit
Integration with the Cisco 3200 Series Rugged ISRs	<ul style="list-style-type: none"> Eliminates the need for external 2.4-GHz 802.11b/g LAN or WAN devices Simplifies hardware and power design for in-vehicle networks and outdoor wireless infrastructure Provides an important component of a Cisco 3200 Series router solution that combines Layer 2 and Layer 3 wireless networking
Rugged, compact form factor	<ul style="list-style-type: none"> Built with industrial-grade components in the PC/104-Plus architecture Extended temperature range of -40° to +85°C Meets MIL-STD-810F and SAE standards Stacks on other Cisco 3200 interface cards, sharing a common power supply
Configurable as an access point, bridge, or workgroup bridge (client)	<ul style="list-style-type: none"> Configurable as a workgroup bridge or universal workgroup bridge, providing interoperability with standards-based 802.11b/g access points, including the Cisco 1500 Series Outdoor Mesh Access Points Software configuration allows flexibility in the function of the WMIC's capabilities


Table 2. Cisco 3201 WMIC Part Numbers

Part Number	Description
The Cisco 3201 WMIC is sold mainly as part of a Cisco 3200 Series product bundle or as a spare card. For additional information, refer to the Cisco 3200 Series ordering brochure: http://www.cisco.com/en/US/products/hw/routers/ps272/prod_brochure0900aecd803fabbf.html	
C3201WMIC-A-K9=	Cisco 3201 802.11b/g WMIC for operation in most of the Americas
C3201WMIC-TPAK9=	Cisco 3201 802.11b/g WMIC with thermal plates for operation in most of the Americas
C3201WMIC-E-K9=	Cisco 3201 802.11b/g WMIC for operation in most of Europe
C3201WMIC-TPEK9=	Cisco 3201 802.11b/g WMIC with thermal plates for operation in most of Europe
C3201WMIC-J-K9=	Cisco 3201 802.11b/g WMIC for operation in Japan (30 mW output power)
C3201WMIC-TPJK9=	Cisco 3201 802.11b/g WMIC with thermal plates for operation in Japan (30 mW output power)
C3201WMIC-J10-K9=	Cisco 3201 802.11b/g WMIC for operation in Japan (10 mW output power)
C3201WMIC-TPJ10K9=	Cisco 3201 802.11b/g WMIC with thermal plates for operation in Japan (10 mW output power)

Table 3. Product Specifications for the Cisco 3201 WMIC

Feature	Description
Data Rates Supported	1, 2, 5.5, 6, 9, 11, 12, 18, 24, 36, 48, and 54 Mbps
Network Standard	IEEE 802.11b and IEEE 802.11g
Frequency Band	2.4 to 2.497 GHz
Network Architecture Types	Vehicular mobile networks, outdoor wireless infrastructure
Media Access Protocol	Carrier Sense Multiple Access with Collision Avoidance (CSMA/CA)
Modulation	<p>Wireless modulation 802.11b</p> <p>Direct sequence spread spectrum (DSSS):</p> <ul style="list-style-type: none"> Differential Binary Phase Shift Keying (DBPSK) at 1 Mbps Differential Quadrature Phase Shift Keying (DQPSK) at 2 Mbps Complementary Code Keying (CCK) at 5.5 and 11 Mbps <p>Wireless modulation 802.11g</p> <p>Orthogonal frequency divisional multiplexing (OFDM):</p> <ul style="list-style-type: none"> BPSK at 6 and 9 Mbps QPSK at 12 and 18 Mbps 16-quadrature amplitude modulation (QAM) at 24 and 36 Mbps 64-QAM at 48 and 54 Mbps

Feature	Description																												
Operating Channels	North America: 11; ETSI: 13; Japan: 14																												
Nonoverlapping Channels	3 (United States)																												
Receive Sensitivity	<table border="1"> <tr> <td> <ul style="list-style-type: none"> 1 Mbps: -94 dBm 2 Mbps: -91 dBm 5.5 Mbps: -89 dBm 11 Mbps: -85 dBm </td> <td> <ul style="list-style-type: none"> 6 Mbps: -90 dBm 9 Mbps: -89 dBm 12 Mbps: -86 dBm 18 Mbps: -84 dBm </td> <td> <ul style="list-style-type: none"> 24 Mbps: -81 dBm 36 Mbps: -77 dBm 48 Mbps: -73 dBm 54 Mbps: -72 dBm </td> </tr> </table>	<ul style="list-style-type: none"> 1 Mbps: -94 dBm 2 Mbps: -91 dBm 5.5 Mbps: -89 dBm 11 Mbps: -85 dBm 	<ul style="list-style-type: none"> 6 Mbps: -90 dBm 9 Mbps: -89 dBm 12 Mbps: -86 dBm 18 Mbps: -84 dBm 	<ul style="list-style-type: none"> 24 Mbps: -81 dBm 36 Mbps: -77 dBm 48 Mbps: -73 dBm 54 Mbps: -72 dBm 																									
<ul style="list-style-type: none"> 1 Mbps: -94 dBm 2 Mbps: -91 dBm 5.5 Mbps: -89 dBm 11 Mbps: -85 dBm 	<ul style="list-style-type: none"> 6 Mbps: -90 dBm 9 Mbps: -89 dBm 12 Mbps: -86 dBm 18 Mbps: -84 dBm 	<ul style="list-style-type: none"> 24 Mbps: -81 dBm 36 Mbps: -77 dBm 48 Mbps: -73 dBm 54 Mbps: -72 dBm 																											
Delay Spread	<table border="1"> <tr> <td> <ul style="list-style-type: none"> 1 Mbps: 500 ns 2 Mbps: 400 ns 5.5 Mbps: 300 ns 11 Mbps: 140 ns </td> <td> <ul style="list-style-type: none"> 6 Mbps: 300 ns 9 Mbps: 300 ns 12 Mbps: 300 ns 18 Mbps: 300 ns </td> <td> <ul style="list-style-type: none"> 24 Mbps: 240 ns 36 Mbps: 240 ns 48 Mbps: 120 ns 54 Mbps: 120 ns </td> </tr> </table>	<ul style="list-style-type: none"> 1 Mbps: 500 ns 2 Mbps: 400 ns 5.5 Mbps: 300 ns 11 Mbps: 140 ns 	<ul style="list-style-type: none"> 6 Mbps: 300 ns 9 Mbps: 300 ns 12 Mbps: 300 ns 18 Mbps: 300 ns 	<ul style="list-style-type: none"> 24 Mbps: 240 ns 36 Mbps: 240 ns 48 Mbps: 120 ns 54 Mbps: 120 ns 																									
<ul style="list-style-type: none"> 1 Mbps: 500 ns 2 Mbps: 400 ns 5.5 Mbps: 300 ns 11 Mbps: 140 ns 	<ul style="list-style-type: none"> 6 Mbps: 300 ns 9 Mbps: 300 ns 12 Mbps: 300 ns 18 Mbps: 300 ns 	<ul style="list-style-type: none"> 24 Mbps: 240 ns 36 Mbps: 240 ns 48 Mbps: 120 ns 54 Mbps: 120 ns 																											
Available Transmit Power Settings	<table border="1"> <tr> <td> 802.11b: <ul style="list-style-type: none"> 100 mW (20 dBm) 50 mW (17 dBm) 30 mW (15 dBm) 20 mW (13 dBm) 10 mW (10 dBm) 5 mW (7 dBm) 1 mW (0 dBm) Maximum power setting will vary according to individual country regulations. </td> <td> 802.11g: <ul style="list-style-type: none"> 30 mW (15 dBm) 20 mW (13 dBm) 10 mW (10 dBm) 5 mW (7 dBm) 1 mW (0 dBm) Maximum power setting will vary according to individual country regulations </td> </tr> </table>	802.11b: <ul style="list-style-type: none"> 100 mW (20 dBm) 50 mW (17 dBm) 30 mW (15 dBm) 20 mW (13 dBm) 10 mW (10 dBm) 5 mW (7 dBm) 1 mW (0 dBm) Maximum power setting will vary according to individual country regulations.	802.11g: <ul style="list-style-type: none"> 30 mW (15 dBm) 20 mW (13 dBm) 10 mW (10 dBm) 5 mW (7 dBm) 1 mW (0 dBm) Maximum power setting will vary according to individual country regulations																										
802.11b: <ul style="list-style-type: none"> 100 mW (20 dBm) 50 mW (17 dBm) 30 mW (15 dBm) 20 mW (13 dBm) 10 mW (10 dBm) 5 mW (7 dBm) 1 mW (0 dBm) Maximum power setting will vary according to individual country regulations.	802.11g: <ul style="list-style-type: none"> 30 mW (15 dBm) 20 mW (13 dBm) 10 mW (10 dBm) 5 mW (7 dBm) 1 mW (0 dBm) Maximum power setting will vary according to individual country regulations																												
Range (typical @ 100-mW transmit power setting with 6 dBi diversity dipole antenna)	Outdoor: <ul style="list-style-type: none"> 0.5 mile (804 m) at 45 Mbps 1 mile (1609 m) at 11 Mbps 3 miles (4827 m) at 1 Mbps 																												
Compliance	Operates license free under FCC Part 15 and complies as a Class B device; complies with DOC regulations; complies with ETS 300.328, FTZ 2100, and MPT 1349 standards; rugged version complies with UL 2043																												
Simple Network Management Protocol (SNMP) Compliance	MIB I and MIB II																												
Antenna	<table border="1"> <tr> <th colspan="7">Antennas Supported for 2.4 GHz (Stationary)</th> </tr> <tr> <td>ANT3549 PATCH 9 dBi</td> <td>ANT1729 PATCH 6 dBi</td> <td>ANT250 OMNI MAST 5.2 dBi</td> <td>ANT24120 OMNI MAST 12 dBi</td> <td>ANT2410 YAGI 10 dBi</td> <td>ANT1949 YAGI 13.5 dBi</td> <td>ANT3338 DISH 21 dBi</td> </tr> <tr> <th colspan="7">Mobile Antennas Supported</th> </tr> <tr> <td colspan="2">BMAXC24503 Mobile MAG Mount 3 dBi</td> <td colspan="2">BMAXC24505 Mobile MAG Mount 5 dBi</td> <td colspan="3">BMAXC24003 Mobile MAG Mount 5 dBi</td> </tr> </table> <p>For more information on antennas, refer to the Cisco 3200 Series antenna brochure: http://www.cisco.com/en/US/products/hw/routers/ps272/prod_brochure_list.html</p>	Antennas Supported for 2.4 GHz (Stationary)							ANT3549 PATCH 9 dBi	ANT1729 PATCH 6 dBi	ANT250 OMNI MAST 5.2 dBi	ANT24120 OMNI MAST 12 dBi	ANT2410 YAGI 10 dBi	ANT1949 YAGI 13.5 dBi	ANT3338 DISH 21 dBi	Mobile Antennas Supported							BMAXC24503 Mobile MAG Mount 3 dBi		BMAXC24505 Mobile MAG Mount 5 dBi		BMAXC24003 Mobile MAG Mount 5 dBi		
Antennas Supported for 2.4 GHz (Stationary)																													
ANT3549 PATCH 9 dBi	ANT1729 PATCH 6 dBi	ANT250 OMNI MAST 5.2 dBi	ANT24120 OMNI MAST 12 dBi	ANT2410 YAGI 10 dBi	ANT1949 YAGI 13.5 dBi	ANT3338 DISH 21 dBi																							
Mobile Antennas Supported																													
BMAXC24503 Mobile MAG Mount 3 dBi		BMAXC24505 Mobile MAG Mount 5 dBi		BMAXC24003 Mobile MAG Mount 5 dBi																									
Workgroup Bridge	Allows the Cisco 3200 Series router to connect as a client device to Cisco 152x Mesh Access Points																												
Universal Workgroup Bridge	Allows the Cisco 3200 Series router to connect as a client device to standards-based 802.11b/g access points with the ability to use multiple profiles for various authentication types.																												
VLAN Support	Allows segmentation of up to 16 user groups, creating increased system flexibility by allowing differentiation of LAN policies and services, such as security and QoS, for different users.																												
Multiple Basic Secure Set Identifiers (BSSIDs)	Multiple BSSIDs provide up to 16 SSIDs to use with multiple VLANs.																												
Quality-of-Service (QoS) Support	Wireless Multimedia (WMM) as part of the 802.11e specification for wireless QoS. Prioritization of traffic for different application requirements to improve the voice and video user experience.																												

Feature	Description
Security	Cisco Wireless Security Suite supporting Wi-Fi Protected Access (WPA) and WPA2, including: Authentication <ul style="list-style-type: none"> 802.1X support, including Cisco LEAP, Projected Extensible Authentication Protocol (PEAP), Extensible Authentication Protocol Transport Layer Security (EAP-TLS) (Root-AP and Client), EAP Tunneled TLS (EAP-TTLS), EAP Subscriber Information Module (EAP-SIM), and EAP Flexible Authentication via Secure Tunneling (EAP-FAST) Encryption <ul style="list-style-type: none"> WPA: Cisco TKIP or WPA TKIP WPA2: AES (802.11i)
Status Indicators	Signals for four status indicators (ETH, RF, INSTALL, and STATUS) to provide information concerning association status, operation, error or warning, firmware upgrade, configuration, network or modem, and radio status
Automatic Configuration Support	BOOTP and Dynamic Host Configuration Protocol (DHCP)
Remote Configuration Support	Telnet, HTTP, FTP, Trivial File Transfer Protocol (TFTP), and SNMP
Local Configuration	Direct console port
Dimensions	<ul style="list-style-type: none"> 3.775 in. wide x 0.937 in. high x 3.550 in. deep Height dimension includes component side height, board height, and the shroud height on the solder side
Weight	0.22 lb (0.102 kg)
Rugged Enclosure	The Cisco 3200 Series offers system bundles in a rugged enclosure. For details, see: http://www.cisco.com/en/US/products/hw/routers/ps272/products_data_sheet0900aecd8028e3a7.html
Environmental	<ul style="list-style-type: none"> Operating temperature:* -40 to +85C (operating) Operating altitude: 15,000 ft Nonoperating temperature: -40° to +85°C Nonoperating altitude: 40,000 ft
Input Power Requirements	3.3V and 5.0V input required (same as the Cisco 3200 card stack)
Warranty	90 days
Wi-Fi Certification	

* Immediate local ambient temperature around onboard components; system level external ambient operating temperature may vary depending on the enclosure and the thermal solution used.

Ordering Information

The Cisco 3201 WMIC was developed for the Cisco 3200 Series Rugged ISRs to provide integrated 802.11b/g wireless WAN or LAN capabilities. For additional information, refer to the Cisco 3200 Series ordering brochure:

http://www.cisco.com/en/US/prod/collateral/routers/ps272/prod_brochure0900aecd803fabbf.html

Service and Support

Cisco offers a wide range of service programs to accelerate customer success. These innovative service programs are delivered through a unique combination of people, processes, tools, and partners, resulting in high levels of customer satisfaction. Cisco services help you protect your network investment, optimize network operations, and prepare the network for new applications to extend network intelligence and the power of your business. For more information about Cisco services, refer to [Cisco Technical Support Services](#) or [Cisco Advanced Services](#).

For More Information

For more information about the Cisco 3200 Series Rugged ISRs, visit <http://www.cisco.com/go/3200> or contact your local Cisco account representative.



Americas Headquarters
Cisco Systems, Inc.
San Jose, CA

Asia Pacific Headquarters
Cisco Systems (USA) Pte. Ltd.
Singapore

Europe Headquarters
Cisco Systems International BV
Amsterdam, The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at www.cisco.com/go/offices.

CCDE, CCENT, Cisco Eos, Cisco Lumin, Cisco Nexus, Cisco StadiumVision, Cisco TelePresence, the Cisco logo, DCE, and Welcome to the Human Network are trademarks; Changing the Way We Work, Live, Play, and Learn and Cisco Store are service marks; and Access Registrar, Aironet, AsyncOS, Bringing the Meeting To You, Catalyst, CCDA, CCDP, CCIE, CCIP, CCNA, CCNP, CCSP, CVP, Cisco, the Cisco Certified Internetwork Expert logo, Cisco IOS, Cisco Press, Cisco Systems, Cisco Systems Capital, the Cisco Systems logo, Cisco Unity, Collaboration Without Limitation, EtherFast, EtherSwitch, Event Center, Fast Step, Follow Me Browsing, FormShare, GigaDrive, HomeLink, Internet Quotient, IOS, iPhone, iQ Expertise, the iQ logo, iQ Net Readiness Scorecard, iQuick Study, IronPort, the IronPort logo, LightStream, Linksys, MediaTone, MeetingPlace, MeetingPlace Chime Sound, MGX, Networkers, Networking Academy, Network Registrar, PCNow, PIX, PowerPanels, ProConnect, ScriptShare, SenderBase, SMARTnet, Spectrum Expert, StackWise, The Fastest Way to Increase Your Internet Quotient, TransPath, WebEx, and the WebEx logo are registered trademarks of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries.

All other trademarks mentioned in this document or Website are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (0807R)