



CHAPTER 6

Timing

This chapter provides information about Cisco ONS 15310-MA SDH timing. To provision timing, refer to the *Cisco ONS 15310-MA SDH Procedure Guide*.

Chapter topics include:

- [6.1 Timing Parameters, page 6-1](#)
- [6.2 Network Timing, page 6-2](#)
- [6.3 Synchronization Status Messaging, page 6-2](#)

6.1 Timing Parameters

Node Timing parameters must be set for each ONS 15310-MA SDH. Each ONS 15310-MA SDH independently accepts its timing reference from one of three sources:

- The building integrated timing supply (BITS) port on the ONS 15310-MA SDH.
- An STM-N/E1 port on the ONS 15310-MA SDH. The port is connected to a node that receives timing through a BITS source.
- The internal G.813/SMC clock on the CTX card.

You can set ONS 15310-MA SDH timing to one of three modes: external, line, or mixed. If timing is coming from the BITS port, set ONS 15310-MA SDH timing to external. If the timing comes from an STM-N and E1 port, set the timing to line. Typical ONS 15310-MA SDH networks have the following timing configurations:

- One node is set to external. The external node derives its timing from a BITS source wired to the CTX port. The BITS source derives its timing from a primary reference source (PRS) such as a Stratum 1 clock or global positioning satellite (GPS) signal.
- The other nodes are set to line. The line nodes derive timing from the externally timed node through the E1 port and STMN trunk (span) port.

You can set three timing references for each ONS 15310-MA SDH. The first two references are typically one BITS-level sources, or two line-level sources optically connected to a node with a BITS source. The third reference is usually assigned to the internal clock provided on every ONS 15310-MA SDH CTX card. However, if you assign all three references to other timing sources, the internal clock is always available as a backup timing reference. The internal clock is a SETS (G.813) in ONS 15310-MA SDH. If a node becomes isolated, timing is maintained at the SETS level.

The CTC Maintenance > Timing > Report tabs show current timing information for an ONS 15310-MA SDH, including the timing mode, clock state and status, switch type, and reference data.


**Caution**

Mixed timing allows you to select both external and line timing sources. However, Cisco does not recommend its use because it can create timing loops. Use mixed timing mode with caution.

6.2 Network Timing

Figure 6-1 shows an example of an ONS 15310-MA SDH network timing setup. Node 1 is set to external timing. One reference is set to BITS, the two references are set to internal. The BITS output pins on the CTX cards of Node 3 provide timing to outside equipment, such as a digital access line multiplexer.

Figure 6-1 ONS 15310-MA SDH Timing Example

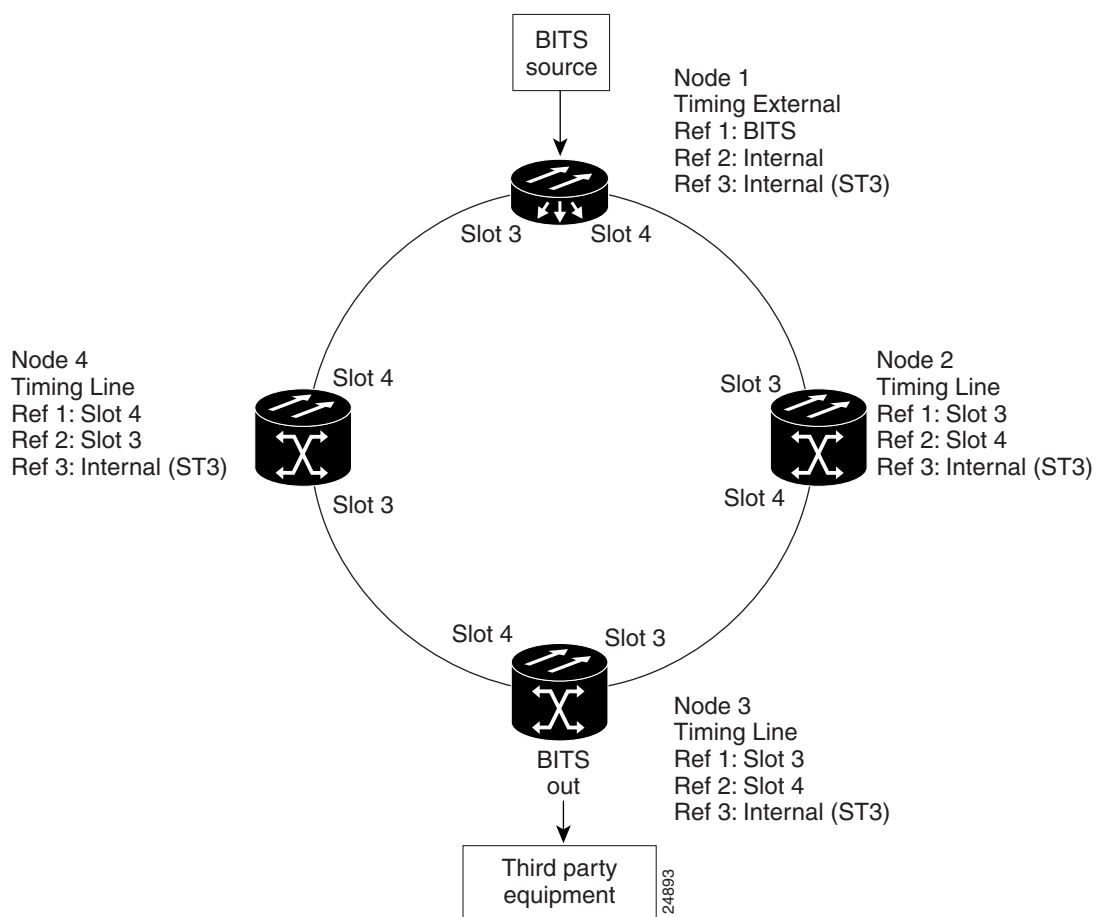

6.3 Synchronization Status Messaging

Synchronization status messaging (SSM) is an SDH protocol that communicates information about the quality of the timing source. SSM messages are carried on the S1 byte of the SDH line layer. They enable SDH devices to automatically select the highest quality timing reference and to avoid timing loops.

If you enable SSM for the ONS 15310-MA SDH, consult your timing reference documentation to determine which message set to use. [Table 6-1](#) and [Table 6-2](#) show the Generation 1 and Generation 2 message sets.

Table 6-1 SSM Message Set

Message	Quality	Description
G811	1	Primary reference clock
STU	2	Sync traceability unknown
G812T	3	Transit node clock traceable
G812L	4	Local node clock traceable
SETS	5	Synchronous equipment
DUS	6	Do not use for timing synchronization

Table 6-2 SSM Generation 2 Message Set

Message	Quality	Description
PRC	1	Primary reference source—Stratum 1
STU	2	Synchronization traceability unknown
ST2	3	Stratum 2
TNC	4	Transit node clock
G.813E	5	Stratum 3E
G.813	6	PRC
SMC	7	SDH minimum clock
ST4	8	Stratum 4
DUS	9	Do not use for timing synchronization
RES		Reserved; quality level set by user

