

Cisco Smart PHY 300 and 600 Shelves



Product Description

The Cisco Smart PHY models 300 and 600 RPHY (Remote Phy) shelves enables service providers to deploy cBR-8 CCAP services to small-to-medium hubs in a cost effective manner while preparing their networks for future cloud CMTS. The extended operating temperature range enables deployment in outdoor cabinets.


An extension of the Modular Headend Architecture, MHA v2 splits CMTS functions so that CCAP core and physical-layer functions can run separately, in different locations. CCAP core routing can run out of larger hubs (or even cloud CMTS instances in a datacenter), while QAM and OFDM modulation are pushed out to Remote PHY shelves located in hubs near the subscribers.

Remote PHY is the product of cable operators asking the industry to help them overcome the limitations of analog fiber and break through the HFC bottleneck. In its most basic form, Remote PHY unlocks major bandwidth increases in existing access networks. But it also enables “fiber deep” architectures that push digital fiber out much closer to homes. Ultimately, Remote PHY helps cable operators deliver capacity and Gigabit service tiers on par with any pure-fiber competitor, at a fraction of the cost of ripping and replacing the existing HFC plant.

With Cisco Smart PHY shelves, you can deploy fewer sophisticated CCAP routing platforms, connected to many smaller-footprint, less expensive shelves and RPDs. You don't have to run a large number of full-featured I-CMTS platforms at every hub, consuming huge amounts of space and power as you scale, and requiring advanced onsite expertise to deploy and maintain. You can consolidate CCAP core functions in headends or data centers and interconnect hubs with digital fiber.

The Cisco Smart PHY model 300 and 600 shelves have been integrated with the Cisco Smart PHY deployment automation software. Cisco Smart PHY deployment automation software is a micro-service based software tool that enables full automation for provisioning, configuration and maintenance of standards based RPDs, shelves and Cisco RPHY Cores.

Figure 1. MHA v2 Reference Architecture

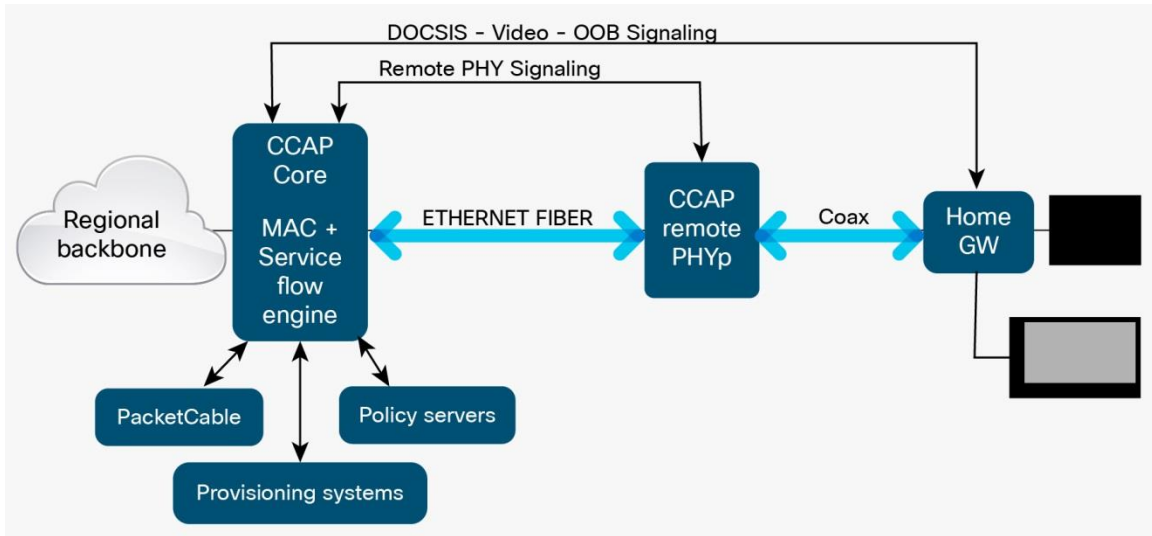

Features and Benefits

The Cisco RPHY Shelves offer the following features and benefits:

Table 1. Features

Smart PHY 600 6x12 RPHY Shelf	6 Service Groups
Smart PHY 300 3x6 RPHY Shelf	3 Service Groups
Downstream/Upstream configurations	1x1 and 1x2 (Downstream x Upstream)
DS Capacity	160 narrowcast QAMS plus Six OFDM 192 MHz Orthogonal Frequency-Division Multiplexing (OFDM) blocks per Service Group
US Capacity	12 US channels per port or 2 OFDMA blocks (96 MHz) per port
Channel Assignment	Single channel QAM frequency placement
Video	Broadcast, VOD and SDV
Video Encryption	PowerKEY, VPME and DVB (future)
CIN connectivity	Dual 10 GBE SFP+ per Service Group Path Redundancy (future) Daisy Chaining (future)
Fans	N+1 modular field replaceable fan modules
Operation & Maintenance	US monitoring Supported by Cisco Smart PHY RPD deployment automation application

Table 2. Specifications

Description	Specification
Design to be Compliant with Cablelabs Remote PHY specifications	<ul style="list-style-type: none"> • CM-SP-R-PHY-I07-170524 Remote PHY Specification • CM-SP-R-DEPI-I07-170524 Remote Downstream External PHY Interface Specification • CM-SP-R-UEPI-I07-170524 Remote Upstream External PHY Interface Specification • CM-SP-GCP-I03-170524 Generic Control Plane Specification • CM-SP-R-DTI-I05-170524 Remote DOCSIS Timing Interface Specification • CM-SP-R-OOB-I05-170908 Remote Out-of-Band Specification • CM-SP-R-OSSI-I07-170908 Remote PHY OSS Interface Specification • CM-SP-DRFI-I16-170111

Description	Specification
Power Requirements	
Redundant Power Supply	Supports 1+1
Power Input	Worldwide ranging AC (200-240V; 50-60 Hz; 12A maximum) Worldwide ranging DC (-40 to -72V; 50A nominal, 16A maximum)
Power Consumption:	320 W (max)
3x6 Configuration	530 W (max)
6x12 Configuration	
Environmental Specifications	
Operating temperature range	-40 to 140°F (-40 to 60°C)
Operating humidity range	5 to 95%
Mechanical Specifications	
Dimensions	Height: 1RU (1.75 in/4.45 cm) Width: 17.45 in (44.32 cm) Depth: 23.6 in (59.94 cm)
Weight	12 Kg (6x12 Configuration)
RF Connectors	F connector

Optical SFP+ Options

Table 3. Optical SFP+ module options.

SFP-10G-SR=
SFP-10G-LR=
SFP-10G-ER=
SFP-10G-ZR=

Table 4. DWDM Optical SFP+ module options (extended temperature range).

20 KM SFP+ PIDs 400 ps/nm/km dispersion	40 KM SFP+ PIDs 800 ps/nm/km dispersion	80 KM SFP+ PIDs 1600 ps/nm/km dispersion
RPHY-S10G-20K-200=	RPHY-S10G-40K-200=	RPHY-S10G-80K-200=
RPHY-S10G-20K-210=	RPHY-S10G-40K-210=	RPHY-S10G-80K-210=
RPHY-S10G-20K-220=	RPHY-S10G-40K-220=	RPHY-S10G-80K-220=
RPHY-S10G-20K-230=	RPHY-S10G-40K-230=	RPHY-S10G-80K-230=
RPHY-S10G-20K-240=	RPHY-S10G-40K-240=	RPHY-S10G-80K-240=
RPHY-S10G-20K-250=	RPHY-S10G-40K-250=	RPHY-S10G-80K-250=
RPHY-S10G-20K-260=	RPHY-S10G-40K-260=	RPHY-S10G-80K-260=
RPHY-S10G-20K-270=	RPHY-S10G-40K-270=	RPHY-S10G-80K-270=
RPHY-S10G-20K-280=	RPHY-S10G-40K-280=	RPHY-S10G-80K-280=
RPHY-S10G-20K-290=	RPHY-S10G-40K-290=	RPHY-S10G-80K-290=
RPHY-S10G-20K-300=	RPHY-S10G-40K-300=	RPHY-S10G-80K-300=
RPHY-S10G-20K-310=	RPHY-S10G-40K-310=	RPHY-S10G-80K-310=
RPHY-S10G-20K-320=	RPHY-S10G-40K-320=	RPHY-S10G-80K-320=
RPHY-S10G-20K-330=	RPHY-S10G-20K-330=	RPHY-S10G-80K-330=
RPHY-S10G-20K-340=	RPHY-S10G-40K-340=	RPHY-S10G-80K-340=
RPHY-S10G-20K-350=	RPHY-S10G-20K-350=	RPHY-S10G-80K-350=
RPHY-S10G-20K-360=	RPHY-S10G-40K-360=	RPHY-S10G-80K-360=

20 KM SFP+ PIDs 400 ps/nm/km dispersion	40 KM SFP+ PIDs 800 ps/nm/km dispersion	80 KM SFP+ PIDs 1600 ps/nm/km dispersion
RPHY-S10G-20K-370=	RPHY-S10G-20K-370=	RPHY-S10G-80K-370=
RPHY-S10G-20K-380=	RPHY-S10G-40K-380=	RPHY-S10G-80K-380=
RPHY-S10G-20K-390=	RPHY-S10G-40K-390=	RPHY-S10G-80K-390=

Ordering Information

PID	Description
RPHYSHELF_3X6	Smart PHY 300 Shelf 3x6 Configured PID
RPHYSHELF_6X12	Smart PHY 600 Shelf 6x12 Configured PID
RPHYSHLF_DC(=)	Smart PHY Shelf DC Supply
RPHYSHLF_AC(=)	Smart PHY Shelf AC Supply
RPHY_CAB_DS_3x6(=)	Smart PHY 300 Shelf DS to RF Plant Quad-Shield RF Cable
RPHY_CAB_US_3x6(=)	Smart PHY 300 Shelf US to RF Plant Quad-Shield RF Cable
RPHY_CAB_DS_6x12(=)	Smart PHY 600 Shelf DS to RF Plant Quad-Shield RF Cable
RPHY_CAB_US_6x12(=)	Smart PHY 600 Shelf US to RF Plant Quad-Shield RF Cable
RPHYSHLF_FAN(=)	Smart PHY Shelf Fan Qty=1
RPHYSHLF_ACC_KIT(=)	Smart PHY Shelf Accessory Kit
RPHYSHLF_3X6AC=	Smart PHY 300 Shelf pre-Configured System, 3 1x2 RPD, 2AC Supplies
RPHYSHLF_3X6DC=	Smart PHY 300 Shelf pre-Configured System, 3 1x2 RPD, 2DC Supplies
RPHYSHLF_6X12AC=	Smart PHY 600 Shelf pre-Configured System, 6 1x2 RPD, 2AC Supplies
RPHYSHLF_6X12DC=	Smart PHY 600 Shelf pre-Configured System, 6 1x2 RPD, 2DC Supplies
CAB-AC-ARG(=)	Power Cord - Argentina, 10A,250V,2500mm, -40C to +85C
CAB-AC-AUS(=)	Power Cord - Australia, 10A,250V,2500mm, -40C to +85C
CAB-AC-BRA(=)	Power Cord - Brazil, 10A,250V,2500mm, -40C to +85C
CAB-AC-CHI(=)	Power Cord - China, 10A,250V,2500mm, -40C to +85C
CAB-AC-EUR(=)	Power Cord - Europe, 10A,250V,2500mm, -40C to +85C
CAB-AC-IND(=)	Power Cord - India, 10A,250V,2500mm, -40C to +85C
CAB-AC-ISR(=)	Power Cord - Israel, 10A,250V,2500mm, -40C to +85C
CAB-AC-ITL(=)	Power Cord - Italy, 10A,250V,2500mm, -40C to +85C
CAB-AC-KOR(=)	Power Cord - Korea, 10A,250V,2500mm, -40C to +85C
CAB-AC-SUI(=)	Power Cord - Swiss, 10A,250V,2500mm, -40C to +85C
CAB-AC-TAI(=)	Power Cord - Taiwan, 10A,250V,2500mm, -40C to +85C
CAB-AC-UK(=)	Power Cord - UK, 10A,250V,2500mm, -40C to +85C
CAB-AC-US(=)	Power Cord - US, 10A,250V,2500mm, -40C to +85C

Cisco Capital

Financing to Help You Achieve Your Objectives

Cisco Capital can help you acquire the technology you need to achieve your objectives and stay competitive. We can help you reduce CapEx. Accelerate your growth. Optimize your investment dollars and ROI. Cisco Capital financing gives you flexibility in acquiring hardware, software, services, and complementary third-party equipment. And there's just one predictable payment. Cisco Capital is available in more than 100 countries. [Learn more.](#)




Americas Headquarters
Cisco Systems, Inc.
San Jose, CA

Asia Pacific Headquarters
Cisco Systems (USA) Pte. Ltd.
Singapore

Europe Headquarters
Cisco Systems International BV Amsterdam,
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at <https://www.cisco.com/go/offices>.

 Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: <https://www.cisco.com/go/trademarks>. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)