



Calculating the Maximum Attenuation for Optical Fiber Links

[TAC Notice: What's Changing on TAC Web](#)

Document ID: 27042

Contents

[Introduction](#)

[Prerequisites](#)

[Requirements](#)

[Components Used](#)

[Conventions](#)

[What is Attenuation?](#)

[Wavelength](#)

[Estimate the Attenuation on the Optical Link](#)

[NetPro Discussion Forums - Featured](#)

[Conversations](#)

[Related Information](#)

Help us help you.

Please rate this document.

- Excellent
- Good
- Average
- Fair
- Poor

This document solved my problem.

- Yes
- No
- Just browsing

Suggestions for improvement:

(256 character limit)

Send

Introduction

This document describes how to calculate the maximum attenuation for an optical fiber. You can apply this methodology to all types of optical fibers in order to estimate the maximum distance that optical systems use.

Note: Always perform measurements in the field.

Prerequisites

Requirements

There are no specific requirements for this document.

Components Used

This document is not restricted to specific software and hardware versions.

Conventions

Refer to [Cisco Technical Tips Conventions](#) for more information on document conventions.

What is Attenuation?

Attenuation is a measure of the loss of signal strength or light power that occurs as light pulses propagate through a run of multimode or single-mode fiber. Measurements are typically defined in terms of decibels or dB/km.

Wavelength

The most common peak wavelengths are 780 nm, 850 nm, 1310 nm, 1550 nm, and 1625 nm. The 850 nm region, referred to as the first window, was used initially because of the support for the original LED and detector technology. Today, the 1310 nm region is popular because of the dramatically lower loss and lower dispersion.

You can also use the 1550 nm region, which can avoid the need for repeaters. Generally, performance and cost increase as wavelength increases.

Multimode and single-mode fibers use different fiber types or sizes. For example, single-mode fiber uses 9/125 μ m and multimode uses 62.5/125 or 50/125. The different size fibers have different optical loss dB/km values. Fiber loss depends heavily on the operating wavelength. Practical fibers have the lowest loss at 1550 nm and the highest loss at 780 nm with all physical fiber sizes (for example, 9/125 or 62.5/125).

When you start to calculate the maximum distances for any optical link, consider tables 1 and 2:


Table 1 – For Wavelength 1310nm

	Attenuation/ Km (dB/Km)	Attenuation/optical connector (dB)	Attenuation/joint (dB)	
Min	0.3	0.4	0.02	Best Conditions
Average	0.38	0.6	0.1	Normal
Max	0.5	1	0.2	Worst situation

Table 2 – For Wavelength 1550nm

	Attenuation/ Km (dB/Km)	Attenuation/optical connector (dB)	Attenuation/joint (dB)	
Min	0.17	0.2	0.01	Best Conditions
Average	0.22	0.35	0.05	Normal
Max	0.4	0.7	0.1	Worst situation

Here is an example of a typical situation in the field:

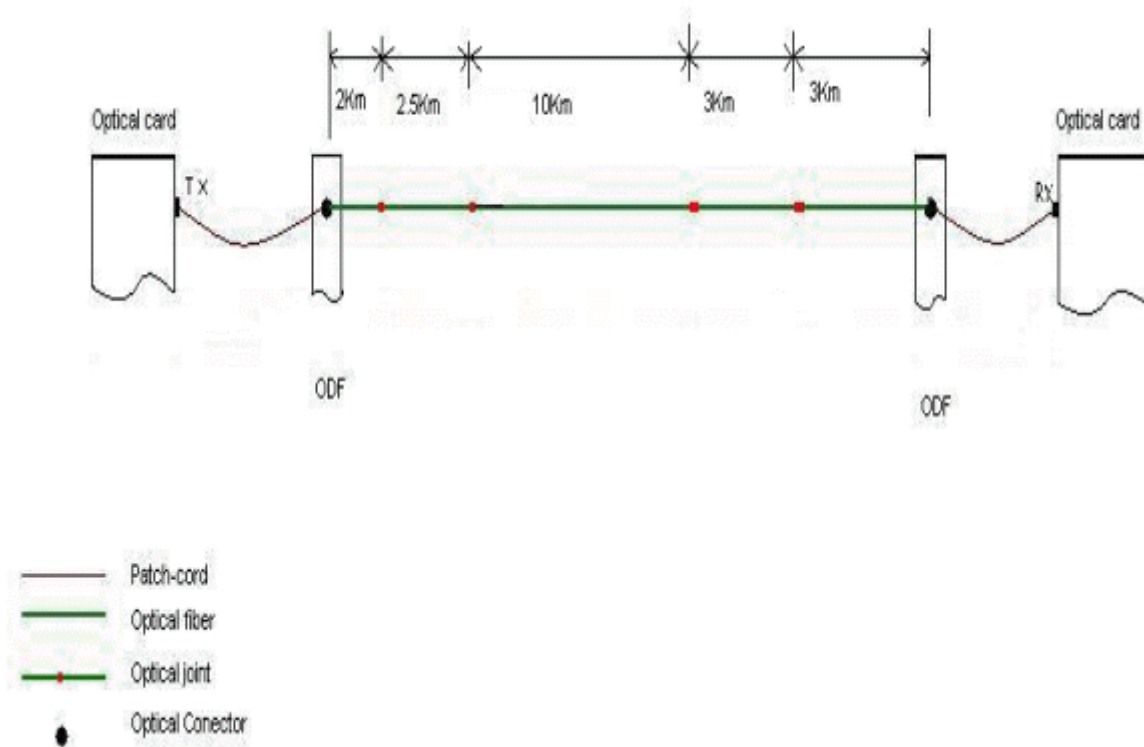

Estimate the Attenuation on the Optical Link

You can now calculate the attenuation for this link. You can arrive at the total attenuation (TA) of an elementary cable section as:

$$\mathbf{TA = n \times C + c \times J + L \times a + M}$$

where:

- n—number of connectors
- C—attenuation for one optical connector (dB)
- c—number of splices in elementary cable section
- J—attenuation for one splice (dB)
- M—system margin (patch cords, cable bend, unpredictable optical attenuation events, and so on, should be considered around 3dB)
- a—attenuation for optical cable (dB/Km)
- L—total length of the optical cable

When you apply this formula to the example, and assume certain values for the optical cards, you obtain these results:

For wavelength 1310nm: Normal

$$\mathbf{TA = n \times C + c \times J + L \times a + M = 2 \times 0.6dB + 4 \times 0.1dB + 20.5Km \times 0.38dB/Km + 3dB =}$$

12.39dB

For wavelength 1310nm: Worst Situation

$$TA = n \times C + c \times J + L \times a + M = 2 \times 1dB + 4 \times 0.2dB + 20.5Km \times 0.5dB/Km + 3dB = 16.05dB$$

For wavelength 1550nm: Normal

$$TA = n \times C + c \times J + L \times a + M = 2 \times 0.35dB + 4 \times 0.05dB + 20.5Km \times 0.22dB/Km + 3dB = 8.41dB$$

For wavelength 1550nm: Worst Situation

$$TA = n \times C + c \times J + L \times a + M = 2 \times 0.7dB + 4 \times 0.1dB + 20.5Km \times 0.4dB/Km + 3dB = 13dB$$

Assume that the optical card has these specifications:

Tx = - 3 dB to 0dB at 1310nm

Rx = -20 dB to -27 dB at 1310nm

In this case, the power budget is between 27 dB and 17 dB.

If you consider the worst card, which has the power budget at 17 db at 1310nm, and the worst situation for the optical link to be 16.05dB at 1310nm, you can estimate that your optical link will work without any problem. In order to be sure of this, you must measure the link.

NetPro Discussion Forums - Featured Conversations

Networking Professionals Connection is a forum for networking professionals to share questions, suggestions, and information about networking solutions, products, and technologies. The featured links are some of the most recent conversations available in this technology.

NetPro Discussion Forums - Featured Conversations for Optical
Service Providers: Optical Networking
Metroplanner 7.0.1 Pricelist update - May 17, 2006 Point to Point, outdoor, line of site, wireless network - May 16, 2006 Is attenuation cumulative with inline attenuators at both ends? - May 10, 2006 CTC, multiple software revisions, and Java - May 9, 2006 Help on for short distance Single Mode cable - Apr 28, 2006
Service Providers: Metro
Etherchannel, load balancing between 2950 and 7500 - May 12, 2006 VPLS and RPR - May 11, 2006 PPPoE profile problem - May 9, 2006 3800 + pppoe - May 1, 2006 CISCO XENPAK-10GB-LW (WAN PHY) - Apr 27, 2006

Related Information

- [Technical Support & Documentation - Cisco Systems](#)

Home	How to Buy	Login	Profile	Feedback	Site Map	Help
----------------------	----------------------------	-----------------------	-------------------------	--------------------------	--------------------------	----------------------

All contents are Copyright © 1992-2006 Cisco Systems, Inc. All rights reserved. [Important Notices](#) and [Privacy Statement](#).

Updated: May 17, 2006

Document ID: 27042
