



Viavi Integration

- [Hardware Compatibility Matrix for Cisco Remote PHY Device, on page 1](#)
- [Viavi Integration, on page 2](#)
- [Verifying Spectrum Capture Configuration, on page 2](#)
- [Feature Information for Viavi Integration, on page 3](#)

Hardware Compatibility Matrix for Cisco Remote PHY Device



Note Unless otherwise specified, the hardware components introduced in a given Cisco Remote PHY Device Software Release are supported in all subsequent releases.

Table 1: Hardware Compatibility Matrix for the Cisco Remote PHY Device

Cisco HFC Platform	Remote PHY Device
Cisco GS7000 Super High Output Node	Cisco 1x2 / Compact Shelf RPD Software 2.1 and Later Releases
Cisco GS7000 Super High Output Intelligent Node (iNode)	Cisco 1x2 / Compact Shelf RPD Software 4.1 and Later Releases Cisco Intelligent Remote PHY Device 1x2 <ul style="list-style-type: none">• PID—iRPD-1X2=• PID—iRPD-1X2-PKEY=




Note The -PKEY suffix in the PID indicates units that enable the SCTE-55-2 Out-of-Band protocol support.

Viavi Integration

In this feature, RPD supports non-CCAP defined MAX-HOLD mode for spectrum capture that work with Viavi RCI Agent.

Figure 1: Viavi integration workflow

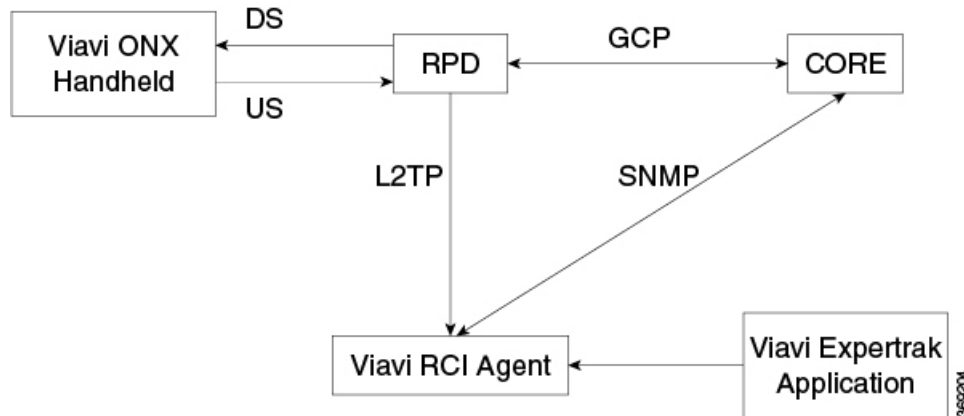

- Note**
1. Communications with core is implemented using SNMP.
 2. Before using this feature, the NDF/NDR feature must be configured on cBR-8.
 3. Viavi RCI Agent needs to be installed and configured on the system with Linux/Ubuntu operating system.

Verifying Spectrum Capture Configuration

To verify if the spectrum capture is enabled, use **show bcm-register wbbft config** command as shown in the following example. The WBFFT Trigger Mode should be FreeRunning if this feature is enabled.

```

R-PHY#show bcm-register wbbft config
WBFFT Trigger Mode : FreeRunning
Enable UTSC       : TRUE
Sample Num        : 4096
Session ID        : 44201020
PNM Dest IP       : 2001:30:84:0:1:0:66:1
PNM Dest Mac      : c414.3c16.d682

R-PHY#show bcm-register wbbft all 0
WBFFT Start Ctrl  [cc000000] : 00000001
In Control        [cc000004] : 00472F04
Out Control       [cc00000c] : 0000009B
Timing Ctrl      [cc000010] : 00000003
WBFFT FIRST WDW CF [cc000024] : 00000920
WBFFT SCND WDW CF [cc000028] : 0000C660
WBFFT MIDL WDW CF [cc00002c] : 000061E0
WBFFT MAX CTL     [d0000048] : 33800000
WBFFT Status      [cc000034] : 00000000
  
```

```
WBFFTS In Ctrl      [d0000044]      : 00000100
WBFFT PKT BYTE      : 004A0000
WBFFT PKT COUNT     : 00004A00
```

Feature Information for Viavi Integration

The following table provides release information about the feature or features described in this module. This table lists only the software release that introduced support for a given feature in a given software release train. Unless noted otherwise, subsequent releases of that software release train also support that feature.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Table 2: Feature Information for Viavi Integration

Feature Name	Releases	Feature Information
Viavi Integration	Cisco 1x2 / Compact Shelf RPD Software 6.4	This feature was integrated into the Cisco Remote PHY Device.

