



Ultra Cloud Core 5G Policy Control Function, Release 2022.03 - API Reference

First Published: 2022-07-29

Americas Headquarters

Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
<http://www.cisco.com>
Tel: 408 526-4000
800 553-NETS (6387)
Fax: 408 527-0883

THE SPECIFICATIONS AND INFORMATION REGARDING THE PRODUCTS IN THIS MANUAL ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL STATEMENTS, INFORMATION, AND RECOMMENDATIONS IN THIS MANUAL ARE BELIEVED TO BE ACCURATE BUT ARE PRESENTED WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED. USERS MUST TAKE FULL RESPONSIBILITY FOR THEIR APPLICATION OF ANY PRODUCTS.

THE SOFTWARE LICENSE AND LIMITED WARRANTY FOR THE ACCOMPANYING PRODUCT ARE SET FORTH IN THE INFORMATION PACKET THAT SHIPPED WITH THE PRODUCT AND ARE INCORPORATED HEREIN BY THIS REFERENCE. IF YOU ARE UNABLE TO LOCATE THE SOFTWARE LICENSE OR LIMITED WARRANTY, CONTACT YOUR CISCO REPRESENTATIVE FOR A COPY.

The Cisco implementation of TCP header compression is an adaptation of a program developed by the University of California, Berkeley (UCB) as part of UCB's public domain version of the UNIX operating system. All rights reserved. Copyright © 1981, Regents of the University of California.

NOTWITHSTANDING ANY OTHER WARRANTY HEREIN, ALL DOCUMENT FILES AND SOFTWARE OF THESE SUPPLIERS ARE PROVIDED "AS IS" WITH ALL FAULTS. CISCO AND THE ABOVE-NAMED SUPPLIERS DISCLAIM ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, THOSE OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE.

IN NO EVENT SHALL CISCO OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THIS MANUAL, EVEN IF CISCO OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.


Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.

All printed copies and duplicate soft copies of this document are considered uncontrolled. See the current online version for the latest version.

Cisco has more than 200 offices worldwide. Addresses and phone numbers are listed on the Cisco website at www.cisco.com/go/offices.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: <https://www.cisco.com/c/en/us/about/legal/trademarks.html>. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1721R)

© 2022 Cisco Systems, Inc. All rights reserved.

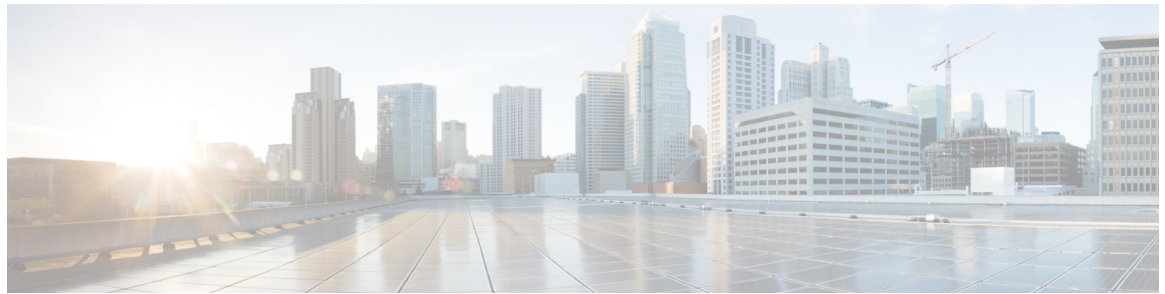

CONTENTS

PREFACE

About this Guide	vii
Conventions Used	vii
Contacting Customer Support	viii

CHAPTER 1

Npcf_AMPolicyControl	1
OpenAPI	1
Info	1
Servers	1
Security	2
Paths	2
/policies	2
/policies/{polAssoId}	4
/policies/{polAssoId}/update	6
Components	7

CHAPTER 2

Nnrf_NFDiscovery	11
OpenAPI	11
Info	11
Servers	11
Security	12
Paths	12
/nf-instances	12
Components	12
External Docs	19

CHAPTER 3

Nnrf_NFManagement	21
-----------------------------------	----

OpenAPI	21
Info	21
Servers	21
Security	22
Paths	22
/nf-instances	22
/nf-instances/{nfInstanceId}	25
/subscriptions	25
/subscriptions/{subscriptionID}	27
Components	30
External Docs	30

CHAPTER 4

Npcf_SMPolicyControl	31
OpenAPI	31
Info	31
Servers	31
Security	31
Paths	32
/sm-policies	32
/sm-policies/{smPolicyId}	32
/sm-policies/{smPolicyId}/update	32
/sm-policies/{smPolicyId}/delete	33
Components	34
External Docs	60

CHAPTER 5

Nchf_SpendingLimitControl	61
OpenAPI	61
Info	61
Servers	61
Security	62
Paths	62
/subscriptions	62
/subscriptions/{subscriptionId}	64
Components	66

[External Docs](#) 68

CHAPTER 6

[Nchf_SpendingLimitControl_Callbacks](#) 69

[OpenAPI](#) 69

[Info](#) 69

[Servers](#) 69

[Security](#) 69

[Paths](#) 70

[/npcf/callbacks/nchf-spendinglimitcontrol/v1/subscriptions/{subscriptionId}/notify](#) 70

[/npcf/callbacks/nchf-spendinglimitcontrol/v1/subscriptions/{subscriptionId}/terminate](#) 71

[Components](#) 71



About this Guide



Note The documentation set for this product strives to use bias-free language. For purposes of this documentation set, bias-free is defined as language that does not imply discrimination based on age, disability, gender, racial identity, ethnic identity, sexual orientation, socioeconomic status, and intersectionality. While any existing biased terms are being substituted, exceptions may be present in the documentation due to language that is hardcoded in the user interfaces of the product software, language used based on RFP documentation, or language that is used by a referenced third-party product.

This preface describes the *Ultra Cloud Core 5G Policy Control Function API Reference*, the document conventions, and the customer support details.

- [Conventions Used, on page vii](#)
- [Contacting Customer Support, on page viii](#)

Conventions Used

The following tables describe the conventions used throughout this documentation.

Notice Type	Description
Information Note	Provides information about important features or instructions.
Caution	Alerts you of potential damage to a program, device, or system.
Warning	Alerts you of potential personal injury or fatality. May also alert you of potential electrical hazards.

Typeface Conventions	Description
Text represented as a screen display	This typeface represents displays that appear on your terminal screen, for example: Login:

Typeface Conventions	Description
Text represented as commands	This typeface represents commands that you enter, for example: show ip access-list This document always gives the full form of a command in lowercase letters. Commands are not case sensitive.
Text represented as a command variable	This typeface represents a variable that is part of a command, for example: show card slot_number <i>slot_number</i> is a variable representing the applicable chassis slot number.
Text represented as menu or sub-menu names	This typeface represents menus and sub-menus that you access within a software application, for example: Click the File menu, then click New

Contacting Customer Support

Use the information in this section to contact customer support.

Refer to the support area of <http://www.cisco.com> for up-to-date product documentation or to submit a service request. A valid username and password are required to access this site. Please contact your Cisco sales or service representative for additional information.



CHAPTER 1

Npcf_AMPolicyControl

The PCF uses the Npcf_AMPolicyControl API to communicate with the Access and Mobility Management Function (AMF) over the N15 Interface.

- [OpenAPI, on page 1](#)
- [Info, on page 1](#)
- [Servers, on page 1](#)
- [Security, on page 2](#)
- [Paths, on page 2](#)
- [Components, on page 7](#)

OpenAPI

OpenAPI Version: 3.0.0

Info

Description: Access and Mobility Policy Control Service API

Version: "1.0.0"

Title: Npcf_AMPolicyControl

Servers

URL: '{apiRoot}/npcf-am-policy-control/v1'

Variables:

API Root:

Default: `https://example.com`

Description: apiRoot as defined in subclause subclause 4.4 of 3GPP TS 29.501

Security

```
- {}
- oAuth2ClientCredentials:
  - npcf-am-policy-control
```

Paths

/policies

```
Method: Post
Request Body:
  Required/Optional: true
  Content:
    Application/JSON:
      Schema:
        Reference: '#/components/schemas/PolicyAssociationRequest'

Responses:
  '201':
    Description: Created
    Content:
      Application/JSON:
        Schema:
          Reference: '#/components/schemas/PolicyAssociation'
    Headers:
      Location:
        description: 'Contains the URI of the newly created resource,
according to the structure: {apiRoot}/npcf-am-policy-control/v1/policies/{polAssoId}'

      Required/Optional: true
      Schema:
        Type: string
  '400':
    Reference: 'TS29571_CommonData.yaml#/components/responses/400'
  '401':
    Reference: 'TS29571_CommonData.yaml#/components/responses/401'
  '403':
    Reference: 'TS29571_CommonData.yaml#/components/responses/403'
  '404':
    Reference: 'TS29571_CommonData.yaml#/components/responses/404'
  '411':
    Reference: 'TS29571_CommonData.yaml#/components/responses/411'
  '413':
    Reference: 'TS29571_CommonData.yaml#/components/responses/413'
  '415':
    Reference: 'TS29571_CommonData.yaml#/components/responses/415'
```

```

'429':
  Reference: 'TS29571_CommonData.yaml#/components/responses/429'
'500':
  Reference: 'TS29571_CommonData.yaml#/components/responses/500'
'503':
  Reference: 'TS29571_CommonData.yaml#/components/responses/503'
Default:
  Reference: 'TS29571_CommonData.yaml#/components/responses/default'
Callbacks:
  policyUpdateNotification:
    '{$request.body#/notificationUri}/update':
      Method: Post
      Request Body:
        Required/Optional: true
        Content:
          Application/JSON:
            Schema:
              Reference: '#/components/schemas/PolicyUpdate'

      Responses:
        '204':
          Description: No Content, Notification was succesfull
        '307':
          Description: temporary redirect
        '400':
          Reference: 'TS29571_CommonData.yaml#/components/responses/400'
        '401':
          Reference: 'TS29571_CommonData.yaml#/components/responses/401'
        '403':
          Reference: 'TS29571_CommonData.yaml#/components/responses/403'
        '404':
          Reference: 'TS29571_CommonData.yaml#/components/responses/404'
        '411':
          Reference: 'TS29571_CommonData.yaml#/components/responses/411'
        '413':
          Reference: 'TS29571_CommonData.yaml#/components/responses/413'
        '415':
          Reference: 'TS29571_CommonData.yaml#/components/responses/415'
        '429':
          Reference: 'TS29571_CommonData.yaml#/components/responses/429'
        '500':
          Reference: 'TS29571_CommonData.yaml#/components/responses/500'
        '503':
          Reference: 'TS29571_CommonData.yaml#/components/responses/503'
        Default:
          Reference: 'TS29571_CommonData.yaml#/components/responses/default'
  policyAssociationTerminationRequestNotification:
    '{$request.body#/notificationUri}/terminate':
      Method: Post
      Request Body:
        Required/Optional: true
        Content:

```

Application/JSON:**Schema:****Reference:** '#/components/schemas/TerminationNotification'**Responses:****'204':****Description:** No Content, Notification was succesfull**'307':****Description:** temporary redirect**'400':****Reference:** 'TS29571_CommonData.yaml#/components/responses/400'**'401':****Reference:** 'TS29571_CommonData.yaml#/components/responses/401'**'403':****Reference:** 'TS29571_CommonData.yaml#/components/responses/403'**'404':****Reference:** 'TS29571_CommonData.yaml#/components/responses/404'**'411':****Reference:** 'TS29571_CommonData.yaml#/components/responses/411'**'413':****Reference:** 'TS29571_CommonData.yaml#/components/responses/413'**'415':****Reference:** 'TS29571_CommonData.yaml#/components/responses/415'**'429':****Reference:** 'TS29571_CommonData.yaml#/components/responses/429'**'500':****Reference:** 'TS29571_CommonData.yaml#/components/responses/500'**'503':****Reference:** 'TS29571_CommonData.yaml#/components/responses/503'**Default:****Reference:** 'TS29571_CommonData.yaml#/components/responses/default'

/policies/{polAssold}

get:**Parameters:****- Name:** polAssoId**In:** path**Description:** Identifier of a policy association**Required/Optional:** true**Schema:****Type:** string**Responses:****'200':****Description:** OK. Resource representation is returned**Content:****Application/JSON:****Schema:****Reference:** '#/components/schemas/PolicyAssociation'

```

'400':
  Reference: 'TS29571_CommonData.yaml#/components/responses/400'
'401':
  Reference: 'TS29571_CommonData.yaml#/components/responses/401'
'403':
  Reference: 'TS29571_CommonData.yaml#/components/responses/403'
'404':
  Reference: 'TS29571_CommonData.yaml#/components/responses/404'
'406':
  Reference: 'TS29571_CommonData.yaml#/components/responses/406'
'429':
  Reference: 'TS29571_CommonData.yaml#/components/responses/429'
'500':
  Reference: 'TS29571_CommonData.yaml#/components/responses/500'
'503':
  Reference: 'TS29571_CommonData.yaml#/components/responses/503'
Default:
  Reference: 'TS29571_CommonData.yaml#/components/responses/default'
delete:

```

Parameters:

```

- Name: polAssId
  In: path
  Description: Identifier of a policy association
  Required/Optional: true
  Schema:
    Type: string

```

Responses:

```

'204':
  Description: No Content. Resource was succesfully deleted
'400':
  Reference: 'TS29571_CommonData.yaml#/components/responses/400'
'401':
  Reference: 'TS29571_CommonData.yaml#/components/responses/401'
'403':
  Reference: 'TS29571_CommonData.yaml#/components/responses/403'
'404':
  Reference: 'TS29571_CommonData.yaml#/components/responses/404'
'429':
  Reference: 'TS29571_CommonData.yaml#/components/responses/429'
'500':
  Reference: 'TS29571_CommonData.yaml#/components/responses/500'
'503':
  Reference: 'TS29571_CommonData.yaml#/components/responses/503'
Default:
  Reference: 'TS29571_CommonData.yaml#/components/responses/default'

```

/policies/{polAssold}/update

Method: Post

Request Body:

Required/Optional: true

Content:

Application/JSON:

Schema:

Reference: '#/components/schemas/PolicyAssociationUpdateRequest'

Parameters:

- **Name:** polAssoId

In: path

Description: Identifier of a policy association

Required/Optional: true

Schema:

Type: string

Responses:

'200':

Description: OK. Updated policies are returned

Content:

Application/JSON:

Schema:

Reference: '#/components/schemas/PolicyUpdate'

'400':

Reference: 'TS29571_CommonData.yaml#/components/responses/400'

'401':

Reference: 'TS29571_CommonData.yaml#/components/responses/401'

'403':

Reference: 'TS29571_CommonData.yaml#/components/responses/403'

'404':

Reference: 'TS29571_CommonData.yaml#/components/responses/404'

'411':

Reference: 'TS29571_CommonData.yaml#/components/responses/411'

'413':

Reference: 'TS29571_CommonData.yaml#/components/responses/413'

'415':

Reference: 'TS29571_CommonData.yaml#/components/responses/415'

'429':

Reference: 'TS29571_CommonData.yaml#/components/responses/429'

'500':

Reference: 'TS29571_CommonData.yaml#/components/responses/500'

'503':

Reference: 'TS29571_CommonData.yaml#/components/responses/503'

Default:

Reference: 'TS29571_CommonData.yaml#/components/responses/default'

Components

```

securitySchemes:
  oAuth2ClientCredentials:
    Type: oauth2
    Flows:
      clientCredentials:
        tokenUrl: '{nrfApiRoot}/oauth2/token'
        scopes:
          npcf-am-policy-control: Access to the Npcf_AMPolicyControl API

schemas:
  PolicyAssociation:
    Type: object
    Properties:
      request:
        Reference: '#/components/schemas/PolicyAssociationRequest'
      triggers:
        Type: array
        Items:
          Reference: '#/components/schemas/RequestTrigger'
        minItems: 1
        Description: Request Triggers that the PCF subscribes. Only values "LOC_CH" and
"PRA_CH" are permitted.
      servAreaRes:
        Reference: 'TS29571_CommonData.yaml#/components/schemas/ServiceAreaRestriction'
      rfsp:
        Reference: 'TS29571_CommonData.yaml#/components/schemas/RfspIndex'
      pras:
        Type: object
        additionalProperties:
          Reference: 'TS29571_CommonData.yaml#/components/schemas/PresenceInfo'
        minProperties: 1
      suppFeat:
        Reference: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
    Required:
      - suppFeat
  PolicyAssociationRequest:
    Type: object
    Properties:
      notificationUri:
        Reference: 'TS29571_CommonData.yaml#/components/schemas/Uri'
      altNotifIpv4Addrs:
        Type: array
        Items:
          Reference: 'TS29571_CommonData.yaml#/components/schemas/Ipv4Addr'
        minItems: 1
        Description: Alternate or backup IPv4 Address(es) where to send Notifications.
      altNotifIpv6Addrs:

```

```

    Type: array
    Items:
      Reference: 'TS29571_CommonData.yaml#/components/schemas/Ipv6Addr'
    minItems: 1
    Description: Alternate or backup IPv6 Address(es) where to send Notifications.
  supi:
    Reference: 'TS29571_CommonData.yaml#/components/schemas/Supi'
  gpsi:
    Reference: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
  accessType:
    Reference: 'TS29571_CommonData.yaml#/components/schemas/AccessType'
  pei:
    Reference: 'TS29571_CommonData.yaml#/components/schemas/Pei'
  userLoc:
    Reference: 'TS29571_CommonData.yaml#/components/schemas/UserLocation'
  timeZone:
    Reference: 'TS29571_CommonData.yaml#/components/schemas/TimeZone'
  servingPlmn:
    Reference: 'TS29571_CommonData.yaml#/components/schemas/NetworkId'
  ratType:
    Reference: 'TS29571_CommonData.yaml#/components/schemas/RatType'
  groupIds:
    Type: array
    Items:
      Reference: 'TS29571_CommonData.yaml#/components/schemas/GroupId'
    minItems: 1
  servAreaRes:
    Reference: 'TS29571_CommonData.yaml#/components/schemas/ServiceAreaRestriction'
  rfsp:
    Reference: 'TS29571_CommonData.yaml#/components/schemas/RfspIndex'
  guami:
    Reference: 'TS29571_CommonData.yaml#/components/schemas/Guami'
  serviveName:
    Type: string
    Description: If the NF service consumer is an AMF, it should provide the name of
    a service produced by the AMF that makes use of information received within the
    Npcf_AMPolicyControl_UpdateNotify service operation.
  traceReq:
    Reference: 'TS29571_CommonData.yaml#/components/schemas/TraceData'
  suppFeat:
    Reference: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
Required:
  - notificationUri
  - suppFeat
  - supi
PolicyAssociationUpdateRequest:
  Type: object
  Properties:
    notificationUri:
      Reference: 'TS29571_CommonData.yaml#/components/schemas/Uri'
    altNotifIpv4Addrs:
      Type: array

```



```

    Items:
      Reference: 'TS29571_CommonData.yaml#/components/schemas/Ipv4Addr'
    minItems: 1
    Description: Alternate or backup IPv4 Address(es) where to send Notifications.
  altNotifIpv6Addrs:
    Type: array
    Items:
      Reference: 'TS29571_CommonData.yaml#/components/schemas/Ipv6Addr'
    minItems: 1
    Description: Alternate or backup IPv6 Address(es) where to send Notifications.
  triggers:
    Type: array
    Items:
      Reference: '#/components/schemas/RequestTrigger'
    minItems: 1
    Description: Request Triggers that the NF service consumer observes.
  servAreaRes:
    Reference: 'TS29571_CommonData.yaml#/components/schemas/ServiceAreaRestriction'
  rfsp:
    Reference: 'TS29571_CommonData.yaml#/components/schemas/RfspIndex'
  praStatuses:
    Type: object
    additionalProperties:
      Reference: 'TS29571_CommonData.yaml#/components/schemas/PresenceInfo'
    minProperties: 1
    Description: Map of PRA status information.
  userLoc:
    Reference: 'TS29571_CommonData.yaml#/components/schemas/UserLocation'
  traceReq:
    Reference: 'TS29571_CommonData.yaml#/components/schemas/TraceData'
PolicyUpdate:
  Type: object
  Properties:
    resourceUri:
      Reference: 'TS29571_CommonData.yaml#/components/schemas/Uri'
    triggers:
      Type: array
      Items:
        Reference: '#/components/schemas/RequestTrigger'
      minItems: 1
      nullable: true
      Description: Request Triggers that the PCF subscribes. Only values "LOC_CH" and
        "PRA_CH" are permitted.
    servAreaRes:
      Reference: 'TS29571_CommonData.yaml#/components/schemas/ServiceAreaRestriction'
    rfsp:
      Reference: 'TS29571_CommonData.yaml#/components/schemas/RfspIndex'
    pras:
      Type: object
      additionalProperties:
        Reference: 'TS29571_CommonData.yaml#/components/schemas/PresenceInfoRm'
      Description: Map of PRA information.

```

```

        minProperties: 1
        nullable: true
    Required:
      - resourceUri
  TerminationNotification:
    Type: object
    Properties:
      resourceUri:
        Reference: 'TS29571_CommonData.yaml#/components/schemas/Uri'
      cause:
        Reference: '#/components/schemas/PolicyAssociationReleaseCause'
    Required:
      - resourceUri
      - cause
  RequestTrigger:
    anyOf:
      - type: string
        enum:
          - LOC_CH
          - PRA_CH
          - SERV_AREA_CH
          - RFSP_CH
      - type: string
        Description:
          This string provides forward-compatibility with future
          extensions to the enumeration but is not used to encode
          content defined in the present version of this API.
        Description:
          Possible values are
          - LOC_CH: Location change (tracking area). The tracking area of the UE has changed.
          - PRA_CH: Change of UE presence in PRA. The UE is entering/leaving a Presence Reporting
            Area.
          - SERV_AREA_CH: Service Area Restriction change. The UDM notifies the AMF that the
            subscribed service area restriction information has changed.
          - RFSP_CH: RFSP index change. The UDM notifies the AMF that the subscribed RFSP index
            has changed.
    PolicyAssociationReleaseCause:
      anyOf:
        - type: string
          enum:
            - UNSPECIFIED
            - UE_SUBSCRIPTION
            - INSUFFICIENT_RES
        - type: string
          Description:
            This string provides forward-compatibility with future
            extensions to the enumeration but is not used to encode
            content defined in the present version of this API.
          Description:
            Possible values are
            - UNSPECIFIED: This value is used for unspecified reasons.
            - UE_SUBSCRIPTION: This value is used to indicate that the session needs to be
              terminated because the subscription of UE has changed (e.g. was removed).
            - INSUFFICIENT_RES: This value is used to indicate that the server is overloaded and
              needs to abort the session.

```



CHAPTER 2

Nnrf_NFDiscovery

The Network Repository Function authorizes an NF client to perform the discovery operation using the Nnrf_NFDiscovery service to detect an NF.

- [OpenAPI, on page 11](#)
- [Info, on page 11](#)
- [Servers, on page 11](#)
- [Security, on page 12](#)
- [Paths, on page 12](#)
- [Components, on page 12](#)
- [External Docs, on page 19](#)

OpenAPI

OpenAPI Version: 3.0.0

Info

Version: '1.0.0'

Title: 'NRF NFDiscovery Service'

Description: 'NRF NFDiscovery Service'

Servers

URL: '{apiRoot}/nnrf-disc/v1'

Variables:

API Root:

Default: `https://example.com`

Description: apiRoot as defined in subclause subclause 4.4 of 3GPP TS 29.501

Security

```
- {}  
- oAuth2ClientCredentials:  
  - nnrf-disc
```

Paths

/nf-instances

Components

```
securitySchemes:  
  oAuth2ClientCredentials:  
    Type: oauth2  
    Flows:  
      clientCredentials:  
        tokenUrl: '/oauth2/token'  
        scopes:  
          nnrf-disc: Access to the Nnrf_NFDisccovery API
```

```
schemas:
```

SearchResult:

Type: object
Required:
- nfInstances
Properties:
 validityPeriod:
 Type: integer
 nfInstances:
 Type: array
 Items:
 Reference: '#/components/schemas/NFProfile'

NFProfile:

Type: object
Required:
- nfInstanceId
- nfType
- nfStatus
Properties:
 nfInstanceId:
 Reference: 'TS29571_CommonData.yaml#/components/schemas/NfInstanceId'

 nfType:
 Reference: 'TS29510_Nnrf_NFManagement.yaml#/components/schemas/NFType'
 nfStatus:
 Reference: 'TS29510_Nnrf_NFManagement.yaml#/components/schemas/NFStatus'
 plmnList:
 Type: array
 Items:
 Reference: 'TS29571_CommonData.yaml#/components/schemas/PlmnId'
 minItems: 1
 sNssais:
 Type: array
 Items:
 minItems: 1

```
nsiList:
  Type: array
  Items:
    Type: string
  minItems: 1
fqdn:
  Reference: 'TS29510_Nnrf_NFManagement.yaml#/components/schemas/Fqdn'
ipv4Addresses:
  Type: array
  Items:
    Reference: 'TS29571_CommonData.yaml#/components/schemas/Ipv4Addr'
  minItems: 1
ipv6Addresses:
  Type: array
  Items:
    Reference: 'TS29571_CommonData.yaml#/components/schemas/Ipv6Addr'
  minItems: 1
capacity:
  Type: integer
  Minimum: 0
  Maximum: 65535
load:
  Type: integer
  Minimum: 0
  Maximum: 100
locality:
  Type: string
priority:
  Type: integer
  Minimum: 0
  Maximum: 65535
udrInfo:
  Reference: 'TS29510_Nnrf_NFManagement.yaml#/components/schemas/UdrInfo'

udmInfo:
  Reference: 'TS29510_Nnrf_NFManagement.yaml#/components/schemas/UdmInfo'

ausfInfo:
  Reference: 'TS29510_Nnrf_NFManagement.yaml#/components/schemas/AusfInfo'

amfInfo:
  Reference: 'TS29510_Nnrf_NFManagement.yaml#/components/schemas/AmfInfo'
```

smfInfo:

Reference: 'TS29510_Nnrf_NFManagement.yaml#/components/schemas/SmfInfo'

upfInfo:

Reference: 'TS29510_Nnrf_NFManagement.yaml#/components/schemas/UpfInfo'

pcfInfo:

Reference: 'TS29510_Nnrf_NFManagement.yaml#/components/schemas/PcfInfo'

bsfInfo:

Reference: 'TS29510_Nnrf_NFManagement.yaml#/components/schemas/bsfInfo'

chfInfo:

Reference: 'TS29510_Nnrf_NFManagement.yaml#/components/schemas/ChfInfo'

customInfo:

```

    Type: object
  recoveryTime:
    Reference: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
  nfServicePersistence:
    Type: boolean
    Default: false
  nfServices:
    Type: array
    Items:
      Reference: '#/components/schemas/NFService'
    minItems: 1

```

Reference: 'TS29510_Nnrf_NFManagement.yaml#/components/schemas/lmfInfo'

Reference: 'TS29510_Nnrf_NFManagement.yaml#/components/schemas/gmlcInfo'

NFService:**Type:** object**Required:**

- serviceInstanceId
- serviceName
- versions
- scheme
- nfServiceStatus

Properties:**serviceInstanceId:****Type:** string**serviceName:****Reference:** 'TS29510_Nnrf_NFManagement.yaml#/components/schemas/ServiceName'**versions:****Type:** array**Items:****Reference:** 'TS29510_Nnrf_NFManagement.yaml#/components/schemas/NFServiceVersion'**minItems:** 1**scheme:****Reference:** 'TS29571_CommonData.yaml#/components/schemas/UriScheme'**nfServiceStatus:****Reference:** 'TS29510_Nnrf_NFManagement.yaml#/components/schemas/NFServiceStatus'**fqdn:****Reference:** 'TS29510_Nnrf_NFManagement.yaml#/components/schemas/Fqdn'**ipEndPoints:****Type:** array**Items:****Reference:** 'TS29510_Nnrf_NFManagement.yaml#/components/schemas/IpEndPoint'**minItems:** 1**apiPrefix:****Type:** string**defaultNotificationSubscriptions:****Type:** array**Items:****Reference:**

'TS29510_Nnrf_NFManagement.yaml#/components/schemas/DefaultNotificationSubscription'

minItems: 1**capacity:****Type:** integer**Minimum:** 0**Maximum:** 65535**load:****Type:** integer**Minimum:** 0**Maximum:** 100**priority:****Type:** integer

Minimum: 0
Maximum: 65535
recoveryTime:
Reference: 'TS29571_CommonData.yaml#/components/schemas/DateTime'

supportedFeatures:
Reference: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'

External Docs

Description: 3GPP TS 29.510 V15.2.0; 5G System; Network Function Repository Services; Stage 3

URL: 'http://www.3gpp.org/ftp/Specs/archive/29_series/29.510/'



CHAPTER 3

Nnrf_NFManagement

The Network Repository Function uses the Nnrf_NFManagement service to manage the create, update, and delete an NF.

- [OpenAPI, on page 21](#)
- [Info, on page 21](#)
- [Servers, on page 21](#)
- [Security, on page 22](#)
- [Paths, on page 22](#)
- [Components, on page 30](#)
- [External Docs, on page 30](#)

OpenAPI

OpenAPI Version: 3.0.0

Info

Title: 'NRF NFManagement Service'

Description: 'NRF NFManagement Service'

Servers

URL: '{apiRoot}/nnrf-nfm/v1'

Variables:

API Root:

Default: `https://example.com`

Security

```
- {}
- oAuth2ClientCredentials:
  - nnrf-nfm
```

Paths

/nf-instances

get:

Summary: Retrieves a collection of NF Instances

Operation ID: GetNFInstances

Tags:

- NF Instances (Store)

Parameters:

```
- Name: nf-type
  In: query
  Description: Type of NF
  Required/Optional: false
  Schema:
    Reference: '#/components/schemas/NFType'
- Name: limit
  In: query
  Description: How many items to return at one time
  Required/Optional: false
  Schema:
    Type: integer
```

Responses:

```
'200':
  Description: Expected response to a valid request
  Content:
    application/3gppHal+json:
      Schema:
        Type: object
        Properties:
          _links:
            Type: object
            Description: 'List of the URI of NF instances. It has two members whose
names are item and self. The item one contains an array of URIs.'
          additionalProperties:
            Reference:
'TS29571_CommonData.yaml#/components/schemas/LinksValueSchema'
        minProperties: 1
```

```
'400':
  Reference: 'TS29571_CommonData.yaml#/components/responses/400'
'403':
  Reference: 'TS29571_CommonData.yaml#/components/responses/403'
'404':
  Reference: 'TS29571_CommonData.yaml#/components/responses/404'
'411':
  Reference: 'TS29571_CommonData.yaml#/components/responses/411'
'413':
  Reference: 'TS29571_CommonData.yaml#/components/responses/413'
'415':
  Reference: 'TS29571_CommonData.yaml#/components/responses/415'
'500':
  Reference: 'TS29571_CommonData.yaml#/components/responses/500'
'501':
  Reference: 'TS29571_CommonData.yaml#/components/responses/501'
'503':
  Reference: 'TS29571_CommonData.yaml#/components/responses/503'
Default:
  Reference: 'TS29571_CommonData.yaml#/components/responses/default'
options:
  summary: Discover communication options supported by NRF for NF Instances
  operationId: OptionsNFInstances
  tags:
    - NF Instances (Store)
  responses:
    '200':
      description: OK

  headers:
    Accept-Encoding:
```

description: Accept-Encoding, described in IETF RFC 7694

'400':
 Reference: 'TS29571_CommonData.yaml#/components/responses/400'
'403':
 Reference: 'TS29571_CommonData.yaml#/components/responses/403'
'404':
 Reference: 'TS29571_CommonData.yaml#/components/responses/404'
'411':
 Reference: 'TS29571_CommonData.yaml#/components/responses/411'
'413':
 Reference: 'TS29571_CommonData.yaml#/components/responses/413'
'415':
 Reference: 'TS29571_CommonData.yaml#/components/responses/415'
'500':
 Reference: 'TS29571_CommonData.yaml#/components/responses/500'
'501':
 Reference: 'TS29571_CommonData.yaml#/components/responses/501'
'503':
 Reference: 'TS29571_CommonData.yaml#/components/responses/503'
Default:
 Reference: 'TS29571_CommonData.yaml#/components/responses/default'

/nf-instances/{nfInstanceId}

/subscriptions

Method: Post

Summary: Create a new subscription

Operation ID: CreateSubscription

Tags:

- Subscriptions (Collection)

parameters:

- name: Content-Encoding

Request Body:

Content:

Application/JSON:

Schema:

Reference: '#/components/schemas/SubscriptionData'

Required/Optional: true

Responses:

'201':

Description: Expected response to a valid request

Content:

Application/JSON:

Schema:

Reference: '#/components/schemas/SubscriptionData'

Headers:

Location:

description: 'Contains the URI of the newly created resource, according to the structure: {apiRoot}/nnrf-nfm/v1/subscriptions/{subscriptionId}'

```

'400':
  Reference: 'TS29571_CommonData.yaml#/components/responses/400'
'403':
  Reference: 'TS29571_CommonData.yaml#/components/responses/403'
'404':
  Reference: 'TS29571_CommonData.yaml#/components/responses/404'
'411':
  Reference: 'TS29571_CommonData.yaml#/components/responses/411'
'413':
  Reference: 'TS29571_CommonData.yaml#/components/responses/413'
'415':
  Reference: 'TS29571_CommonData.yaml#/components/responses/415'
'500':
  Reference: 'TS29571_CommonData.yaml#/components/responses/500'
'501':
  Reference: 'TS29571_CommonData.yaml#/components/responses/501'
'503':
  Reference: 'TS29571_CommonData.yaml#/components/responses/503'
Default:
  Reference: 'TS29571_CommonData.yaml#/components/responses/default'
Callbacks:
  onNFStatusEvent:
    '{$request.body#/nfStatusNotificationUri}':
      Post:

```

Request Body:**Description:** Notification Payload**Content:****Application/JSON:****Schema:****Reference:** '#/components/schemas/NotificationData'**Responses:****'204':****Description:** Expected response to a successful callback processing

```
'400':  
  Reference: 'TS29571_CommonData.yaml#/components/responses/400'  
'403':  
  Reference: 'TS29571_CommonData.yaml#/components/responses/403'  
'404':  
  Reference: 'TS29571_CommonData.yaml#/components/responses/404'  
'411':  
  Reference: 'TS29571_CommonData.yaml#/components/responses/411'  
'413':  
  Reference: 'TS29571_CommonData.yaml#/components/responses/413'  
'415':  
  Reference: 'TS29571_CommonData.yaml#/components/responses/415'  
'500':  
  Reference: 'TS29571_CommonData.yaml#/components/responses/500'  
'501':  
  Reference: 'TS29571_CommonData.yaml#/components/responses/501'  
'503':  
  Reference: 'TS29571_CommonData.yaml#/components/responses/503'  
Default:  
  Reference: 'TS29571_CommonData.yaml#/components/responses/default'
```

/subscriptions/{subscriptionID}

patch:

Summary: Updates a subscription
Operation ID: UpdateSubscription

Tags:

- Subscription ID (Document)

Parameters:

- **Name:** subscriptionID
In: path
Required/Optional: true

Description: Unique ID of the subscription to update

Schema:

Type: string

pattern: '^([0-9]{5,6}-)?[^-]+\$'

Request Body:

Content:

application/json-patch+json:

Schema:

Type: array

Items:

Reference: 'TS29571_CommonData.yaml#/components/schemas/PatchItem'

Required/Optional: true

Responses:

'200':

Description: Expected response to a valid request

Content:

Application/JSON:

Schema:

Reference: '#/components/schemas/SubscriptionData'

'204':

Description: No Content

```
'400':
  Reference: 'TS29571_CommonData.yaml#/components/responses/400'
'403':
  Reference: 'TS29571_CommonData.yaml#/components/responses/403'
'404':
  Reference: 'TS29571_CommonData.yaml#/components/responses/404'
'411':
  Reference: 'TS29571_CommonData.yaml#/components/responses/411'
'413':
  Reference: 'TS29571_CommonData.yaml#/components/responses/413'
'415':
  Reference: 'TS29571_CommonData.yaml#/components/responses/415'
'500':
  Reference: 'TS29571_CommonData.yaml#/components/responses/500'
'501':
  Reference: 'TS29571_CommonData.yaml#/components/responses/501'
'503':
  Reference: 'TS29571_CommonData.yaml#/components/responses/503'
Default:
  Reference: 'TS29571_CommonData.yaml#/components/responses/default'
delete:
  Summary: Deletes a subscription
  Operation ID: RemoveSubscription

Tags:
- Subscription ID (Document)

Parameters:
- Name: subscriptionID
  In: path
  Required/Optional: true
  Description: Unique ID of the subscription to remove
  Schema:
    Type: string
    pattern: '^[0-9]{5,6}-?[^-]+$'

Responses:
'204':
  Description: Expected response to a successful subscription removal
```

```

'400':
  Reference: 'TS29571_CommonData.yaml#/components/responses/400'
'403':
  Reference: 'TS29571_CommonData.yaml#/components/responses/403'
'404':
  Reference: 'TS29571_CommonData.yaml#/components/responses/404'
'411':
  Reference: 'TS29571_CommonData.yaml#/components/responses/411'
'413':
  Reference: 'TS29571_CommonData.yaml#/components/responses/413'
'415':
  Reference: 'TS29571_CommonData.yaml#/components/responses/415'
'500':
  Reference: 'TS29571_CommonData.yaml#/components/responses/500'
'501':
  Reference: 'TS29571_CommonData.yaml#/components/responses/501'
'503':
  Reference: 'TS29571_CommonData.yaml#/components/responses/503'
Default:
  Reference: 'TS29571_CommonData.yaml#/components/responses/default'

```

Components

External Docs

Description: 3GPP TS 29.510 V15.2.0; 5G System; Network Function Repository Services; Stage 3

URL: 'http://www.3gpp.org/ftp/Specs/archive/29_series/29.510/'



CHAPTER 4

Npcf_SMPolicyControl

The Policy Control Function (PCF) uses the Npcf_SMPolicyControl service to create, update, and delete requests on the SMF.

- [OpenAPI, on page 31](#)
- [Info, on page 31](#)
- [Servers, on page 31](#)
- [Security, on page 31](#)
- [Paths, on page 32](#)
- [Components, on page 34](#)
- [External Docs, on page 60](#)

OpenAPI

OpenAPI Version: 3.0.0

Info

Servers

URL: '{apiRoot}/npcf-smpolicycontrol/v1'

Variables:

API Root:

Default: https://example.com

Description: apiRoot as defined in subclause 4.4 of 3GPP TS 29.501

Security

- {}
- oAuth2Clientcredentials:
 - npcf-smpolicycontrol

Paths

/sm-policies

/sm-policies/{smPolicyId}

get:

Parameters:

- **Name:** smPolicyId
- In:** path
- Description:** Identifier of a policy association
- Required/Optional:** true
- Schema:**
 - Type:** string

Responses:

- '200':
 - Description:** OK. Resource representation is returned
 - Content:**
 - Application/JSON:**
 - Schema:**
 - Reference:** '#/components/schemas/SmPolicyControl'
- '400':
 - Reference:** 'TS29571_CommonData.yaml#/components/responses/400'
- '401':
 - Reference:** 'TS29571_CommonData.yaml#/components/responses/401'
- '403':
 - Reference:** 'TS29571_CommonData.yaml#/components/responses/403'
- '404':
 - Reference:** 'TS29571_CommonData.yaml#/components/responses/404'
- '406':
 - Reference:** 'TS29571_CommonData.yaml#/components/responses/406'
- '429':
 - Reference:** 'TS29571_CommonData.yaml#/components/responses/429'
- '500':
 - Reference:** 'TS29571_CommonData.yaml#/components/responses/500'
- '503':
 - Reference:** 'TS29571_CommonData.yaml#/components/responses/503'
- Default:**
 - Reference:** 'TS29571_CommonData.yaml#/components/responses/default'

/sm-policies/{smPolicyId}/update

Method: Post

Request Body:

Required/Optional: true
Content:
Application/JSON:
Schema:
Reference: '#/components/schemas/SmPolicyUpdateContextData'

Parameters:
 - **Name:** smPolicyId
In: path
Description: Identifier of a policy association
Required/Optional: true
Schema:
Type: string

Responses:
'200':
Description: OK. Updated policies are returned
Content:
Application/JSON:
Schema:
Reference: '#/components/schemas/SmPolicyDecision'

'400':
Reference: 'TS29571_CommonData.yaml#/components/responses/400'

'401':
Reference: 'TS29571_CommonData.yaml#/components/responses/401'

'403':
Reference: 'TS29571_CommonData.yaml#/components/responses/403'

'404':
Reference: 'TS29571_CommonData.yaml#/components/responses/404'

'411':
Reference: 'TS29571_CommonData.yaml#/components/responses/411'

'413':
Reference: 'TS29571_CommonData.yaml#/components/responses/413'

'415':
Reference: 'TS29571_CommonData.yaml#/components/responses/415'

'429':
Reference: 'TS29571_CommonData.yaml#/components/responses/429'

'500':
Reference: 'TS29571_CommonData.yaml#/components/responses/500'

'503':
Reference: 'TS29571_CommonData.yaml#/components/responses/503'

Default:
Reference: 'TS29571_CommonData.yaml#/components/responses/default'

/sm-policies/{smPolicyId}/delete

Method: Post
Request Body:
Required/Optional: true
Content:

```

    Application/JSON:
      Schema:
        Reference: '#/components/schemas/SmPolicyDeleteData'

Parameters:
  - Name: smPolicyId
    In: path
    Description: Identifier of a policy association
    Required/Optional: true
    Schema:
      Type: string

Responses:
  '204':
    Description: No content
  '400':
    Reference: 'TS29571_CommonData.yaml#/components/responses/400'
  '401':
    Reference: 'TS29571_CommonData.yaml#/components/responses/401'
  '403':
    Reference: 'TS29571_CommonData.yaml#/components/responses/403'
  '404':
    Reference: 'TS29571_CommonData.yaml#/components/responses/404'
  '411':
    Reference: 'TS29571_CommonData.yaml#/components/responses/411'
  '413':
    Reference: 'TS29571_CommonData.yaml#/components/responses/413'
  '415':
    Reference: 'TS29571_CommonData.yaml#/components/responses/415'
  '429':
    Reference: 'TS29571_CommonData.yaml#/components/responses/429'
  '500':
    Reference: 'TS29571_CommonData.yaml#/components/responses/500'
  '503':
    Reference: 'TS29571_CommonData.yaml#/components/responses/503'
Default:
  Reference: 'TS29571_CommonData.yaml#/components/responses/default'

```

Components

```

securitySchemes:
  oAuth2ClientCredentials:
    Type: oauth2
    Flows:
      clientCredentials:
        tokenUrl: '{nrfApiRoot}/oauth2/token'
        scopes:
          npcf-smpolicycontrol: Access to the Npcf_SMPolicyControl API

schemas:

```

```

SmPolicyControl :
  Type: object
  Properties:
    context:
      Reference: '#/components/schemas/SmPolicyContextData'
    policy:
      Reference: '#/components/schemas/SmPolicyDecision'
  Required:
    - context
    - policy
SmPolicyContextData:
  Type: object
  Properties:
    accNetChId:
      Reference: '#/components/schemas/AccNetChId'
    chargEntityAddr:
      Reference: '#/components/schemas/AccNetChargingAddress'
    gpsi:
      Reference: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
    supi:
      Reference: 'TS29571_CommonData.yaml#/components/schemas/Supi'
    interGrpIds:
      Type: array
      Items:
        Reference: 'TS29571_CommonData.yaml#/components/schemas/GroupId'
      minItems: 1
    pduSessionId:
      Reference: 'TS29571_CommonData.yaml#/components/schemas/PduSessionId'
    pduSessionType:
      Reference: 'TS29571_CommonData.yaml#/components/schemas/PduSessionType'
    chargingcharacteristics:
      Type: string
    dnn:
      Reference: 'TS29571_CommonData.yaml#/components/schemas/Dnn'
    notificationUri:
      Reference: 'TS29571_CommonData.yaml#/components/schemas/Uri'
    accessType:
      Reference: 'TS29571_CommonData.yaml#/components/schemas/AccessType'
    ratType:
      Reference: 'TS29571_CommonData.yaml#/components/schemas/RatType'
    servingNetwork:
      Reference: 'TS29571_CommonData.yaml#/components/schemas/NetworkId'
    userLocationInfo:
      Reference: 'TS29571_CommonData.yaml#/components/schemas/UserLocation'
    ueTimeZone:
      Reference: 'TS29571_CommonData.yaml#/components/schemas/TimeZone'
    pei:
      Reference: 'TS29571_CommonData.yaml#/components/schemas/Pei'
    ipv4Address:
      Reference: 'TS29571_CommonData.yaml#/components/schemas/Ipv4Addr'
    ipv6AddressPrefix:
      Reference: 'TS29571_CommonData.yaml#/components/schemas/Ipv6Prefix'

```

```

ipDomain:
  Type: string
  Description: Indicates the IPv4 address domain
subsSessAmbr:
  Reference: 'TS29571_CommonData.yaml#/components/schemas/Ambr'
subsDefQos:
  Reference: 'TS29571_CommonData.yaml#/components/schemas/SubscribedDefaultQos'
numOfPackFilter:
  Type: integer
  Description: Contains the number of supported packet filter for signalled QoS
rules.
online:
  Type: boolean
  Description: If it is included and set to true, the online charging is applied
to the PDU session.
offline:
  Type: boolean
  Description: If it is included and set to true, the offline charging is applied
to the PDU session.
3gppPsDataOffStatus:
  Type: boolean
  Description: If it is included and set to true, the 3GPP PS Data Off is activated
by the UE.
refQosIndication:
  Type: boolean
  Description: If it is included and set to true, the reflective QoS is supported
by the UE.
traceReq:
  Reference: 'TS29571_CommonData.yaml#/components/schemas/TraceData'
sliceInfo:
  Reference: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
qosFlowUsage:
  Reference: '#/components/schemas/QosFlowUsage'
suppFeat:
  Reference: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
Required:
  - supi
  - pduSessionId
  - pduSessionType
  - dnn
  - notificationUri
  - sliceInfo
SmPolicyDecision:
  Type: object
  Properties:
    sessRules:
      Type: object
      additionalProperties:
        Reference: '#/components/schemas/SessionRule'
      minProperties: 1
      Description: A map of Sessionrules with the content being the SessionRule as
described in subclause 5.6.2.7.
    pccRules:
      Type: object

```

```

additionalProperties:
  Reference: '#/components/schemas/PccRule'
minProperties: 1
Description: A map of PCC rules with the content being the PCCRule as described
in subclause 5.6.2.6.
nullable: true
pcscfRestIndication:
  Type: boolean
Description: If it is included and set to true, it indicates the P-CSCF Restoration
is requested.
qosDecs:
  Type: object
additionalProperties:
  Reference: '#/components/schemas/QosData'
minProperties: 1
Description: Map of QoS data policy decisions.
chgDecs:
  Type: object
additionalProperties:
  Reference: '#/components/schemas/ChargingData'
minProperties: 1
Description: Map of Charging data policy decisions.
nullable: true
chargingInfo:
  Reference: '#/components/schemas/ChargingInformation'
traffContDecs:
  Type: object
additionalProperties:
  Reference: '#/components/schemas/TrafficControlData'
minProperties: 1
Description: Map of Traffic Control data policy decisions.
umDecs:
  Type: object
additionalProperties:
  Reference: '#/components/schemas/UsageMonitoringData'
minProperties: 1
Description: Map of Usage Monitoring data policy decisions.
nullable: true
qosChars:
  Type: object
additionalProperties:
  Reference: '#/components/schemas/QosCharacteristics'
minProperties: 1
Description: Map of QoS characteristics for non standard 5QIs. This map uses the
5QI values as keys.
reflectiveQoS_TIMER:
  Reference: 'TS29571_CommonData.yaml#/components/schemas/DurationSec'
conds:
  Type: object
additionalProperties:
  Reference: '#/components/schemas/ConditionData'
minProperties: 1

```

Description: A map of condition data with the content being as described in subclause 5.6.2.9.

nullable: true

revalidationTime:

Reference: 'TS29571_CommonData.yaml#/components/schemas/DateTime'

offline:

Type: boolean

Description: Indicates the offline charging is applicable to the PDU session or PCC rule.

online:

Type: boolean

Description: Indicates the online charging is applicable to the PDU session or PCC rule.

policyCtrlReqTriggers:

Type: array

Items:

Reference: '#/components/schemas/PolicyControlRequestTrigger'

minItems: 1

Description: Defines the policy control request triggers subscribed by the PCF.

nullable: true

lastReqRuleData:

Type: array

Items:

Reference: '#/components/schemas/RequestedRuleData'

minItems: 1

Description: Defines the last list of rule control data requested by the PCF.

lastReqUsageData:

Reference: '#/components/schemas/RequestedUsageData'

priInfos:

Type: object

additionalProperties:

Reference: 'TS29571_CommonData.yaml#/components/schemas/PresenceInfoRm'

minProperties: 1

Description: Map of PRA information.

nullable: true

ipv4Index:

Reference: 'TS29519_ApplicationData.yaml#/components/schemas/IpIndex'

Description: Information that identifies which IP pool or external server is used to allocate the IPv4 address.

ipv6Index:

Reference: 'TS29519_ApplicationData.yaml#/components/schemas/IpIndex'

Description: Information that identifies which IP pool or external server is used to allocate the IPv6 address.

qosFlowUsage:

Reference: '#/components/schemas/QosFlowUsage'

suppFeat:

Reference: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'

SmPolicyNotification:

Type: object

Properties:

resourceUri:

Reference: 'TS29571_CommonData.yaml#/components/schemas/Uri'

```

    smPolicyDecision:
      Reference: '#/components/schemas/SmPolicyDecision'
PccRule:
  Type: object
  Properties:
    flowInfos:
      Type: array
      Items:
        Reference: '#/components/schemas/FlowInformation'
      minItems: 1
      Description: An array of IP flow packet filter information.
    appId:
      Type: string
      Description: A reference to the application detection filter configured at the
UPF.
    contVer:
      Reference:
'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/ContentVersion'
    pccRuleId:
      Type: string
      Description: Univocally identifies the PCC rule within a PDU session.
    precedence:
      Type: integer
      Description: Determines the order in which this PCC rule is applied relative to
other PCC rules within the same PDU session.
    afSigProtocol:
      Reference: '#/components/schemas/AfSigProtocol'
      nullable: true
    appReloc:
      Type: boolean
      Description: Indication of application relocation possibility.
    refQosData:
      Type: array
      Items:
        Type: string
      minItems: 1
      maxItems: 1
      Description: A reference to the QoSData policy type decision type. It is the
qosId described in subclause 5.6.2.8. (NOTE)
    refTcData:
      Type: array
      Items:
        Type: string
      minItems: 1
      maxItems: 1
      Description: A reference to the TrafficControlData policy decision type. It is
the tcId described in subclause 5.6.2.10. (NOTE)
    refChgData:
      Type: array
      Items:
        Type: string
      minItems: 1

```

```

    maxItems: 1
    Description: A reference to the ChargingData policy decision type. It is the
    chgId described in subclause 5.6.2.11. (NOTE)
    nullable: true
    refUmData:
      Type: array
      Items:
        Type: string
      minItems: 1
      maxItems: 1
      Description: A reference to UsageMonitoringData policy decision type. It is the
      umId described in subclause 5.6.2.12. (NOTE)
      nullable: true
    refCondData:
      Type: string
      Description: A reference to the condition data. It is the condId described in
      subclause 5.6.2.9.
      nullable: true
    Required:
      - pccRuleId
    nullable: true
  SessionRule:
    Type: object
    Properties:
      authSessAmbr:
        Reference: 'TS29571_CommonData.yaml#/components/schemas/Ambr'
      authDefQos:
        Reference: '#/components/schemas/AuthorizedDefaultQos'
      sessRuleId:
        Type: string
        Description: Univocally identifies the session rule within a PDU session.
      refUmData:
        Type: string
        Description: A reference to UsageMonitoringData policy decision type. It is the
        umId described in subclause 5.6.2.12.
        nullable: true
      refCondData:
        Type: string
        Description: A reference to the condition data. It is the condId described in
        subclause 5.6.2.9.
        nullable: true
    Required:
      - sessRuleId
    nullable: true
  QosData:
    Type: object
    Properties:
      qosId:
        Type: string
        Description: Univocally identifies the QoS control policy data within a PDU
        session.
      5qi:
        Reference: 'TS29571_CommonData.yaml#/components/schemas/5qi'

```


maxbrUl:
Reference: 'TS29571_CommonData.yaml#/components/schemas/BitRateRm'

maxbrDl:
Reference: 'TS29571_CommonData.yaml#/components/schemas/BitRateRm'

gbrUl:
Reference: 'TS29571_CommonData.yaml#/components/schemas/BitRateRm'

gbrDl:
Reference: 'TS29571_CommonData.yaml#/components/schemas/BitRateRm'

arp:
Reference: 'TS29571_CommonData.yaml#/components/schemas/Arp'

qnc:
Type: boolean
Description: Indicates whether notifications are requested from 3GPP NG-RAN when the GBR can no longer (or again) be guaranteed for a QoS Flow during the lifetime of the QoS Flow.

priorityLevel:
Reference: 'TS29571_CommonData.yaml#/components/schemas/5QIPriorityLevelRm'

averWindow:
Reference: 'TS29571_CommonData.yaml#/components/schemas/AverWindowRm'

maxDataBurstVol:
Reference: 'TS29571_CommonData.yaml#/components/schemas/MaxDataBurstVolRm'

reflectiveQos:
Type: boolean
Description: Indicates whether the QoS information is reflective for the corresponding service data flow.

sharingKeyDl:
Type: string
Description: Indicates, by containing the same value, what PCC rules may share resource in downlink direction.

sharingKeyUl:
Type: string
Description: Indicates, by containing the same value, what PCC rules may share resource in uplink direction.

maxPacketLossRateDl:
Reference: 'TS29571_CommonData.yaml#/components/schemas/PacketLossRateRm'

maxPacketLossRateUl:
Reference: 'TS29571_CommonData.yaml#/components/schemas/PacketLossRateRm'

defQosFlowIndication:
Type: boolean
Description: Indicates that the dynamic PCC rule shall always have its binding with the QoS Flow associated with the default QoS rule

Required:
 - qosId

nullable: true

ConditionData:
Type: object

Properties:

condId:
Type: string
Description: Uniquely identifies the condition data within a PDU session.

activationTime:
Reference: 'TS29571_CommonData.yaml#/components/schemas/DateTimeRm'

deactivationTime:

```

    Reference: 'TS29571_CommonData.yaml#/components/schemas/DateTimeRm'
Required:
  - condId
nullable: true
TrafficControlData:
  Type: object
  Properties:
    tcId:
      Type: string
      Description: Univocally identifies the traffic control policy data within a PDU
session.
    flowStatus:
      Reference: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/FlowStatus'

    redirectInfo:
      Reference: '#/components/schemas/RedirectInformation'
    muteNotif:
      Type: boolean
      Description: Indicates whether applicat'on's start or stop notification is to be
muted.
    trafficSteeringPolIdDl:
      Type: string
      Description: Reference to a pre-configured traffic steering policy for downlink
traffic at the SMF.
      nullable: true
    trafficSteeringPolIdUl:
      Type: string
      Description: Reference to a pre-configured traffic steering policy for uplink
traffic at the SMF.
      nullable: true
    routeToLocs:
      Type: array
      Items:
        Reference: 'TS29571_CommonData.yaml#/components/schemas/RouteToLocation'
        minItems: 1
        Description: A list of location which the traffic shall be routed to for the AF
request
    upPathChgEvent:
      Reference: '#/components/schemas/UpPathChgEvent'
Required:
  - tcId
nullable: true
ChargingData:
  Type: object
  Properties:
    chgId:
      Type: string
      Description: Univocally identifies the charging control policy data within a PDU
session.
    meteringMethod:
      Reference: '#/components/schemas/MeteringMethod'
      nullable: true
    offline:

```

Type: boolean
Description: Indicates the offline charging is applicable to the PDU session or PCC rule.

online:
Type: boolean
Description: Indicates the online charging is applicable to the PDU session or PCC rule.

ratingGroup:
Reference: 'TS29571_CommonData.yaml#/components/schemas/RatingGroup'

reportingLevel:
Reference: '#/components/schemas/ReportingLevel'
nullable: true

serviceId:
Reference: 'TS29571_CommonData.yaml#/components/schemas/ServiceId'

sponsorId:
Type: string
Description: Indicates the sponsor identity.

appSvcProvId:
Type: string
Description: Indicates the application service provider identity.

afChargingIdentifier:
Reference: 'TS29571_CommonData.yaml#/components/schemas/ChargingId'

Required:
- chgId

nullable: true

UsageMonitoringData:
Type: object

Properties:

umId:
Type: string
Description: Univocally identifies the usage monitoring policy data within a PDU session.

volumeThreshold:
Reference: 'TS29122_CommonData.yaml#/components/schemas/VolumeRm'

volumeThresholdUplink:
Reference: 'TS29122_CommonData.yaml#/components/schemas/VolumeRm'

volumeThresholdDownlink:
Reference: 'TS29122_CommonData.yaml#/components/schemas/VolumeRm'

timeThreshold:
Reference: 'TS29571_CommonData.yaml#/components/schemas/DurationSecRm'

monitoringTime:
Reference: 'TS29571_CommonData.yaml#/components/schemas/DateTimeRm'

nextVolThreshold:
Reference: 'TS29122_CommonData.yaml#/components/schemas/VolumeRm'

nextVolThresholdUplink:
Reference: 'TS29122_CommonData.yaml#/components/schemas/VolumeRm'

nextVolThresholdDownlink:
Reference: 'TS29122_CommonData.yaml#/components/schemas/VolumeRm'

nextTimeThreshold:
Reference: 'TS29571_CommonData.yaml#/components/schemas/DurationSecRm'

inactivityTime:
Reference: 'TS29571_CommonData.yaml#/components/schemas/DurationSecRm'

```

exUsagePccRuleIds:
  Type: array
  Items:
    Type: string
    minItems: 1
  Description: Contains the PCC rule identifier(s) which corresponding service data
  flow(s) shall be excluded from PDU Session usage monitoring. It is only included in the
  UsageMonitoringData instance for session level usage monitoring.
  nullable: true
Required:
  - umId
nullable: true
RedirectInformation:
Type: object
Properties:
  redirectEnabled:
    Type: boolean
    Description: Indicates the redirect is enable.
  redirectAddressType:
    Reference: '#/components/schemas/RedirectAddressType'
  redirectServerAddress:
    Type: string
    Description: Indicates the address of the redirect server.
FlowInformation:
Type: object
Properties:
  flowDescription:
    Reference: '#/components/schemas/FlowDescription'
  ethFlowDescription:
    Reference:
'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/EthFlowDescription'
    Description: Defines a packet filter for an Ethernet flow. "fDir" attribute is
not applicable.
  packFiltId:
    Type: string
    Description: An identifier of packet filter.
  packetFilterUsage:
    Type: boolean
    Description: The packet shall be sent to the UE.
  tosTrafficClass:
    Type: string
    Description: Contains the Ipv4 Type-of-Service and mask field or the Ipv6
Traffic-Class field and mask field.
    nullable: true
  spi:
    Type: string
    Description: the security parameter index of the IPSec packet.
    nullable: true
  flowLabel:
    Type: string
    Description: the Ipv6 flow label header field.
    nullable: true
  flowDirection:

```

```

    Reference: '#/components/schemas/FlowDirectionRm'
SmPolicyDeleteData:
  Type: object
  Properties:
    userLocationInfo:
      Reference: 'TS29571_CommonData.yaml#/components/schemas/UserLocation'
    ueTimeZone:
      Reference: 'TS29571_CommonData.yaml#/components/schemas/TimeZone'
    servingNetwork:
      Reference: 'TS29571_CommonData.yaml#/components/schemas/NetworkId'
    userLocationInfoTime:
      Reference: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
    ranNasRelCauses:
      Type: array
      Items:
        Reference: '#/components/schemas/RanNasRelCause'
      minItems: 1
      Description: Contains the RAN and/or NAS release cause.
    accuUsageReports:
      Type: array
      Items:
        Reference: '#/components/schemas/AccuUsageReport'
      minItems: 1
      Description: Contains the usage report
QosCharacteristics:
  Type: object
  Properties:
    5qi:
      Reference: 'TS29571_CommonData.yaml#/components/schemas/5Qi'
    resourceType:
      Reference: 'TS29571_CommonData.yaml#/components/schemas/QosResourceType'
    priorityLevel:
      Reference: 'TS29571_CommonData.yaml#/components/schemas/5QiPriorityLevel'
    packetDelayBudget:
      Reference: 'TS29571_CommonData.yaml#/components/schemas/PacketDelBudget'
    packetErrorRate:
      Reference: 'TS29571_CommonData.yaml#/components/schemas/PacketErrRate'
    averagingWindow:
      Reference: 'TS29571_CommonData.yaml#/components/schemas/AverWindow'
    maxDataBurstVol:
      Reference: 'TS29571_CommonData.yaml#/components/schemas/MaxDataBurstVol'
  Required:
    - 5qi
    - resourceType
    - priorityLevel
    - packetDelayBudget
    - packetErrorRate
ChargingInformation:
  Type: object
  Properties:
    primaryChfAddress:
      Reference: 'TS29571_CommonData.yaml#/components/schemas/Uri'

```

```

    secondaryChfAddress:
      Reference: 'TS29571_CommonData.yaml#/components/schemas/Uri'
    Required:
      - primaryChfAddress
      - secondaryChfAddress
    AccuUsageReport:
      Type: object
      Properties:
        refUmIds:
          Type: string
          Description: An id referencing UsageMonitoringData objects associated with this
usage report.
        volUsage:
          Reference: 'TS29122_CommonData.yaml#/components/schemas/Volume'
        volUsageUplink:
          Reference: 'TS29122_CommonData.yaml#/components/schemas/Volume'
        volUsageDownlink:
          Reference: 'TS29122_CommonData.yaml#/components/schemas/Volume'
        timeUsage:
          Reference: 'TS29571_CommonData.yaml#/components/schemas/DurationSec'
        nextVolUsage:
          Reference: 'TS29122_CommonData.yaml#/components/schemas/Volume'
        nextVolUsageUplink:
          Reference: 'TS29122_CommonData.yaml#/components/schemas/Volume'
        nextVolUsageDownlink:
          Reference: 'TS29122_CommonData.yaml#/components/schemas/Volume'
        nextTimeUsage:
          Reference: 'TS29571_CommonData.yaml#/components/schemas/DurationSec'
    Required:
      - refUmIds
    SmPolicyUpdateContextData:
      Type: object
      Properties:
        repPolicyCtrlReqTriggers:
          Type: array
          Items:
            Reference: '#/components/schemas/PolicyControlRequestTrigger'
            minItems: 1
            Description: The policy control request triggers which are met.
        accNetChIds:
          Type: array
          Items:
            Reference: '#/components/schemas/AccNetChId'
            minItems: 1
            Description: Indicates the access network charging identifier for the PCC rule(s)
or whole PDU session.
        accessType:
          Reference: 'TS29571_CommonData.yaml#/components/schemas/AccessType'
        ratType:
          Reference: 'TS29571_CommonData.yaml#/components/schemas/RatType'
        servingNetwork:
          Reference: 'TS29571_CommonData.yaml#/components/schemas/NetworkId'

```

```

userLocationInfo:
  Reference: 'TS29571_CommonData.yaml#/components/schemas/UserLocation'
ueTimeZone:
  Reference: 'TS29571_CommonData.yaml#/components/schemas/TimeZone'
relIpv4Address:
  Reference: 'TS29571_CommonData.yaml#/components/schemas/Ipv4Addr'
ipv4Address:
  Reference: 'TS29571_CommonData.yaml#/components/schemas/Ipv4Addr'
ipv6AddressPrefix:
  Reference: 'TS29571_CommonData.yaml#/components/schemas/Ipv6Prefix'
relIpv6AddressPrefix:
  Reference: 'TS29571_CommonData.yaml#/components/schemas/Ipv6Prefix'
relUeMac:
  Reference: 'TS29571_CommonData.yaml#/components/schemas/MacAddr48'
ueMac:
  Reference: 'TS29571_CommonData.yaml#/components/schemas/MacAddr48'
subsSessAmbr:
  Reference: 'TS29571_CommonData.yaml#/components/schemas/Ambr'
subsDefQos:
  Reference: 'TS29571_CommonData.yaml#/components/schemas/SubscribedDefaultQos'
numOfPackFilter:
  Type: integer
  Description: Contains the number of supported packet filter for signalled QoS
rules.
accuUsageReports:
  Type: array
  Items:
    Reference: '#/components/schemas/AccuUsageReport'
  minItems: 1
  Description: Contains the usage report
3gppPsDataOffStatus:
  Type: boolean
  Description: If it is included and set to true, the 3GPP PS Data Off is activated
by the UE.
appDetectionInfos:
  Type: array
  Items:
    Reference: '#/components/schemas/AppDetectionInfo'
  minItems: 1
  Description: Report the start/stop of the application traffic and detected SDF
descriptions if applicable.
ruleReports:
  Type: array
  Items:
    Reference: '#/components/schemas/RuleReport'
  minItems: 1
  Description: Used to report the PCC rule failure.
qncReports:
  Type: array
  Items:
    Reference: '#/components/schemas/QosNotificationControlInfo'
  minItems: 1

```

Description: QoS Notification Control information.

userLocationInfoTime:

Reference: 'TS29571_CommonData.yaml#/components/schemas/DateTime'

repPraInfos:

Type: object

additionalProperties:

Reference: 'TS29571_CommonData.yaml#/components/schemas/PresenceInfo'

minProperties: 1

Description: Reports the changes of presence reporting area.

ueInitResReq:

Reference: '#/components/schemas/UeInitiatedResourceRequest'

Description: Indicates a UE requests specific QoS handling for selected SDF.

refQosIndication:

Type: boolean

Description: If it is included and set to true, the reflective QoS is supported by the UE. If it is included and set to false, the reflective QoS is revoked by the UE.

qosFlowUsage:

Reference: '#/components/schemas/QosFlowUsage'

traceReq:

Reference: 'TS29571_CommonData.yaml#/components/schemas/TraceData'

UpPathChgEvent:

Type: object

Properties:

notificationUri:

Reference: 'TS29571_CommonData.yaml#/components/schemas/Uri'

notifCorreId:

Type: string

Description: It is used to set the value of Notification Correlation ID in the notification sent by the SMF.

dnaiChgType:

Reference: 'TS29571_CommonData.yaml#/components/schemas/DnaiChangeType'

Required:

- notificationUri
- notifCorreId
- dnaiChgType

nullable: true

TerminationNotification:

Type: object

Properties:

resourceUri:

Reference: 'TS29571_CommonData.yaml#/components/schemas/Uri'

cause:

Reference: 'TS29507_Npcf_AMPolicyControl.yaml#/components/schemas/PolicyAssociationReleaseCause'

Required:

- resourceUri
- cause

AppDetectionInfo :

Type: object

Properties:

appId:

Type: string

Description: A reference to the application detection filter configured at the

UPF

instanceId:**Type:** string

Description: Identifier dynamically assigned by the SMF in order to allow correlation of application Start and Stop events to the specific service data flow description, if service data flow descriptions are deducible.

sdfDescriptions:**Type:** array**Items:****Reference:** '#/components/schemas/FlowInformation'**minItems:** 1

Description: Contains the detected service data flow descriptions if they are deducible.

Required:

- appId

AccNetChId:**Type:** object**Properties:****accNetChaIdValue:****Reference:** 'TS29571_CommonData.yaml#/components/schemas/ChargingId'**refPccRuleIds:****Type:** array**Items:****Type:** string**minItems:** 1

Description: Contains the identifier of the PCC rule(s) associated to the provided Access Network Charging Identifier.

sessionChScope:**Type:** boolean

Description: When it is included and set to true, indicates the Access Network Charging Identifier applies to the whole PDU Session

Required:

- accNetChaIdValue

AccNetChargingAddress:

Description: Describes the network entity within the access network performing charging

Type: object**anyOf:**

- required: [anChargIpv4Addr]

- required: [anChargIpv6Addr]

Properties:**anChargIpv4Addr:****Reference:** 'TS29571_CommonData.yaml#/components/schemas/Ipv4Addr'**anChargIpv6Addr:****Reference:** 'TS29571_CommonData.yaml#/components/schemas/Ipv6Addr'**RequestedRuleData:****Type:** object**Properties:****refPccRuleIds:****Type:** array**Items:****Type:** string**minItems:** 1

Description: An array of PCC rule id references to the PCC rules associated with

the control data.

reqData:

Type: array

Items:

Reference: '#/components/schemas/RequestedRuleDataType'

minItems: 1

Description: Array of requested rule data type elements indicating what type of rule data is requested for the corresponding referenced PCC rules.

Required:

- refPccRuleIds
- reqData

RequestedUsageData:

Type: object

Properties:

refUmIds:

Type: array

Items:

Type: string

minItems: 1

Description: An array of usage monitoring data id references to the usage monitoring data instances for which the PCF is requesting a usage report. This attribute shall only be provided when allUmIds is not set to true.

allUmIds:

Type: boolean

Description: The boolean indicates whether requested usage data applies to all usage monitoring data instances. When it's not included, it means requested usage data shall only apply to the usage monitoring data instances referenced by the refUmIds attribute.

UeCampingRep:

Type: object

Properties:

accessType:

Reference: 'TS29571_CommonData.yaml#/components/schemas/AccessType'

Description: The Access Type where the served UE is camping

ratType:

Reference: 'TS29571_CommonData.yaml#/components/schemas/RatType'

servingNetwork:

Reference: 'TS29571_CommonData.yaml#/components/schemas/NetworkId'

userLocationInfo:

Reference: 'TS29571_CommonData.yaml#/components/schemas/UserLocation'

ueTimeZone:

Reference: 'TS29571_CommonData.yaml#/components/schemas/TimeZone'

RuleReport:

Type: object

Properties:

pccRuleIds:

Type: array

Items:

Type: string

minItems: 1

Description: Contains the identifier of the affected PCC rule(s).

ruleStatus:

Reference: '#/components/schemas/RuleStatus'

Description: Indicates the status of the PCC rule(s).

contVers:

Type: array

Items:

Reference:

'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/ContentVersion'

minItems: 1

Description: Indicates the version of a PCC rule.

failureCode:

Reference: '#/components/schemas/FailureCode'

Description: Indicates the reason tha the PCC Rule is being reported.

finUnitAct:

Reference: 'TS32291_Nchf_ConvergedCharging.yaml#/components/schemas/FinalUnitAction'

Description: Contains the related filter parameters and redirect address parameters (if available), when the user's account cannot cover the service cost.

ranNasRelCauses:

Type: array

Items:

Reference: '#/components/schemas/RanNasRelCause'

minItems: 1

Description: indicates the RAN or NAS release cause code information.

Required:

- pccRuleIds
- ruleStatus
- failureCode

RanNasRelCause:

Type: object

Properties:

ngApCause:

Reference: 'TS29571_CommonData.yaml#/components/schemas/NgApCause'

Description: Indicate the cause value for NGAP protocol.

5gMmCause:

Reference: 'TS29571_CommonData.yaml#/components/schemas/5GMMCause'

Description: Indicate the cause value for 5GMM protocol.

5gSmCause:

Reference: '#/components/schemas/5GSmCause'

Description: Indicate the cause value for 5GSM protocol.

UeInitiatedResourceRequest:

Type: object

Properties:

packFiltOp:

Reference: '#/components/schemas/PacketFilterOperation'

Description: Indicates a UE requests specific QoS handling for selected SDF.

packFiltInfo:

Type: array

Items:

Reference: '#/components/schemas/PacketFilterInfo'

Description: Contains the information from a single packet filter sent from the SMF to the PCF.

minItems: 1

reqQos:

Reference: '#/components/schemas/RequestedQos'

Description: Contains the QoS information requested by the UE.

Required:

- packFiltOp
- packFiltInfo

PacketFilterInfo:

Type: object

Properties:

packFiltId:

Type: string

Description: An identifier of packet filter.

precedence:

Type: integer

Description: The requested order for the PCC rule generated from the packet filter information.

packFiltCont:

Reference: '#/components/schemas/PacketFilterContent'

Description: Contains the content of the packet filter as requested by the UE and required by the PCF to create the PCC rules.

tosTrafficClass:

Type: string

Description: Contains the Ipv4 Type-of-Service and mask field or the Ipv6 Traffic-Class field and mask field.

spi:

Type: string

Description: The security parameter index of the IPSec packet.

flowLabel:

Type: string

Description: The Ipv6 flow label header field.

flowDirection:

Reference: '#/components/schemas/FlowDirection'

Description: Indicates the direction/directions that a filter is applicable, downlink only, uplink only or both down- and uplink (bidirectional).

RequestedQos:

Type: object

Properties:

5qi:

Reference: 'TS29571_CommonData.yaml#/components/schemas/5qi'

Description: Identifier for the authorized QoS parameters for the service data flow.

gbrUl:

Reference: 'TS29571_CommonData.yaml#/components/schemas/BitRate'

Description: Indicates the guaranteed bandwidth in uplink requested by the UE.

gbrDl:

Reference: 'TS29571_CommonData.yaml#/components/schemas/BitRate'

Description: Indicates the guaranteed bandwidth in downlink requested by the UE.

Required:

- 5qi

QosNotificationControlInfo:

Type: object

Properties:

refPccRuleIds:

Type: array

```

    Items:
      Type: string
      minItems: 1
      Description: An array of PCC rule id references to the PCC rules associated with
the QoS notification control info.
      notifType:
        Reference: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/QosNotifType'

    contVer:
      Reference:
'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/ContentVersion'
      Required:
        - refPccRuleIds
        - notifType
    PartialSuccessReport:
      Type: object
      Properties:
        failureCause:
          Type: string
          Description: Application error cause specific to this report.
        ruleReports:
          Type: array
          Items:
            Reference: '#/components/schemas/RuleReport'
            minItems: 1
            Description: Information about the PCC rules provisioned by the PCF not
successfully installed/activated.
        ueCampingRep:
          Reference: '#/components/schemas/UeCampingRep'
          Description: Includes the current applicable values corresponding to the
provisioned policy control request triggers.
      Required:
        - failureCause
        - ruleReports
    AuthorizedDefaultQos:
      Type: object
      Properties:
        5qi:
          Reference: 'TS29571_CommonData.yaml#/components/schemas/5Qi'
          Description: Identifier for the 5QI.
        arp:
          Reference: 'TS29571_CommonData.yaml#/components/schemas/Arp'
        priorityLevel:
          Reference: 'TS29571_CommonData.yaml#/components/schemas/5QiPriorityLevelRm'
        averWindow:
          Reference: 'TS29571_CommonData.yaml#/components/schemas/AverWindowRm'
        maxDataBurstVol:
          Reference: 'TS29571_CommonData.yaml#/components/schemas/MaxDataBurstVolRm'
    ErrorReport:
      Type: object
      Properties:
        error:
          Reference: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'

```

```

    ruleReports:
      Type: array
      Items:
        Reference: '#/components/schemas/RuleReport'
      minItems: 1
      Description: Used to report the PCC rule failure.
  5GSmCause:
    Reference: 'TS29571_CommonData.yaml#/components/schemas/UInteger'
    Description: Indicating the cause value of 5GSM protocol.
  PacketFilterContent:
    Type: string
    Description: Defines a packet filter for an IP flow.Refer to subclause 5.3.54 of 3GPP
    TS 29.212 [23] for encoding.
  FlowDescription:
    Type: string
    Description: Defines a packet filter for an IP flow.Refer to subclause 5.4.2 of 3GPP
    TS 29.212 [23] for encoding.
  FlowDirection:
    anyOf:
      - type: string
        enum:
          - DOWNLINK
          - UPLINK
          - BIDIRECTIONAL
          - UNSPECIFIED
      - type: string
        Description:
          This string provides forward-compatibility with future
          extensions to the enumeration but is not used to encode
          content defined in the present version of this API.
    Description:
      Possible values are
      - DOWNLINK: The corresponding filter applies for traffic to the UE.
      - UPLINK: The corresponding filter applies for traffic from the UE.
      - BIDIRECTIONAL: The corresponding filter applies for traffic both to and from the
      UE.
      - UNSPECIFIED: The corresponding filter applies for traffic to the UE (downlink), but
      has no specific direction declared. The service data flow detection shall apply the filter
      for uplink traffic as if the filter was bidirectional. The PCF shall not use the value
      UNSPECIFIED in filters created by the network in NW-initiated procedures. The PCF shall
      only include the value UNSPECIFIED in filters in UE-initiated procedures if the same value
      is received from the SMF.
  FlowDirectionRm:
    anyOf:
      - type: string
        enum:
          - DOWNLINK
          - UPLINK
          - BIDIRECTIONAL
          - UNSPECIFIED
      - type: string
        Description:
          This string provides forward-compatibility with future
          extensions to the enumeration but is not used to encode
          content defined in the present version of this API.
    Description:
      Possible values are
      - DOWNLINK: The corresponding filter applies for traffic to the UE.

```

- UPLINK: The corresponding filter applies for traffic from the UE.
- BIDIRECTIONAL: The corresponding filter applies for traffic both to and from the UE.
- UNSPECIFIED: The corresponding filter applies for traffic to the UE (downlink), but has no specific direction declared. The service data flow detection shall apply the filter for uplink traffic as if the filter was bidirectional. The PCF shall not use the value UNSPECIFIED in filters created by the network in NW-initiated procedures. The PCF shall only include the value UNSPECIFIED in filters in UE-initiated procedures if the same value is received from the SMF.

nullable: true

ReportingLevel:

anyOf:

- type: string

enum:

- SER_ID_LEVEL
- RAT_GR_LEVEL
- SPON_CON_LEVEL

- type: string

Description:

This string provides forward-compatibility with future extensions to the enumeration but is not used to encode content defined in the present version of this API.

Description:

Possible values are

- SER_ID_LEVEL: Indicates that the usage shall be reported on service id and rating group combination level.
- RAT_GR_LEVEL: Indicates that the usage shall be reported on rating group level.
- SPON_CON_LEVEL: Indicates that the usage shall be reported on sponsor identity and rating group combination level.

MeteringMethod:

anyOf:

- type: string

enum:

- DURATION
- VOLUME
- DURATION_VOLUME
- EVENT

- type: string

Description:

This string provides forward-compatibility with future extensions to the enumeration but is not used to encode content defined in the present version of this API.

Description:

Possible values are

- DURATION: Indicates that the duration of the service data flow traffic shall be metered.
- VOLUME: Indicates that volume of the service data flow traffic shall be metered.
- DURATION_VOLUME: Indicates that the duration and the volume of the service data flow traffic shall be metered.
- EVENT: Indicates that events of the service data flow traffic shall be metered.

PolicyControlRequestTrigger:

anyOf:

- type: string

enum:

- PLMN_CH
- RES_MO_RE
- AC_TY_CH
- UE_IP_CH
- UE_MAC_CH
- AN_CH_COR
- US_RE

- APP_STA
 - APP_STO
 - AN_INFO
 - CM_SES_FAIL
 - PS_DA_OFF
 - DEF_QOS_CH
 - SE_AMBR_CH
 - QOS_NOTIF
 - NO_CREDIT
 - PRA_CH
 - SAREA_CH
 - SCNN_CH
 - RE_TIMEOUT
 - RES_RELEASE
 - SUCC_RES_ALLO
 - RAT_TY_CH
 - REF_QOS_IND_CH
- type: string

Description:

This string provides forward-compatibility with future extensions to the enumeration but is not used to encode content defined in the present version of this API.

Description:

- Possible values are
- PLMN_CH: PLMN Change
 - RES_MO_RE: A request for resource modification has been received by the SMF. The SMF always reports to the PCF.
 - AC_TY_CH: Access Type Change
 - UE_IP_CH: UE IP address change. The SMF always reports to the PCF.
 - UE_MAC_CH: A new UE MAC address is detected or a used UE MAC address is inactive for a specific period
 - AN_CH_COR: Access Network Charging Correlation Information
 - US_RE: The PDU Session or the Monitoring key specific resources consumed by a UE either reached the threshold or needs to be reported for other reasons.
 - APP_STA: The start of application traffic has been detected.
 - APP_STO: The stop of application traffic has been detected.
 - AN_INFO: Access Network Information report
 - CM_SES_FAIL: Credit management session failure
 - PS_DA_OFF: The SMF reports when the 3GPP PS Data Off status changes. The SMF always reports to the PCF.
 - DEF_QOS_CH: Default QoS Change. The SMF always reports to the PCF.
 - SE_AMBR_CH: Session AMBR Change. The SMF always reports to the PCF.
 - QOS_NOTIF: The SMF notify the PCF when receiving notification from RAN that QoS targets of the QoS Flow cannot be guranteed or gurateed again.
 - NO_CREDIT: Out of credit
 - PRA_CH: Change of UE presence in Presence Reporting Area
 - SAREA_CH: Location Change with respect to the Serving Area
 - SCNN_CH: Location Change with respect to the Serving CN node
 - RE_TIMEOUT: Indicates the SMF generated the request because there has been a PCC revalidation timeout
 - RES_RELEASE: Indicate that the SMF can inform the PCF of the outcome of the release of resources for those rules that require so.
 - SUCC_RES_ALLO: Indicates that the requested rule data is the successful resource allocation.
 - RAT_TY_CH: RAT Type Change.
 - REF_QOS_IND_CH: Reflective QoS indication Change

RequestedRuleDataType:**anyOf:**

- type: string

enum:

- CH_ID
- MS_TIME_ZONE
- USER_LOC_INFO

- RES_RELEASE
- SUCC_RES_ALLO
- type: string

Description:

This string provides forward-compatibility with future extensions to the enumeration but is not used to encode content defined in the present version of this API.

Description:

Possible values are

- CH_ID: Indicates that the requested rule data is the charging identifier.
- MS_TIME_ZONE: Indicates that the requested access network info type is the UE's timezone.
- USER_LOC_INFO: Indicates that the requested access network info type is the UE's location.
- RES_RELEASE: Indicates that the requested rule data is the result of the release of resource.
- SUCC_RES_ALLO: Indicates that the requested rule data is the successful resource allocation.

RuleStatus:**anyOf:**

- type: string

enum:

- ACTIVE
- INACTIVE

- type: string

Description:

This string provides forward-compatibility with future extensions to the enumeration but is not used to encode content defined in the present version of this API.

Description:

Possible values are

- ACTIVE: Indicates that the PCC rule(s) are successfully installed (for those provisioned from PCF) or activated (for those pre-defined in SMF), or the session rule(s) are successfully installed
- INACTIVE: Indicates that the PCC rule(s) are removed (for those provisioned from PCF) or inactive (for those pre-defined in SMF) or the session rule(s) are removed.

FailureCode:**anyOf:**

- type: string

enum:

- UNK_RULE_ID
- RA_GR_ERR
- SER_ID_ERR
- NF_MAL
- RES_LIM
- MAX_NR_QoS_FLOW
- MISS_FLOW_INFO
- RES_ALLO_FAIL
- UNSUCC_QOS_VAL
- INCOR_FLOW_INFO
- PS_TO_CS_HAN
- APP_ID_ERR
- NO_QOS_FLOW_BOUND
- FILTER_RES
- MISS_REDI_SER_ADDR
- CM_END_USER_SER_DENIED
- CM_CREDIT_CON_NOT_APP
- CM_AUTH_REJ
- CM_USER_UNK
- CM_RAT_FAILED
- SESS_AMBR_FAILURE
- DEF_QOS_FAILURL

- type: string

Description:

This string provides forward-compatibility with future extensions to the enumeration but is not used to encode content defined in the present version of this API.

Description:

Possible values are

- UNK_RULE_ID: Indicates that the pre-provisioned PCC rule could not be successfully activated because the PCC rule identifier is unknown to the SMF.
- RA_GR_ERR: Indicate that the PCC rule could not be successfully installed or enforced because the Rating Group specified within the Charging Data policy decision which the PCC rule refers to is unknown or, invalid.
- SER_ID_ERR: Indicate that the PCC rule could not be successfully installed or enforced because the Service Identifier specified within the Charging Data policy decision which the PCC rule refers to is invalid, unknown, or not applicable to the service being charged.
- NF_MAL: Indicate that the PCC rule could not be successfully installed (for those provisioned from the PCF) or activated (for those pre-defined in SMF) or enforced (for those already successfully installed) due to SMF/UPF malfunction.
- RES_LIM: Indicate that the PCC rule could not be successfully installed (for those provisioned from PCF) or activated (for those pre-defined in SMF) or enforced (for those already successfully installed) due to a limitation of resources at the SMF/UPF.
- MAX_NR_QoS_FLOW: Indicate that the PCC rule could not be successfully installed (for those provisioned from PCF) or activated (for those pre-defined in SMF) or enforced (for those already successfully installed) due to the fact that the maximum number of QoS flows has been reached for the PDU session.
- MISS_FLOW_INFO: Indicate that the PCC rule could not be successfully installed or enforced because the Flow Information AVP is not specified within the "pccRule" attribute by the PCF during the first install request of the PCC rule.
- RES_ALLO_FAIL: Indicate that the PCC rule could not be successfully installed or maintained since the QoS flow establishment/modification failed, or the QoS flow was released.
- UNSUCC_QOS_VAL: indicate that the QoS validation has failed or when Guaranteed Bandwidth > Max-Requested-Bandwidth.
- INCOR_FLOW_INFO: Indicate that the PCC rule could not be successfully installed or modified at the SMF because the provided flow information is not supported by the network (e.g. the provided IP address(es) or Ipv6 prefix(es) do not correspond to an IP version applicable for the PDU session).
- PS_TO_CS_HAN: Indicate that the PCC rule could not be maintained because of PS to CS handover.
- APP_ID_ERR: Indicate that the rule could not be successfully installed or enforced because the Application Identifier is invalid, unknown, or not applicable to the application required for detection.
- NO_QOS_FLOW_BOUND: Indicate that there is no QoS flow which the SMF can bind the PCC rule(s) to.
- FILTER_RES: Indicate that the Flow Information cannot be handled by the SMF because any of the restrictions was not met.
- MISS_REDI_SER_ADDR: Indicate that the PCC rule could not be successfully installed or enforced at the SMF because there is no valid Redirect Server Address within the Traffic Control Data policy decision which the PCC rule refers to provided by the PCF and no preconfigured redirection address for this PCC rule at the SMF.
- CM_END_USER_SER_DENIED: Indicate that the charging system denied the service request due to service restrictions (e.g. terminate rating group) or limitations related to the end-user, for example the end-user's account could not cover the requested service.
- CM_CREDIT_CON_NOT_APP: Indicate that the charging system determined that the service can be granted to the end user but no further credit control is needed for the service (e.g. service is free of charge or is treated for offline charging).
- CM_AUTH_REJ: Indicate that the charging system denied the service request in order to terminate the service for which credit is requested.
- CM_USER_UNK: Indicate that the specified end user could not be found in the charging system.
- CM_RAT_FAILED: Indicate that the charging system cannot rate the service request due to insufficient rating input, incorrect AVP combination or due to an attribute or an attribute value that is not recognized or supported in the rating.

- SESS_AMBR_FAILURE: Indicate that the session AMBR update is failure.
- DEF_QOS_FAILURL: Indicate that the default QoS update is failure.

AfSigProtocol:**anyOf:**

- type: string

enum:

- NO_INFORMATION
- SIP

- type: string

Description:

This string provides forward-compatibility with future extensions to the enumeration but is not used to encode content defined in the present version of this API.

Description:

Possible values are

- NO_INFORMATION: Indicate that no information about the AF signalling protocol is being provided.
- SIP: Indicate that the signalling protocol is Session Initiation Protocol.

PacketFilterOperation:**anyOf:**

- type: string

enum:

- DELETION
- ADDITION
- MODIFICATION

- type: string

Description:

This string provides forward-compatibility with future extensions to the enumeration but is not used to encode content defined in the present version of this API.

Description:

Possible values are

- DELETION: Indicates that the resources reserved for the provided packet filter identifiers are to be deleted and are no longer used by the UE.
- ADDITION: Indicates that the UE requests resources allocated for the provided packet filters.
- MODIFICATION: Indicates that the reserved QoS, the filter, the precedence, or any of the fields for the provided packet filter identifiers are being modified.

RedirectAddressType:**anyOf:**

- type: string

enum:

- IPV4_ADDR
- IPV6_ADDR
- URL
- SIP_URI

- type: string

Description:

This string provides forward-compatibility with future extensions to the enumeration but is not used to encode content defined in the present version of this API.

Description:

Possible values are

- IPV4_ADDR: Indicates that the address type is in the form of "dotted-decimal" IPv4 address.
- IPV6_ADDR: Indicates that the address type is in the form of IPv6 address.
- URL: Indicates that the address type is in the form of Uniform Resource Locator.
- SIP_URI: Indicates that the address type is in the form of SIP Uniform Resource Identifier.

QosFlowUsage:

anyOf:

- type: string

enum:

- GENERAL
- IMS_SIG

- type: string

Description:

This string provides forward-compatibility with future extensions to the enumeration but is not used to encode content defined in the present version of this API.

Description:

Possible values are

- GENERAL: Indicate no specific QoS flow usage information is available.
- IMS_SIG: Indicate that the QoS flow is used for IMS signalling only.

External Docs

Description: 3GPP TS 29.512 V15.2.0; 5G System; Session Management Policy Control Service.

URL: 'http://www.3gpp.org/ftp/Specs/archive/29_series/29.512/'



CHAPTER 5

Nchf_SpendingLimitControl

The Nchf_SpendingLimitControl service enables the NF service consumer to retrieve policy counter status information per UE from the CHF by subscribing to spending limit reporting (that is notifications of policy counter status changes).

- [OpenAPI, on page 61](#)
- [Info, on page 61](#)
- [Servers, on page 61](#)
- [Security, on page 62](#)
- [Paths, on page 62](#)
- [Components, on page 66](#)
- [External Docs, on page 68](#)

OpenAPI

OpenAPI Version: 3.0.0

Info

Description: Spending Limit Control Service API

Version: "1.0.0"

Title: Nchf_SpendingLimitControl

Servers

URL: 'http://{apiRoot}/nchf-spendinglimitcontrol/v1'

Variables:

API Root:

Default: https://example.com

Description: apiRoot as defined in subclause subclause 4.4 of 3GPP TS 29.501

Security

```
- {}
- oAuth2ClientCredentials:
  - nchf-spendinglimitcontrol
```

Paths

/subscriptions

```
Method: Post
Request Body:
  Required/Optional: true
  Content:
    Application/JSON:
      Schema:
        Reference: '#/components/schemas/SpendingLimitContext'

Responses:
  '201':
    Description: Success
    Content:
      Application/JSON:
        Schema:
          Reference: '#/components/schemas/SpendingLimitStatus'
    Headers:
      Location:
        description: 'Contains the URI of the created individual spending
limit resource, according to the structure:
{apiRoot}/nchf-spendinglimitcontrol/v1/subscriptions/{subscriptionId}'
      Required/Optional: true
      Schema:
        Type: string
  '400':
    Reference: './TS29571_CommonData.yaml#/components/responses/400'
  '401':
    Reference: './TS29571_CommonData.yaml#/components/responses/401'
  '403':
    Reference: './TS29571_CommonData.yaml#/components/responses/403'
  '404':
    Reference: './TS29571_CommonData.yaml#/components/responses/404'
  '411':
    Reference: './TS29571_CommonData.yaml#/components/responses/411'
  '413':
    Reference: './TS29571_CommonData.yaml#/components/responses/413'
  '415':
    Reference: './TS29571_CommonData.yaml#/components/responses/415'
```

```

'429':
  Reference: './TS29571_CommonData.yaml#/components/responses/429'
'500':
  Reference: './TS29571_CommonData.yaml#/components/responses/500'
'503':
  Reference: './TS29571_CommonData.yaml#/components/responses/503'
Default:
  Reference: './TS29571_CommonData.yaml#/components/responses/default'
Callbacks:
  statusNotification:
    '{$request.body#/notifUri}/notify':
      Method: Post
      Request Body:
        Required/Optional: true
        Content:
          Application/JSON:
            Schema:
              Reference: '#/components/schemas/SpendingLimitStatus'

  Responses:
    '204':
      Description: No Content, Notification was succesfull
    '400':
      Reference: './TS29571_CommonData.yaml#/components/responses/400'
    '401':
      Reference: './TS29571_CommonData.yaml#/components/responses/401'
    '403':
      Reference: './TS29571_CommonData.yaml#/components/responses/403'
    '404':
      Reference: './TS29571_CommonData.yaml#/components/responses/404'
    '411':
      Reference: './TS29571_CommonData.yaml#/components/responses/411'
    '413':
      Reference: './TS29571_CommonData.yaml#/components/responses/413'
    '415':
      Reference: './TS29571_CommonData.yaml#/components/responses/415'
    '429':
      Reference: './TS29571_CommonData.yaml#/components/responses/429'
    '500':
      Reference: './TS29571_CommonData.yaml#/components/responses/500'
    '503':
      Reference: './TS29571_CommonData.yaml#/components/responses/503'
    Default:
      Reference: './TS29571_CommonData.yaml#/components/responses/default'
  subscriptionTermination:
    '{$request.body#/notifUri}/terminate':
      Method: Post
      Request Body:
        Required/Optional: true
        Content:
          Application/JSON:
            Schema:

```

Reference: '#/components/schemas/SubscriptionTerminationInfo'

Responses:

'204':

Description: No Content, Notification was succesfull

'400':

Reference: './TS29571_CommonData.yaml#/components/responses/400'

'401':

Reference: './TS29571_CommonData.yaml#/components/responses/401'

'403':

Reference: './TS29571_CommonData.yaml#/components/responses/403'

'404':

Reference: './TS29571_CommonData.yaml#/components/responses/404'

'411':

Reference: './TS29571_CommonData.yaml#/components/responses/411'

'413':

Reference: './TS29571_CommonData.yaml#/components/responses/413'

'415':

Reference: './TS29571_CommonData.yaml#/components/responses/415'

'429':

Reference: './TS29571_CommonData.yaml#/components/responses/429'

'500':

Reference: './TS29571_CommonData.yaml#/components/responses/500'

'503':

Reference: './TS29571_CommonData.yaml#/components/responses/503'

Default:

Reference: './TS29571_CommonData.yaml#/components/responses/default'

/subscriptions/{subscriptionId}

Parameters:

- **in:** path

name: subscriptionId

Description: Identifies an individual spending limit retrieval subscription.

Required/Optional: true

Schema:

Type: string

put:

Request Body:

Required/Optional: true

Content:

Application/JSON:

Schema:

Reference: '#/components/schemas/SpendingLimitContext'

Responses:

'200':

Description: OK. Resource was succesfully modified and representation is returned

Content:


```
    Application/JSON:
      Schema:
        Reference: '#/components/schemas/SpendingLimitStatus'
      '400':
        Reference: './TS29571_CommonData.yaml#/components/responses/400'
      '401':
        Reference: './TS29571_CommonData.yaml#/components/responses/401'
      '403':
        Reference: './TS29571_CommonData.yaml#/components/responses/403'
      '404':
        Reference: './TS29571_CommonData.yaml#/components/responses/404'
      '411':
        Reference: './TS29571_CommonData.yaml#/components/responses/411'
      '413':
        Reference: './TS29571_CommonData.yaml#/components/responses/413'
      '415':
        Reference: './TS29571_CommonData.yaml#/components/responses/415'
      '429':
        Reference: './TS29571_CommonData.yaml#/components/responses/429'
      '500':
        Reference: './TS29571_CommonData.yaml#/components/responses/500'
      '503':
        Reference: './TS29571_CommonData.yaml#/components/responses/503'
      Default:
        Reference: './TS29571_CommonData.yaml#/components/responses/default'
delete:
  Responses:
    '204':
      Description: No Content. Resource was succesfully deleted
    '400':
      Reference: './TS29571_CommonData.yaml#/components/responses/400'
    '401':
      Reference: './TS29571_CommonData.yaml#/components/responses/401'
    '403':
      Reference: './TS29571_CommonData.yaml#/components/responses/403'
    '404':
      Reference: './TS29571_CommonData.yaml#/components/responses/404'
    '429':
      Reference: './TS29571_CommonData.yaml#/components/responses/429'
    '500':
      Reference: './TS29571_CommonData.yaml#/components/responses/500'
    '503':
      Reference: './TS29571_CommonData.yaml#/components/responses/503'
    Default:
      Reference: './TS29571_CommonData.yaml#/components/responses/default'
```

Components

```

securitySchemes:
  oAuth2ClientCredentials:
    Type: oauth2
    Flows:
      clientCredentials:
        tokenUrl: '{nrfApiRoot}/oauth2/token'
        scopes:
          nchf-spendinglimitcontrol: Access to the Nchf_SpendingLimitControl API

schemas:
  SpendingLimitContext:
    Type: object
    Properties:
      supi:
        Description: The Subscription Permanent Identifier (Supi) shall be present within
the initial spending limit retrieval procedure (creation of a new individual subscription).

        Reference: './TS29571_CommonData.yaml#/components/schemas/Supi'
      gpsi:
        Description: The Generic Public Subscription Identifier (Gpsi) may be present
within the initial spending limit retrieval procedure (creation of a new individual
subscription).
        Reference: './TS29571_CommonData.yaml#/components/schemas/Gpsi'
      policyCounterIds:
        Type: array
        Items:
          Reference: './#/components/schemas/PolicyCounterId'
        minItems: 1
        Description: This is a list of policy counter identifier(s), which identifies
policy counters maintained per subscriber within the CHF.
      notifUri:
        Description: This attribute identifies the recipient of spending limit
notifications sent to the NF service consumer by the CHF. The notifUri shall be present
within the initial spending limit retrieval procedure (creation of a new individual
subscription). It may be present within the intermediate spending limit retrieval procedure
(modification of an existing subscription).
        Reference: './TS29571_CommonData.yaml#/components/schemas/Uri'
      supportedFeatures:
        Description: The list of supported features as described in subclause 5.8 shall
be supplied by the NF service consumer in the POST request that request the creation of a
spending limit report resource.
        Reference: './TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
      SpendingLimitStatus:
        Type: object
        Properties:
          supi:
            Description: The Subscription Permanent Identifier (Supi) shall be present within
the callback notify service operation (notification of the status of subscribed policy
counters).
            Reference: './TS29571_CommonData.yaml#/components/schemas/Supi'

```

statusInfos:
Type: object
additionalProperties:
Reference: '#/components/schemas/PolicyCounterInfo'
minProperties: 1
Description: Status of the requested policy counters. The key of the map is the attribute "policyCounterId".
supportedFeatures:
Description: If the supportedFeatures is included in the request by the NF service consumer, it shall be supplied in the reply of the corresponding request by the CHF.
Reference: './TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
Required:
 - statusInfos

PolicyCounterInfo:
Type: object
Properties:
policyCounterId:
Reference: '#/components/schemas/PolicyCounterId'
currentStatus:
Type: string
Description: Identifies the policy counter status applicable for a specific policy counter identified by the policyCounterId. The values (e.g. valid, invalid or any other status) are not specified. The interpretation and actions related to the defined values are out of scope of 3GPP.
penPolCounterStatuses:
Type: array
Items:
Reference: '#/components/schemas/PendingPolicyCounterStatus'
minItems: 1
Description: Provides the pending policy counter status.
Required:
 - policyCounterId
 - currentStatus

PendingPolicyCounterStatus:
Type: object
Properties:
policyCounterStatus:
Type: string
Description: Identifies the policy counter status applicable for a specific policy counter identified by the policyCounterId. The values (e.g. valid, invalid or any other status) are not specified. The interpretation and actions related to the defined values are out of scope of 3GPP.
activationTime:
Description: Indicates the activation times per required policy counter.
Reference: './TS29571_CommonData.yaml#/components/schemas/DateTime'
Required:
 - policyCounterStatus
 - activationTime

PolicyCounterId:
Type: string
Description: Identifies a policy counter.

SubscriptionTerminationInfo:
Type: object
Properties:

```
    supi:
      Reference: './TS29571_CommonData.yaml#/components/schemas/Supi'
    termCause:
      Reference: '#/components/schemas/TerminationCause'
  Required:
    - supi
  TerminationCause:
    Type: string
  enum:
    - REMOVED_SUBSCRIBER
```

External Docs

Description: 3GPP TS 29.594 V15.2.0; 5G System; Spending Limit Control Service.
URL: 'http://www.3gpp.org/ftp/Specs/archive/29_series/29.594/'



CHAPTER 6

Nchf_SpendingLimitControl_Callbacks

- [OpenAPI, on page 69](#)
- [Info, on page 69](#)
- [Servers, on page 69](#)
- [Security, on page 69](#)
- [Paths, on page 70](#)
- [Components, on page 71](#)

OpenAPI

OpenAPI Version: 3.0.0

Info

Description: Spending Limit Control Service API Callbacks
Version: "1.0.0"
Title: Nchf_SpendingLimitControl Callbacks

Servers

URL: 'http://{apiRoot}/'

Variables:

API Root:

Default: https://example.com

Description: apiRoot as defined in subclause subclause 4.4 of 3GPP TS 29.501

Security

- {}

- oAuth2ClientCredentials:
 - nchf-spendinglimitcontrol

Paths

/npcf/callbacks/nchf-spendinglimitcontrol/v1/subscriptions/{subscriptionId}/notify

Method: Post

Parameters:

- in: path
 - name:** subscriptionId
 - Description:** Identifies an individual spending limit retrieval subscription.
 - Required/Optional:** true
 - Schema:**
 - Type:** string

Request Body:

- Required/Optional:** true
- Content:**
 - Application/JSON:**
 - Schema:**
 - Reference:**

'./TS29594_Nchf_SpendingLimitControl.yaml#/components/schemas/SpendingLimitStatus'

Responses:

- '204':
 - Description:** No Content, Notification was succesfull
- '400':
 - Reference:** './TS29571_CommonData.yaml#/components/responses/400'
- '401':
 - Reference:** './TS29571_CommonData.yaml#/components/responses/401'
- '403':
 - Reference:** './TS29571_CommonData.yaml#/components/responses/403'
- '404':
 - Reference:** './TS29571_CommonData.yaml#/components/responses/404'
- '411':
 - Reference:** './TS29571_CommonData.yaml#/components/responses/411'
- '413':
 - Reference:** './TS29571_CommonData.yaml#/components/responses/413'
- '415':
 - Reference:** './TS29571_CommonData.yaml#/components/responses/415'
- '429':
 - Reference:** './TS29571_CommonData.yaml#/components/responses/429'
- '500':
 - Reference:** './TS29571_CommonData.yaml#/components/responses/500'
- '503':
 - Reference:** './TS29571_CommonData.yaml#/components/responses/503'
- Default:**
 - Reference:** './TS29571_CommonData.yaml#/components/responses/default'

/npcf/callbacks/nchf-spendinglimitcontrol/v1/subscriptions/{subscriptionId}/terminate

Method: Post

Parameters:

- **in:** path

name: subscriptionId

Description: Identifies an individual spending limit retrieval subscription.

Required/Optional: true

Schema:

Type: string

Request Body:

Required/Optional: true

Content:

Application/JSON:

Schema:

Reference:

'./TS29594_Nchf_SpendingLimitControl.yaml#/components/schemas/SubscriptionTerminationInfo'

Responses:

'204':

Description: No Content, Notification was succesfull

'400':

Reference: './TS29571_CommonData.yaml#/components/responses/400'

'401':

Reference: './TS29571_CommonData.yaml#/components/responses/401'

'403':

Reference: './TS29571_CommonData.yaml#/components/responses/403'

'404':

Reference: './TS29571_CommonData.yaml#/components/responses/404'

'411':

Reference: './TS29571_CommonData.yaml#/components/responses/411'

'413':

Reference: './TS29571_CommonData.yaml#/components/responses/413'

'415':

Reference: './TS29571_CommonData.yaml#/components/responses/415'

'429':

Reference: './TS29571_CommonData.yaml#/components/responses/429'

'500':

Reference: './TS29571_CommonData.yaml#/components/responses/500'

'503':

Reference: './TS29571_CommonData.yaml#/components/responses/503'

Default:

Reference: './TS29571_CommonData.yaml#/components/responses/default'

Components

securitySchemes:

oAuth2ClientCredentials:

Type: oauth2

Flows:

clientCredentials:

tokenUrl: '{nrfApiRoot}/oauth2/token'

scopes:

nchf-spendinglimitcontrol: Access to the Nchf_SpendingLimitControl API