



GTPU Error Indication

- [Feature Summary and Revision History, on page 1](#)
- [Feature Description, on page 2](#)
- [How it Works, on page 2](#)
- [Feature Configuration, on page 19](#)
- [OAM Support, on page 20](#)

Feature Summary and Revision History

Summary Data

Table 1: Summary Data

Applicable Product(s) or Functional Area	cnSGW-C
Applicable Platform(s)	SMI
Feature Default Setting	Enabled - Always-on
Related Documentation	Not Applicable

Revision History

Table 2: Revision History

Revision Details	Release
Support added for signal peer (error indication and configuration is signal peer)	2021.02.3
First introduced.	2021.02.1

Feature Description

cnSGW-C supports the UPF reported GTPU errors in Session Report Request. UPF reports different GTPU errors to CP (cnSGW-C) in PFCP Session Report Request message.

cnSGW-C supports the following report requests.

- Error Indication Support (ERIR)
- Graceful Termination (GTER)
- Session Replacement (SRIR)

For more information, see the [GTPU Error Indication, on page 1](#) chapter.

How it Works

This section describes how this feature works.

Error Indication Support

When cnSGW-C receives Error Indication with PFCP Session Report Request from UPF, it responds with PFCP Session Report Response and performs as per the configuration.

For cnSGW-C, signaling is based on configuration.

- S1U - local purge or page-ue
- S5U - local purge or peer signaling

Table 3: Error Indication Support (ERIR) Report Type

Interface	Configuration	TEID	Action
S1U	Local Purge	Default	Send SxSessionDeleteRequest to clean up on UPF Purge locally
		Dedicated	Send SxModReq (Remove Traffic Endpoint) Purge locally
		IDFT	Send SxMod (Remove IDFT Traffic Endpoint) - async Purge Bearer locally
	Page-UE	Default / Dedicated	Move UE to Idle state Send Sx_Modification_Request (Set FAR Action=BUFFER)
S5U	Local Purge	Default	Send SxDeleteSession Purge locally
		Dedicated	Send SxMod (Remove Traffic Endpoint) Purge Bearer locally
	Signal Peer	Default	Send SxMod (Drop) DBR/DSR, SxDelete
		Dedicated	Send DBR/DBC (Async), SxMod (Remove Traffic Endpoint)

Default Bearer with s1u as local-purge Call Flow

This section describes Default Bearer with s1u as local-purge call flow.

Figure 1: Default Bearer with s1u as local-purge Call Flow

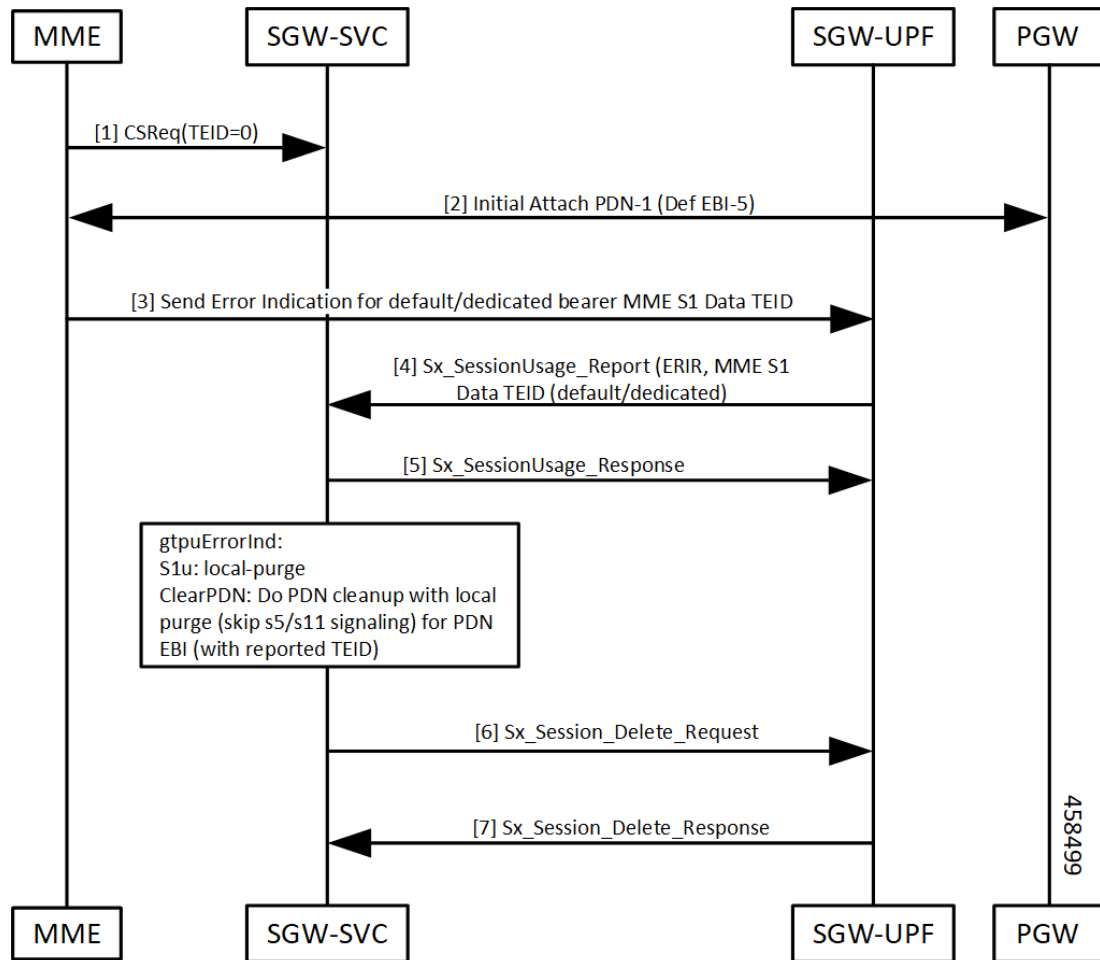


Table 4: Default Bearer with s1u as local-purge Call Flow Description

Step	Description
1, 2	Initial attach complete.
3, 4, 5	<ul style="list-style-type: none"> UPF sends Sx_Session_Report_Request with report type as ERIR and s1u TEID. cnSGW-C responds with Sx_Session_Report_Response.

Step	Description
6, 7	<p>cnSGW-C processes Sx_Session_Report_Request.</p> <p>gtpuErrorInd: s1u: local-purge</p> <p>If TEID received is for default bearer, submit internal transaction (T2) to clean up bearer (No peer signaling).</p> <ul style="list-style-type: none"> • Send Sx_Session_Deletion_Request. • UPF responds with Sx_Session_Deletion_Response.

Dedicated Bearer with s1u as local-purge Call Flow

This section describes Dedicated Bearer with s1u as local-purge call flow.

Figure 2: Dedicated Bearer with s1u as local-purge Call Flow

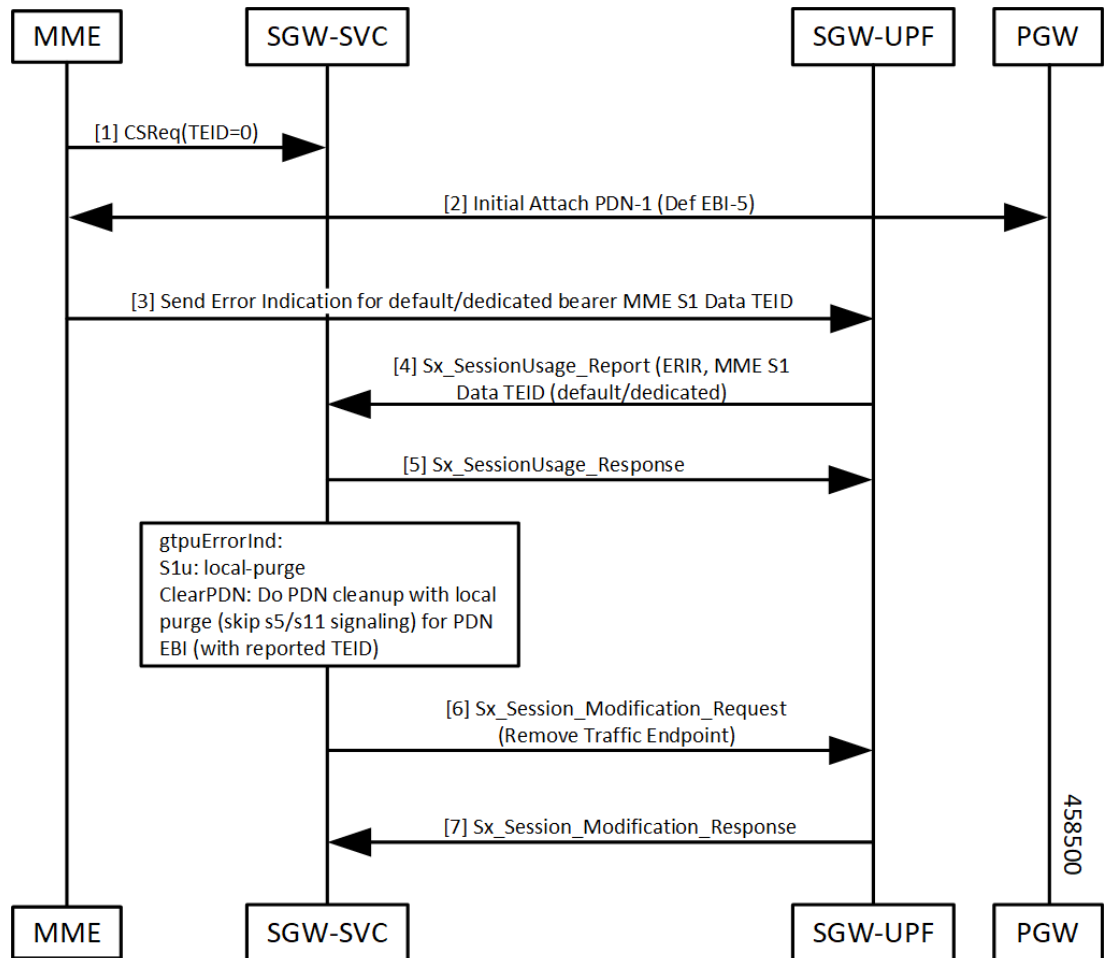


Table 5: Dedicated Bearer with s1u as local-purge Call Flow Description

Step	Description
1, 2	Initial attach complete.
3, 4, 5	<ul style="list-style-type: none"> • UPF sends Sx_Session_Report_Request with report type as ERIR and s1u TEID. • cnSGW-C responds with Sx_Session_Report_Response.
6, 7	<p>cnSGW-C processes Sx_Session_Report_Request.</p> <p>gtpuErrorInd: s1u: local-purge</p> <p>If TEID received is for dedicated bearer, submit internal transaction (T2) to clean up bearer (No peer signaling).</p> <ul style="list-style-type: none"> • Send Sx_Session_Modification_Request (Remove Traffic Endpoint). • UPF responds with Sx_Session_Modification_Response.

Dedicated Bearer (IDFT) with s1u as local-purge Call Flow

This section describes Dedicated Bearer (IDFT) with s1u as local-purge call flow.

Figure 3: Dedicated Bearer (IDFT) with s1u as local-purge Call Flow

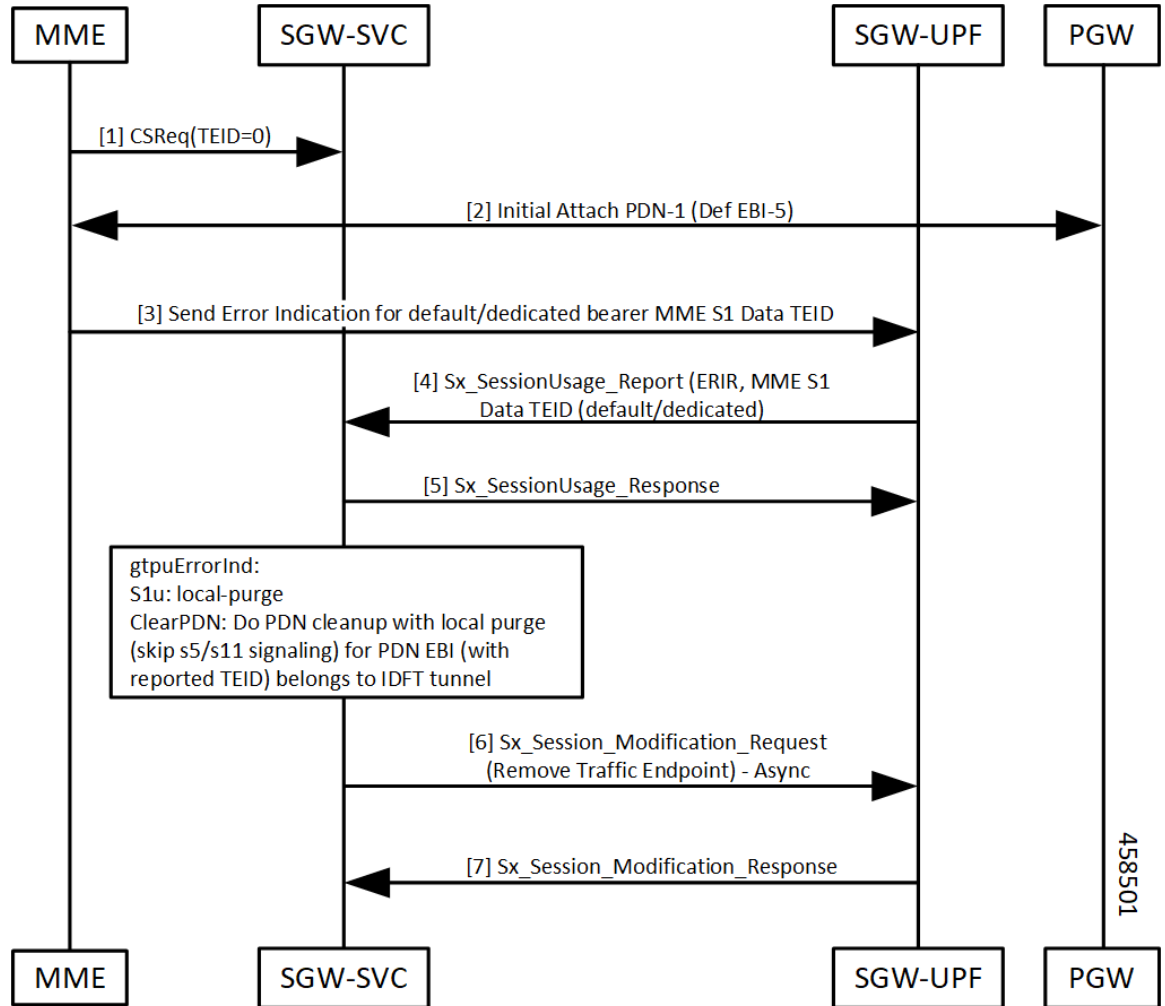


Table 6: Dedicated Bearer (IDFT) with s1u as local-purge Call Flow Description

Step	Description
1, 2	Initial attach complete.
3, 4, 5	<ul style="list-style-type: none"> UPF sends Sx_Session_Report_Request with report type as ERIR and s1u TEID. cnSGW-C responds with Sx_Session_Report_Response.

Step	Description
6, 7	<p>cnSGW-C processes Sx_Session_Report_Request.</p> <p>gtpuErrorInd: s1u: local-purge</p> <p>If TEID received is for dedicated bearer (IDFT), submit internal transaction (T2) to clean up bearer (No peer signaling).</p> <ul style="list-style-type: none"> • Send Sx_Session_Modification_Request (Remove Traffic Endpoint). • UPF responds with Sx_Session_Modification_Response.

Default/Dedicated Bearer with s1u as page-ue Call Flow

This section describes Default/Dedicated Bearer with s1u as page-ue call flow.

Figure 4: Default/Dedicated Bearer with s1u as page-ue Call Flow

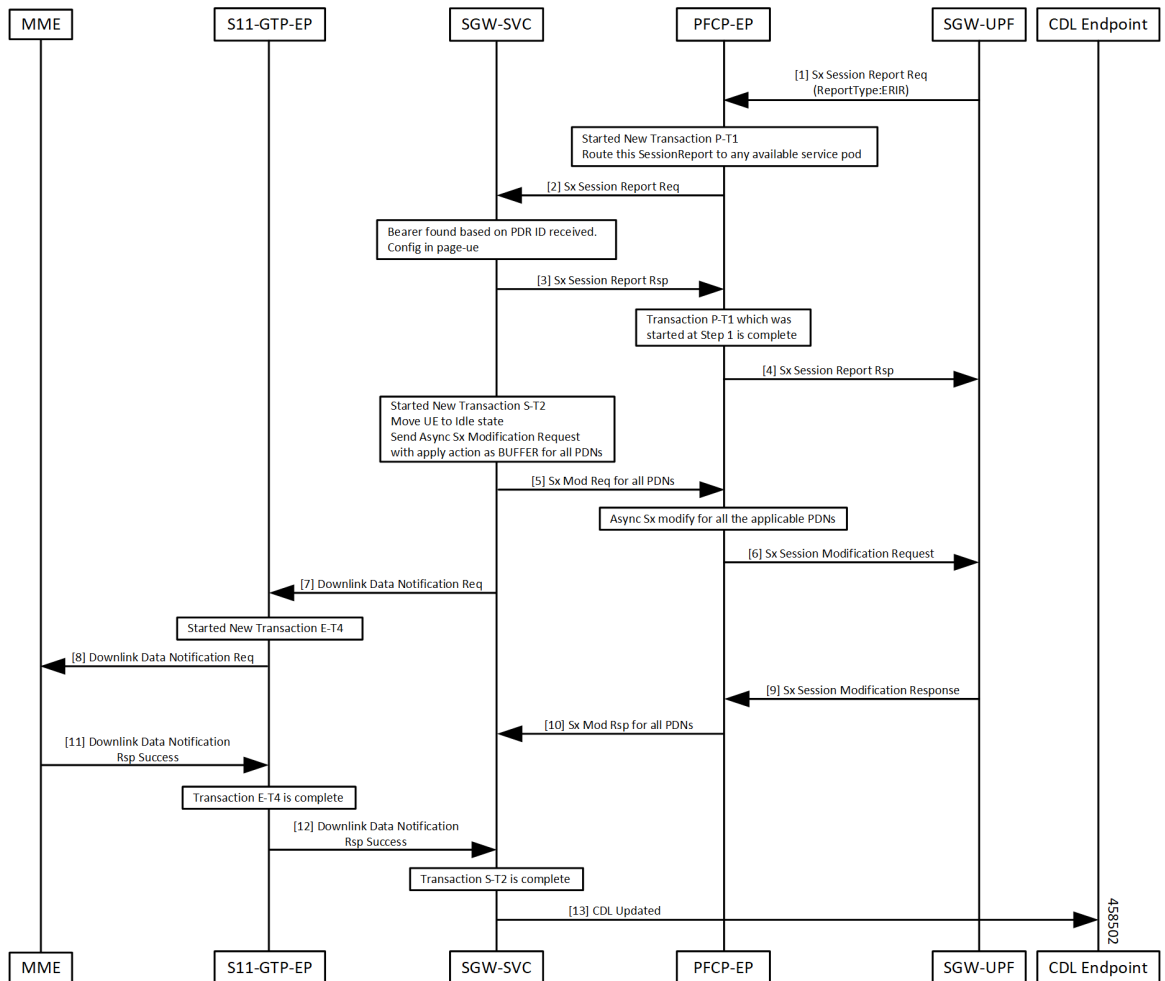


Table 7: Default/Dedicated Bearer with s1u as page-ue Call Flow Description

Step	Description
1, 2	SGW-UP sends Sx Session Report Req with type as ERIR to SGW service POD.
3, 4	SGW service POD sends Sx Session Report Res to SGW-UPF.
5, 6	PFCP-EP sends Sx Mod Req for all PDNs to SGW service POD. PFCP-EP sends Sx Session Modification Req to SGW-UP.
7, 8	SGW service POD sends Downlink Data Notification Req to S11-GTP-EP. S11-GTP-EP forwards Downlink Data Notification to MME.
9, 10	SGW-UP sends Sx session Modification Rsp to SGW service POD.
11, 12, 13	MME sends Downlink Data Notification Rsp Success to S11-GTP-EP. S11-GTP-EP forwards Downlink Data Notification Rsp Success to SGW service POD. SGW service POD sends CDL update to CDL endpoint when S-T2 transaction gets completed.

Default Bearer with s5u as local-purge/signal-peer Call Flow

This section describes Default Bearer with s5u as local-purge/signal-peer call flow.

Figure 5: Default Bearer with s5u as local-purge/signal-peer Call Flow

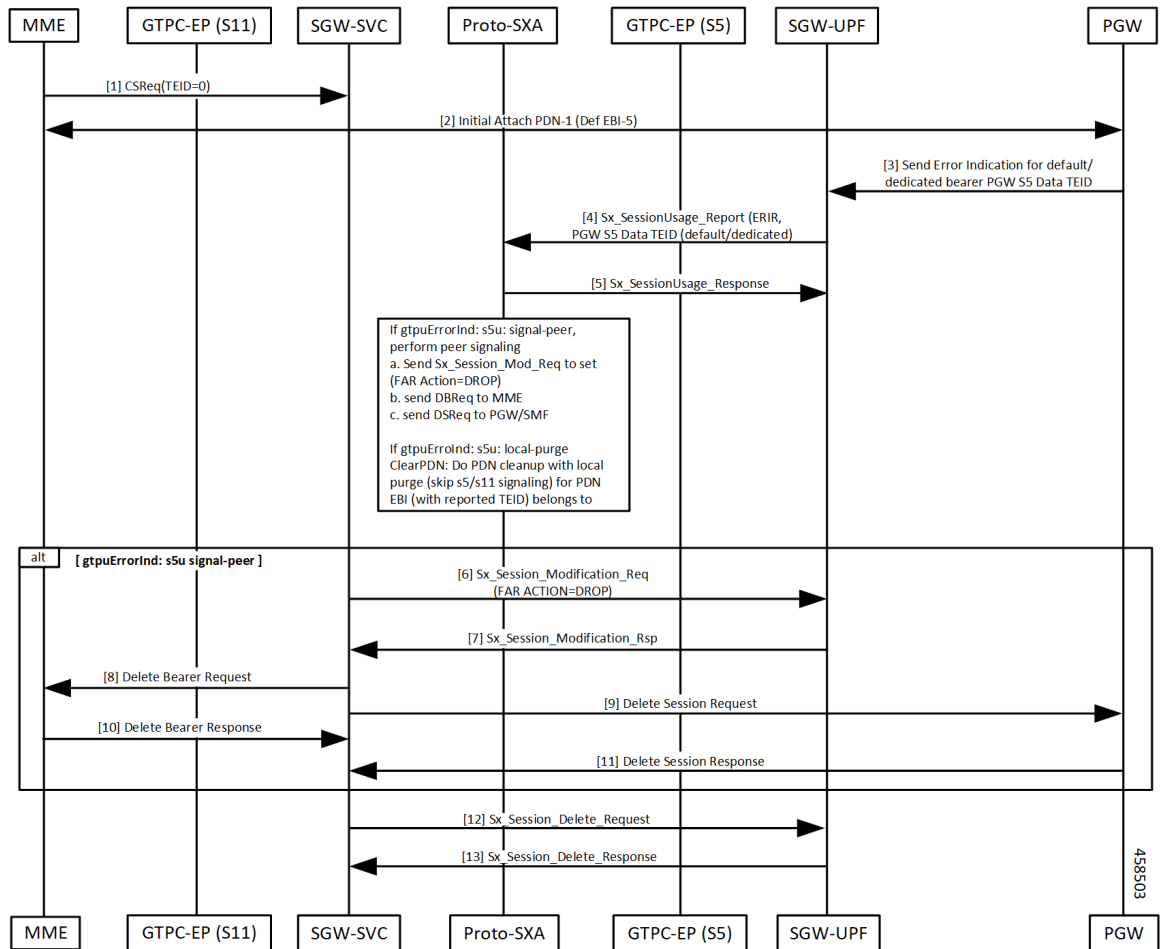


Table 8: Default Bearer with s5u as local-purge/signal-peer Call Flow Description

Step	Description
1, 2	Initial attach complete.
3, 4, 5	GTPU Error detected on UPF. <ul style="list-style-type: none"> • Sx_Session_Report_Request sent to cnSGW-C. • cnSGW-C responds with Sx_Session_Resport_Response.

Step	Description
6-11	<p>cnSGW-C processes Session Report Request (ERIR).</p> <p>If TEID is received for default bearer, submit internal transaction to clean up PDN (behavior depends on CLI configured).</p> <p>CLI: sgw-profile config</p> <p>If gtpuErrorInd:</p> <p>s5u: signal-peer</p> <ul style="list-style-type: none"> • Send Sx_Session_Report_Request to UPF to set (FAR ACTION=DROP). • Send Delete Bearer Req to MME. • Send Delete Session Request to PGW.
12	Send Sx_Session_Delete_Request to UPF.
13	UPF responds with Sx_Session_Delete_Response.

Dedicated Bearer with s5u as local-purge/signal-peer Call Flow

This section describes Dedicated Bearer with s5u as local-purge/signal-peer call flow.

Figure 6: Dedicated Bearer with s5u as local-purge/signal-peer Call Flow

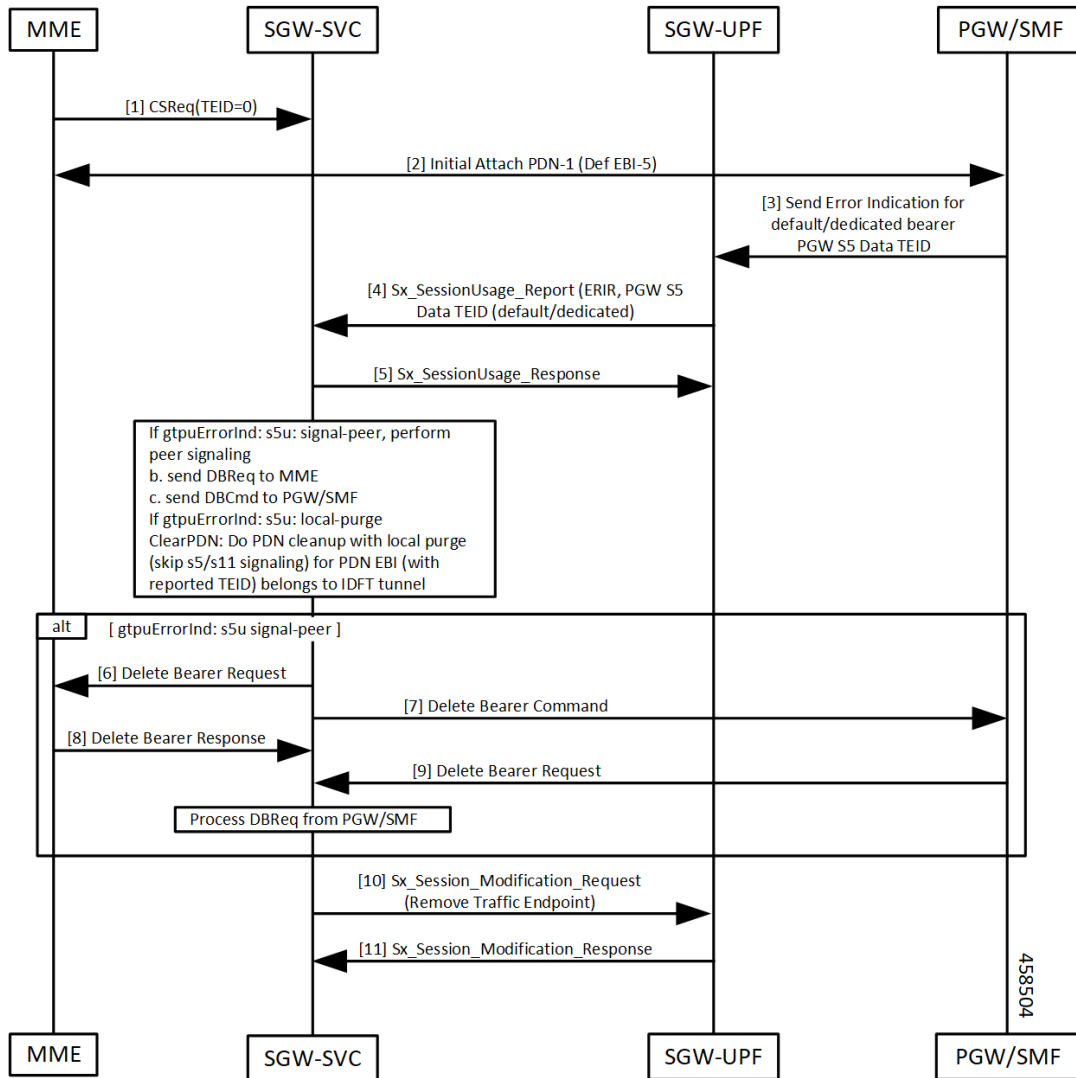


Table 9: Dedicated Bearer with s5u as local-purge/signal-peer Call Flow Description

Step	Description
1, 2	Initial attach complete.
3, 4, 5	GTPU Error detected on UPF. <ul style="list-style-type: none"> Sx_Session_Report_Request sent to cnSGW-C. cnSGW-C responds with Sx_Session_Report_Response.

Step	Description
6, 7, 8, 9	<p>cnSGW-C processes Session Report Request (ERIR). If TEID is received for dedicated bearer (s5u), submit internal transaction to clean up bearer.</p> <p>CLI: sgw-profile config</p> <p>If gtpuErrorInd:</p> <p>s5u: signal-peer</p> <ul style="list-style-type: none"> • Send Delete Bearer Req to MME. • Send Delete Bearer Command to PGW.
10	Send Sx_Session_Modification_Request (Remove Traffic Endpoint) to UPF.
11	UPF responds with Sx_Session_Modification_Response.

Graceful Termination

When UPF can't recover PDU session during SR/ICSR recovery, it sends PFCP session Report Request to cnSGW with type as Graceful Termination Report (GTER).

When UPF can't load session during session recovery, it sends a GTER indicating to clear up all the interfaces for this reported session.

Graceful Termination Call Flow

This section describes Graceful Termination call flow.

Figure 7: Graceful Termination Call Flow

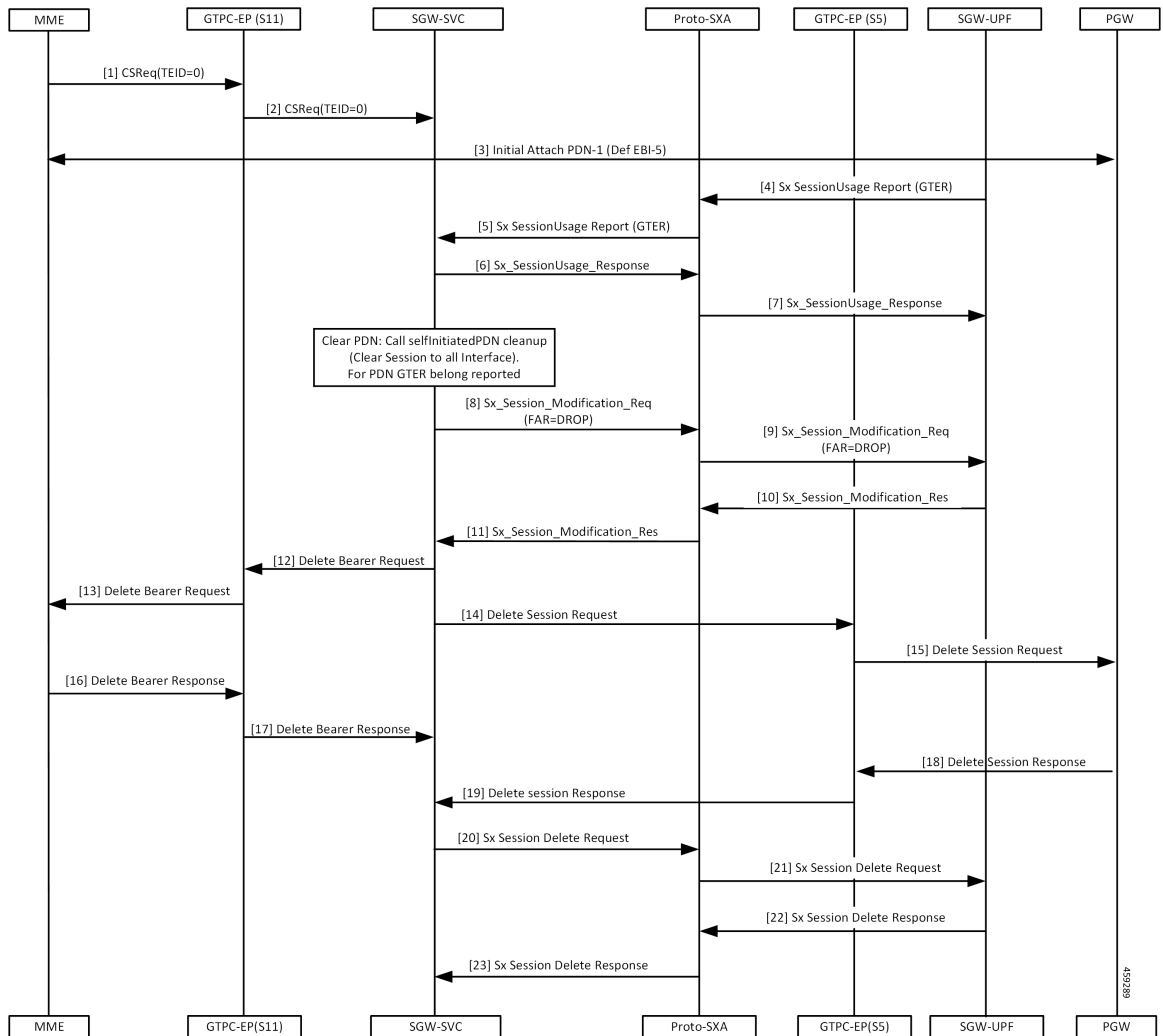


Table 10: Graceful Termination Call Flow Description

Step	Description
1, 2, 3	Initial attach complete.
4-7	<ul style="list-style-type: none"> • UPF sends Sx_Session_Report_Request with report type as GTER and TEID. • cnSGW-C responds with Sx_Session_Report_Response.
8-11	cnSGW-C processes Sx_Session_Report_Request and submits internal transaction (T2) to clean up PDN. <ul style="list-style-type: none"> • cnSGW-C sends Sx_Session_Modification_Request to set FAR Action=Drop. • UPF responds with Sx_Session_Modification_Response.

Step	Description
12-19	<ul style="list-style-type: none"> • Send Delete Bearer Req to MME. • Send Delete Session Request to PGW.
20-23	<ul style="list-style-type: none"> • Send Sx_Session_Delete_Request. • UPF responds with Sx_Session_Delete_Response.

Session Replacement

A Session Replacement (SRIR) is required when peer allocates same GTP-U TEID.

UPF sends SRIR report indicating to delete old session with same TEID. cnSGW-C uses GTPU path failure configuration for SRIR request processing.

Table 11: Session Replacement

Interface	Configuration	TEID	Action
S1U/S5U	Local Purge	Default	Send SxDeleteSession Purge locally
		Dedicated	Send SxMod (Remove Traffic Endpoint) Purge Bearer locally
	Signal Peer	Default	Send SxMod (Drop) DBR/DSR SxDelete
		Dedicated	Send DBR/DBC (Async) SxMod (Remove Traffic Endpoint)
IDFT	NA	NA	Send SxMod (Remove IDFT Traffic Endpoint)- async Purge Bearer locally

Session Replacement for Default Bearer Call Flow

This section describes the Session Replacement (SRIR) for Default Bearer call flow.

Figure 8: Session Replacement for Default Bearer Call Flow

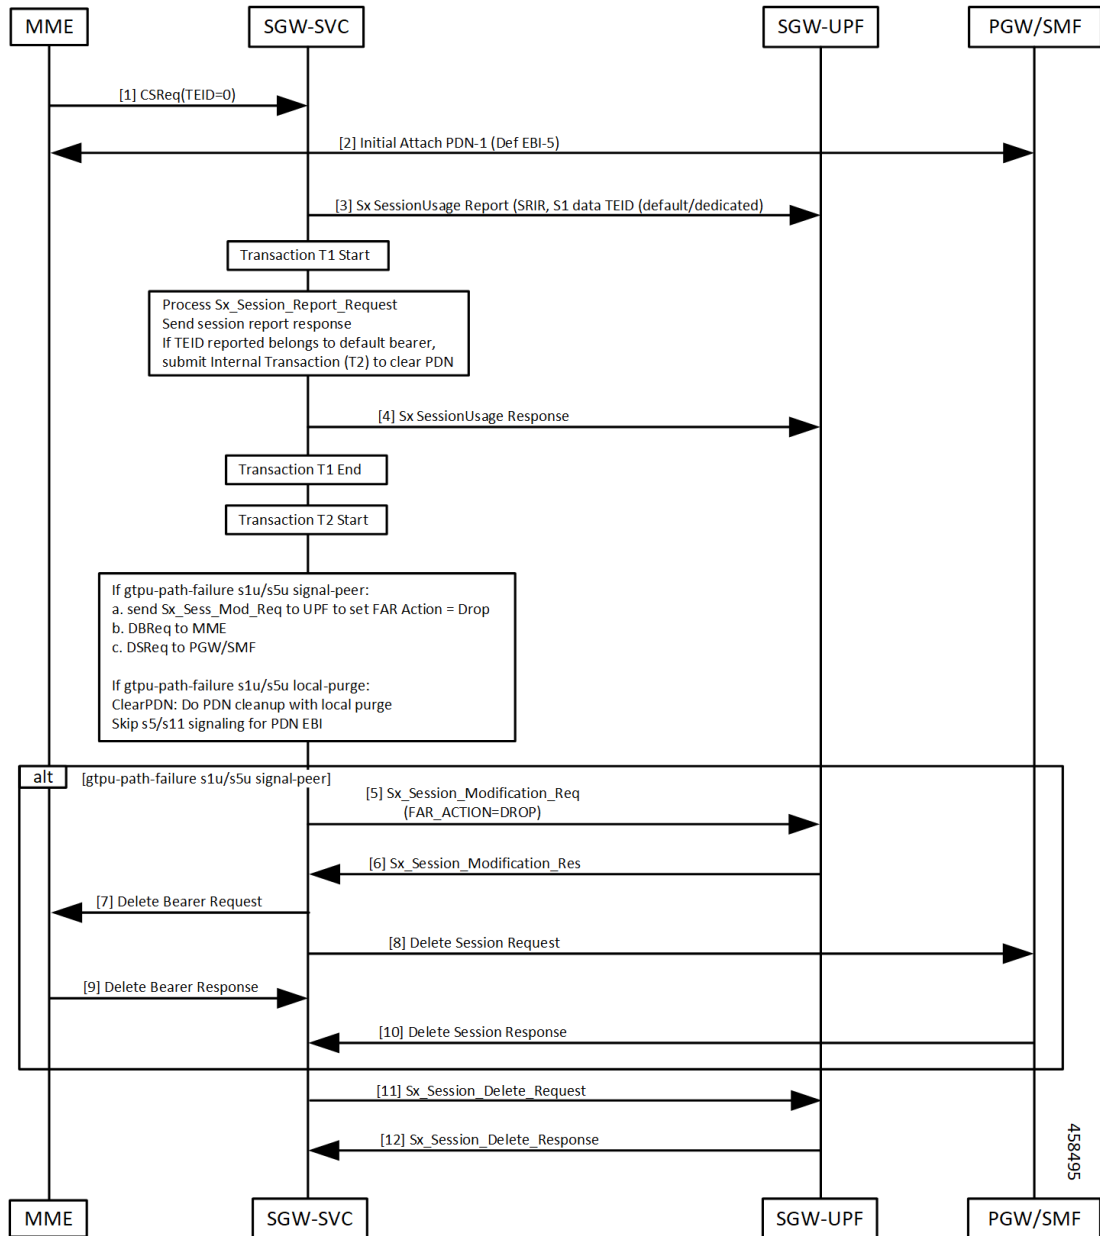


Table 12: Session Replacement for Default Bearer Call Flow Description

Step	Description
1, 2	Initial attach complete.
3, 4	<ul style="list-style-type: none"> UPF sends Sx_Session_Report_Request with report type as SRIR and TEID. cnSGW-C responds with Sx_Session_Report_Response.

Step	Description
5–10	<p>cnSGW-C processes Sx_Session_Report_Request, wrong Session Replacement uses GTPU path failure CLI for peer-signaling or local purge.</p> <p>If TEID is received for default bearer, submit internal transaction (T2) to clean up PDN.</p> <p>If CLI, <code>gtpu-path-failure s1u/s5u signal-peer</code></p> <ul style="list-style-type: none"> • Send Sx_Session_Report_Request to UPF to set FAR ACTION=DROP. • Send Delete Bearer Req to MME. • Send Delete Session Request to PGW.
11, 12	<ul style="list-style-type: none"> • Send Sx_Session_Delete_Request • UPF responds with Sx_Session_Delete_Response.

Session Replacement for Dedicated Bearer Call Flow

This section describes the Session Replacement (SRIR) for Dedicated Bearer call flow.

Figure 9: Session Replacement for Dedicated Bearer Call Flow

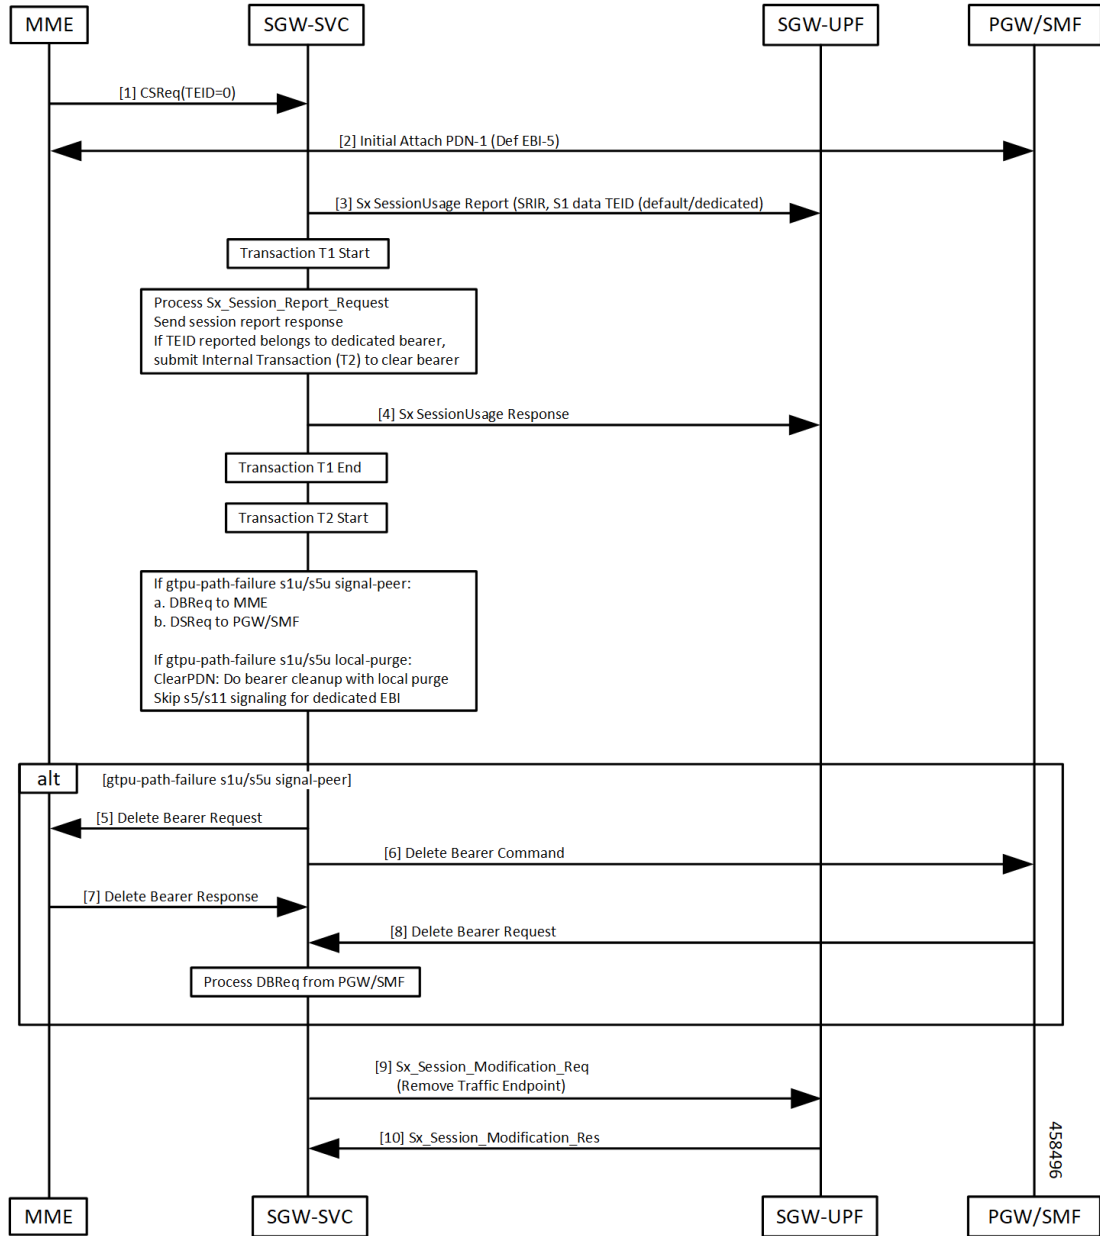


Table 13: Session Replacement for Dedicated Bearer Call Flow Description

Step	Description
1, 2	Initial attach complete.
3, 4	<ul style="list-style-type: none"> UPF sends Sx_Session_Report_Request with report type as SRIR and TEID. cnSGW-C responds with Sx_Session_Report_Response.

Step	Description
5–10	<p>cnSGW-C processes Sx_Session_Report_Request, wrong Session Replacement uses GTPU path failure CLI for peer-signaling or local purge.</p> <p>If TEID is received for dedicated bearer, submit internal transaction (T2) to clean up bearer.</p> <p>If CLI, <code>gtpu-path-failure s1u/s5u signal-peer</code></p> <ul style="list-style-type: none"> • Send Sx_Session_Report_Request to UPF to set FAR ACTION=DROP. • Send Delete Bearer Req to MME. • Send Delete Session Request to PGW.
11, 12	<ul style="list-style-type: none"> • Send Sx_Session_Modification_Request (Remove Traffic Endpoint) • UPF responds with Sx_Session_Modification_Response.

Feature Configuration

This section describes how to configure the GTPU Error Indication feature.

To configure this feature, use the following configuration:

```

config
  profile sgw sgw_profile_name
    gtpu-error-ind
      s1u [ local-purge | page-ue ]
      s5u [ local-purge | signal-peer ]
    end

```

NOTES:

- **s1u**—S1-U interface.
- **s5u**—S5-U interface.
- **local-purge**—Locally purge the affected bearers or PDNs without informing peer.
- **page-ue**—Reset to S1-Idle state and initiate paging for this UE.
- **signal-peer**—Clear the affected bearers or PDNs with signaling towards peer.

Configuration Example

The following is an example configuration.

```

config
  profile sgw sgw1
    gtpu-error-ind s1u local-purge
    gtpu-error-ind s5u signal-peer s1u local-purge
  end

```

Configuration Verification

To verify the configuration:

```
show running-config profile sgw gtpu-error-ind slu local-purge
profile sgw sgw1
gtpu-error-ind slu local-purge
```

OAM Support

This section describes operations, administration, and maintenance information for this feature.

Bulk Statistics

The following are statistics for PDN cleanup due to Error Report.

```
sgw_pdn_disconnect_stats{app_name="smf",cluster="Local",data_center="DC",instance_id="0",
pdn_type="ipv4",rat_type="EUTRAN",reason="slu_gtpu_error",service_name="sgw-service"}
1
```

```
sgw_pdn_disconnect_stats{app_name="smf",cluster="Local",data_center="DC",instance_id="0",
pdn_type="ipv4",rat_type="EUTRAN",reason="s5u_gtpu_error",service_name="sgw-service"}
1
```

```
sgw_pdn_disconnect_stats{app_name="smf",cluster="Local",data_center="DC",instance_id="0",
pdn_type="ipv4",rat_type="EUTRAN",reason="slu_gtpu_session_replacement",service_name="sgw-service"}
1
```

```
sgw_pdn_disconnect_stats{app_name="smf",cluster="Local",data_center="DC",instance_id="0",
pdn_type="ipv4",rat_type="EUTRAN",reason="userplane_requested_graceful_termination",service_name="sgw-service"}
1
```

```
sgw_service_stats{app_name="smf",cluster="Local",data_center="DC",fail_reason="",gr_instance_id="1",
instance_id="0",interface="interface_sgw_egress",reject_cause="",service_name="sgw-service",
sgw_procedure_type="s5u_gtpu_error_initiated_bearer_deletion",status="attempted",sub_fail_reason=""}
```

1

```
sgw_service_stats{app_name="smf",cluster="Local",data_center="DC",fail_reason="",gr_instance_id="1",
instance_id="0",interface="interface_sgw_egress",reject_cause="",service_name="sgw-service",
sgw_procedure_type="s5u_gtpu_error_initiated_bearer_deletion",status="success",sub_fail_reason=""}
```

1

```
sgw_service_stats{app_name="smf",cluster="Local",data_center="DC",fail_reason="",gr_instance_id="1",
instance_id="0",interface="interface_sgw_egress",reject_cause="",service_name="sgw-service",
sgw_procedure_type="s5u_gtpu_session_replacement_initiated_bearer_deletion",status="attempted",sub_fail_reason=""}
```

1

```
sgw_service_stats{app_name="smf",cluster="Local",data_center="DC",fail_reason="",gr_instance_id="1",
instance_id="0",interface="interface_sgw_egress",reject_cause="",service_name="sgw-service",sgw_procedure_type=
"s5u_gtpu_session_replacement_initiated_bearer_deletion",status="success",sub_fail_reason=""}
1
```

```
sgw_service_stats{app_name="smf",cluster="Local",data_center="DC",fail_reason="",gr_instance_id="1",
instance_id="0",interface="interface_sgw_ingress",reject_cause="",service_name="sgw-service",sgw_procedure_type=
"s5u_gtpu_error_initiated_bearer_deletion",status="attempted",sub_fail_reason=""}
1
```

```
sgw_service_stats{app_name="smf",cluster="Local",data_center="DC",fail_reason="",gr_instance_id="1",
instance_id="0",interface="interface_sgw_ingress",reject_cause="",service_name="sgw-service",sgw_procedure_type=
"s5u_gtpu_error_initiated_bearer_deletion",status="success",sub_fail_reason=""}
1
```

```
sgw_service_stats{app_name="smf",cluster="Local",data_center="DC",fail_reason="",gr_instance_id="1",
instance_id="0",interface="interface_sgw_ingress",reject_cause="",service_name="sgw-service",sgw_procedure_type=
"s5u_gtpu_session_replacement_initiated_bearer_deletion",status="attempted",sub_fail_reason=""}
1
```

```
sgw_service_stats{app_name="smf",cluster="Local",data_center="DC",fail_reason="",gr_instance_id="1",
instance_id="0",interface="interface_sgw_ingress",reject_cause="",service_name="sgw-service",sgw_procedure_type=
"s5u_gtpu_session_replacement_initiated_bearer_deletion",status="success",sub_fail_reason=""}
1
```

The following SGW `ddn_stats_type` is added for DDN initiated due to GTPU Error indication on S1u tunnel.

```
sgw_ddn_stats{app_name="smf",cluster="cn",data_center="cn",ddn_stats_type="gtpu_err_ind_triggered",
instance_id="0",service_name="sgw-service"} 2
```

