



View and Manage Issues

- [About Issues, on page 1](#)
- [About Machine Reasoning Engine, on page 2](#)
- [About Layer 2 Loop Issue, on page 2](#)
- [View Open Issues, on page 2](#)
- [Troubleshoot Wired Client Issues Using MRE , on page 14](#)
- [View Resolved Issues, on page 16](#)
- [View Ignored Issues, on page 18](#)
- [Resolve or Ignore Issues, on page 19](#)
- [Radio Outage Issue Triggers, on page 21](#)
- [Automatic Issue Resolution, on page 21](#)
- [Manage Issue Settings, on page 22](#)
- [Enable Issue Notifications, on page 23](#)
- [Assurance, Cisco AI Network Analytics, and MRE Issues, on page 24](#)

About Issues

Assurance provides both system-guided as well as self-guided troubleshooting. For a large number of issues, Assurance provides a system-guided approach, where multiple Key Performance Indicators (KPIs) are correlated, and the results from tests and sensors are used to determine the root cause of the problem, and then possible actions are provided to resolve the problem. The focus is on highlighting an issue rather than monitoring data. Quite frequently, Assurance performs the work of a Level 3 support engineer.

With Cisco DNA Center, you can view and troubleshoot AI-driven issues using Cisco AI Network Analytics. Cisco AI Network Analytics leverages a cloud-based learning platform with advanced artificial intelligence (AI) and machine learning (ML) technologies to provide intelligent issue detection and analysis. It detects anomalies to determine their root causes and ease troubleshooting.

Cisco AI Network Analytics can detect the following types of cloud-based AI-driven issues:

- **Connection Issues** (Onboarding Issues): Excessive Time, Excessive Failures, Excessive Association Time, Excessive Association Failures, Excessive Authentication Time, Excessive Authentication Failures, Excessive DHCP Time, and Excessive DHCP Failures
- **Application Experience Issues:** Total Radio Throughput, Media Application Throughput, Cloud Application Throughput, Collab Application Throughput, and Social Application Throughput.



Note Currently, Cisco AI Network Analytics use cases are supported only for wireless environments that are running AireOS controllers.

About Machine Reasoning Engine

The Machine Reasoning Engine (MRE) is a network automation engine that uses artificial intelligence (AI) to automate complex network operation workflows. It encapsulates human knowledge and expertise into a fully automated inference engine to help you perform complex root cause analysis, detect issues and vulnerabilities, and either manually or automatically perform corrective actions. MRE is powered by a cloud-hosted knowledge base, built by Cisco networking experts.

You can use the MRE to troubleshoot wired client issues, Layer 2 loop issue, and PoE issue. For the list of issues, see [MRE Issues, on page 36](#).

For procedure, see [Troubleshoot Wired Client Issues Using MRE, on page 14](#), [Issue Instance Details for Layer 2 Loop and PoE Issues, on page 10](#), and [Issue Instance Details for PoE Issue, on page 12](#).

About Layer 2 Loop Issue

A Layer 2 Loop issue occurs when a forwarding loop forms in the path of one or more VLANs. In this case, packets are forwarded and multiplied indefinitely along the affected path, until the links and devices reach maximum capacity. A broadcast storm occurs and the entire Layer 2 network shuts down very quickly. The MRE enables you to troubleshoot the Layer 2 Loop issue by allowing you to do the following:

- View the VLANs and ports that are involved in the probable loop.
- View the devices that are associated with the loop.



Note The scale constraints for the Layer 2 Loop are the following:

- Number of VLANs is 10.
 - Number of devices per VLAN is 30.
-



Important Currently, the MRE does not perform root cause analysis on Layer 2 loops that occur as a result of unmanaged network devices, virtual machines, or other entities that are not part of the topology known to the Cisco DNA Center.

View Open Issues

Use this procedure to view all open issues, which fall under the following categories:

- **Threshold-based issues:** Issues detected by Assurance.
- **AI-Driven Issues:** Issues detected by Cisco AI Network Analytics. These issues are triggered based on deviations from the predicted baseline for your specific network environment.

If you have installed and configured Cisco AI Network Analytics application with Cisco DNA Center, you can view the following types of cloud-based AI-driven issues:

- **Connection Issues (Onboarding Issues):** Excessive Time, Excessive Failures, Excessive Association Time, Excessive Association Failures, Excessive Authentication Time, Excessive Authentication Failures, Excessive DHCP Time, and Excessive DHCP Failures.



Note For Connection issues to display, make sure that the APs are properly assigned to sites.

- **Application Experience Issues:** Total Radio Throughput, Media Application Throughput, Cloud Application Throughput, Collab Application Throughput, and Social Application Throughput.



Note For Application Experience issues to display, make sure that Application Visibility and Control (AVC) is enabled on the wireless controllers. The throughput issues rely on the AVC data for baselining and anomaly detection.

- **Layer 2 Loop Issue and PoE Issue:** Issues detected by Assurance that you can troubleshoot using the MRE workflow. See [About Machine Reasoning Engine, on page 2](#).

Before you begin

- To view AI-driven cloud-based issues that uses artificial intelligence (AI) and machine learning (ML) technologies to provide intelligent issue detection and analysis, make sure that you have configured Cisco AI Network Analytics data collection. See [Configure Cisco AI Network Analytics Data Collection](#).
- To view syslog messages, make sure that you have configured syslog. See [Configure Syslog, SNMP Traps, NetFlow Collector Servers, and Wired Client Data Collection Using Telemetry](#) in [Cisco Digital Network Architecture Center User Guide](#).

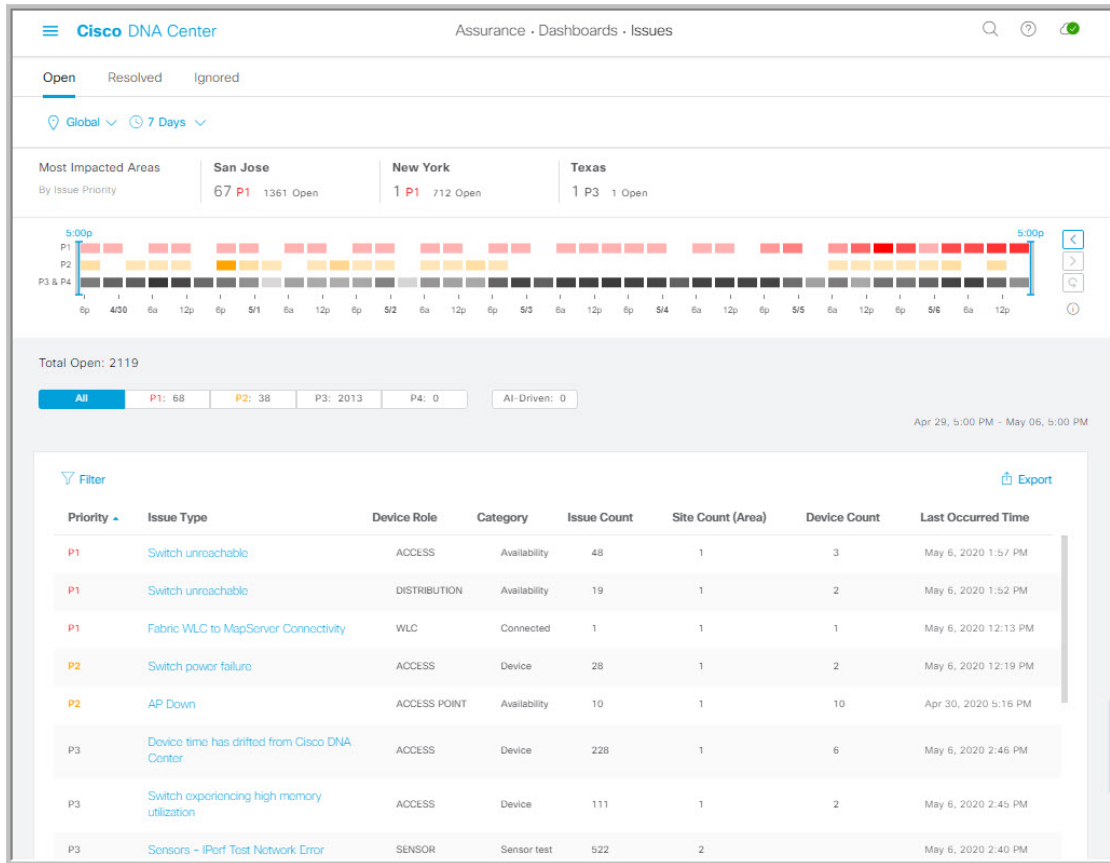
Step 1

Do one of the following:

- From the Cisco DNA Center home page, in the **Assurance Summary > Critical Issues** area, choose **View Details**.
- In the Cisco DNA Center GUI, click the **Menu** icon (☰) and choose **Assurance > Dashboards > Issues**.




The **Open Issues** dashboard appears with the following information:

Figure 1: Open Issues Dashboard




Open Issues Dashboard

Item	Description
<p> Global </p> <p>Location pane</p>	<p>Allows you to display information on the window based on the location you select. Default is Global. To change the location, do the following:</p> <ol style="list-style-type: none"> Click Global. The Site/Building/Floor table is displayed. Choose the Hierarchical Site View or Building View from the drop-down list. Based on what you choose, the table is refreshed. To view information about a specific site, building, or floor, click Apply in the appropriate row; information in the Open Issues window is refreshed based on your selection.
<p></p> <p>Time Range setting</p>	<p>Allows you to display information on the window based on the time range you select. Default is 24 Hours. Do the following:</p> <ol style="list-style-type: none"> From the 24 Hours drop-down list, choose a time range: 3 hours, 24 hours, or 7 days. Specify the Start Date and time; and the End Date and time. Click Apply. <p>This sets the range of the timeline.</p>

Open Issues Dashboard	
Item	Description
Most Impacted Areas	Provides information about the areas that are most impacted based on issue priority. Click the hyper-linked location to drill down to the exact building and floor where the issue has occurred.
Timeline Slider	<p>Allows you to specify a more granular time range. Click and drag the timeline boundary lines to specify the time range.</p> <p>The colors represent the issue priority:</p> <p>: P1</p> <p>: P2</p> <p>: P3 and P4</p> <p>Note The intensity of the color indicates its significance, whether more or fewer issues have occurred for that priority level. For example, a lighter shade of yellow indicates fewer P2 issues (still open) than a deeper shade of yellow.</p>
Total Open	<p>Provides the total count of open issues that require action.</p> <p>The Total Open value changes depending on the tab you choose. Options are All, P1, P2, P3, P4, and AI-Driven. Default is All.</p>

Step 2 Click the **All**, **P1**, **P2**, **P3**, **P4**, or **AI-Driven** tab to display a list of issues in that category in the **Issue Type** table.

Issue Type Table in the Open Issues Window	
Item	Description
Priority	Preassigned priority level of the issue type.
Issue Type	<p>Type of issue.</p> <p>Note For AI-driven issues, the  icon appears in front of the issue type.</p>
Device Role	Role assigned to the device on which the issue was detected. Can be one of the following: Access, Core, Distribution, Border Router, or Unknown.
Category	Category under which the issue type falls. For example, Connectivity, Availability, Onboarding, Utilization, and so on.
Issue Count	Number of times this type of issue has occurred.
Site Count (Area)	Number of sites where this type of issue occurred.
Device Count	Number of devices that were impacted by this type of issue.
Last Occurred Time	Most recent date and time this issue occurred.

Step 3 From the **Issue Type** table, click an issue type.

The first slide-in pane, **Issue Instances**, opens, which lists all the issues for that issue type with the following information:

Issue Instances (First Slide-In Pane)	
Item	Description
Open Issues	Number of open issues for that issue type.
Area	Number of buildings and floors that are impacted by the issue.
Device	Number of devices that are impacted by the issue.
Actions drop-down list	Allows you to resolve or ignore a single issue or a bulk of issues at a time. See Resolve or Ignore Issues, on page 19 .
Issue	Description of the issue.
Site	Site, building, or floor that was impacted by the issue.
Device	Device that was impacted by the issue. Click the device name to open the Device 360 window.
Device Type	Type of device that was impacted by the issue
Issue Count	Number of times this type of issue occurred.
Last Occurred Time	Date and time this issue occurred.
Last Updated Time	Date and time this issue was last updated.
Updated By	Name of the entity who updated this issue.

Step 4 From the **Issue** column in the **Issue Instances** slide-in pane, click an issue.

A second slide-in pane, **Issue Instance Details**, opens, which provides details about the issue. Depending on the issue, the description and suggested actions are displayed.

Note Some of the suggested actions have a **Run** button adjacent to it. Click **Run** to execute the CLI command on the device.

For AI-driven issues, the **Issue Instance Details** slide-in pane contains AI-driven specific information. See [Issue Instance Details for AI-Driven Issues, on page 6](#).

For a Layer 2 loop issue, which support Machine Reasoning, the **Issue Instance Details** slide-in pane contains specific information. See [Issue Instance Details for Layer 2 Loop and PoE Issues, on page 10](#).


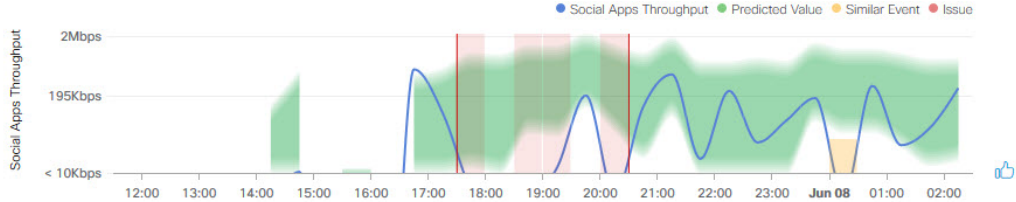
For a PoE issue, which support Machine Reasoning, the **Issue Instance Details** slide-in pane contains specific information. See [Issue Instance Details for PoE Issue, on page 12](#).

Issue Instance Details for AI-Driven Issues



Note The **Issue Instance Details** slide-in pane is part of the **Open Issues** workflow. See [Step 4 in View Open Issues, on page 2](#).

For AI-driven issues, the **Issue Instance Details** (second slide-in pane) provides the following information:

Issue Instance Details (Second Slide-In Pane)	
Item	Description
Description	Description of the issue.
Status drop-down list	Allows you to change the status of the issue. Do the following: <ul style="list-style-type: none"> To resolve an issue, from the Status drop-down list, choose Resolve. To stop an issue from being reported, do the following: <ol style="list-style-type: none"> From the Status drop-down list, choose Ignore. Set the number of hours to ignore the issue on the slider, and then click Confirm.
Summary area	Brief summary of the issue, which can include information such as the radios that are impacted, the location of the radios, the time and date the issue occurred, and the location of the issue.
Impacted Summary for this Network	Displays information about the location that was impacted and the number of clients that were impacted by the issue.
Feedback icon	Click the  icon to provide your comments on whether the information on this page was helpful, and then click Submit .
Problem	<p>Provides brief text that describes the problem along with a chart that provides a visual of how the actual KPI value deviated from the predicted normal behavior.</p> <p>By default, the chart is zoomed-in, 6 hours before and 6 hours after the issue, as shown in the following figure:</p> <p>Figure 2: Problem Chart</p>  <p>The chart details for the AI-driven issues are represented by different colors.</p> <ul style="list-style-type: none"> Green band: Predicted normal behavior for your network based on machine learning. Solid blue line: Actual KPI value. Vertical red line or bars: Indicates an issue. When the blue line (actual KPI value) falls outside the green band (predicted normal behavior), an issue is raised. Vertical yellow bars: Indicates that a similar event has occurred. <p>Hover and move your cursor over the charts to view synchronized information, such as the KPI value, the predicted lower value, and the predicted upper value at a selected point in time.</p>

Issue Instance Details (Second Slide-In Pane)	
Item	Description
Impact	<p>Provides information about the connected clients, APs, devices, and applications that are impacted by the issue.</p> <p>For Excessive Onboarding Time and Failures; and Excessive DHCP, Association, or Authentication Time and Failures, the following tabs are provided: Impacted Clients and Top 10 Impacted APs.</p> <p>For Total Radio Throughput and Applications Throughput (Cloud, Collab, Media, and Social), the following tabs are provided: Impacted Clients, Device Breakout, and Applications by TX/RX.</p> <p>Click the tab to update the chart and the table below the chart.</p>

Issue Instance Details (Second Slide-In Pane)

Item	Description
Root Cause Analysis	<p>Provides the issue along with the probable network causes for that issue, displayed in charts, as shown in the following figure:</p> <p>Figure 3: Root Cause Analysis Charts</p> <p>For Excessive Onboarding Time and Failures, the following tabs are provided: Network Causes, Failed Distribution, Failed Percentage, and Failed Count.</p> <p>For Excessive DHCP, Association, or Authentication Time, the following tabs are provided: Network Causes, Top Impacted APs, and Top Impacted Times.</p> <p>For Excessive DHCP, Association, or Authentication Failures, the following tabs are provided: Network Causes, Top Impacted APs, and Top Impacted Failures.</p> <p>For Total Radio Throughput and Applications Throughput (Cloud, Collab, Media, and Social), the following tabs are provided: Network Causes.</p> <p>Click the tab to update the charts below.</p> <p>To view the charts for additional KPIs, click the KPI icon, choose the KPI, and then click Apply.</p>
Suggested Actions	<p>Provides the actions you can take to resolve the issue.</p>

Issue Instance Details for Layer 2 Loop and PoE Issues


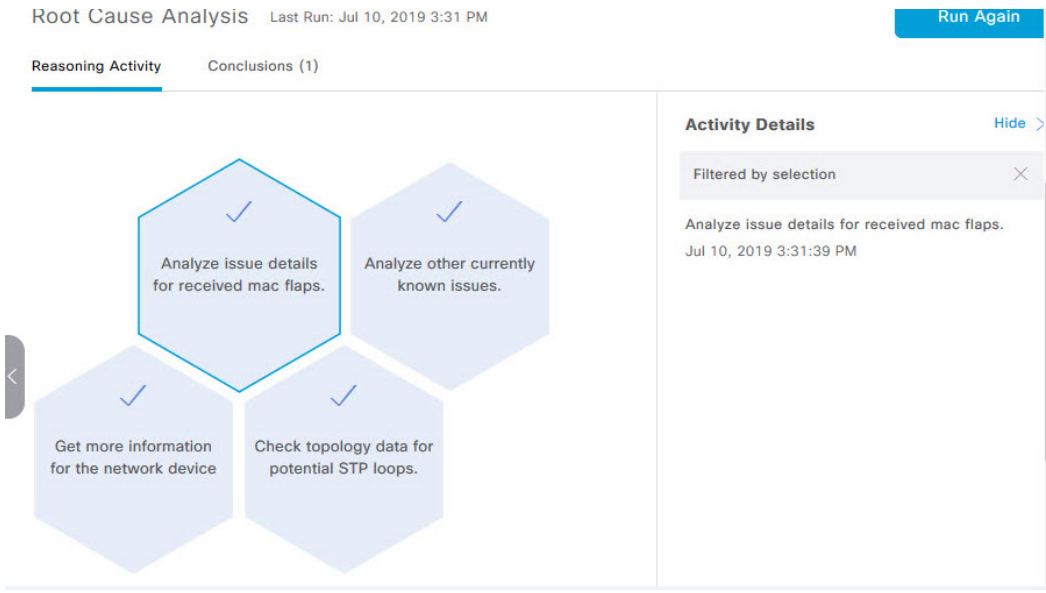



Note The **Issue Instance Details** slide-in pane is part of the **Open Issues** workflow. See [Step 4 in View Open Issues, on page 2](#).

To understand the Layer 2 Loop issue and the Machine Reasoning Engine, see [About Layer 2 Loop Issue, on page 2](#).

For Layer 2 Loop issue, which supports Machine Reasoning, the **Issue Instance Details** slide-in pane contains the following information:

Issue Instance Details (Second Slide-In Pane)	
Item	Description
Status drop-down list	<p>Allows you to change the status of the issue. Do the following:</p> <ul style="list-style-type: none"> To resolve an issue, from the Status drop-down list, choose Resolve. To stop an issue from being reported, do the following: <ol style="list-style-type: none"> From the Status drop-down list, choose Ignore. Set the number of hours to ignore the issue on the slider, and then click Confirm.
Summary	<p>Brief summary of the issue, which can include information, such as device, role, time, location, and potential root cause.</p> <p>For Layer 2 Loop issue, this area provides the initial assessment, such as the VLANs and ports in the potential loop.</p>
Problem Details	<p>Note This area is provided for Layer 2 Loop issue.</p> <p>Provides a brief text that describes the problem along with the following:</p> <ul style="list-style-type: none"> Relevant Events drop-down list: Lists the events that occurred during the loop. Click an event to view details in the side pane. Potential Loop Details drop-down list: Provides loop information, such as the device, role, port in the loop, duplex mode, and VLAN that was involved in the loop.

Issue Instance Details (Second Slide-In Pane)	
Item	Description
Root Cause Analysis	<p>The Machine Reasoning Engine (MRE) allows you to perform complex root cause analysis and suggests corrective actions.</p> <ol style="list-style-type: none"> 1. Click Run Machine Reasoning to allow the MRE to start troubleshooting. After the troubleshooting is completed, the Machine Reasoning Completed pop-up dialog box appears. 2. In the pop-up dialog box, click View Details. The Root Cause Analysis area appears with the Conclusions tab opened by default providing the details of the root cause analysis. 3. From the Conclusions area, click View Relevant Activities to view activity details. The activity shows commands that were used at each step of the root cause analysis. 4. Click the  icon to provide your feedback, whether the information on this page was helpful or not. 5. Click the Reasoning Activity tab to understand how the MRE reached that conclusion. Each reasoning activity is provided in hexagon shaped blocks as shown in the following figure. Click each hexagon shaped block to view activity details in the right pane. <p>To cancel the reasoning activity while it is running, click Stop.</p> <p>Note The check mark indicates that the step is complete.</p> <p>Figure 4: Reasoning Activity</p>  <p>6. Click Run Again if you want to rerun the MRE.</p>
Topology icon	<p>Note This icon is provided for Layer 2 Loop issue.</p> <p>Click the  icon to view the topology of the network segment in which the loop occurred.</p>

Issue Instance Details for PoE Issue


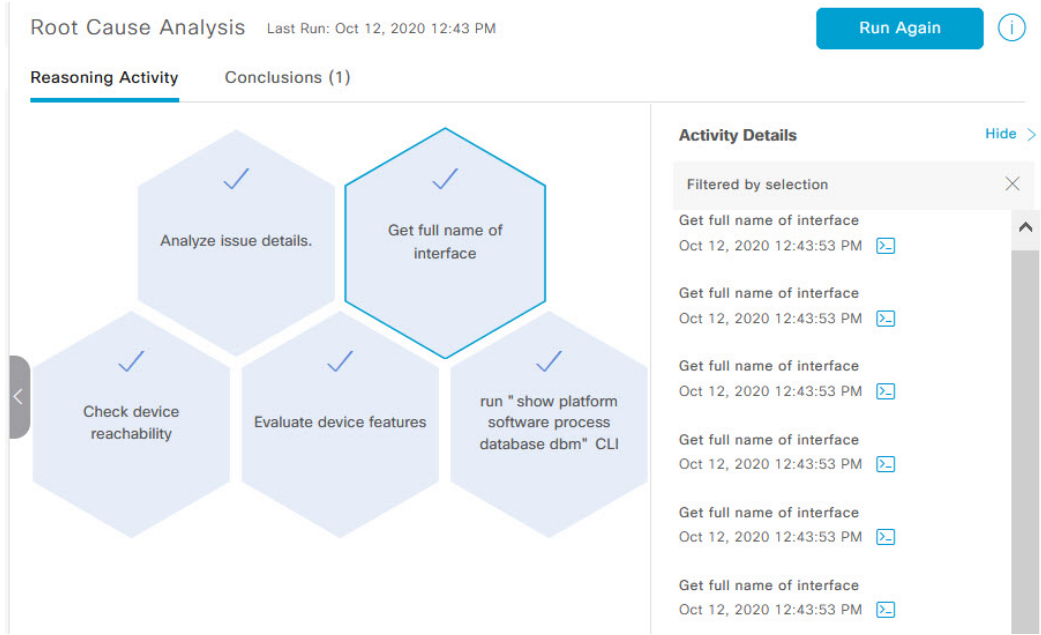


Note The **Issue Instance Details** slide-in pane is part of the **Open Issues** workflow. See [Step 4](#) in [View Open Issues, on page 2](#).

For PoE issue, which supports Machine Reasoning, the Issue Instance Details slide-in pane contains the following information:

Issue Instance Details (Second Slide-In Pane)	
Item	Description
Status drop-down list	<p>Allows you to change the status of the issue. Do the following:</p> <ul style="list-style-type: none"> • To resolve an issue, from the Status drop-down list, choose Resolve. • To stop an issue from being reported, do the following: <ol style="list-style-type: none"> 1. From the Status drop-down list, choose Ignore. 2. Set the number of hours to ignore the issue on the slider, and then click Confirm.
Summary	Summary of the issue, which can include information, such as device, role, time, location, and potential root cause.
Problem Details	<p>Provides a brief text that describes the problem along with the following:</p> <ul style="list-style-type: none"> • Event Types tabs: Contains tabs for the types of events that occurred. Click an event tab to view the list of errors that occurred for that event type. • Errors: Errors that occurred for each event type. The errors are refreshed based on the Event Types tab you click. • Detailed Information Click an error to view additional information about the error.

Issue Instance Details (Second Slide-In Pane)


Item	Description
Root Cause Analysis	<p>The Machine Reasoning Engine (MRE) allows you to perform complex root cause analysis and suggests corrective actions.</p> <ol style="list-style-type: none"> 1. Click Run Machine Reasoning to allow the MRE to start troubleshooting. After the troubleshooting is completed, the Machine Reasoning Completed pop-up dialog box appears. 2. In the pop-up dialog box, click View Details. The Root Cause Analysis area appears with the Conclusions tab opened by default providing the details of the root cause analysis. 3. From the Conclusions area, click View Relevant Activities to view activity details. The activity shows commands that were used at each step of the root cause analysis. 4. Click the  icon to provide your feedback, whether the information on this page was helpful or not. 5. Click the Reasoning Activity tab to understand how the MRE reached that conclusion. Each reasoning activity is provided in hexagon shaped blocks as shown in the following figure. Click each hexagon shaped block to view Activity Details in the right pane. <p>To cancel the reasoning activity while it is running, click Stop.</p> <p>Note The check mark indicates that the step is complete.</p> <p>Figure 5: Reasoning Activity</p>  <p>The screenshot shows the 'Root Cause Analysis' interface. At the top, it says 'Last Run: Oct 12, 2020 12:43 PM' and has a 'Run Again' button. Below this are two tabs: 'Reasoning Activity' (selected) and 'Conclusions (1)'. The 'Reasoning Activity' pane displays five hexagonal blocks, each with a checkmark and a description: 'Analyze issue details.', 'Get full name of interface', 'Check device reachability', 'Evaluate device features', and 'run "show platform software process database dbm" CLI'. The 'Activity Details' pane on the right shows a list of activities, all filtered by selection, with timestamps and expandable icons.</p> 6. Click Run Again if you want to rerun the MRE.

Troubleshoot Wired Client Issues Using MRE

Use this procedure to view wired client issues detected by Assurance that you can troubleshoot using the MRE workflow. For a list of wired client issues that support MRE, see [MRE Issues, on page 36](#).

Before you begin

Make sure you that MRE knowledge base is updated with the latest knowledge packs. See [Update the Machine Reasoning Knowledge Base](#).

Step 1 In the Cisco DNA Center GUI, click the **Menu** icon () and choose **Assurance > Health**.
The **Overall** health dashboard appears.

Step 2 Click the **Client** tab.
The **Client** health dashboard appears.

Step 3 In the **Wired Clients** summary area, click **View Details** to open a slide-in pane.

Step 4 In the slide-in pane, in the **Wired Clients** chart, click **Authentication** or **DHCP** as appropriate.

If you click **Authentication**, the following information is displayed below the chart: Top Authentication Failure Reason, Top Location, Top Switch, Top Host Device Type. A table is also displayed, which provides the list of clients that failed authentication.

If you click **DHCP**, the following information is displayed below the chart: Top DHCP Failure Reason, Top Location, Top Switch, Top Host Device Type. A table is also displayed.


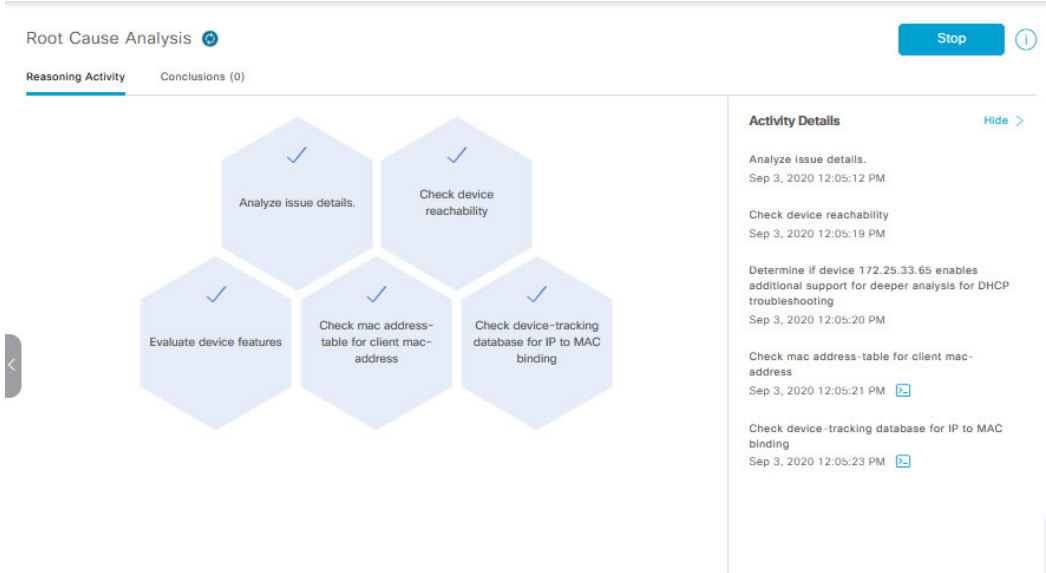
Step 5 Do one of the following:

- If you are a user with SUPER-ADMIN-ROLE privileges, enter the client's MAC address in the search tool.
- In the table, from the **Identifier** column, click the hyper linked identifier.

The **Client 360** window for that client is displayed.

Step 6 In the **Client 360** window, from the **Issues** dashlet, click an authentication or DHCP issue.
The **Issue Details** window is displayed with the following information:

Issue Details	
Item	Description
Status drop-down list	Provides the current status of the issue, which you can change. Do the following: <ul style="list-style-type: none"> • To resolve an issue, from the Status drop-down list, choose Resolve. • To stop an issue from being reported, do the following: <ol style="list-style-type: none"> a. From the Status drop-down list, choose Ignore. b. Set the number of hours to ignore the issue on the slider, and then click Confirm.
Summary	Brief summary of the issue, which can include information, such as device, role, time, location. and potential root cause.

Issue Details	
Item	Description
Root Cause Analysis	<p>The Machine Reasoning Engine (MRE) allows you to perform complex root cause analysis and suggests corrective actions.</p> <ol style="list-style-type: none"> Click Run Machine Reasoning to allow the MRE to start troubleshooting. After the troubleshooting is completed, the Machine Reasoning Completed pop-up dialog box appears. In the pop-up dialog box, click View Details. The Root Cause Analysis area appears with the Conclusions tab opened by default providing the details of the root cause analysis. From the Conclusions area, click View Relevant Activities to view activity details. Click the  icon to provide your feedback, whether the information on this page was helpful or not, and then click Submit. Click the Reasoning Activity tab to understand how the MRE reached that conclusion. Each reasoning activity is provided in hexagon shaped blocks as shown in the following figure. Click each hexagon shaped block to view activity details in the right pane. <p>To abort the reasoning activity while it is running, click Stop.</p> <p>Note The check mark indicates that the step is complete.</p> <p>Figure 6: Reasoning Activity</p>  <p>The screenshot shows the 'Root Cause Analysis' interface. At the top, there is a 'Stop' button and a help icon. Below the title, there are two tabs: 'Reasoning Activity' (selected) and 'Conclusions (0)'. The main area displays five hexagonal blocks, each with a checkmark and a description: 'Analyze issue details.', 'Check device reachability', 'Evaluate device features', 'Check mac address-table for client mac-address', and 'Check device-tracking database for IP to MAC binding'. To the right, an 'Activity Details' pane is open, showing a list of activities with their timestamps and a 'Hide' button.</p> <ol style="list-style-type: none"> Click Run Again if you want to rerun the MRE.


View Resolved Issues

Use this procedure to view all resolved issues, which fall under the following categories:

- **Threshold-based issues:** Issues detected by Assurance.
- **AI-driven Issues:** Issues detected by Cisco AI Network Analytics. These issues are triggered based on deviations from the predicted baseline for your specific network environment.

Before you begin

To view AI-driven resolved issues, make sure that you have configured Cisco AI Network Analytics data collection. See [Configure Cisco AI Network Analytics Data Collection](#).

Step 1 In the Cisco DNA Center GUI, click the **Menu** icon () and choose **Assurance > Dashboards > Issues**.

The **Open Issues** dashboard appears.

Step 2 Click the **Resolved** tab.


The **Resolved Issues** window appears.

Step 3 Use the **Resolved Issues** window to view the following information:

Resolved Issues Window	
Item	Description
Global	<p>Allows you to display information on the window based on the location you select. Default is Global. To change the location, do the following:</p> <ol style="list-style-type: none"> Click Global. The Site/Building/Floor table is displayed. Choose the Hierarchical Site View or Building View from the drop-down list. Based on what you choose, the table is refreshed. To view information about a specific site, building, or floor, click Apply in the appropriate row; information in the Open Issues window is refreshed based on your selection.
24 Hours drop-down list	<p>Allows you to display information on the window based on the time range you select. Default is 24 Hours. Do the following:</p> <ol style="list-style-type: none"> From the 24 Hours drop-down list, choose a time range: 3 hours, 24 hours, or 7 days. Specify the Start Date and time and the End Date and time. Click Apply. <p>This sets the range of the timeline.</p>
Timeline slider	<p>Allows you to specify a more granular time range. Click and drag the timeline boundary lines to specify the time range.</p>

Resolved Issues Window	
Item	Description
Total Resolved	Provides the total count of resolved issues. The Total Resolved value changes depending on the tab you choose. Options are All , P1 , P2 , P3 , P4 , and AI-Driven . Default is All .

Step 4 Click the **All**, **P1**, **P2**, **P3**, **P4**, or **AI-Driven** tab to display a list of issues in that category in the **Issue Type** table.

Issue Type Table in the Resolved Issues Window	
Item	Description
Priority	Preassigned priority level of the issue type.
Issue Type	Type of issue. Note For AI-driven issues, the  icon appears in front of the issue type.
Device Role	Role assigned to the device on which the issue was detected. Can be one of the following: Access, Core, Distribution, Border Router, or Unknown.
Category	Category under which the issue type falls. For example, Connectivity, Availability, Onboarding, Utilization, and so on.
Issue Count	Number of times this type of issue has occurred.
Site Count (Area)	Number of sites where this type of issue occurred.
Device Count	Number of devices that were impacted by this type of issue.
Last Occurred Time	Most recent date and time this issue occurred.

Step 5 From the **Issue Type** table, click an issue type.

The first slide-in pane, **Issue Instances**, opens, which lists all the resolved issues for that issue type and information such as site, device, device type, occurrence, last occurrence timestamp, last updated timestamp, and the name of the entity that updated the issue.

If the issue condition no longer exists, the system automatically resolves the issue and displays **System** in the **Updated By** column. See [Automatic Issue Resolution, on page 21](#).

Step 6 From the **Issue** column in the **Issue Instances** slide-in pane, click an issue.

A second slide-in pane, **Issue Instance Details**, opens, which provides details about the issue, the name of the entity that resolved the issue, and the timestamp. Depending on the issue, the description and suggested actions are displayed.


View Ignored Issues

Use this procedure to view all issues that are marked as ignored. The list of ignored issues that appear fall under the following two categories:

- **Threshold-based issues:** Issues detected by Assurance.
- **AI-Driven Issues:** Issues detected by Cisco AI Network Analytics. These issues are triggered based on deviations from the predicted baseline for your specific network environment.

Before you begin

To view the AI-Driven ignored issues, make sure that you have configured Cisco AI Network Analytics data collection. See [Configure Cisco AI Network Analytics Data Collection](#).

Step 1 In the Cisco DNA Center GUI, click the **Menu** icon () and choose **Assurance > Dashboards > Issues**. The **Open Issues** dashboard appears.


Step 2 Click the **Ignored** tab. The **Ignored Issues** window appears.

Step 3 Use the **Ignored Issues** window to view the following information:

Ignored Issues Window	
Item	Description
Global	<p>Allows you to display information on the window based on the location you select. Default is Global. To change the location, do the following:</p> <ol style="list-style-type: none"> Click Global. The Site/Building/Floor table is displayed. Choose the Hierarchical Site View or Building View from the drop-down list. Based on what you choose, the table is refreshed. To view information about a specific site, building, or floor, click Apply in the appropriate row; information in the Ignored Issues window is refreshed based on your selection.
24 Hours drop-down list	<p>Allows you to display information on the window based on the time range you select. Default is 24 Hours. Do the following:</p> <ol style="list-style-type: none"> From the 24 Hours drop-down list, choose a time range: 3 hours, 24 hours, or 7 days. Specify the Start Date and time; and the End Date and time. Click Apply. This sets the range of the timeline.
Timeline slider	<p>Allows you to specify a more granular time range. Click and drag the timeline boundary lines to specify the time range.</p>

Ignored Issues Window	
Item	Description
Total Ignored	Provides the total count of ignored issues. The Total Ignored value changes depending on the tab you choose. Options are All , P1 , P2 , P3 , P4 , and AI-Driven . Default is All .

Step 4 Click the **All**, **P1**, **P2**, **P3**, **P4**, or **AI-Driven** tab to display a list of issues in that category in the **Issue Type** table.

Issue Type Table in the Ignored Issues Window	
Item	Description
Priority	Preassigned priority level of the issue type.
Issue Type	Type of issue. Note For AI-driven issues, the  icon appears in front of the issue type.
Device Role	Role assigned to the device on which the issue was detected. Can be one of the following: Access, Core, Distribution, Border Router, or Unknown.
Category	Category under which the issue type falls. For example, Connectivity, Availability, Onboarding, Utilization, and so on.
Issue Count	Number of times this type of issue has occurred.
Site Count (Area)	Number of sites where this type of issue occurred.
Device Count	Number of devices that were impacted by this type of issue.
Last Occurred Time	Most recent date and time this issue occurred.

Step 5 From the **Issue Type** table, click an issue type.


The first slide-in pane, **Issue Instances** opens, which lists all the ignored issues for that issue type and information such as site, device, device type, occurrence, and the time stamp of the last occurrence.

Step 6 From the **Issue** column in the **Issue Instances** slide-in pane, click an issue.

A second slide-in pane, **Issue Instance Details**, opens, which provides details about the issue. Depending on the issue, the description along with suggested actions are displayed.

Resolve or Ignore Issues

Use this procedure to resolve or ignore a bulk of issues or to resolve or ignore a single issue.

Step 1 In the Cisco DNA Center GUI, click the **Menu** icon () and choose **Assurance** > **Dashboards** > **Issues**.

The **Open Issues** dashboard appears.

Step 2

To resolve or ignore a bulk of issues, do the following:

- a) From the **Issue Type** table in the **Open Issues** dashboard, click an issue type.

The first slide-in pane, **Issue Instances**, opens, which lists all the open issues for that issue type. This slide-in-pane allows you to resolve or ignore a bulk of issues.

- b) Do one of the following:

- To resolve or ignore specific issues, check the check boxes adjacent to those issues.
- To resolve or ignore all open issues that are displayed in the browser window for an issue type, check the check box adjacent to the **Issue** column. All the issues that are displayed in the browser window are selected.
- If the open issue count is more than 25 (for example, 100), the first 25 issues are displayed in the browser window. To select all the open issues, do the following:

1. Check the check box adjacent to the **Issue** column.

The first 25 issues are selected and the **Select all number open issues** tab appears next to the **Actions** drop-down list.

2. Click the **Select all number open issues** to select all open issues for that issue type (for example, all 100 issues).
3. (Optional) To view the next 25 issues in the browser window, click **Show More** located on the bottom of the page. The next 25 issues are appended to the browser window increasing the displayed issue count to 50. Click **Show More** to view the next 25 issues on the browser window, and so on.

- c) To resolve the issues, from the **Actions** drop-down list, choose **Resolve**.

A Warning dialog box appears. Click **Yes** in the Warning dialog box to proceed with the action.

After the issues are resolved, the **View resolved issues** tab is displayed. Click the **View resolved issues** to open the **Resolved Issues** window.

- d) To ignore the issues, from the **Actions** drop-down list, choose **Ignore**.

Set the number of hours to ignore the issues on the slider, and then click **Confirm**.

After the issues are ignored, the **View ignored issues** tab is displayed. Click the **View ignored issues** tab to open the **Ignored Issues** window.

Note If you try to resolve or ignore more than 750 issues, a warning message appears letting you know that it might take up to a minute to complete the action.

Step 3

To resolve or ignore a single issue, do the following:

- a) From the **Issue** column in the **Issue Instances** slide-in pane (first slide-in pane), click an issue.

A second slide-in pane, **Issue Instance Details**, opens, which provides details about the issue. This second slide-in-pane allows you to resolve or ignore the issue that you are viewing.

- b) To resolve an issue, from the **Status** drop-down list, choose **Resolve**.

- c) To stop an issue from being reported, do the following:

1. From the **Status** drop-down list, choose **Ignore**.

2. Set the number of hours to ignore the issue on the slider, and then click **Confirm**.

Radio Outage Issue Triggers

A radio outage issue is triggered when all of the following conditions are met for 60 minutes, which is the default trigger time:



Note To change the default trigger time, go to **Assurance > Manage > Issue Settings**. See [Manage Issue Settings, on page 22](#).

- The AP radio operation state is "up".
- The AP mode is Local or Flex-Connect.
- Client count on this radio is equal to 0.
- The RX data or management frame count is *not* increasing.
- The AP radio channel utilization is equal to 0.
- The AP is not an **isolated** AP.

Automatic Issue Resolution

For the following types of issues, if the issue condition no longer exists, the system automatically resolves the issue:

- Interface is down.
- Wireless Controller/Switch/Router unreachable.
- AP Disconnect from WLC.
- No activity on radio.




Note The system automatically resolves this issue when one of the following conditions no longer exist:

- Client count on this radio is equal to 0.
 - The RX data or management frame count is *not* increasing.
 - The AP radio channel utilization is equal to 0.
-

After the issue is resolved, the **Updated By** column in the **Resolved Issues > Issue Instance** slide-in pane, displays **System**. See **Step 3** in [View Resolved Issues, on page 16](#).


Manage Issue Settings

Use this procedure to manage the settings for issues. You can enable or disable specific issues that can be triggered, change the priority for issues, change the threshold for when an issue is triggered, and subscribe to external notifications for issues when they are triggered.

Step 1 In the Cisco DNA Center GUI, click the **Menu** icon () and choose **Assurance > Manage > Issue Settings**. The **Issue Settings** window appears.

Step 2 Set the **DEVICE TYPE** and **CATEGORY** filters to view the type of issues you want to configure. To view the AI-driven issues, click the **AI-Driven** tab in the **CATEGORY** filter.

Step 3 Click an issue in the **Issue Name** column to open an slide-in pane with the settings:

Note For some issues, changes made to the settings are shared across multiple device types. In the slide-in pane, hover your cursor over the information icon () to display the affected device types.

- a) To enable or disable if the issue can be triggered, click the **Enabled** toggle.
- b) To set the issue priority, click the **Priority** drop-down list and select the priority. The options are:
 - **P1**: A critical issue that needs immediate attention which can result in wider impact on network operations.
 - **P2**: A major issue that can potentially impact multiple devices or clients.
 - **P3**: A minor issue that has a localized or minimal impact.
 - **P4**: A warning issue that may not be an immediate problem but addressing it can optimize the network performance.
- c) (For certain issues) In the **Trigger Condition** area, you can change the threshold value for when the issue is reported.

Note For radio outage trigger conditions, see [Radio Outage Issue Triggers, on page 21](#).

Examples of a trigger condition:

```
No Activity on Radio(2.4 GHz) >= 60 minutes.
```


```
Memory Utilization of Access Points greater than 90%
```

- d) (Optional) If there are any changes to the settings, you can hover your cursor over **View Default Settings** to display the default issues. Click **Use Default** to restore all the issue settings to the default values.
- e) Click **Apply**.

Step 4 Click **Manage Subscription** to subscribe to external notifications for supported issues when they are triggered. See [Enable Issue Notifications, on page 23](#).

Enable Issue Notifications

Use this procedure to receive external notifications for when specific issues are triggered in Assurance. When an issue is triggered and there is status change, Assurance can generate a REST or email notification.

Step 1 In the Cisco DNA Center GUI, click the **Menu** icon () and choose **Assurance > Manage > Issue Settings**.
The **Issue Settings** window appears.

Step 2 Click **Manage Subscriptions**.
The **Events** window appears.


Step 3 Check the check boxes of the events that you want to subscribe to.

Note The **Event** name in Cisco DNA Center platform is the same as the **Issue Name** in Assurance.

Step 4 Click **Subscribe**.
The **Subscribe** dialog box appears.

Step 5 In the **Subscribe** dialog box, enter the details for the subscription:

- a) Enter a name for the subscription in the **Name** field.
- b) Click the **Subscription Type** drop-down list to select the notification type. You can receive REST or email notifications:

Notification Type	Details
REST	<p>Receive a REST notification when the issue/event is triggered. Configure the following settings:</p> <ul style="list-style-type: none"> • Select the option Select an existing endpoint or Create a new endpoint to specify the endpoint and configure the subsequent fields for the endpoint. • Trust Certificate • HTTP Method: Options are POST or PUT. • Headers: Enter the header details in the Header Key and Header Value fields.
EMAIL	<p>Receive an email notification when an issue/event is triggered.</p> <p>Important To receive email notifications, make sure you have the email server configured in the  > System Settings > Email configuration window.</p>

- c) Click **Subscribe**.

A subscription for the issue/event is created. A notification is sent when the issue/event is triggered and there is a status change.

What to do next

You can view and manage existing event subscriptions in Cisco DNA Center platform. For details, see "Working with Events" in the [Cisco DNA Center Platform User Guide](#).

Assurance, Cisco AI Network Analytics, and MRE Issues

Router Issues

The following table lists the router issues detected by Assurance:

Router Issues		
Category	Issue Name	Summary
Connectivity	BGP tunnel connectivity	BGP connectivity failure with peer due to wrong AS (autonomous system) number.
Connectivity	Interface connecting network devices is down	Interface connecting network devices is down.
Connectivity	Layer 2 loop symptoms	Host MAC address flapping seen on network device.
Connectivity	Network device Interface connectivity - BGP Flap	BGP connectivity is flapping with neighbor.
Connectivity	Network device interface connectivity - EIGRP adjacency failure	EIGRP (Enhanced Interior Gateway Routing Protocol) adjacency failed with neighbor.
Connectivity	Network device interface connectivity - Interface down	Interface on device is down.
Connectivity	Network device interface connectivity - ISIS adjacency failure	ISIS (Intermediate System Intermediate System) adjacency failed on device.
Connectivity	Network device interface connectivity - OSPF adjacency failure	OSPF (Open Shortest Path First) adjacency failed with neighbor.
Connectivity	WAN Interface Down	Interface connecting WAN network is down.
Connected	Failure to install an access policy for SGT	Failure to install an SGACL access policy for SGT.
Connected	High input/output error on router interfaces	High input/output error on interfaces.
Connected	High input/output discards on router interfaces	High input/output discards on interfaces.
Connected	High input/output utilization on router interfaces	High input/output utilization on interfaces.
Connected	High input/output discards on router WAN interfaces	High input/output discard on WAN interfaces.
Connected	High input/output utilization on router WAN interfaces	High input/output utilization on WAN interfaces.

Router Issues		
Category	Issue Name	Summary
Connected	SGT access policy download failed on the device	Failed to download SGACL ACEs for SGT.
Connected	SGT access policy installation failed on the device	Failure to install an access policy for SGT. Policy rule error found in RBACL.
Connected	Unable to download SGT access policy from the policy server	Failure to download the source list for access policy for SGT.
Connected	Uninstall of SGT access policy failed on the device	Failure to uninstall an SGACL access policy for SGT.
Device	DNA Center and network device time has drifted	Excessive time lag between Cisco DNA Center and device.
Device	Issues based on syslog events - High temperature	Issues created by single occurrence of syslog event related to high temperature.
Device	Router experiencing high CPU utilization	Device experiencing high CPU utilization.
Device	Router experiencing high memory utilization	Device experiencing high memory utilization
Availability	Network device HA switchover	The network device went through an HA switchover.
Availability	Router unreachable	Network device is unreachable from controller.

Core, Distribution, and Access Issues

The following table lists the core, distribution, and access issues detected by Assurance:

Core, Distribution, and Access Issues		
Category	Issue Name	Summary
Connectivity	BGP tunnel connectivity	BGP connectivity failure with peer due to wrong AS (autonomous system) number.
Connectivity	Interface connecting network devices is down	Interface connecting network devices is down.
Connectivity	Layer 2 loop symptoms	Host MAC address flapping seen on network device.
Connectivity	Network device Interface connectivity - BGP Flap	BGP connectivity is flapping with neighbor.
Connectivity	Network device interface connectivity - EIGRP adjacency failure	EIGRP (Enhanced Interior Gateway Routing Protocol) adjacency failed with neighbor.

Core, Distribution, and Access Issues		
Category	Issue Name	Summary
Connectivity	Network device interface connectivity - Interface down	Interface on device is down.
Connectivity	Network device interface connectivity - ISIS adjacency failure	ISIS (Intermediate System Intermediate System) adjacency failed on device.
Connectivity	Network device interface connectivity - OSPF adjacency failure	OSPF (Open Shortest Path First) adjacency failed with neighbor.
Connectivity	Dual Active Detection link failed on network device	The Dual Active Detection link has failed on the network device <i>Switch Name</i> .
Connectivity	StackWise Virtual link failed on network device	The StackWise Virtual link has failed on the network device <i>Switch Name</i> .
Connectivity	StackWise link failed on network device	The StackWise link has failed on the network device <i>Switch Name</i> .
Connected	Fabric devices connectivity - Border overlay	Fabric edge lost connectivity to the fabric border in the virtual network.
Connected	Fabric devices connectivity - Border underlay	Fabric edge lost connectivity to the fabric border in the physical network.
Connected	Fabric devices connectivity - Control border underlay	Fabric node lost connectivity to the co-located fabric border and control plane in the physical network.
Connected	Fabric devices connectivity - Control underlay	Fabric node lost connectivity to the fabric control plane device in the physical network.
Connected	Fabric devices connectivity - DHCP overlay	Fabric node lost connectivity to the DHCP server in the virtual network.
Connected	Fabric devices connectivity - DHCP underlay	Fabric node lost connectivity to the DHCP server in the physical network.
Connected	Fabric devices connectivity - DNS overlay	Fabric node lost connectivity to the DNS server in the virtual network.
Connected	Fabric devices connectivity - DNS underlay	Fabric node lost connectivity to the DNS server in the physical network.
Connected	Fabric devices connectivity - External URL	The fabric border cannot reach the user-provisioned external URL.
Connected	Fabric devices connectivity - ISE server	Fabric edge lost connectivity to the ISE server in the physical network.
Connected	Failure to install an access policy for SGT	Failure to install an SGACL access policy for SGT.

Core, Distribution, and Access Issues		
Category	Issue Name	Summary
Connected	High input/output error on switch interfaces	High input/output error on switch interfaces.
Connected	High input/output discards on switch interfaces	High input/output discards on switch interfaces.
Connected	High input/output utilization on switch interfaces	High input/output utilization on interfaces.
Connected	SGT access policy download failed on the device	Failed to download SGACL ACEs for SGT.
Connected	SGT access policy installation failed on the device	Failure to install an access policy for SGT. Policy rule error found in RBACL.
Connected	Unable to download SGT access policy from the policy server	Failure to download the source list for access policy for SGT.
Connected	Uninstall of SGT access policy failed on the device	Failure to uninstall an SGACL access policy for SGT.
Device	Device reboot crash	Device has rebooted due to a hardware or software crash.
Device	Device time has drifted from Cisco DNA Center	Excessive time lag between Cisco DNA Center and the device.
Device	Interface is flapping on network device	A port interface is flapping on a switch.
Device	Issues based on syslog events - High temperature	Issues created by single occurrence of syslog event related to high temperature.
Device	Issues based on syslog events - POE	Issues created by single occurrence of syslog event related to power.
Device	PoE port in error state	PoE port is error disabled as reported by a syslog event.
Device	PoE powered device flagged faulty	PoE-capable device connected to a PoE port has been flagged faulty as reported by a syslog event.
Device	Power denied for PoE powered device	PoE-capable device connected to a PoE port has been power denied as reported by a syslog event.
Device	Stack member removal	Stack member was removed.
Device	Stack member running incompatible image	Stack member is running an incompatible image.
Device	Switch experiencing high CPU utilization	Device experiencing high CPU utilization.
Device	Switch experiencing high memory utilization	Device experiencing high memory utilization.

Core, Distribution, and Access Issues		
Category	Issue Name	Summary
Device	Switch fan failure	Fan failure on switch.
Device	Switch power failure	Power supply failure on switch.
Device	TCAM utilization high issues	Issues for TCAM exhaustion in layer 2, layer 3, QoS, and SGACL.
Availability	Network device HA switchover	The network device went through an HA switchover.
Availability	Switch unreachable	Device is unreachable.
Utilization	Map cache limit reached	Map cache entries have exceeded limit on map server.

Controller Issues

The following table lists the controller issues detected by Assurance:

Controller Issues		
Category	Issue Name	Summary
Connectivity	Interface connecting network devices is down	Interface connecting network devices is down.
Connected	Fabric WLC to MapServer connectivity	Fabric WLC lost connectivity to the fabric control plane node.
Device	Device time has drifted from Cisco DNA Center	Excessive time lag between Cisco DNA Center and the device.
Availability	Network device HA switchover	The network device went through an HA switchover.
Availability	WLC monitor	Network controller is not receiving data from WLC.
Availability	WLC power supply failure	Power supply has failed on this WLC.
Availability	WLC reboot crash	WLC reboot crash.
Availability	WLC unreachable	Device is unreachable.
Utilization	AP license exhausted on WLC	WLC currently has no free AP licenses.
Utilization	WLC memory high utilization	WLC is experiencing high memory utilization.

Access Point Issues

The following table lists the access point issues detected by Assurance:

Access Point Issues		
Category	Issue Name	Summary
Availability	AP coverage hole	AP has a coverage hole.
Availability	AP Disconnect from WLC	AP is disconnected.
Availability	AP flap	AP has flapped. This issue is triggered when AP flaps more than two times within 15 mins time period.
Availability	AP reboot crash	AP has rebooted due to a hardware or software crash.
Utilization	AP CPU high utilization	AP is experiencing high CPU utilization.
Utilization	AP memory high utilization	AP is experiencing high memory utilization.
Utilization	Radio high utilization (2.4GHz)	2.4 GHz radio on AP(s) are experiencing high utilization.
Utilization	Radio high utilization (5GHz)	5 GHz radio on AP(s) are experiencing high utilization.
Utilization	No activity on radio (2.4GHz)	No activity on 2.4 GHz radio <i>x</i> on AP.
Utilization	No activity on radio (5GHz)	No activity on 5 GHz radio <i>x</i> on AP.
AP Anomaly	AP anomaly	AP encountered anomaly issue.

Wired Client Issues

The following table lists the wired client issues detected by Assurance:

Wired Client Issues		
Category	Issue Name	Summary
Onboarding	Client DHCP reachability issue	The client has failed to obtain an IP address from DHCP server.
Onboarding	Client DNS reachability issue	The client failed to obtain a response from the DNS server.
Onboarding	Wired client authentication failures - Dot1.x failure	Wired client authentication failed. User device authentication with Dot1.x failure. Note This issue is applicable only for single wired clients.
Onboarding	Wired client authentication failures - MAB failure	Wired client authentication failed. User device authentication failed with MAC authentication bypass issues. Note This issue is applicable only for single wired clients.

Wireless Client Issues

The following table lists the wireless client issues detected by Assurance:



Note These issues are applicable for both single clients and multiple clients.

Wireless Client Issues		
Category	Issue Name	Summary
Onboarding	802.11r client roaming slowly	While roaming, a wireless client capable of fast roaming is doing full authentication instead of fast authentication.
Onboarding	Client DHCP reachability issue	The client has failed to obtain an IP address from DHCP server.
Onboarding	Client DNS reachability issue	The client failed to obtain a response from the DNS server.
Onboarding	Wireless client excluded - Client was excluded before roaming	Wireless client excluded - Client was excluded before roaming.
Onboarding	Wireless client excluded - IP theft issue	Wireless client excluded - IP theft issue.
Onboarding	Wireless client failed to connect - AAA server rejected client	Wireless client failed to connect - AAA server rejected client.
Onboarding	Wireless client failed to connect - AAA server timeout	Wireless client failed to connect - AAA server timeout.
Onboarding	Wireless client failed to connect - Client PMK not found	Wireless client failed to connect - Client PMK not found.
Onboarding	Wireless client failed to connect - Client timeout	Wireless client failed to connect - Failed to authenticate due to client timeout.
Onboarding	Wireless client failed to connect - DHCP server timeout	Wireless client failed to connect - DHCP server timeout.
Onboarding	Wireless client failed to connect - DHCP timeout	Wireless client failed to connect - DHCP timeout.
Onboarding	Wireless client failed to connect - Failed to get an IP address due to client timeout	Wireless client failed to connect - Failed to get an IP address due to client timeout.
Onboarding	Wireless client failed to connect - Incorrect PSK	Wireless client failed to connect and was excluded - The client's PSK did not match the configured WLAN PSK.
Onboarding	Wireless client failed to connect - Security parameter mismatch	Wireless client failed to connect - Security parameter mismatch.
Onboarding	Wireless client failed to connect - WLC configuration error	Wireless client failed to connect - WLC configuration error.
Onboarding	Wireless client failed to connect - WLC internal error	Wireless client failed to connect - WLC internal error.

Wireless Client Issues		
Category	Issue Name	Summary
Onboarding	Wireless client failed to roam - AAA server rejected client	Wireless client failed to roam - AAA server rejected client.
Onboarding	Wireless client failed to roam - AAA server timeout	Wireless client failed to roam - AAA server timeout.
Onboarding	Wireless client failed to roam - Client PMK not found	Wireless client failed to roam - Client PMK not found.
Onboarding	Wireless client failed to roam - Client timeout	Wireless client failed to roam - Failed to authenticate due to client timeout.
Onboarding	Wireless client failed to roam - Security parameter mismatch	Wireless client failed to roam - Security parameter mismatch.
Onboarding	Wireless client failed to roam - WLC configuration error	Wireless client failed to roam - WLC configuration error.
Onboarding	Wireless client failed to roam - WLC internal error	Wireless client failed to roam - WLC internal error.
Onboarding	Wireless client failed to roam between APs - External error	Wireless client failed to roam between APs - External error.
Onboarding	Wireless client failed to roam between APs - WLC configuration mismatch	Wireless client failed to roam between APs - WLC configuration mismatch.
Onboarding	Wireless client took a long time to connect - Excessive time due to authentication timeouts	Wireless client took a long time to connect - Excessive time due to authentication timeouts.
Onboarding	Wireless client took a long time to connect - Excessive time due to DHCP server failures	Wireless client took a long time to connect - Excessive time due to DHCP server failures.
Onboarding	Wireless client took a long time to connect - Excessive time due to failed credentials	Wireless client took a long time to connect - Excessive time due to failed credentials.
Onboarding	Wireless client took a long time to connect - Excessive time due to WLC failures	Wireless client took a long time to connect - Excessive time due to WLC failures.
Onboarding	Wireless client took a long time to connect - Excessive time for authentication due to AAA server or network delays	Wireless client took a long time to connect - Excessive time for authentication due to AAA server or network delays.
Onboarding	Wireless clients excluded - IP theft issue	Wireless clients excluded - IP theft issue.

Wireless Client Issues		
Category	Issue Name	Summary
Onboarding	Wireless clients failed to connect - AAA server rejected clients	Wireless clients failed to connect - AAA server rejected clients.
Onboarding	Wireless clients failed to connect - AAA server timeout	Wireless clients failed to connect - AAA server timeout.
Onboarding	Wireless clients failed to connect - Client PMK not found	Wireless clients failed to connect - Client PMK not found.
Onboarding	Wireless Clients failed to connect - DHCP server timeout	Wireless Clients failed to connect - DHCP server timeout.
Onboarding	Wireless clients failed to connect - Failed to authenticate due to client timeouts	Wireless clients failed to connect - Failed to authenticate due to client timeouts.
Onboarding	Wireless clients failed to connect - Failed to get an IP address due to client timeouts	Wireless clients failed to connect - Failed to get an IP address due to client timeouts.
Onboarding	Wireless clients failed to connect - Failed to get an IP address due to DHCP server or client timeouts	Wireless clients failed to connect - Failed to get an IP address due to DHCP server or client timeouts.
Onboarding	Wireless clients failed to connect - Incorrect PSK	Wireless clients failed to connect and were excluded - The clients' PSK did not match the configured WLAN PSK.
Onboarding	Wireless clients failed to connect - Security parameter mismatch	Wireless clients failed to connect - Security parameter mismatch during authentication.
Onboarding	Wireless clients failed to connect - WLC configuration error	Wireless clients failed to connect - WLC configuration error.
Onboarding	Wireless clients failed to roam - Client exclusion policies on the WLC	Wireless clients failed to roam - Clients were excluded due to client exclusion policies on the WLC.
Onboarding	Wireless clients failed to roam - Clients were excluded before roaming	Wireless clients failed to roam - Clients were excluded before roaming.
Onboarding	Wireless clients failed to roam - WLC configuration mismatch	Wireless clients failed to roam between APs - WLC configuration mismatch.
Onboarding	Wireless clients took a long time to connect - Excessive time due to DHCP server failures	Wireless clients took a long time to connect - Excessive time due to DHCP server failures.
Onboarding	Wireless clients took a long time to connect - Failed credentials	Wireless clients took a long time to connect - Excessive time due to failed credentials.
Onboarding	Wireless clients took a long time to connect - WLC failures	Wireless clients took a long time to connect - Excessive time due to WLC failures.

Wireless Client Issues		
Category	Issue Name	Summary
Connected	Dual band capable client prefers 2.4 GHz over 5 GHz	Dual-band capable client is consistently connecting to a 2.4-GHz radio, even though a 5-GHz radio that provides a better experience is available.
Connected	Wireless client has poor RF	Wireless client is experience poor RF condition because the client has no better neighboring APs to roam to.
Connected	Wireless client shows sticky behavior	Wireless client is maintaining an association with an AP that has a weaker signal. It should roam to an available AP that has the stronger signal.

Application Issues

The following table lists the application issues detected by Assurance:

Application Issues		
Category	Issue Name	Summary
Application	Application experience issues	All issues pertaining to Application Experience.

Sensor Issues

The following table lists the sensor issues detected by Assurance:










Sensor Issues		
Category	Issue Name	Summary
Sensor Test	Sensors - Speed test HTTP error	Multiple sensors are reporting speed test HTTP error while accessing query server.
Sensor Test	Sensors - DHCP failures	Multiple sensors failed to get an IPv4 address.
Sensor Test	Sensors - DNS resolution failed	Multiple sensors failed to resolve domain name with DNS server.
Sensor Test	Sensors - Failed association during onboarding	Multiple sensors failed to associate during onboarding.
Sensor Test	Sensors -Failed authentication during onboarding	Multiple sensors failed to authenticate during onboarding.
Sensor Test	Sensors - FTP test fail	Multiple sensors are reporting unable to connect to FTP server.
Sensor Test	Sensors - FTP transfer fail	Multiple sensors are reporting failed to transfer file with FTP server.
Sensor Test	Sensors - FTP unreachable	Multiple sensors are reporting unreachable FTP server.
Sensor Test	Sensors - IPerf invalid config error	Multiple sensors have failed to conduct the iPerf test due to receiving invalid iPerf configurations.

Sensor Issues		
Category	Issue Name	Summary
Sensor Test	Sensors - IPerf server busy	Multiple sensors have failed to conduct the iPerf test due to an iPerf busy error.
Sensor Test	Sensors - IPerf test network error	Multiple sensors have failed to conduct the iPerf test due to an iPerf network error.
Sensor Test	Sensors - IPerf undefined error	Multiple sensors have failed to conduct the iPerf test due to an undefined error.
Sensor Test	Sensors - IPSLA no IP address	Multiple sensors are reporting IPSLA test IP address not received from Cisco DNA Center.
Sensor Test	Sensors - IPSLA no response	Multiple sensors are reporting IPSLA test - no response from IPSLA responder.
Sensor Test	Sensors - IPSLA socket error	Multiple sensors are reporting IPSLA test socket error.
Sensor Test	Sensors - IPSLA test fail	Multiple sensors are reporting IPSLA test failed.
Sensor Test	Sensors - IPSLA unsupported probe type	Multiple sensors are reporting IPSLA test unsupported probe type.
Sensor Test	Sensors - Mail server test fail	Multiple sensors are reporting failed to connect to mail server.
Sensor Test	Sensors - Mail server unreachable	Multiple sensors are reporting unreachable mail server.
Sensor Test	Sensors - No NDT server	Multiple sensors are reporting speed test NDT server does not exist.
Sensor Test	Sensors - Onboarding failures	Sensors failed to connect to the wireless network.
Sensor Test	Sensors - Outlook server test fail	Multiple sensors are reporting failed to connect to Outlook Web Access.
Sensor Test	Sensors - Outlook server unreachable	Multiple sensors are reporting unreachable Outlook Web Access host.
Sensor Test	Sensors - Query server timeout	Multiple sensors are reporting speed test query server timeout.
Sensor Test	Sensors - RADIUS authentication fail	Multiple sensors are reporting failed to authenticate with RADIUS server.
Sensor Test	Sensors - Speed test fail	Multiple sensors are reporting speed test failed.
Sensor Test	Sensors - Speed test generic error	Multiple sensors are reporting speed test generic failure.
Sensor Test	Sensors - Speed test uplink timeout	Multiple sensors are reporting speed test uplink test timeout.
Sensor Test	Sensors - Speed test URL error	Multiple sensors are reporting speed test URL error while accessing query server.
Sensor Test	Sensors - Unreachable host	Multiple sensors are reporting ping failure to the host. Unreachable host.
Sensor Test	Sensors - Unreachable RADIUS	Multiple sensors are reporting unreachable RADIUS server.
Sensor Test	Sensors - Web authentication fail	Multiple sensors are reporting clients are failing web authentication test.

Sensor Issues		
Category	Issue Name	Summary
Sensor Test	Sensors - Web server test failed	Multiple sensors are reporting failed to load page from web server.
Sensor Test	Sensors - Web server unreachable	Multiple sensors are reporting unreachable web server.
Sensor Test	Sensors - Web socket error	Multiple sensors are reporting speed test websocket error during the test.
Sensor Test	Sensors - Speed test uplink proxy error	Multiple sensors are reporting speed test uplink test proxy error.

AI-Driven Issues

The following table lists the AI-Driven issues detected by Cisco AI Network Analytics:

AI-Driven Issues		
Category	Issue Name	Summary
Connection Issues		
Onboarding	 Excessive time to connect - High deviation from baseline	The network is experiencing excessive onboarding time compared to usual. Clients are taking longer than the usual time to connect to <i>SSID</i> .
Onboarding	 Excessive failures to connect - High deviation from baseline	The network is experiencing excessive onboarding time compared to usual. Clients are taking longer than the usual time to connect to <i>SSID</i> .
Onboarding	 Wireless clients took a long time to connect - Total time above baseline	Wireless clients took longer to connect to <i>SSID</i> at <i>location</i> .
AAA	 Excessive time to get Associated - High deviation from baseline	Excessive time to get associated - At least <i>value</i> % increase in time on <i>SSID</i> .
AAA	 Excessive failures to Associate - High deviation from baseline	Excessive failures to get associated - At least <i>value</i> % increase in failures on <i>SSID</i> .
AAA	 Excessive time to get Authenticated - High deviation from baseline	Excessive time to get authenticated - At least <i>value</i> % increase in time on <i>SSID</i> .
AAA	 Excessive failures to get Authenticated - High deviation from baseline	Excessive failures to get authenticated - At least <i>value</i> % increase in failures on <i>SSID</i> .
DHCP	 Excessive time to get an IP Address - High deviation from baseline	Excessive time to get an IP address - At least <i>value</i> % increase in time from <i>server_IP</i> .
DHCP	 Excessive failures to get an IP address - High deviation from baseline	Excessive failures to get an IP address - At least <i>value</i> % increase in failures from <i>server_IP</i> .
Network Connectivity Issue		

AI-Driven Issues		
Category	Issue Name	Summary
Connectivity	[AI] Host MAC address flapping seen on network device	Network is experiencing Layer 2 loop symptoms.
Application Experience Issues		
Throughput	[AI] Drop in total radio throughput for All Applications	APs in network are experiencing a drop in total radio throughput for all applications. These radios are in the <i>frequency</i> band. These radios are located at <i>location</i> .
Throughput	[AI] Drop in radio throughput for Cloud Applications	APs in network are experiencing a drop in Cloud Applications throughput. These radios are in the <i>frequency</i> band. These radios are located at <i>location</i> .
Throughput	[AI] Drop in radio throughput for Social Applications	APs in network are experiencing a drop in Social Applications throughput. These radios are in the <i>frequency</i> band. These radios are located at <i>location</i> .
Throughput	[AI] Drop in radio throughput for Media Applications	APs in network are experiencing a drop in Media Applications throughput. These radios are in the <i>frequency</i> band. These radios are located at <i>location</i> .
Throughput	[AI] Drop in radio throughput for Collab Applications	APs in network are experiencing a drop in Collab Applications throughput. These radios are in the <i>frequency</i> band. These radios are located at <i>location</i> .

MRE Issues

The following table lists the issues detected by Assurance that you can troubleshoot using the MRE workflow:

MRE Issues		
Category	Issue Name	Summary
Wired Client Issues		
Onboarding	Client DHCP reachability issue	The client has failed to obtain an IPv4 address from the DHCP server.
Onboarding	Wired client authentication failures - Dot1.x failure	Wired client authentication failed. User device authentication with Dot1.x failure. Note This issue is applicable only for single wired clients.
Onboarding	Wired client authentication failures - MAB failure	Wired client authentication failed. User device authentication failed with MAC authentication bypass issues. Note This issue is applicable only for single wired clients.
PoE Issue		

MRE Issues		
Category	Issue Name	Summary
Device	PoE powered device flagged faulty	PoE-capable device connected to a PoE port has been flagged faulty as reported by a syslog event.

