

# Descripción conmutada y ejemplo de configuración del Multicast de la escritura de la etiqueta ASR 9000 VPL (LS)

## Contenido

[Introducción](#)

[prerrequisitos](#)

[Requisitos](#)

[Componentes Utilizados](#)

[Los VPL etiquetan la descripción conmutada del Multicast \(LS\)](#)

[Desventajas de la replicación del ingreso](#)

[Características VPL LS](#)

[Restricciones VPL LS](#)

[Aprendizaje del Media Access Control \(MAC\)](#)

[Soporte de la indagación del Internet Group Management Protocol \(IGMPSN\)](#)

[Escala soportada](#)

[Configuración VPL LS](#)

[Configuración del túnel del auto P2MP](#)

[Configuración del Fast ReRoute del MPLS TE \(FRR\)](#)

[Configuración L2VPN](#)

[Topología de ejemplo y configuración](#)

[Configuración PE1](#)

[Configuración P](#)

[Configuración PE2](#)

[Configuración PE3](#)

[Verifique - Comandos show](#)

[Troubleshooting VPL LS](#)

[Problemas de la configuración común](#)

[L2VPN y comandos show y Troubleshooting L2FIB](#)

## Introducción

Este documento describe el Multicast conmutado escritura de la etiqueta virtual del servicio del LAN privado (VPL) (LS) para las 9000 Series del router de los servicios de la agregación (ASR) que funcionan con el software del <sup>®</sup> XR del Cisco IOS.

## Prerrequisitos

## Requisitos

No hay requisitos específicos para este documento.

## Componentes Utilizados

Este documento no tiene restricciones específicas en cuanto a versiones de software y de hardware.

La información que contiene este documento se creó a partir de los dispositivos en un ambiente de laboratorio específico. Todos los dispositivos que se utilizan en este documento se pusieron en funcionamiento con una configuración verificada (predeterminada). Si la red está funcionando, asegúrese de haber comprendido el impacto que puede tener cualquier comando.


## Los VPL etiquetan la descripción conmutada del Multicast (LS)

Los VPL emulan a los servicios LAN a través de una base del Multiprotocol Label Switching (MPLS). Una interconexión total de los pseudowires de punto a punto (P2P) (PWs) se configura entre todo el Routers del borde del proveedor (PE) que participe en un dominio VPL para proporcionar la emulación VPL. El broadcast, el Multicast, y el tráfico de la unidifusión desconocida se inunda en un dominio VPL a todos los PE. La replicación del ingreso se utiliza para enviar ese tráfico saturado sobre cada P2P PWs a todo el Routers del telecontrol PE que sea parte del mismo dominio VPL.


## Desventajas de la replicación del ingreso

- La replicación del ingreso es ancho de banda ineficaz porque el mismo paquete se pudo enviar las épocas múltiples sobre el mismo link para cada P2P picovatio.
- La replicación del ingreso puede dar lugar al ancho de banda de link perdido significativo cuando hay broadcast pesado y el Multicast VPL trafica.
- La replicación del ingreso es también uso intensivo de recurso porque el router del ingreso PE lleva la carga completa de la replicación.

## Problems

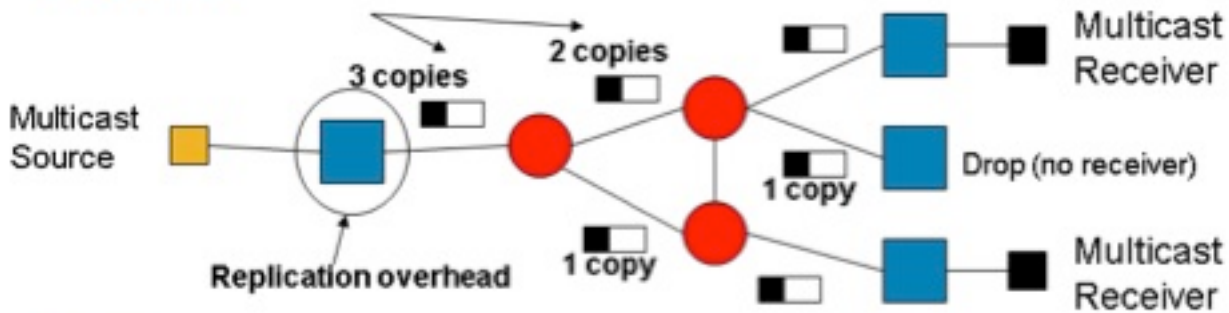

## Solution

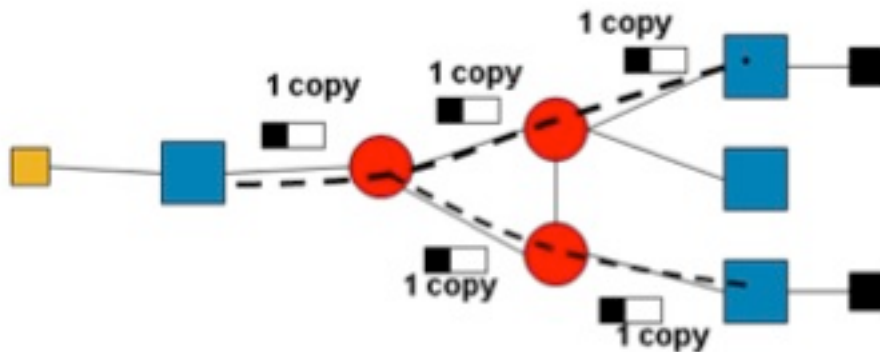

## Características VPL LS

Los VPL son una tecnología ancho-desplegada del proveedor de servicio L2VPN que también se utiliza para el transporte del Multicast. Aunque la tecnología L2 permita que el snooping sea utilizado para optimizar la replicación del tráfico Multicast en los pseudowires L2, la base sigue siendo agnóstica al tráfico Multicast. Como consecuencia, las copias múltiples del mismo flujo atraviesan las redes del núcleo. Para atenuar esta ineficacia, pares LS con los VPL para introducir los árboles de multidifusión LS sobre la base. En la versión 5.1.0 del Software Cisco IOS XR, las 9000 Series de Cisco ASR implementan VPL LS con los árboles inclusivos de la ingeniería de tráfico de la punta a de múltiples puntos (P2MP-TE). Los puntos extremos VPL se descubren automáticamente y los árboles P2MP-TE se configuran con el uso de la ingeniería de tráfico del Resource Reservation Protocol (RSVP-TE) sin la intervención operativa.

- Los VPL LS superan las desventajas de la replicación del ingreso.
- La solución VPL LS emplea P2MP LSP en la base MPLS para llevar el broadcast, el Multicast, y el tráfico de la unidifusión desconocida para un dominio VPL.
- El P2MP LSP permite la replicación en el nodo óptimo de la red MPLS a lo más y minimiza la cantidad de replicación del paquete en la red.
- La solución VPL LS envía solamente el tráfico inundado VPL sobre P2MP LSP.
- El tráfico del unicast VPL todavía se envía sobre P2P PWs. El tráfico enviado sobre el acceso PWs continúa siendo enviado con la replicación del ingreso.
- El P2MP PWs es unidireccional en comparación con P2P PWs, que son bidireccionales.


- La solución VPL LS implica la creación de un P2MP picovatio por el dominio VPL para emular a un servicio VPL P2MP para la base PWs en el dominio VPL.
- Los VPL LS se soportan en la versión 5.1.0 del Cisco IOS XR y posterior.

## Restricciones VPL LS

- Las funciones de la versión 5.1.0 VPL LS del Cisco IOS XR soportan solamente los árboles de la Ingeniería de tráfico MPLS P2MP-TE configurados con RSVP-TE.
- UN P2MP picovatio se puede señalar con el protocolo BGP solamente en la versión 5.1.0 del Cisco IOS XR. En esta primera fase, el telecontrol PE que participa en el dominio VPL auto-se descubre con la detección automática BGP (BGP-AD).
- La señalización estática LDP no se soporta en la versión 5.1.0 del Cisco IOS XR.

## Aprendizaje del Media Access Control (MAC)

El aprendizaje de MAC en la hoja PE para una trama que llegue en P2MP picovatio se hace como si la trama se reciba en el P2P picovatio que lleva a la raíz PE para ese P2MP picovatio. En esta imagen, el aprendizaje de MAC en PE-2 para las tramas que llegan en el P2MP picovatio LSP arraigado el PE-1 se hace como si la trama llegara en el P2P picovatio entre el PE-1 y PE-2. El avión del control L2VPN es responsable de programar la información de la disposición VPL con la información P2P picovatio para el aprendizaje de MAC en la disposición P2MP LSP.

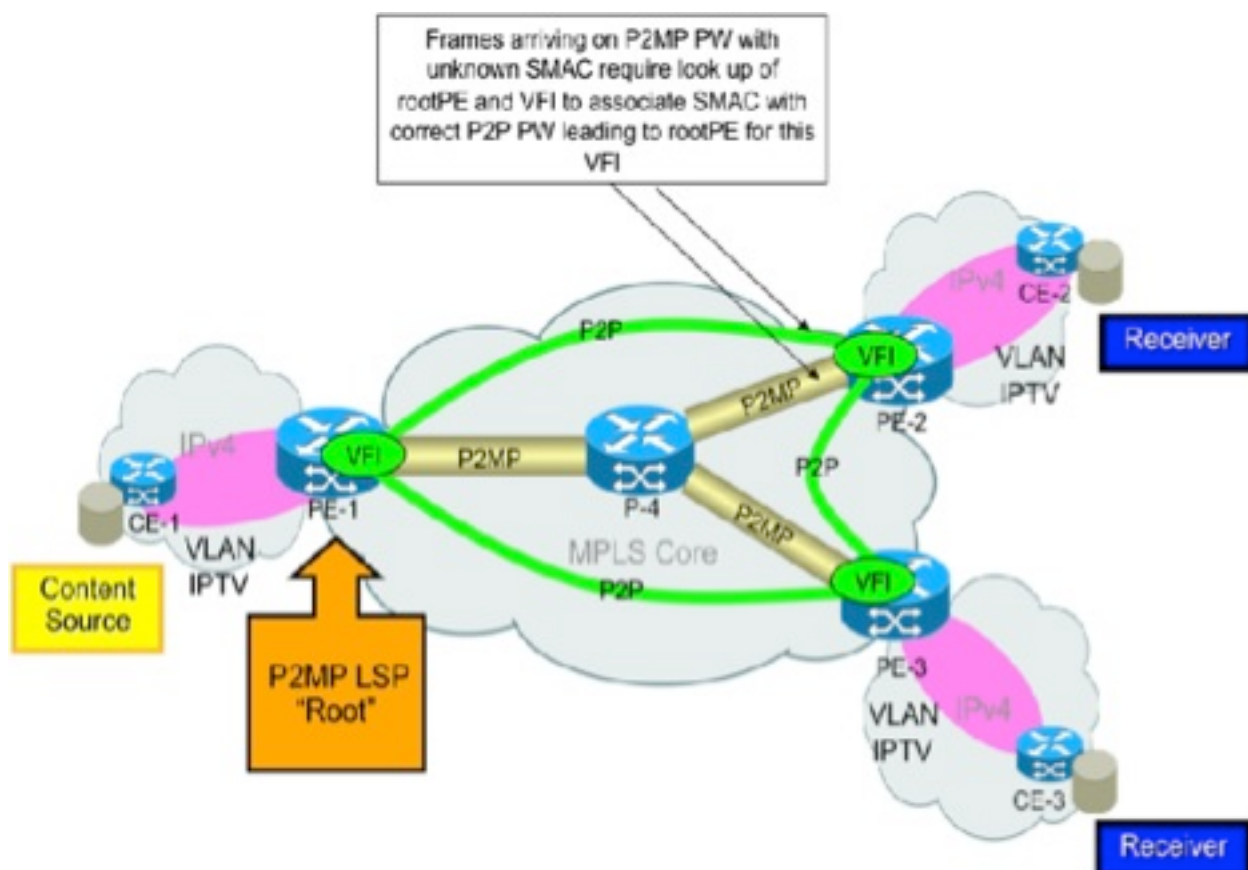

# Soporte de la indagación del Internet Group Management Protocol (IGMPSN)

El snooping del Internet Group Management Protocol (IGMP) (IGMPSN) se soporta en ambos la cabeza y cola del P-árbol P2MP en un dominio de Bridge que participe en VPL LS. Esto permite que el tráfico Multicast IGMPSN sobre un caso de reenvío virtual (VFI) PWs se beneficie de la optimización del recurso proporcionada por P2MP LSP. Si IGMPSN se habilita en un dominio de Bridge con uno o más VFI PWs que participa en VPL LS, todo el tráfico Multicast de la capa dos (L2) se envía sobre la pista del P-árbol P2MP asociada al dominio de Bridge. Las rutas de Multicast L2 se utilizan para remitir el tráfico a los receptores locales, los Ethernetes fluyen las puntas (EFPs), acceso PWs, y VFI PWs que no participen en VPL LS.

Cuando IGMPSN se habilita en un dominio de Bridge que sea una cola P2MP LSP, la disposición optimizada del tráfico Multicast L2 recibida en el P2MP LSP se hace para los receptores locales (es decir, los puertos de Bridge del circuito de la conexión (AC) (BP) y el acceso picovatio BP).

Nota: El snooping del Label Distribution Protocol del Multicast (MLDP) no se soporta en la versión 5.1.0 del Cisco IOS XR.

## Escala soportada

La versión 5.1.0 soporta un máximo de **1000** túneles P2MP o **1000** P2MP PWs del Cisco IOS XR por cabeza/router del Tail.

## Configuración VPL LS

### Configuración del túnel del auto P2MP

```
mpls traffic-eng
interface GigabitEthernet0/1/1/0
!
interface GigabitEthernet0/1/1/1
!
auto-tunnel p2mp
tunnel-id min 100 max 200
```

### Configuración del Fast ReRoute del MPLS TE (FRR)

```
mpls traffic-eng
interface GigabitEthernet0/1/1/0
auto-tunnel backup
nhop-only
!
!
interface GigabitEthernet0/1/1/1
auto-tunnel backup
nhop-only
!
```

```

!
auto-tunnel p2mp
tunnel-id min 100 max 200
!
auto-tunnel backup
tunnel-id min 1000 max 1500
!
attribute-set p2mp-te set1
bandwidth 10000
fast-reroute
record-route
!

```


## Configuración L2VPN

```

l2vpn
bridge group bg1
bridge-domain bg1_bd1
interface GigabitEthernet0/1/1/10.1
!
vfi bg1_bd1_vfi
vpn-id 1
autodiscovery bgp
rd auto
route-target 209.165.201.1:1
signaling-protocol bgp
ve-id 100
!
!
multicast p2mp
signaling-protocol bgp
!
transport rsvp-te
attribute-set p2mp-te set1
!

```

## Topología de ejemplo y configuración

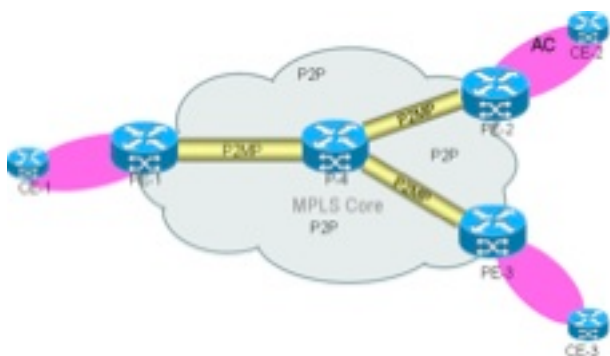

Los túneles P2MP son túneles auto-descubiertos. Los túneles estáticos P2MP no se soportan.

Las configuraciones del túnel estáticas no se utilizan. La configuración del túnel auto P2MP se debe habilitar en todo el Routers PE y también en un router P si actúa como nodo del brote. Un nodo del brote es un router del punto mediano y del tailend al mismo tiempo.

Una topología de ejemplo con la configuración se muestra aquí. En esta topología, el P2MP PWs se crea entre los tres PE y un router P que actúe como nodo del brote. El tres Routers PE actúa como la pista (para el Tráfico de ingreso) y Tail (para el tráfico de salida).

# Configuración PE1

```
RP/0/RSP0/CPU0:PE1#show run
hostname PE1
!
ipv4 unnumbered mpls traffic-eng Loopback0
!
interface Loopback0
  ipv4 address 209.165.200.225 255.255.255.255
!
interface GigabitEthernet0/1/1/0
  description connected P router
  ipv4 address 209.165.201.1 255.255.255.224
!
interface GigabitEthernet0/1/1/1
  description connected to P router
  ipv4 address 209.165.201.151 255.255.255.224
  transceiver permit pid all
!
interface GigabitEthernet0/1/1/10
  transceiver permit pid all
!
interface GigabitEthernet0/1/1/10.1 l2transport
  encapsulation dot1q 1
!
router ospf 100
  router-id 209.165.200.225
  area 0
  mpls traffic-eng
  interface Loopback0
  !
  interface GigabitEthernet0/1/1/0
  !
  interface GigabitEthernet0/1/1/1
  !
  !
  mpls traffic-eng router-id 209.165.200.225
!
router bgp 100
  nsr
  bgp router-id 209.165.200.225
  bgp graceful-restart
  address-family l2vpn vpls-vpws
  !
  neighbor 209.165.200.226
  remote-as 100
  update-source Loopback0
  address-family l2vpn vpls-vpws
  !
  !
  neighbor 209.165.200.227
  remote-as 100
  update-source Loopback0
  address-family l2vpn vpls-vpws
  !
  !
  neighbor 209.165.200.228
  remote-as 100
  update-source Loopback0
  address-family l2vpn vpls-vpws
  !
  !
```





```
!  
!  
end
```

```
RP/0/RSP0/CPU0:PE1#
```

## Configuración P

```
RP/0/RSP0/CPU0:P#show run
```

```
hostname P  
ipv4 unnumbered mpls traffic-eng Loopback0  
interface Loopback0  
  ipv4 address 209.165.200.226 255.255.255.255  
!  
interface GigabitEthernet0/1/1/0  
  description connected to PE1 router  
  ipv4 address 209.165.201.2 255.255.255.224  
  transceiver permit pid all  
!  
interface GigabitEthernet0/1/1/1  
  description connected to PE1 router  
  ipv4 address 209.165.201.152 255.255.255.224  
  transceiver permit pid all  
!  
interface GigabitEthernet0/1/1/3  
  description connected to PE2 router  
  ipv4 address 209.165.201.61 255.255.255.224  
!  
interface GigabitEthernet0/1/1/4  
  transceiver permit pid all  
!  
interface GigabitEthernet0/1/1/4.1 l2transport  
  encapsulation dot1q 1  
!  
interface GigabitEthernet0/1/1/8  
  description connected to PE3 router  
  ipv4 address 209.165.201.101 255.255.255.224  
!  
router ospf 100  
  nsr  
  nsf cisco  
  area 0  
  mpls traffic-eng  
  interface Loopback0  
  !  
  interface GigabitEthernet0/1/1/0  
  !  
  interface GigabitEthernet0/1/1/1  
  !  
  interface GigabitEthernet0/1/1/3  
  !  
  interface GigabitEthernet0/1/1/8  
  !  
  !  
  mpls traffic-eng router-id 209.165.200.226  
!  
router bgp 100  
  nsr  
  bgp router-id 209.165.200.226  
  bgp graceful-restart  
  address-family l2vpn vpls-vpws  
  !  
  neighbor 209.165.200.225
```

```
remote-as 100
update-source Loopback0
address-family l2vpn vpls-vpws
!
!
neighbor 209.165.200.227
remote-as 100
update-source Loopback0
address-family l2vpn vpls-vpws
!
!
neighbor 209.165.200.228
remote-as 100
update-source Loopback0
address-family l2vpn vpls-vpws
!
!
!
l2vpn
bridge group bg1
bridge-domain bg1_bd1
interface GigabitEthernet0/1/1/4.1
!
vfi bg1_bd1_vfi
vpn-id 1
autodiscovery bgp
rd auto
route-target 209.165.201.1:1
signaling-protocol bgp
ve-id 200
!
!
multicast p2mp
signaling-protocol bgp
!
transport rsvp-te
attribute-set p2mp-te set1
!
!
!
!
!
!
!
!
!
rsvp
interface GigabitEthernet0/1/1/0
bandwidth 100000
!
interface GigabitEthernet0/1/1/1
bandwidth 100000
!
interface GigabitEthernet0/1/1/3
bandwidth 100000
!
interface GigabitEthernet0/1/1/8
bandwidth 100000
!
!
mpls traffic-eng
interface GigabitEthernet0/1/1/0
auto-tunnel backup
nhop-only
!
!
interface GigabitEthernet0/1/1/1
```

```

auto-tunnel backup
  nhop-only
!
!
interface GigabitEthernet0/1/1/3
!
interface GigabitEthernet0/1/1/8
!
auto-tunnel p2mp
tunnel-id min 100 max 200
!
auto-tunnel backup
tunnel-id min 1000 max 1500
!
attribute-set p2mp-te set1
bandwidth 10000
fast-reroute
record-route
!
!
mpls ldp
nsr
graceful-restart
router-id 209.165.200.226
interface GigabitEthernet0/1/1/0
!
interface GigabitEthernet0/1/1/1
!
interface GigabitEthernet0/1/1/3
!
interface GigabitEthernet0/1/1/8
!
!
end

RP/0/RSP0/CPU0:P#

```

## Configuración PE2

```

RP/0/RSP0/CPU0:PE2#show run
hostname PE2
ipv4 unnumbered mpls traffic-eng Loopback0
interface Loopback0
  ipv4 address 209.165.200.227 255.255.255.255
!
interface GigabitEthernet0/3/0/2.1 l2transport
  encapsulation dot1q 1
!
interface GigabitEthernet0/3/0/3
  description connected to P router
  ipv4 address 209.165.201.62 255.255.255.224
  transceiver permit pid all
!
router ospf 100
nsr
router-id 209.165.200.227
nsf cisco
area 0
mpls traffic-eng
interface Loopback0
!
interface GigabitEthernet0/3/0/3
!

```

```
!  
mpls traffic-eng router-id 209.165.200.227  
!  
router bgp 100  
  nsr  
  bgp router-id 209.165.200.227  
  bgp graceful-restart  
  address-family l2vpn vpls-vpws  
  !  
  neighbor 209.165.200.225  
  remote-as 100  
  update-source Loopback0  
  address-family l2vpn vpls-vpws  
  !  
  !  
  neighbor 209.165.200.226  
  remote-as 100  
  update-source Loopback0  
  address-family l2vpn vpls-vpws  
  !  
  !  
  neighbor 209.165.200.228  
  remote-as 100  
  update-source Loopback0  
  address-family l2vpn vpls-vpws  
  !  
  !  
!  
l2vpn  
  bridge group bg1  
  bridge-domain bg1_bd1  
  interface GigabitEthernet0/3/0/2.1  
  !  
  vfi bg1_bd1_vfi  
  vpn-id 1  
  autodiscovery bgp  
  rd auto  
  route-target 209.165.201.1:1  
  signaling-protocol bgp  
  ve-id 300  
  !  
  !  
  multicast p2mp  
  signaling-protocol bgp  
  !  
  transport rsvp-te  
  attribute-set p2mp-te set1  
  !  
  !  
  !  
  !  
!  
rsvp  
  interface GigabitEthernet0/3/0/3  
  bandwidth 100000  
  !  
!  
mpls traffic-eng  
  interface GigabitEthernet0/3/0/3  
  !  
  auto-tunnel p2mp  
  tunnel-id min 100 max 200  
  !
```

```

auto-tunnel backup
tunnel-id min 1000 max 1500
!
attribute-set p2mp-te set1
bandwidth 10000
fast-reroute
record-route
!
!
mpls ldp
nsr
graceful-restart
router-id 209.165.200.227
interface GigabitEthernet0/3/0/3
!
!
end

```

RP/0/RSP0/CPU0:PE2#

## Configuración PE3

```

RP/0/RSP0/CPU0:PE3#show run
hostname PE3
ipv4 unnumbered mpls traffic-eng Loopback0

interface Loopback0
  ipv4 address 209.165.200.228 255.255.255.255
!
interface GigabitEthernet0/2/1/8
  description connected to P router
  ipv4 address 209.165.201.102 255.255.255.224
  transceiver permit pid all
!
interface GigabitEthernet0/2/1/11
  transceiver permit pid all
!
interface GigabitEthernet0/2/1/11.1 l2transport
  encapsulation dot1q 1
!
router ospf 100
  nsr
  router-id 209.165.200.228
  nsf cisco
  area 0
  mpls traffic-eng
  interface Loopback0
  !
  interface GigabitEthernet0/2/1/8
  !
  !
  mpls traffic-eng router-id 209.165.200.228
!
router bgp 100
  nsr
  bgp router-id 209.165.200.228
  bgp graceful-restart
  address-family l2vpn vpls-vpws
  !
  neighbor 209.165.200.225
  remote-as 100
  update-source Loopback0
  address-family l2vpn vpls-vpws

```

```
!  
!  
neighbor 209.165.200.226  
remote-as 100  
update-source Loopback0  
address-family l2vpn vpls-vpws  
!  
!  
neighbor 209.165.200.227  
remote-as 100  
update-source Loopback0  
address-family l2vpn vpls-vpws  
!  
!  
!  
l2vpn  
bridge group bg1  
bridge-domain bg1_bd1  
interface GigabitEthernet0/2/1/11.1  
!  
vfi bg1_bd1_vfi  
vpn-id 1  
autodiscovery bgp  
rd auto  
route-target 209.165.201.1:1  
signaling-protocol bgp  
ve-id 400  
!  
!  
multicast p2mp  
signaling-protocol bgp  
!  
transport rsvp-te  
attribute-set p2mp-te set1  
!  
!  
!  
!  
!  
rsvp  
interface GigabitEthernet0/2/1/8  
bandwidth 1000000  
!  
!  
mpls traffic-eng  
interface GigabitEthernet0/2/1/8  
!  
auto-tunnel p2mp  
tunnel-id min 100 max 200  
!  
auto-tunnel backup  
tunnel-id min 1000 max 1500  
!  
attribute-set p2mp-te set1  
bandwidth 10000  
fast-reroute  
record-route  
!  
!  
mpls ldp  
nsr  
graceful-restart  
router-id 209.165.200.228
```

```
interface GigabitEthernet0/2/1/8
!  
!  
end
```

```
RP/0/RSP0/CPU0:PE3#
```

## Verifique - Comandos show

Estos comandos show son útiles para hacer el debug de y verificar el estatus de los túneles del MPLS TE P2MP picovatio y P2MP.

- muestre el dominio de Bridge l2vpn
- muestre el detalle del dominio de Bridge l2vpn
- muestre a mpls los túneles tráfico-ingleses p2mp
- muestre los mpls que remiten el detalle del <label> de las escrituras de la etiqueta
- muestre a mpls los túneles tráfico-ingleses p2mp tabulares

A continuación, se incluyen algunos ejemplos:

```
show l2vpn bridge-domain
```

```
RP/0/RSP0/CPU0:PE1#show l2vpn bridge-domain  
Legend: pp = Partially Programmed.  
Bridge group: bg1, bridge-domain: bg1_bd1, id: 0, state: up, ShgId: 0, MSTi: 0  
Aging: 300 s, MAC limit: 4000, Action: none, Notification: syslog  
Filter MAC addresses: 0  
ACs: 1 (1 up), VFIs: 1, PWs: 3 (3 up), PBBs: 0 (0 up)  
List of ACs:  
  GigabitEthernet0/1/1/10.1, state: up, Static MAC addresses: 0  
List of Access PWs:  
List of VFIs:  
  VFI bg1_bd1_vfi (up)  
    P2MP: RSVP-TE, BGP, 1, Tunnel Up  
    Neighbor 209.165.200.226 pw-id 1, state: up, Static MAC addresses: 0  
    Neighbor 209.165.200.227 pw-id 1, state: up, Static MAC addresses: 0  
    Neighbor 209.165.200.228 pw-id 1, state: up, Static MAC addresses: 0  
RP/0/RSP0/CPU0:PE1#
```

```
show l2vpn bridge-domain detail
```

```
RP/0/RSP0/CPU0:PE1#show l2vpn bridge-domain detail  
Legend: pp = Partially Programmed.  
Bridge group: bg1, bridge-domain: bg1_bd1, id: 0, state: up, ShgId: 0, MSTi: 0  
Coupled state: disabled  
MAC learning: enabled  
MAC withdraw: enabled  
  MAC withdraw for Access PW: enabled  
  MAC withdraw sent on: bridge port up  
  MAC withdraw relaying (access to access): disabled  
Flooding:  
  Broadcast & Multicast: enabled  
  Unknown unicast: enabled  
MAC aging time: 300 s, Type: inactivity  
MAC limit: 4000, Action: none, Notification: syslog  
MAC limit reached: no  
MAC port down flush: enabled  
MAC Secure: disabled, Logging: disabled  
Split Horizon Group: none
```

Dynamic ARP Inspection: disabled, Logging: disabled  
IP Source Guard: disabled, Logging: disabled  
DHCPv4 snooping: disabled  
IGMP Snooping: enabled  
IGMP Snooping profile: none  
MLD Snooping profile: none  
Storm Control: disabled  
Bridge MTU: 1500  
MIB cvplsConfigIndex: 1  
Filter MAC addresses:  
P2MP PW: enabled  
Create time: 18/02/2014 03:47:59 (00:41:54 ago)  
No status change since creation  
ACs: 1 (1 up), VFIs: 1, PWs: 3 (3 up), PBBs: 0 (0 up)  
List of ACs:

AC: GigabitEthernet0/1/1/10.1, state is up

Type VLAN; Num Ranges: 1

VLAN ranges: [1, 1]

MTU 1504; XC ID 0x8802a7; interworking none

MAC learning: enabled

Flooding:

Broadcast & Multicast: enabled

Unknown unicast: enabled

MAC aging time: 300 s, Type: inactivity

MAC limit: 4000, Action: none, Notification: syslog

MAC limit reached: no

MAC port down flush: enabled

MAC Secure: disabled, Logging: disabled

Split Horizon Group: none

Dynamic ARP Inspection: disabled, Logging: disabled

IP Source Guard: disabled, Logging: disabled

DHCPv4 snooping: disabled

IGMP Snooping: enabled

IGMP Snooping profile: none

MLD Snooping profile: none

Storm Control: disabled

Static MAC addresses:

Statistics:

packets: received 0, sent 0

bytes: received 0, sent 0

Storm control drop counters:

packets: broadcast 0, multicast 0, unknown unicast 0

bytes: broadcast 0, multicast 0, unknown unicast 0

Dynamic ARP inspection drop counters:

packets: 0, bytes: 0

IP source guard drop counters:

packets: 0, bytes: 0

List of Access PWs:

List of VFIs:

VFI bg1\_bd1\_vfi (up)

**P2MP:**

**Type RSVP-TE, BGP signaling, PTree ID 1**

**P2MP Status: Tunnel Up**

**P2MP-TE attribute-set: set1**

**Tunnel tunnel-mte100, Local Label: 289994**

**VPN-ID: 1, Auto Discovery: BGP, state is Provisioned (Service Connected)**

**Route Distinguisher: (auto) 209.165.200.225:32768**

Import Route Targets:

209.165.201.1:1

Export Route Targets:

209.165.201.1:1

Signaling protocol: BGP

Local VE-ID: 100 , Advertised Local VE-ID : 100

VE-Range: 10



PW: neighbor 209.165.200.226, PW ID 1, state is up ( established )  
PW class not set, XC ID 0xc0000001  
Encapsulation MPLS, Auto-discovered (BGP), protocol BGP  
Source address 209.165.200.225  
PW type VPLS, control word disabled, interworking none  
Sequencing not set

MPLS	Local	Remote
Label	289959	16030
MTU	1500	1500
Control word disabled		disabled
PW type	VPLS	VPLS
VE-ID	100	200

MIB cpwVcIndex: 3221225473  
Create time: 18/02/2014 03:58:31 (00:31:23 ago)  
Last time status changed: 18/02/2014 03:58:31 (00:31:23 ago)  
MAC withdraw messages: sent 0, received 0  
Static MAC addresses:  
Statistics:  
  packets: received 0, sent 0  
  bytes: received 0, sent 0  
Storm control drop counters:  
  packets: broadcast 0, multicast 0, unknown unicast 0  
  bytes: broadcast 0, multicast 0, unknown unicast 0  
DHCPv4 snooping: disabled  
IGMP Snooping profile: none  
MLD Snooping profile: none

P2MP-PW:

FEC	Local	Remote
Label	NULL (inclusive tree)	NULL (inclusive tree)
P2MP ID	100	100
Flags	0x00	0x00
PTree Type	RSVP-TE	RSVP-TE
Tunnel ID	100	100
Ext. Tunnel ID	209.165.200.225	209.165.200.226

Statistics:  
  packets: received 0  
  bytes: received 0

PW: neighbor 209.165.200.227, PW ID 1, state is up ( established )  
PW class not set, XC ID 0xc0000002  
Encapsulation MPLS, Auto-discovered (BGP), protocol BGP  
Source address 209.165.200.225  
PW type VPLS, control word disabled, interworking none  
Sequencing not set

MPLS	Local	Remote
Label	289944	16030
MTU	1500	1500
Control word disabled		disabled
PW type	VPLS	VPLS
VE-ID	100	300

MIB cpwVcIndex: 3221225474  
Create time: 18/02/2014 04:05:25 (00:24:29 ago)  
Last time status changed: 18/02/2014 04:05:25 (00:24:29 ago)  
MAC withdraw messages: sent 0, received 0  
Static MAC addresses:  
Statistics:  
  packets: received 0, sent 0  
  bytes: received 0, sent 0

Storm control drop counters:

packets: broadcast 0, multicast 0, unknown unicast 0

bytes: broadcast 0, multicast 0, unknown unicast 0

DHCPv4 snooping: disabled

IGMP Snooping profile: none

MLD Snooping profile: none

P2MP-PW:

FEC	Local	Remote
Label	NULL (inclusive tree)	NULL (inclusive tree)
P2MP ID	100	100
Flags	0x00	0x00
PTree Type	RSVP-TE	RSVP-TE
Tunnel ID	100	100
Ext. Tunnel ID	209.165.200.225	209.165.200.227

Statistics:

packets: received 0

bytes: received 0

PW: neighbor 209.165.200.228, PW ID 1, state is up ( established )

PW class not set, XC ID 0xc0000003

Encapsulation MPLS, Auto-discovered (BGP), protocol BGP

Source address 209.165.200.225

PW type VPLS, control word disabled, interworking none

Sequencing not set

MPLS	Local	Remote
Label	289929	16045
MTU	1500	1500
Control word disabled		disabled
PW type	VPLS	VPLS
VE-ID	100	400

MIB cpwVcIndex: 3221225475

Create time: 18/02/2014 04:08:11 (00:21:43 ago)

Last time status changed: 18/02/2014 04:08:11 (00:21:43 ago)

MAC withdraw messages: sent 0, received 0

Static MAC addresses:

Statistics:

packets: received 0, sent 0

bytes: received 0, sent 0

Storm control drop counters:

packets: broadcast 0, multicast 0, unknown unicast 0

bytes: broadcast 0, multicast 0, unknown unicast 0

DHCPv4 snooping: disabled

IGMP Snooping profile: none

MLD Snooping profile: none

P2MP-PW:

FEC	Local	Remote
Label	NULL (inclusive tree)	NULL (inclusive tree)
P2MP ID	100	100
Flags	0x00	0x00
PTree Type	RSVP-TE	RSVP-TE
Tunnel ID	100	100
Ext. Tunnel ID	209.165.200.225	209.165.200.228

Statistics:

packets: received 0

bytes: received 0

VFI Statistics:

drops: illegal VLAN 0, illegal length 0

RP/0/RSP0/CPU0:PE1#

**show mpls traffic-eng tunnels p2mp**

RP/0/RSP0/CPU0:PE1#**show mpls traffic-eng tunnels p2mp**

Name: tunnel-mt100 (auto-tunnel for VPLS (l2vpn))

Signalled-Name: auto\_PE1\_mt100

Status:

Admin: up Oper: up (Up for 00:32:35)

Config Parameters:

Bandwidth: 0 kbps (CT0) Priority: 7 7 Affinity: 0x0/0xffff

Interface Bandwidth: 10000 kbps

Metric Type: TE (default)

Fast Reroute: Enabled, Protection Desired: Any

Record Route: Enabled

Reoptimization after affinity failure: Enabled

Attribute-set: set1 (type p2mp-te)

Destination summary: (3 up, 0 down, 0 disabled) Affinity: 0x0/0xffff

Auto-bw: disabled

Destination: 209.165.200.226

State: Up for 00:32:35

Path options:

path-option 10 dynamic [active]

Destination: 209.165.200.227

State: Up for 00:25:41

Path options:

path-option 10 dynamic [active]

Destination: 209.165.200.228

State: Up for 00:22:55

Path options:

path-option 10 dynamic [active]

Current LSP:

lsp-id: 10004 p2mp-id: 100 tun-id: 100 src: 209.165.200.225 extid:  
209.165.200.225

LSP up for: 00:32:35 (since Tue Feb 18 03:58:31 UTC 2014)

Reroute Pending: No

Inuse Bandwidth: 0 kbps (CT0)

Number of S2Ls: 3 connected, 0 signaling proceeding, 0 down

S2L Sub LSP: Destination 209.165.200.226 Signaling Status: connected

S2L up for: 00:32:35 (since Tue Feb 18 03:58:31 UTC 2014)

Sub Group ID: 1 Sub Group Originator ID: 209.165.200.225

Path option path-option 10 dynamic (path weight 1)

Path info (OSPF 100 area 0)

209.165.201.2

209.165.200.226

S2L Sub LSP: Destination 209.165.200.227 Signaling Status: connected

S2L up for: 00:25:41 (since Tue Feb 18 04:05:25 UTC 2014)

Sub Group ID: 2 Sub Group Originator ID: 209.165.200.225

Path option path-option 10 dynamic (path weight 2)

Path info (OSPF 100 area 0)

209.165.201.2

209.165.201.61

209.165.201.62

209.165.200.227

S2L Sub LSP: Destination 209.165.200.228 Signaling Status: connected

S2L up for: 00:22:55 (since Tue Feb 18 04:08:11 UTC 2014)

Sub Group ID: 4 Sub Group Originator ID: 209.165.200.225

Path option path-option 10 dynamic (path weight 2)

Path info (OSPF 100 area 0)  
209.165.201.2  
209.165.201.101  
209.165.201.102  
209.165.200.228

Reoptimized LSP (Install Timer Remaining 0 Seconds):

None

Cleaned LSP (Cleanup Timer Remaining 0 Seconds):

None

LSP Tunnel 209.165.200.226 100 [10005] is signalled, connection is up

Tunnel Name: auto\_P\_mt100 **Tunnel Role: Tail**

InLabel: GigabitEthernet0/1/1/0, 289995

Signalling Info:

Src 209.165.200.226 Dst 209.165.200.225, Tun ID 100, Tun Inst 10005, Ext ID  
209.165.200.226

Router-IDs: upstream 209.165.200.226  
local 209.165.200.225

Bandwidth: 0 kbps (CT0) Priority: 7 7 DSTE-class: 0

Soft Preemption: None

Path Info:

Incoming Address: 209.165.201.1

Incoming:

Explicit Route:

Strict, 209.165.201.1

Strict, 209.165.200.225

Record Route:

IPv4 209.165.201.2, flags 0x0

Tspec: avg rate=0 kbits, burst=1000 bytes, peak rate=0 kbits

Session Attributes: Local Prot: Set, Node Prot: Not Set, BW Prot: Not Set

Soft Preemption Desired: Not Set

Resv Info: None

Record Route: Empty

Resv Info:

Record Route: Empty

Fspec: avg rate=0 kbits, burst=1000 bytes, peak rate=0 kbits

LSP Tunnel 209.165.200.227 100 [10003] is signalled, connection is up

Tunnel Name: auto\_PE2\_mt100 **Tunnel Role: Tail**

InLabel: GigabitEthernet0/1/1/0, 289998

Signalling Info:

Src 209.165.200.227 Dst 209.165.200.225, Tun ID 100, Tun Inst 10003, Ext ID  
209.165.200.227

Router-IDs: upstream 209.165.200.226  
local 209.165.200.225

Bandwidth: 0 kbps (CT0) Priority: 7 7 DSTE-class: 0

Soft Preemption: None

Path Info:

Incoming Address: 209.165.201.1

Incoming:

Explicit Route:

Strict, 209.165.201.1

Strict, 209.165.200.225

Record Route:

IPv4 209.165.201.2, flags 0x0

IPv4 209.165.201.62, flags 0x0

Tspec: avg rate=0 kbits, burst=1000 bytes, peak rate=0 kbits

Session Attributes: Local Prot: Set, Node Prot: Not Set, BW Prot: Not Set

Soft Preemption Desired: Not Set

Resv Info: None

Record Route: Empty

Resv Info:

Record Route: Empty

Fspec: avg rate=0 kbits, burst=1000 bytes, peak rate=0 kbits

LSP Tunnel 209.165.200.228 100 [10004] is signalled, connection is up

Tunnel Name: auto\_PE3\_mt100 **Tunnel Role: Tail**

InLabel: GigabitEthernet0/1/1/0, 289970

Signalling Info:

Src 209.165.200.228 Dst 209.165.200.225, Tun ID 100, Tun Inst 10004, Ext ID 209.165.200.228

Router-IDs: upstream 209.165.200.226  
              local 209.165.200.225

Bandwidth: 0 kbps (CT0) Priority: 7 7 DSTE-class: 0

Soft Preemption: None

Path Info:

Incoming Address: 209.165.201.1

Incoming:

Explicit Route:

Strict, 209.165.201.1

Strict, 209.165.200.225

Record Route:

IPv4 209.165.201.2, flags 0x0

IPv4 209.165.201.102, flags 0x0

Tspec: avg rate=0 kbits, burst=1000 bytes, peak rate=0 kbits

Session Attributes: Local Prot: Set, Node Prot: Not Set, BW Prot: Not Set

Soft Preemption Desired: Not Set

Resv Info: None

Record Route: Empty

Resv Info:

Record Route: Empty

Fspec: avg rate=0 kbits, burst=1000 bytes, peak rate=0 kbits

Displayed 1 (of 2) heads, 0 (of 0) midpoints, 3 (of 4) tails

Displayed 1 up, 0 down, 0 recovering, 0 recovered heads

RP/0/RSP0/CPU0:PE1#

**show mpls forwarding labels <label> detail**

RP/0/RSP0/CPU0:PE1#**show mpls forwarding labels 289994 detail**

Local Label	Outgoing Label	Prefix or ID	Outgoing Interface	Next Hop	Bytes Switched
-------------	----------------	--------------	--------------------	----------	----------------

-----  
289994                   P2MP TE: 100  
Updated Feb 18 03:58:32.360  
TE Tunnel Head, tunnel ID: 100, tunnel ifh: 0x8000e20  
IPv4 Tableid: 0xe0000000, IPv6 Tableid: 0xe0800000  
Flags:IP Lookup:not-set, Expnulv4:not-set, Expnulv6:set  
  Payload Type v4:set, Payload Type v6:not-set, l2vpn:set  
  Head:set, Tail:not-set, Bud:not-set, Peek:not-set, inclusive:set  
  Ingress Drop:not-set, Egress Drop:not-set  
Platform Data: {0x2000000, 0x2000000, 0x0, 0x0}, RPF-ID:0x80003  
VPLS Disposition: Bridge ID: 0, SHG ID: 0, PW Xconnect ID: 0x0

mpls paths: 1, local mpls paths: 0, protected mpls paths: 1

16005	P2MP TE: 100	Gi0/1/1/0	209.165.201.2	0
-------	--------------	-----------	---------------	---

Updated Feb 18 03:58:32.360

My Nodeid:65, Interface Nodeid:2065, Backup Interface Nodeid:2065

Packets Switched: 0

RP/0/RSP0/CPU0:PE1#

**show mpls traffic-eng tunnels p2mp tabular**

```
RP/0/RSP0/CPU0:PE1#show mpls traffic-eng tunnels p2mp tabular
```

Tunnel Name	LSP ID	Destination Address	Source Address	State	FRR State	LSP Role	Path Prot
^tunnel-mte100	10004	209.165.200.226	209.165.200.225	up	Ready	Head	
^tunnel-mte100	10004	209.165.200.227	209.165.200.225	up	Ready	Head	
^tunnel-mte100	10004	209.165.200.228	209.165.200.225	up	Ready	Head	
auto_P_mt100	10005	209.165.200.225	209.165.200.226	up	Inact	Tail	
auto_PE2_mt100	10003	209.165.200.225	209.165.200.227	up	Inact	Tail	
auto_PE3_mt100	10004	209.165.200.225	209.165.200.228	up	Inact	Tail	

\* = automatically created backup tunnel

^ = automatically created P2MP tunnel

```
RP/0/RSP0/CPU0:PE1#
```

## Troubleshooting VPL LS

### Problemas de la configuración común

La mayoría de las causas comunes para los problemas P2MP en el L2VPN se muestran aquí.

- La configuración BGP para el LS es exactamente lo mismo que ésa para BGP-AD. Asegúrese exportar/las rutas de la familia del direccionamiento de la importación l2vpn VPL-vpws configurando a la direccionamiento-familia l2vpn VPL-vpws para los vecinos BGP.
- Hay MPLS y Errores de configuración del Multicast.

La Ingeniería de tráfico MPLS se debe habilitar en las interfaces adonde el P2MP PWs pasa.

#### show l2vpn bridge-domain

```
RP/0/RSP0/CPU0:PE1#show l2vpn bridge-domain
```

Legend: pp = Partially Programmed.

Bridge group: bg1, bridge-domain: bg1\_bd1, id: 0, state: up, ShgId: 0, MSTi: 0

Aging: 300 s, MAC limit: 4000, Action: none, Notification: syslog

Filter MAC addresses: 0

ACs: 1 (1 up), VFIs: 1, PWs: 3 (3 up), PBBs: 0 (0 up)

List of ACs:

GigabitEthernet0/1/1/10.1, state: up, Static MAC addresses: 0

List of Access PWs:

List of VFIs:

VFI bg1\_bd1\_vfi (up)

P2MP: RSVP-TE, BGP, 1, Tunnel Up

Neighbor 209.165.200.226 pw-id 1, state: up, Static MAC addresses: 0

Neighbor 209.165.200.227 pw-id 1, state: up, Static MAC addresses: 0

Neighbor 209.165.200.228 pw-id 1, state: up, Static MAC addresses: 0

```
RP/0/RSP0/CPU0:PE1#
```

#### show l2vpn bridge-domain detail

```
RP/0/RSP0/CPU0:PE1#show l2vpn bridge-domain detail
```

Legend: pp = Partially Programmed.

Bridge group: bg1, bridge-domain: bg1\_bd1, id: 0, state: up, ShgId: 0, MSTi: 0

Coupled state: disabled

MAC learning: enabled

MAC withdraw: enabled

MAC withdraw for Access PW: enabled  
MAC withdraw sent on: bridge port up  
MAC withdraw relaying (access to access): disabled  
Flooding:  
Broadcast & Multicast: enabled  
Unknown unicast: enabled  
MAC aging time: 300 s, Type: inactivity  
MAC limit: 4000, Action: none, Notification: syslog  
MAC limit reached: no  
MAC port down flush: enabled  
MAC Secure: disabled, Logging: disabled  
Split Horizon Group: none  
Dynamic ARP Inspection: disabled, Logging: disabled  
IP Source Guard: disabled, Logging: disabled  
DHCPv4 snooping: disabled  
IGMP Snooping: enabled  
IGMP Snooping profile: none  
MLD Snooping profile: none  
Storm Control: disabled  
Bridge MTU: 1500  
MIB cvplsConfigIndex: 1  
Filter MAC addresses:  
P2MP PW: enabled  
Create time: 18/02/2014 03:47:59 (00:41:54 ago)  
No status change since creation  
ACs: 1 (1 up), VFIs: 1, PWs: 3 (3 up), PBBs: 0 (0 up)  
List of ACs:  
AC: GigabitEthernet0/1/1/10.1, state is up  
Type VLAN; Num Ranges: 1  
VLAN ranges: [1, 1]  
MTU 1504; XC ID 0x8802a7; interworking none  
MAC learning: enabled  
Flooding:  
Broadcast & Multicast: enabled  
Unknown unicast: enabled  
MAC aging time: 300 s, Type: inactivity  
MAC limit: 4000, Action: none, Notification: syslog  
MAC limit reached: no  
MAC port down flush: enabled  
MAC Secure: disabled, Logging: disabled  
Split Horizon Group: none  
Dynamic ARP Inspection: disabled, Logging: disabled  
IP Source Guard: disabled, Logging: disabled  
DHCPv4 snooping: disabled  
IGMP Snooping: enabled  
IGMP Snooping profile: none  
MLD Snooping profile: none  
Storm Control: disabled  
Static MAC addresses:  
Statistics:  
packets: received 0, sent 0  
bytes: received 0, sent 0  
Storm control drop counters:  
packets: broadcast 0, multicast 0, unknown unicast 0  
bytes: broadcast 0, multicast 0, unknown unicast 0  
Dynamic ARP inspection drop counters:  
packets: 0, bytes: 0  
IP source guard drop counters:  
packets: 0, bytes: 0  
List of Access PWs:  
List of VFIs:  
VFI bg1\_bd1\_vfi (up)  
**P2MP:**  
**Type RSVP-TE, BGP signaling, PTree ID 1**

**P2MP Status: Tunnel Up**  
**P2MP-TE attribute-set: set1**  
**Tunnel tunnel-mte100, Local Label: 289994**  
**VPN-ID: 1, Auto Discovery: BGP, state is Provisioned (Service Connected)**  
**Route Distinguisher: (auto) 209.165.200.225:32768**

Import Route Targets:

209.165.201.1:1

Export Route Targets:

209.165.201.1:1

Signaling protocol: BGP

Local VE-ID: 100 , Advertised Local VE-ID : 100

VE-Range: 10

PW: neighbor 209.165.200.226, PW ID 1, state is up ( established )

PW class not set, XC ID 0xc0000001

Encapsulation MPLS, Auto-discovered (BGP), protocol BGP

Source address 209.165.200.225

PW type VPLS, control word disabled, interworking none

Sequencing not set

MPLS	Local	Remote
Label	289959	16030
MTU	1500	1500
Control word	disabled	disabled
PW type	VPLS	VPLS
VE-ID	100	200

MIB cpwVcIndex: 3221225473

Create time: 18/02/2014 03:58:31 (00:31:23 ago)

Last time status changed: 18/02/2014 03:58:31 (00:31:23 ago)

MAC withdraw messages: sent 0, received 0

Static MAC addresses:

Statistics:

packets: received 0, sent 0

bytes: received 0, sent 0

Storm control drop counters:

packets: broadcast 0, multicast 0, unknown unicast 0

bytes: broadcast 0, multicast 0, unknown unicast 0

DHCPv4 snooping: disabled

IGMP Snooping profile: none

MLD Snooping profile: none

P2MP-PW:

FEC	Local	Remote
Label	NULL (inclusive tree)	NULL (inclusive tree)
P2MP ID	100	100
Flags	0x00	0x00
PTree Type	RSVP-TE	RSVP-TE
Tunnel ID	100	100
Ext. Tunnel ID	209.165.200.225	209.165.200.226

Statistics:

packets: received 0

bytes: received 0

PW: neighbor 209.165.200.227, PW ID 1, state is up ( established )

PW class not set, XC ID 0xc0000002

Encapsulation MPLS, Auto-discovered (BGP), protocol BGP

Source address 209.165.200.225

PW type VPLS, control word disabled, interworking none

Sequencing not set

MPLS	Local	Remote
Label	289944	16030
MTU	1500	1500



Control word disabled disabled  
PW type VPLS VPLS  
VE-ID 100 300

-----  
MIB cpwVcIndex: 3221225474

Create time: 18/02/2014 04:05:25 (00:24:29 ago)

Last time status changed: 18/02/2014 04:05:25 (00:24:29 ago)

MAC withdraw messages: sent 0, received 0

Static MAC addresses:

Statistics:

packets: received 0, sent 0

bytes: received 0, sent 0

Storm control drop counters:

packets: broadcast 0, multicast 0, unknown unicast 0

bytes: broadcast 0, multicast 0, unknown unicast 0

DHCPv4 snooping: disabled

IGMP Snooping profile: none

MLD Snooping profile: none

P2MP-PW:

FEC	Local	Remote
Label	NULL (inclusive tree)	NULL (inclusive tree)
P2MP ID	100	100
Flags	0x00	0x00
PTree Type	RSVP-TE	RSVP-TE
Tunnel ID	100	100
Ext. Tunnel ID	209.165.200.225	209.165.200.227

Statistics:

packets: received 0

bytes: received 0

PW: neighbor 209.165.200.228, PW ID 1, state is up ( established )

PW class not set, XC ID 0xc0000003

Encapsulation MPLS, Auto-discovered (BGP), protocol BGP

Source address 209.165.200.225

PW type VPLS, control word disabled, interworking none

Sequencing not set

MPLS	Local	Remote
Label	289929	16045
MTU	1500	1500
Control word	disabled	disabled
PW type	VPLS	VPLS
VE-ID	100	400

-----  
MIB cpwVcIndex: 3221225475

Create time: 18/02/2014 04:08:11 (00:21:43 ago)

Last time status changed: 18/02/2014 04:08:11 (00:21:43 ago)

MAC withdraw messages: sent 0, received 0

Static MAC addresses:

Statistics:

packets: received 0, sent 0

bytes: received 0, sent 0

Storm control drop counters:

packets: broadcast 0, multicast 0, unknown unicast 0

bytes: broadcast 0, multicast 0, unknown unicast 0

DHCPv4 snooping: disabled

IGMP Snooping profile: none

MLD Snooping profile: none

P2MP-PW:

FEC	Local	Remote
Label	NULL (inclusive tree)	NULL (inclusive tree)
P2MP ID	100	100

Flags 0x00 0x00  
PTree Type RSVP-TE RSVP-TE  
Tunnel ID 100 100  
Ext. Tunnel ID 209.165.200.225 209.165.200.228

Statistics:

packets: received 0  
bytes: received 0

VFI Statistics:

drops: illegal VLAN 0, illegal length 0

RP/0/RSP0/CPU0:PE1#

**show mpls traffic-eng tunnels p2mp**

RP/0/RSP0/CPU0:PE1#**show mpls traffic-eng tunnels p2mp**

Name: tunnel-mte100 (auto-tunnel for VPLS (l2vpn))

Signalled-Name: auto\_PE1\_mt100

Status:

Admin: up Oper: up (Up for 00:32:35)

Config Parameters:

Bandwidth: 0 kbps (CT0) Priority: 7 7 Affinity: 0x0/0xffff  
Interface Bandwidth: 10000 kbps  
Metric Type: TE (default)  
Fast Reroute: Enabled, Protection Desired: Any  
Record Route: Enabled  
Reoptimization after affinity failure: Enabled

Attribute-set: set1 (type p2mp-te)

Destination summary: (3 up, 0 down, 0 disabled) Affinity: 0x0/0xffff

Auto-bw: disabled

Destination: 209.165.200.226

State: Up for 00:32:35

Path options:

path-option 10 dynamic [active]

Destination: 209.165.200.227

State: Up for 00:25:41

Path options:

path-option 10 dynamic [active]

Destination: 209.165.200.228

State: Up for 00:22:55

Path options:

path-option 10 dynamic [active]

Current LSP:

lsp-id: 10004 p2mp-id: 100 tun-id: 100 src: 209.165.200.225 extid:  
209.165.200.225

LSP up for: 00:32:35 (since Tue Feb 18 03:58:31 UTC 2014)

Reroute Pending: No

Inuse Bandwidth: 0 kbps (CT0)

Number of S2Ls: 3 connected, 0 signaling proceeding, 0 down

S2L Sub LSP: Destination 209.165.200.226 Signaling Status: connected

S2L up for: 00:32:35 (since Tue Feb 18 03:58:31 UTC 2014)

Sub Group ID: 1 Sub Group Originator ID: 209.165.200.225

Path option path-option 10 dynamic (path weight 1)

Path info (OSPF 100 area 0)

209.165.201.2

209.165.200.226

S2L Sub LSP: Destination 209.165.200.227 Signaling Status: connected

S2L up for: 00:25:41 (since Tue Feb 18 04:05:25 UTC 2014)

Sub Group ID: 2 Sub Group Originator ID: 209.165.200.225  
Path option path-option 10 dynamic (path weight 2)  
Path info (OSPF 100 area 0)  
209.165.201.2  
209.165.201.61  
209.165.201.62  
209.165.200.227

S2L Sub LSP: Destination 209.165.200.228 Signaling Status: connected  
S2L up for: 00:22:55 (since Tue Feb 18 04:08:11 UTC 2014)  
Sub Group ID: 4 Sub Group Originator ID: 209.165.200.225  
Path option path-option 10 dynamic (path weight 2)  
Path info (OSPF 100 area 0)  
209.165.201.2  
209.165.201.101  
209.165.201.102  
209.165.200.228

Reoptimized LSP (Install Timer Remaining 0 Seconds):  
None  
Cleaned LSP (Cleanup Timer Remaining 0 Seconds):  
None

LSP Tunnel 209.165.200.226 100 [10005] is signalled, connection is up  
Tunnel Name: auto\_P\_mt100 **Tunnel Role: Tail**  
InLabel: GigabitEthernet0/1/1/0, 289995  
Signalling Info:  
Src 209.165.200.226 Dst 209.165.200.225, Tun ID 100, Tun Inst 10005, Ext ID  
209.165.200.226  
Router-IDs: upstream 209.165.200.226  
                  local 209.165.200.225  
Bandwidth: 0 kbps (CT0) Priority: 7 7 DSTE-class: 0  
Soft Preemption: None  
Path Info:  
  Incoming Address: 209.165.201.1  
  Incoming:  
  Explicit Route:  
    Strict, 209.165.201.1  
    Strict, 209.165.200.225  
  Record Route:  
    IPv4 209.165.201.2, flags 0x0  
  Tspec: avg rate=0 kbits, burst=1000 bytes, peak rate=0 kbits  
  Session Attributes: Local Prot: Set, Node Prot: Not Set, BW Prot: Not Set  
                  Soft Preemption Desired: Not Set  
Resv Info: None  
  Record Route: Empty  
  Resv Info:  
    Record Route: Empty  
    Fspec: avg rate=0 kbits, burst=1000 bytes, peak rate=0 kbits

LSP Tunnel 209.165.200.227 100 [10003] is signalled, connection is up  
Tunnel Name: auto\_PE2\_mt100 **Tunnel Role: Tail**  
InLabel: GigabitEthernet0/1/1/0, 289998  
Signalling Info:  
Src 209.165.200.227 Dst 209.165.200.225, Tun ID 100, Tun Inst 10003, Ext ID  
209.165.200.227  
Router-IDs: upstream 209.165.200.226  
                  local 209.165.200.225  
Bandwidth: 0 kbps (CT0) Priority: 7 7 DSTE-class: 0  
Soft Preemption: None  
Path Info:  
  Incoming Address: 209.165.201.1  
  Incoming:  
  Explicit Route:

```

    Strict, 209.165.201.1
    Strict, 209.165.200.225
Record Route:
    IPv4 209.165.201.2, flags 0x0
    IPv4 209.165.201.62, flags 0x0
Tspec: avg rate=0 kbits, burst=1000 bytes, peak rate=0 kbits
Session Attributes: Local Prot: Set, Node Prot: Not Set, BW Prot: Not Set
                    Soft Preemption Desired: Not Set

Resv Info: None
Record Route: Empty
Resv Info:
    Record Route: Empty
    Fspec: avg rate=0 kbits, burst=1000 bytes, peak rate=0 kbits

LSP Tunnel 209.165.200.228 100 [10004] is signalled, connection is up
Tunnel Name: auto_PE3_mt100 Tunnel Role: Tail
InLabel: GigabitEthernet0/1/1/0, 289970
Signalling Info:
    Src 209.165.200.228 Dst 209.165.200.225, Tun ID 100, Tun Inst 10004, Ext ID
209.165.200.228
Router-IDs: upstream 209.165.200.226
            local    209.165.200.225
Bandwidth: 0 kbps (CT0) Priority: 7 7 DSTE-class: 0
Soft Preemption: None
Path Info:
    Incoming Address: 209.165.201.1
    Incoming:
    Explicit Route:
        Strict, 209.165.201.1
        Strict, 209.165.200.225
    Record Route:
        IPv4 209.165.201.2, flags 0x0
        IPv4 209.165.201.102, flags 0x0
    Tspec: avg rate=0 kbits, burst=1000 bytes, peak rate=0 kbits
    Session Attributes: Local Prot: Set, Node Prot: Not Set, BW Prot: Not Set
                    Soft Preemption Desired: Not Set

Resv Info: None
Record Route: Empty
Resv Info:
    Record Route: Empty
    Fspec: avg rate=0 kbits, burst=1000 bytes, peak rate=0 kbits
Displayed 1 (of 2) heads, 0 (of 0) midpoints, 3 (of 4) tails
Displayed 1 up, 0 down, 0 recovering, 0 recovered heads
RP/0/RSP0/CPU0:PE1#

```

**show mpls forwarding labels <label> detail**

RP/0/RSP0/CPU0:PE1#**show mpls forwarding labels 289994 detail**

Local Label	Outgoing Label	Prefix or ID	Outgoing Interface	Next Hop	Bytes Switched
289994		P2MP TE: 100			
Updated Feb 18 03:58:32.360					
TE Tunnel Head, tunnel ID: 100, tunnel ifh: 0x8000e20					
IPv4 Tableid: 0xe0000000, IPv6 Tableid: 0xe0800000					
Flags:IP Lookup:not-set, Expnullv4:not-set, Expnullv6:set					
Payload Type v4:set, Payload Type v6:not-set, l2vpn:set					
Head:set, Tail:not-set, Bud:not-set, Peek:not-set, inclusive:set					
Ingress Drop:not-set, Egress Drop:not-set					
Platform Data: {0x2000000, 0x2000000, 0x0, 0x0}, RPF-ID:0x80003					
VPLS Disposition: Bridge ID: 0, SHG ID: 0, PW Xconnect ID: 0x0					

```

mpls paths: 1, local mpls paths: 0, protected mpls paths: 1

16005      P2MP TE: 100      Gi0/1/1/0      209.165.201.2  0
Updated Feb 18 03:58:32.360
My Nodeid:65, Interface Nodeid:2065, Backup Interface Nodeid:2065
Packets Switched: 0

RP/0/RSP0/CPU0:PE1#

```

**show mpls traffic-eng tunnels p2mp tabular**

```
RP/0/RSP0/CPU0:PE1#show mpls traffic-eng tunnels p2mp tabular
```

Tunnel Name	LSP ID	Destination Address	Source Address	State	FRR State	LSP Role	Path Prot
^tunnel-mte100	10004	209.165.200.226	209.165.200.225	up	Ready	Head	
^tunnel-mte100	10004	209.165.200.227	209.165.200.225	up	Ready	Head	
^tunnel-mte100	10004	209.165.200.228	209.165.200.225	up	Ready	Head	
auto_P_mt100	10005	209.165.200.225	209.165.200.226	up	Inact	Tail	
auto_PE2_mt100	10003	209.165.200.225	209.165.200.227	up	Inact	Tail	
auto_PE3_mt100	10004	209.165.200.225	209.165.200.228	up	Inact	Tail	

\* = automatically created backup tunnel  
^ = automatically created P2MP tunnel

```
RP/0/RSP0/CPU0:PE1#
```

- La configuración L2VPN para el LS en la versión 5.1.0 del Cisco IOS XR requiere que usted:

Configure la configuración de ID VPN para el VFI  
Configure el Multicast P2MP para el VFI.  
Configure el Transport Protocol y Signaling Protocol, como en este ejemplo de configuración:

```

l2vpn
bridge group bg
bridge-domain bd1
vfi vf1
  vpn-id 1
  autodiscovery bgp
  rd auto
  route-target 209.165.201.7:1
  signaling-protocol bgp
  ve-id 1
multicast p2mp
  signaling-protocol bgp
  transport rsvp-te

```

- La pista/el Tail LS se debe fijar correctamente. En la versión 5.1.0 del Cisco IOS XR, cada cola LS es también una pista LS y viceversa. Porque no hay **intercambio de capacidad** explícito **LS** entre el Routers, todo el Routers en un dominio de Bridge habilitado LS debe participar en el LS.

## L2VPN y comandos show y Troubleshooting L2FIB

- El proceso de administrador L2VPN (l2vpn\_mgr) comunica con el proceso de control de la Ingeniería de tráfico MPLS (TE) (te\_control) y pide la creación de túnel. Asegúrese de que el te\_control y los procesos l2vpn\_mgr estén en el estado de ejecución con estos comandos:  
**muestre l2vpn\_mgr de procesomuestre el te\_control de proceso**

- Marque que el proceso l2vpn\_mgr ha pedido la creación de túnel. Una entrada para el túnel debe estar en este comando show:

```
RP/0/RSP0/CPU0:PE1#show l2vpn atom-db preferred-path
Tunnel          BW Tot/Avail/Resv      Peer ID          VC ID
-----
tunnel-mte1 0/0/0          209.165.200.226  1
                                     209.165.200.227  1
                                     209.165.200.228  1
```

- El L2VPN tiene que recibir la información del túnel del proceso del te\_control. Verifique que este comando show tenga detalles no-cero tales como túnel-identificación, Ext.tunnel-id, túnel-ifh, y p2mp-id:

```
RP/0/RSP0/CPU0:PE1#show l2vpn atom-db preferred-path private
Tunnel tunnel-mte1 0/0/0:
Peer ID: 209.165.200.226, VC-ID 1
Peer ID: 209.165.200.227, VC-ID 1
Peer ID: 209.165.200.228, VC-ID 1
MTE details:
  tunnel-ifh: 0x08000e20
  local-label: 289994
  p2mp-id: 100
  tunnel-id: 100
  Ext.tunnel-id: 209.165.200.225
```

- El L2VPN debe hacer publicidad del caso del servicio de multidifusión del proveedor (PMSI) al resto del Routers PE. Marque que l2vpn\_mgr ha enviado el PMSI para el VFI configurado. **La pista del evento LS: envíe PMSI** debe estar presente en el historial de eventos para el VFI.

```
RP/0/0/CPU0:one#show l2vpn bridge-domain p2mp private
[...]
Object: VFI
Base info: version=0x0, flags=0x0, type=0, reserved=0
VFI event trace history [Num events: 5]
-----
Time          Event          Flags          Flags
=====
Dec 3 08:52:37.504 LSM Head: P2MP Provision 00000001, 00000000 - -
Dec 3 08:52:37.504 BD VPN Add 00000000, 00000000 M -
Dec 3 08:55:56.672 LSM Head: MTE updated 00000001, 00000000 - -
Dec 3 08:55:56.672 LSM Head: send PMSI 00000480, 00002710 - -
-----
[...]
```

- El L2VPN en el otro Routers debe recibir el PMSI acaba de enviarse que. Asegúrese de que **Tail LS: PMSI recibido** se muestra en el historial de eventos en el lado de recepción:

```
RP/0/0/CPU0:two#show l2vpn bridge-domain p2mp private
[...]
VFI event trace history [Num events: 7]
-----
Time          Event          Flags          Flags
=====
Dec 3 08:42:49.216 LSM Head: P2MP Provision 00000001, 00000000 - -
Dec 3 08:42:50.240 LSM Head: MTE updated 00000001, 00000070 - -
Dec 3 08:42:50.240 LSM Head: send PMSI 00000480, 00002710 - -
Dec 3 08:43:51.680 BD VPN Add 00000000, 00000000 - -
```

```
Dec 3 08:44:59.776 LSM Tail: PMSI received      0100a8c0, 00002710 - -
Dec 3 08:45:00.288 LSM Head: MTE updated      00000001, 00000000 - -
```

-----  
[...]

- Cada router es una cabeza y cola LS y debe enviar el PMSI y recibir PMSIs de cada uno del otro Routers. El primer router marcado debe recibir PMSIs de cada uno de los otros Nodos.
- La base de información de reenvío de la capa dos (L2FIB) debe recibir la información PRINCIPAL del L2VPN y debe descargarlos al linecard.

```
RP/0/RSP0/CPU0:PE1#show l2vpn forwarding bridge-domain detail location 0/1/CPU0
```

```
Bridge-domain name: bg1:bg1_bd1, id: 0, state: up
  MAC learning: enabled
  MAC port down flush: enabled
  Flooding:
    Broadcast & Multicast: enabled
    Unknown unicast: enabled
  MAC aging time: 300 s, Type: inactivity
  MAC limit: 4000, Action: none, Notification: syslog
  MAC limit reached: no
  MAC Secure: disabled, Logging: disabled
  DHCPv4 snooping: profile not known on this node
  Dynamic ARP Inspection: disabled, Logging: disabled
  IP Source Guard: disabled, Logging: disabled
  IGMP snooping: disabled, flooding: enabled
  MLD snooping: disabled, flooding: disabled
  Storm control: disabled
P2MP PW: enabled
Ptree type: RSVP-TE, TE i/f: tunnel-mte100,
nhop valid: TRUE, Status: Bound, Label: 289994
  Bridge MTU: 1500 bytes
  Number of bridge ports: 4
  Number of MAC addresses: 0
  Multi-spanning tree instance: 0
```

- L2FIB debe recibir la información del TAIL del L2VPN para cada picovatio y debe descargarlos a la plataforma.

```
RP/0/RSP0/CPU0:PE1#show l2vpn forwarding bridge-domain hardware ingress detail location 0/1/CPU0
```

```
Bridge-domain name: bg1:bg1_bd1, id: 0, state: up
  MAC learning: enabled
  MAC port down flush: enabled
  Flooding:
    Broadcast & Multicast: enabled
    Unknown unicast: enabled
  MAC aging time: 300 s, Type: inactivity
  MAC limit: 4000, Action: none, Notification: syslog
  MAC limit reached: no
  MAC Secure: disabled, Logging: disabled
  DHCPv4 snooping: profile not known on this node
  Dynamic ARP Inspection: disabled, Logging: disabled
  IP Source Guard: disabled, Logging: disabled
  IGMP snooping: disabled, flooding: enabled
  MLD snooping: disabled, flooding: disabled
  Storm control: disabled
  P2MP PW: enabled
```

Ptree type: RSVP-TE, TE i/f: tunnel-mte100,  
nhop valid: TRUE, Status: Bound, Label: 289994  
Bridge MTU: 1500 bytes  
Number of bridge ports: 4  
Number of MAC addresses: 0  
Multi-spanning tree instance: 0

Platform Bridge context:

Last notification sent at: 02/18/2014 21:58:55  
Ingress Bridge Domain: 0, State: Created  
static MACs: 0, port level static MACs: 0, MAC limit: 4000, current MAC limit:  
4000, MTU: 1500, MAC limit action: 0  
Rack 0 FGIDs:shg0: 0x00000000, shg1: 0x00000002, shg2: 0x00000002  
Rack 1 FGIDs:shg0: 0x00000000, shg1: 0x00000000, shg2: 0x00000000  
Flags: Virtual Table ID Disable, P2MP Enable, CorePW Attach  
P2MP Head-end Info: Head end bound  
Tunnel ifhandle: 0x08000e20, Internal Label: 289994, Local LC NP mask: 0x0,  
Head-end Local LC NP mask: 0x0, All L2 Mcast routes local LC NP mask: 0x0  
Rack: 0, Physical slot: 1, shg 0 members: 1, shg 1 members: 0, shg 2 members: 0

Platform Bridge HAL context:

Number of NPs: 4, NP mask: 0x0008, mgid index: 513, learn key: 0  
NP: 3, shg 0 members: 1, shg 1 members: 0, shg 2 members: 0  
MAC limit counter index: 0x00ec1e60

Platform Bridge Domain Hardware Information:

Bridge Domain: 0 NP 0  
Flags: Virtual Table, Learn Enable, P2MP Tree Enabled  
Head-end P-Tree Int Label: 289994  
Num Members: 0, Learn Key: 0x00, Half Age: 5  
fgid shg0: 0x0000, fgid shg1: 0x0002, fgid shg2: 0x0002, mgid index: 513  
BD learn cntr: 0x00ec1e60

Bridge Domain: 0 NP 1  
Flags: Virtual Table, Learn Enable, P2MP Tree Enabled  
Head-end P-Tree Int Label: 289994  
Num Members: 0, Learn Key: 0x00, Half Age: 5  
fgid shg0: 0x0000, fgid shg1: 0x0002, fgid shg2: 0x0002, mgid index: 513  
BD learn cntr: 0x00ec1e60

Bridge Domain: 0 NP 2  
Flags: Virtual Table, Learn Enable, P2MP Tree Enabled  
Head-end P-Tree Int Label: 289994  
Num Members: 0, Learn Key: 0x00, Half Age: 5  
fgid shg0: 0x0000, fgid shg1: 0x0002, fgid shg2: 0x0002, mgid index: 513  
BD learn cntr: 0x00ec1e60

Bridge Domain: 0 NP 3  
Flags: Virtual Table, Learn Enable, P2MP Tree Enabled  
Head-end P-Tree Int Label: 289994  
Num Members: 1, Learn Key: 0x00, Half Age: 5  
fgid shg0: 0x0000, fgid shg1: 0x0002, fgid shg2: 0x0002, mgid index: 513  
BD learn cntr: 0x00ec1e60

Bridge Member 0, copy 0  
Flags: Active, XID: 0x06c002a7  
Bridge Member 0, copy 1  
Flags: Active, XID: 0x06c002a7

GigabitEthernet0/1/1/10.1, state: oper up

Number of MAC: 0

Statistics:

packets: received 0, sent 0  
bytes: received 0, sent 0

Storm control drop counters:

packets: broadcast 0, multicast 0, unknown unicast 0



bytes: broadcast 0, multicast 0, unknown unicast 0  
Dynamic arp inspection drop counters:  
 packets: 0, bytes: 0  
IP source guard drop counters:  
 packets: 0, bytes: 0  
Platform Bridge Port context:  
Last notification sent at: 02/18/2014 21:58:56  
Ingress State: Bound  
 Flags: None  
  
Platform AC context:  
Ingress AC: VPLS, State: Bound  
 Flags: Port Level MAC Limit  
XID: 0x06c002a7, SHG: None  
uIDB: 0x001a, NP: 3, Port Learn Key: 0  
Slot flood mask rack 0: 0x200000 rack 1: 0x0 NP flood mask: 0x0008  
NP3

Ingress uIDB:  
 Flags: L2, Status, Racetrack Eligible, VPLS  
 Stats Ptr: 0x5302c9, uIDB index: 0x001a, Wire Exp Tag: 1  
 BVI Bridge Domain: 0, BVI Source XID: 0x00000000  
 VLAN1: 0, VLAN1 etype: 0x0000, VLAN2: 0, VLAN2 etype: 0x0000  
 L2 ACL Format: 0, L2 ACL ID: 0, IPV4 ACL ID: 0, IPV6 ACL ID: 0  
 QOS ID: 0, QOS Format ID: 0  
 Local Switch dest XID: 0x06c002a7  
 UIDB IF Handle: 0x02001042, Source Port: 0, Num VLANs: 0  
Xconnect ID: 0x06c002a7, NP: 3  
 Type: AC  
 Flags: Learn enable, VPLS  
 uIDB Index: 0x001a  
 Bridge Domain ID: 0, Stats Pointer: 0xec1e62  
 Split Horizon Group: None  
Bridge Port : Bridge 0 Port 0  
 Flags: Active Member  
 XID: 0x06c002a7  
Bridge Port Virt: Bridge 0 Port 0  
 Flags: Active Member  
 XID: 0x06c002a7  
Storm Control not enabled

Nbor 209.165.200.226 pw-id 1  
Number of MAC: 0  
Statistics:  
 packets: received 0, sent 2  
 bytes: received 0, sent 192  
Storm control drop counters:  
 packets: broadcast 2, multicast 0, unknown unicast 0  
 bytes: broadcast 192, multicast 0, unknown unicast 0  
Dynamic arp inspection drop counters:  
 packets: 0, bytes: 0  
IP source guard drop counters:  
 packets: 0, bytes: 0  
Statistics P2MP:  
 packets: received 0  
 bytes: received 0

Platform Bridge Port context:  
Last notification sent at: 02/18/2014 21:58:55  
Ingress State: Bound  
 Flags: None  
 **P2MP PW enabled, P2MP Role: tail**  
**Platform PW context:**  
 **Ingress PW: VPLS, State: Bound**  
XID: 0xc0008000, bridge: 0, MAC limit: 4000, l2vpn ldi index: 0x0001, vc label:

16030, nr\_ldi\_hash: 0xab, r\_ldi\_hash: 0xbd, lag\_hash: 0x17, SHG: VFI Enabled  
Flags: MAC Limit Port Level  
Port Learn Key: 0  
Trident Layer Flags: None  
Slot flood mask rack 0: 0x0 rack 1: 0x0 NP flood mask: 0x0000  
Primary L3 path: ifhandle: 0x02000100, sfp\_or\_lagid: 0x00d2  
Backup L3 path: Not set  
NP0  
Xconnect ID: 0xc0008000, NP: 0  
Type: Pseudowire (no control word)  
Flags: Learn enable, Type 5, Local replication, VPLS  
VC label hash, nR-LDI Hash: 0xab, R-LDI Hash: 0xb7, LAG Hash: 0x17,  
VC output label: 0x03e9e (16030), LDI: 0x0001, stats ptr: 0x00530258  
Bridge Domain ID: 0, Stats Pointer: 0xec1e62  
Split Horizon Group: VFI Enabled  
NP1  
Xconnect ID: 0xc0008000, NP: 1  
Type: Pseudowire (no control word)  
Flags: Learn enable, Type 5, Local replication, VPLS  
VC label hash, nR-LDI Hash: 0xab, R-LDI Hash: 0xb7, LAG Hash: 0x17,  
VC output label: 0x03e9e (16030), LDI: 0x0001, stats ptr: 0x00530258  
Bridge Domain ID: 0, Stats Pointer: 0xec1e62  
Split Horizon Group: VFI Enabled  
NP2  
Xconnect ID: 0xc0008000, NP: 2  
Type: Pseudowire (no control word)  
Flags: Learn enable, Type 5, Local replication, VPLS  
VC label hash, nR-LDI Hash: 0xab, R-LDI Hash: 0xb7, LAG Hash: 0x17,  
VC output label: 0x03e9e (16030), LDI: 0x0001, stats ptr: 0x00530300  
Bridge Domain ID: 0, Stats Pointer: 0xec1e62  
Split Horizon Group: VFI Enabled  
NP3  
Xconnect ID: 0xc0008000, NP: 3  
Type: Pseudowire (no control word)  
Flags: Learn enable, Type 5, Local replication, VPLS  
VC label hash, nR-LDI Hash: 0xab, R-LDI Hash: 0xb7, LAG Hash: 0x17,  
VC output label: 0x03e9e (16030), LDI: 0x0001, stats ptr: 0x00530488  
Bridge Domain ID: 0, Stats Pointer: 0xec1e64  
Split Horizon Group: VFI Enabled  
  
Nbor 209.165.200.227 pw-id 1  
Number of MAC: 0  
Statistics:  
  packets: received 0, sent 1  
  bytes: received 0, sent 96  
Storm control drop counters:  
  packets: broadcast 0, multicast 0, unknown unicast 0  
  bytes: broadcast 0, multicast 0, unknown unicast 0  
Dynamic arp inspection drop counters:  
  packets: 0, bytes: 0  
IP source guard drop counters:  
  packets: 0, bytes: 0  
Statistics P2MP:  
  packets: received 0  
  bytes: received 0  
  
Platform Bridge Port context:  
Last notification sent at: 02/18/2014 21:58:55  
Ingress State: Bound  
Flags: None  
**P2MP PW enabled, P2MP Role: tail**  
**Platform PW context:**  
**Ingress PW: VPLS, State: Bound**  
XID: 0xc0008001, bridge: 0, MAC limit: 4000, l2vpn ldi index: 0x0002, vc label:

16030, nr\_ldi\_hash: 0xab, r\_ldi\_hash: 0xbd, lag\_hash: 0x17, SHG: VFI Enabled  
Flags: MAC Limit Port Level  
Port Learn Key: 0  
Trident Layer Flags: None  
Slot flood mask rack 0: 0x0 rack 1: 0x0 NP flood mask: 0x0000  
Primary L3 path: ifhandle: 0x02000100, sfp\_or\_lagid: 0x00d2  
Backup L3 path: Not set  
NP0  
Xconnect ID: 0xc0008001, NP: 0  
Type: Pseudowire (no control word)  
Flags: Learn enable, Type 5, Local replication, VPLS  
VC label hash, nR-LDI Hash: 0xab, R-LDI Hash: 0xb7, LAG Hash: 0x17,  
VC output label: 0x03e9e (16030), LDI: 0x0002, stats ptr: 0x0053025e  
Bridge Domain ID: 0, Stats Pointer: 0xec1e64  
Split Horizon Group: VFI Enabled  
NP1  
Xconnect ID: 0xc0008001, NP: 1  
Type: Pseudowire (no control word)  
Flags: Learn enable, Type 5, Local replication, VPLS  
VC label hash, nR-LDI Hash: 0xab, R-LDI Hash: 0xb7, LAG Hash: 0x17,  
VC output label: 0x03e9e (16030), LDI: 0x0002, stats ptr: 0x0053025e  
Bridge Domain ID: 0, Stats Pointer: 0xec1e64  
Split Horizon Group: VFI Enabled  
NP2  
Xconnect ID: 0xc0008001, NP: 2  
Type: Pseudowire (no control word)  
Flags: Learn enable, Type 5, Local replication, VPLS  
VC label hash, nR-LDI Hash: 0xab, R-LDI Hash: 0xb7, LAG Hash: 0x17,  
VC output label: 0x03e9e (16030), LDI: 0x0002, stats ptr: 0x00530306  
Bridge Domain ID: 0, Stats Pointer: 0xec1e64  
Split Horizon Group: VFI Enabled  
NP3  
Xconnect ID: 0xc0008001, NP: 3  
Type: Pseudowire (no control word)  
Flags: Learn enable, Type 5, Local replication, VPLS  
VC label hash, nR-LDI Hash: 0xab, R-LDI Hash: 0xb7, LAG Hash: 0x17,  
VC output label: 0x03e9e (16030), LDI: 0x0002, stats ptr: 0x0053048e  
Bridge Domain ID: 0, Stats Pointer: 0xec1e66  
Split Horizon Group: VFI Enabled  
Nbor 209.165.200.228 pw-id 1  
Number of MAC: 0  
Statistics:  
  packets: received 0, sent 0  
  bytes: received 0, sent 0  
Storm control drop counters:  
  packets: broadcast 0, multicast 0, unknown unicast 0  
  bytes: broadcast 0, multicast 0, unknown unicast 0  
Dynamic arp inspection drop counters:  
  packets: 0, bytes: 0  
IP source guard drop counters:  
  packets: 0, bytes: 0  
Statistics P2MP:  
  packets: received 0  
  bytes: received 0  
Platform Bridge Port context:  
Last notification sent at: 02/18/2014 21:58:55  
Ingress State: Bound  
Flags: None  
**P2MP PW enabled, P2MP Role: tail**  
**Platform PW context:**  
**Ingress PW: VPLS, State: Bound**  
XID: 0xc0008002, bridge: 0, MAC limit: 4000, l2vpn ldi index: 0x0003, vc label:

16045, nr\_ldi\_hash: 0x7b, r\_ldi\_hash: 0xb3, lag\_hash: 0xa8, SHG: VFI Enabled  
Flags: MAC Limit Port Level  
Port Learn Key: 0  
Trident Layer Flags: None  
Slot flood mask rack 0: 0x0 rack 1: 0x0 NP flood mask: 0x0000  
Primary L3 path: ifhandle: 0x02000100, sfp\_or\_lagid: 0x00d2  
Backup L3 path: Not set  
NP0  
Xconnect ID: 0xc0008002, NP: 0  
Type: Pseudowire (no control word)  
Flags: Learn enable, Type 5, Local replication, VPLS  
VC label hash, nR-LDI Hash: 0x7b, R-LDI Hash: 0xd6, LAG Hash: 0xa8,  
VC output label: 0x03ead (16045), LDI: 0x0003, stats ptr: 0x00530264  
Bridge Domain ID: 0, Stats Pointer: 0xec1e66  
Split Horizon Group: VFI Enabled  
NP1  
Xconnect ID: 0xc0008002, NP: 1  
Type: Pseudowire (no control word)  
Flags: Learn enable, Type 5, Local replication, VPLS  
VC label hash, nR-LDI Hash: 0x7b, R-LDI Hash: 0xd6, LAG Hash: 0xa8,  
VC output label: 0x03ead (16045), LDI: 0x0003, stats ptr: 0x00530264  
Bridge Domain ID: 0, Stats Pointer: 0xec1e66  
Split Horizon Group: VFI Enabled  
NP2  
Xconnect ID: 0xc0008002, NP: 2  
Type: Pseudowire (no control word)  
Flags: Learn enable, Type 5, Local replication, VPLS  
VC label hash, nR-LDI Hash: 0x7b, R-LDI Hash: 0xd6, LAG Hash: 0xa8,  
VC output label: 0x03ead (16045), LDI: 0x0003, stats ptr: 0x0053030c  
Bridge Domain ID: 0, Stats Pointer: 0xec1e66  
Split Horizon Group: VFI Enabled  
NP3  
Xconnect ID: 0xc0008002, NP: 3  
Type: Pseudowire (no control word)  
Flags: Learn enable, Type 5, Local replication, VPLS  
VC label hash, nR-LDI Hash: 0x7b, R-LDI Hash: 0xd6, LAG Hash: 0xa8,  
VC output label: 0x03ead (16045), LDI: 0x0003, stats ptr: 0x00530494  
Bridge Domain ID: 0, Stats Pointer: 0xec1e68  
Split Horizon Group: VFI Enabled

RP/0/RSP0/CPU0:PE1#