

基本設定およびトラブルシューティングを記録するコール

目次

[概要](#)

[前提条件](#)

[要件](#)

[使用するコンポーネント](#)

[コール記録の型](#)

[自動 \(Automatic \)](#)

[呼び出されるアプリケーション](#)

[選択的](#)

[ゲートウェイ ベース](#)

[SIP 統合だけのための自動呼記録設定](#)

[記録宛先に SIP トランクを作成して下さい](#)

[記録プロファイルを作成して下さい](#)

[記録呼び出しをルーティングするためにルートパターンを作成して下さい](#)

[電話線に記録プロファイルを割り当てて下さい](#)

[に胸当ておよび Phone Configuration ページのプライバシーをに設定して下さい](#)

[確認](#)

[SCCP](#)

[SIP](#)

[トラブルシューティング](#)

[コーデックのネゴシエーション](#)

[CSS および PT 問題を含むミスコンフィギュレーション](#)

概要

この資料は Cisco Unified Communications Manager (CUCM) の内に記録するコールの基本を期待されたメディア フローします、Session Initiation Protocol (SIP) および Skinny Client Control Protocol (SCCP) デバイスのための期待されたコール フロー、およびセットアップ失敗を記録するコールのよくある タイプの例記述したものです。

前提条件

要件

サードパーティ記録サーバと統合 CUCM。

使用するコンポーネント

CUCM、Cisco IP Phone (IP はインターネット プロトコルです)、およびサーバを記録するコール。


コール記録の型

自動 (Automatic)

自動呼記録のキーエレメントは下記のようにあります:

- IP Phone の構築ブリッジをオーディオ「分岐するのに記録宛先に」使用します
- IP Phone がコールを送信するか、またはコールを受信する度に始められる
- CUCM と記録宛先間の SIP トランクだけ必要とします。 何人かの記録ベンダーは CTI (コンピュータ テレフォニー インテグレーション) 統合を必要とします
- 管理された ネットワークの外にある電話の記録を許可しません (-ブリッジ RTP を直接記録はサーバに送信し、組み込みを割り当てることができる Cisco IP Phone であるアクセスできなければなりません)

下記の図で実線は期待されたメディアをフローします表し、破線は期待されたシグナリング フローを表します:

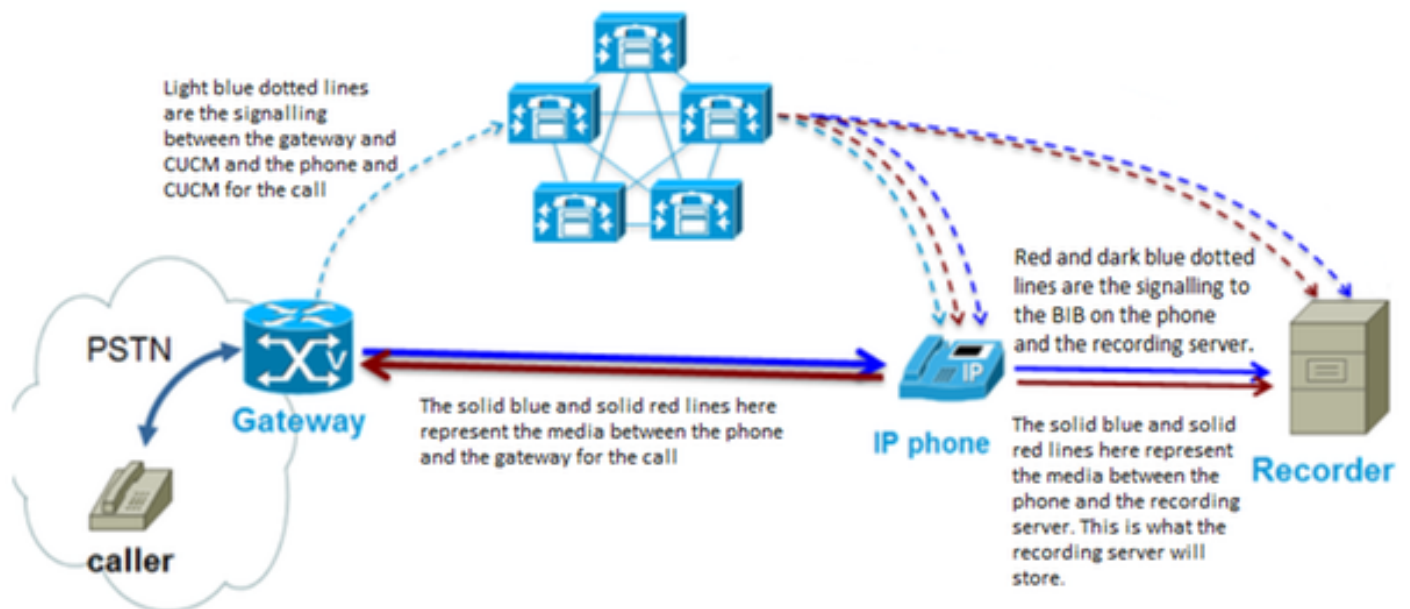


呼び出されるアプリケーション

アプリケーションによって呼び出されるコール記録のキーエレメントは下記のようにあります:

- IP Phone の構築ブリッジをオーディオ「分岐するのに記録宛先に」使用します
- 始める必要があることをアプリケーション (レコーダー) が定める時始められる
- 記録アプリケーションの SIP トランクおよび CTI 統合を必要とします
- CTI アプリケーションのユーザーは記録される必要があるエンドポイントにアクセスできなければなりません
- 管理された ネットワークの外にある電話の記録を許可しません (記録はサーバに RTP を直接送信するアクセスできなければなりません)

下記の図で実線は期待されたメディアをフローします表し、破線は期待された信号を送る flow を表します。 CUCM と記録サーバ間の実線は CUCM とアプリケーション間の CTI 接続を表示します。

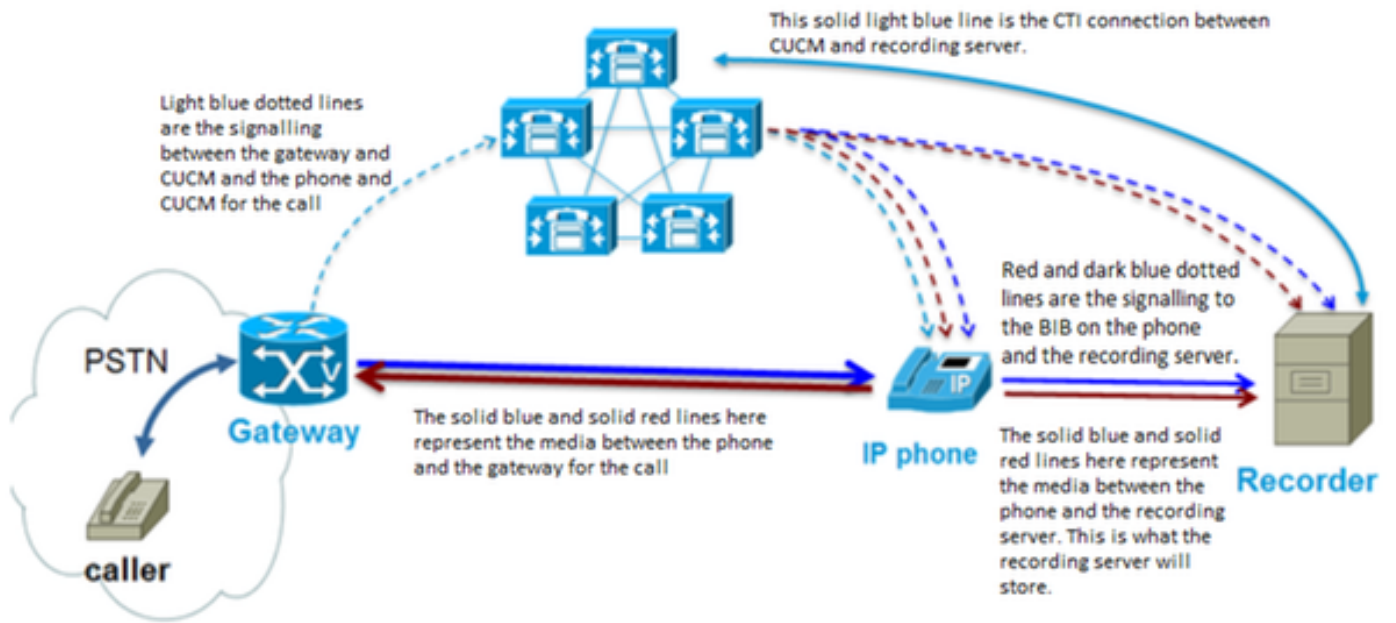


選択的

選択的なコール記録のキーエレメントは下記のようにあります:

- IP Phone の構築ブリッジをオーディオ「分岐するのに記録宛先に」使用します
- IP電話ユーザが IP Phone (CUCM 9.x+) のまたは [このイメージ](#) のようなアプリケーションの記録オプションを選択する度に始められる
- 通常 CUCM と記録宛先間の SIP トランクだけ必要とします (記録アプリケーションベンダーによって)
- 電話の記録に管理された ネットワークの外のそのうそを与えません (記録はサーバに RTP を直接送信 するアクセスできなければなりません)

下記の図を見てわかるようにメディアおよびシグナルパスは自動呼記録に非常に類似したです:

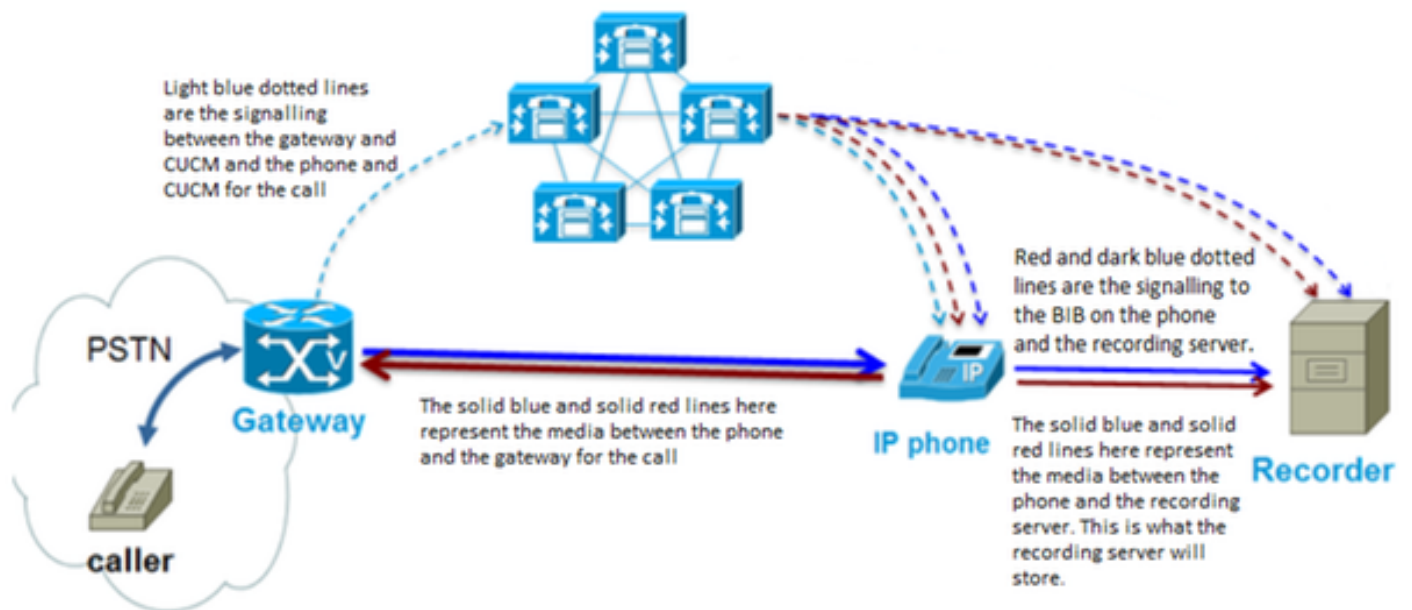


ゲートウェイベース

ゲートウェイbasedcall 記録のキーエレメントは下記のようにあります:

- 音声ゲートウェイはメディア記録宛先の方の分岐します
- アプリケーションとしてゲートウェイが付いている CUCM 登録
- CUCM は記録宛先にメディアを流すように GW に指示するのに HTTP を使用します
- CUCM は SIP トランクによって記録宛先と統合
- 呼び出しのことに単にパススルー 管理された ネットワーク (たとえば、モバイルユーザに) または胸当てをサポートしない電話のための記録を許可します

下記の図からわかるようにメディアはコール記録の他の型とかなり異なっていますフローします:

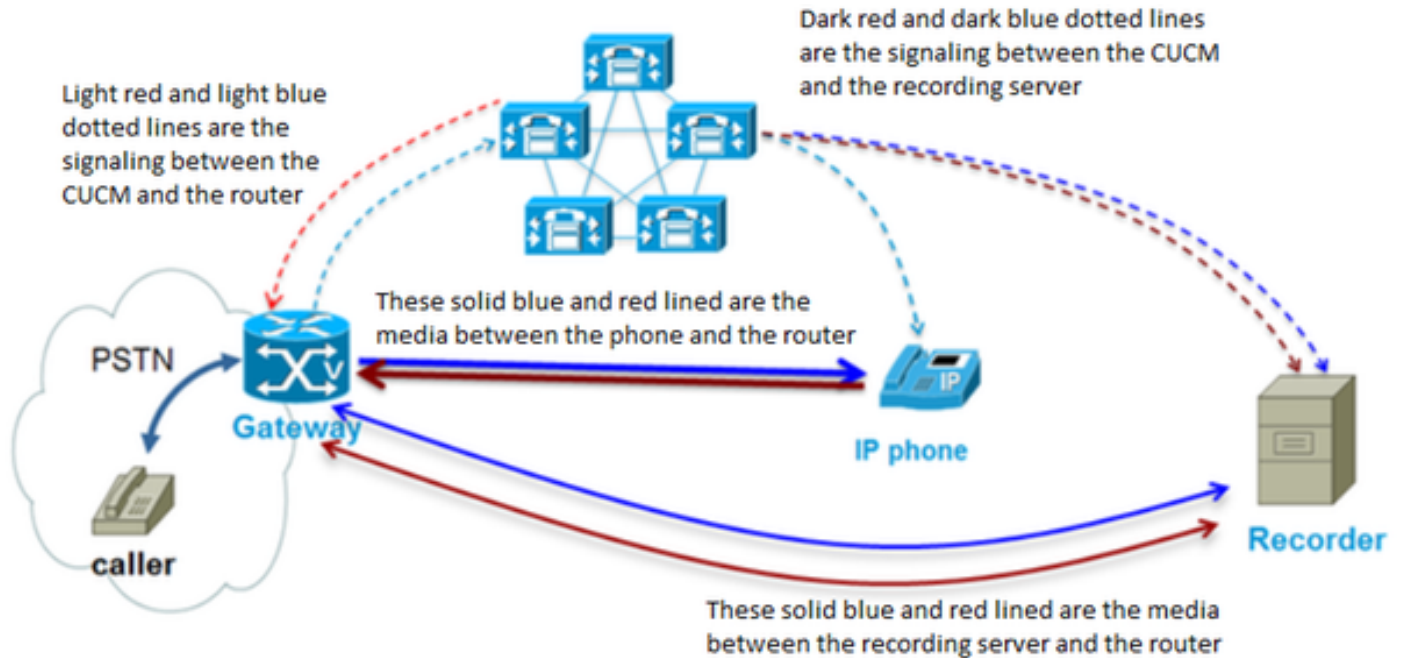

SIP 統合だけのための自動呼記録設定

このセクションは記録サーバの SIP 統合を設定する方法を記述します。


記録宛先に SIP トランクを作成して下さい

- デバイス > トランクの下で、『Add New』を選択して下さい
- 次の設定で SIP トランクを作成して下さい:

Trunk Configuration



Status

 Status: Ready

Trunk Information

Trunk Type* SIP Trunk ▼
Device Protocol* SIP ▼
Trunk Service Type* None(Default) ▼

Next

- 適切なデバイス名、デバイスプール、MRGL、SIP トランク セキュリティプロファイルおよび SIP プロファイルを入力して下さい
- 設定された宛先アドレスは記録アプリケーションサーバのアドレスです。下記の例で記録サーバは 14.48.32.170 です

-SIP Information

Destination





Destination Address is an SRV

	Destination Address	Destination Address IPv6	Destination Port
1*	14.48.32.170		5060


記録プロファイルを作成して下さい

- デバイス > デバイス設定 > 記録プロファイルの下
- 記録宛先アドレスは記録呼び出しが発信される場所です

Recording Profile Configuration

 Save
  Delete
  Copy
  Add New

Status

 Status: Ready

Recording Profile Information

Name*

Recording Calling Search Space

Recording Destination Address *

記録呼び出しをルーティングするためにルートパターンを作成して下さい

- 前の手順で設定される記録宛先アドレスと一致するルートパターンを作成して下さい
- 冗長 SIP トランクを設定したい場合 SIP トランクで Route リストをの代りに直接指すことができます

以下の事項に注意して下さい:このルートパターンに割り当てられるパーティションは記録 Calling Search Space と関連付ける必要があります。

Pattern Definition

Route Pattern*	<input type="text" value="8675309"/>
Route Partition	<input type="text" value="INTERNAL_PT"/>
Description	<input type="text"/>
Numbering Plan	<input type="text" value="-- Not Selected --"/>
Route Filter	<input >")"="" none="" type="text" value("<=""/>
MLPP Precedence*	<input type="text" value="Default"/>
<input type="checkbox"/> Apply Call Blocking Percentage	<input type="text"/>
Resource Priority Namespace Network Domain	<input >")"="" none="" type="text" value("<=""/>
Route Class*	<input type="text" value="Default"/>
Gateway/Route List*	<input type="text" value="RecordingTrunk"/> (Edit)
Route Option	<input checked="" type="radio"/> Route this pattern

電話線に記録プロファイルを割り当てて下さい

- 既存の拡張を用いる既に作成された電話で、作成される記録プロファイルを割り当てて下さい
- この位置に同様に記録するコールの種類を割り当てて下さい
- この例は自動記録を示したものです

Recording Option*	Automatic Call Recording Enabled
Recording Profile	Test Recording Profile
Recording Media Source*	Phone Preferred
Monitoring Calling Search Space	< None >

に胸当ておよび Phone Configuration ページのプライバシーをに設定して下さい

デバイスコンフィギュレーション ページで seciont へのナビゲートがデバイス情報にタイトルを付ける間。 にブリッジおよびにプライバシーで構築されて設定して下さい。

Built In Bridge*	On
Privacy*	Off

確認

下記は SCCP および SIP のための CallManagerトレースの予期された動作電話をかけます上の設定を与えられてです。 これらの例は電話のため電話の 1 つがコール記録のために設定される間、同じクラスタのもう一つの電話です。

SCCP

```
~~~~~
Normal CCM Traces for SCCP phone to SCCP phone with SIP Integrated Call Recording
~~~~~
```

```
### Calling phone places call
```

```
03796977.001 |20:21:08.055 |AppInfo |StationInit: (0000109) SoftKeyEvent softKeyEvent=1(Redial)
lineInstance=0 callReference=0.### CUCM performs digit analysis against the dialed digits
(dd="9110001")
```

```
03797017.001 |20:21:08.057 |AppInfo |Digit Analysis: star_DaReq: daReq.partitionSearchSpace(),
filteredPartitionSearchSpaceString(), partitionSearchSpaceString()
```

```
03797017.002 |20:21:08.057 |AppInfo |Digit Analysis: star_DaReq: Matching Legacy Numeric,
digits=9110001
```

```
03797017.003 |20:21:08.057 |AppInfo |Digit Analysis: getDaRes data&colon; daRes.ssType=[0]
Intercept DAMR.sstype=[0], TPcount=[0], DAMR.NotifyCount=[0], DaRes.NotifyCount=[0]
```

```
03797017.004 |20:21:08.057 |AppInfo |Digit Analysis: getDaRes - Remote Destination [] isURI[1]
```

```
03797017.005 |20:21:08.057 |AppInfo |Digit analysis: patternUsage=2
```

```
03797017.006 |20:21:08.057 |AppInfo |Digit analysis: match(pi="2", fqcn="9110006",
cn="9110006",plv="5", pss="", TodFilteredPss="", dd="9110001",dac="0")
```

```
03797017.007 |20:21:08.057 |AppInfo |Digit analysis: analysis results
```

```
03797017.008 |20:21:08.057 |AppInfo ||PretransformCallingPartyNumber=9110006
```

```
|CallingPartyNumber=9110006
```

```
|DialingPartition=
```

```
|DialingPattern=9110001
```

```
|FullyQualifiedCalledPartyNumber=9110001
```

```
|DialingPatternRegularExpression=(9110001)
```

```
|DialingWhere=
```

```
|PatternType=Enterprise
```

```
|PotentialMatches=NoPotentialMatchesExist
```

```
|DialingSdlProcessId=(0,0,0)
```

```
|PretransformDigitString=9110001
```

```
|PretransformTagsList=SUBSCRIBER
|PretransformPositionalMatchList=9110001
|CollectedDigits=9110001 ### CUCM determines call must stay on same node; go to LineControl
(PID=LineControl(2,100,174,137))

03797019.001 |20:21:08.058 |AppInfo |Digit analysis: wait_DmPidRes- Partition=[]
Pattern=[9110001] Where=[],cmDeviceType=[UserDevice], OutsideDialtone =[0], DeviceOverride=[0],
PID=LineControl(2,100,174,137),CI=[38960749],Sender=Cdcc(2,100,219,29)### CUCM extends call to
phone

03797036.003 |20:21:08.058 |AppInfo |StationD: (0000114) DEBUG whatToDo: line=1 calls=0
limit=4, busy=2. GCI=(2, 5033), cm_PL=(5, 0).
03797036.004 |20:21:08.058 |AppInfo |StationD: (0000114) DEBUG whatToDo: busy trigger not
hit... send to open appearance
03797036.005 |20:21:08.058 |AppInfo |preFilterCapCount =[11], preFilterCaps :: (Cap)= (25) (6)
(4) (2) (7) (8) (15) (16) (11) (12) (257) Filtering Caps due to Service Parameter Configuration
postFilterCapCount =[8], postFilterCaps :: (Cap)= (25) (4) (2) (15) (16) (11) (12) (257)
03797036.006 |20:21:08.058 |AppInfo |preFilterCapCount =[0], preFilterCaps :: (Cap)= Filtering
Caps due to Service Parameter Configuration postFilterCapCount =[0], postFilterCaps :: (Cap)=
03797036.007 |20:21:08.058 |Created | |
|StationCdpc(2,100,64,22) |StationD(2,100,63,114) |
|NumOfCurrentInstances: 2
03797036.008 |20:21:08.058 |AppInfo |StationD: (0000114) DEBUG- getLineRingSetting:
retVal=4.
03797036.009 |20:21:08.058 |AppInfo |StationD: (0000114) DEBUG- saveRinger for: ci=38960750,
line=1, mode=2, cm_precedence=5, callPhase=5.
03797036.010 |20:21:08.058 |AppInfo |StationD: (0000114) DEBUG- saveRinger: ci=38960750,
line=1, mode=2, cm_precedence=5, callPhase=5, modifier=0
03797036.011 |20:21:08.058 |AppInfo |StationD: (0000114) INFO sendCallAcceptReq: Try to
send StationLineCallAccept to cdpc=22 .
03797036.012 |20:21:08.058 |AppInfo |StationD: (0000114) playRinger for: ci=38960750.
03797036.013 |20:21:08.058 |AppInfo |StationD: (0000114) DEBUG- getLineRingSetting:
retVal=4.
03797036.014 |20:21:08.058 |AppInfo |StationD: (0000114) DEBUG- getLineRingSetting:
retVal=4.
03797036.015 |20:21:08.058 |AppInfo |StationD: (0000114) DEBUG- getLineRingSetting:
retVal=4.### Called (recorded) phone goes off hook

03797089.001 |20:21:09.335 |AppInfo |StationD: (0000114) restart0_StationOffHook - INFO:
CI=38960750 on line=1, SPKMode=0, alwaysPrimeLine=0, alwaysUsePrimeLineForVM=0, fid=0,
offHookTrigger=0.### CUCM Tells the calling phone to open the logical channel

03797153.001 |20:21:09.337 |AppInfo |StationD: (0000109) SEP0018195AA209 ,
star_MediaExchangeAgenaOpenLogicalChannel packetSize=20, codec=4, ci=38960749### CUCM Tells the
called (recorded party) phone to open the logical channel

03797156.001 |20:21:09.337 |AppInfo |StationD: (0000114) SEP001795BDD16B ,
star_MediaExchangeAgenaOpenLogicalChannel packetSize=20, codec=4, ci=38960750### CUCM Tells the
calling phone to open the receive channel

03797164.002 |20:21:09.337 |AppInfo |StationD: (0000109) OpenReceiveChannel
conferenceID=38960749 passThruPartyID=33554450 millisecondPacketSize=20
compressionType=4(Media_Payload_G711Ulaw64k) RFC2833PayloadType=0 qualifierIn=?
sourceIpAddr=IpAddr.type:0 ipAddr:0x0e302021000000000000000000000000(14.48.32.33). myIP:
IpAddr.type:0 ipv4Addr:0x0e30201c(14.48.32.28)### CUCM Tells the called (recorded party) phone
to open the receive channel

03797168.002 |20:21:09.337 |AppInfo |StationD: (0000114) OpenReceiveChannel
conferenceID=38960750 passThruPartyID=33554451 millisecondPacketSize=20
compressionType=4(Media_Payload_G711Ulaw64k) RFC2833PayloadType=0 qualifierIn=?
sourceIpAddr=IpAddr.type:0 ipAddr:0x0e30201c000000000000000000000000(14.48.32.28). myIP:
IpAddr.type:0 ipv4Addr:0x0e302021(14.48.32.33)### CUCM allocates BIB on called (recorded) phone
```


03797210.000 |20:21:09.338 |SdlSig |MrmAllocateUcbResourceReq |waiting
|MediaResourceManager(2,100,138,1) |Cc(2,100,220,1)
|2,100,14,8384.91^14.48.32.33^SEP001795BDD16B |[R:N-H:0,N:1,L:0,V:0,Z:0,D:0] CI=38960751
SsType=33554461 SsKey=9 BridgeType=0 MRGLPkid= NumStream=1 Bib=89cdb152-4ef2-4d60-9e6b-
ab8c77c22618 BibTgCi=38960750 FeatId=159 PL=5 PLDmn=0 DeviceCapability=0 NumVideoCapable=0
requestDeviceType=0 requestDeviceLocale=64 forkingDevicePosition=2 playToneDir=3### BiB places
first call to recording destination address (cn is calling party which is the BiB
cn="b00223908001" and it is dialing the recordingdestination dd="8675309")

03797269.001 |20:21:09.340 |AppInfo |Digit Analysis: star_DaReq: daReq.partitionSearchSpace(),
filteredPartitionSearchSpaceString(), partitionSearchSpaceString()
03797269.002 |20:21:09.340 |AppInfo |Digit Analysis: star_DaReq: Matching Legacy Numeric,
digits=8675309
03797269.003 |20:21:09.340 |AppInfo |Digit Analysis: getDaRes data: daRes.ssType=[0] Intercept
DAMR.sstype=[0], TPcount=[0], DAMR.NotifyCount=[0], DaRes.NotifyCount=[0]
03797269.004 |20:21:09.340 |AppInfo |Digit Analysis: getDaRes - Remote Destination [8675309]
isURI[0]
03797269.005 |20:21:09.340 |AppInfo |CMUtility routeCallThroughCTIRD: no matching
RemDestDynamic record exists for remdest [8675309]
03797269.006 |20:21:09.340 |AppInfo |DbMobility: getMatchedRemDest starts: cnumber = 8675309
03797269.007 |20:21:09.340 |AppInfo |DbMobility: getMatchedRemDest: full match case
03797269.008 |20:21:09.340 |AppInfo |DbMobility SelectByDestination: no matching RemDestDynamic
record exists for remdest [8675309]
03797269.009 |20:21:09.340 |AppInfo |DbMobility: can't find remdest 8675309 in map
03797269.010 |20:21:09.340 |AppInfo |Digit analysis: patternUsage=5
03797269.011 |20:21:09.340 |AppInfo |Digit analysis: match(pi="1", fqcn="",
cn="b00223908001",plv="5", pss="E911_PT:Phones_PT:EMERGENCY_PT:INTERNAL_PT:INFORMACAST_PT",
TodFilteredPss="E911_PT:Phones_PT:EMERGENCY_PT:INTERNAL_PT:INFORMACAST_PT",
dd="8675309",dac="0")
03797269.012 |20:21:09.340 |AppInfo |Digit analysis: analysis results
03797269.013 |20:21:09.340 |AppInfo ||PretransformCallingPartyNumber=b00223908001
|CallingPartyNumber=b00223908001
|DialingPartition=
|DialingPattern=8675309
|FullyQualifiedCalledPartyNumber=8675309
|DialingPatternRegularExpression=(8675309)
|DialingWhere=
|PatternType=Enterprise
|PotentialMatches=NoPotentialMatchesExist
|DialingSdlProcessId=(0,0,0)
|PretransformDigitString=8675309
|PretransformTagsList=SUBSCRIBER
|PretransformPositionalMatchList=8675309
|CollectedDigits=8675309 ### CUCM sends INVITE #1 to configured recording server (14.48.32.170)

03797320.001 |20:21:09.343 |AppInfo |//SIP/SIPUdp/wait_SdlSPISignal: Outgoing SIP UDP message
to 14.48.32.170:[5060]:
[212231,NET]
INVITE sip:8675309@14.48.32.170:5060 SIP/2.0
Via: SIP/2.0/UDP 14.48.32.90:5060;branch=z9hg4bk204d520fedb3
From: <sip:9110001@14.48.32.90;x-nearend;x-refci=38960750;x-nearendclusterid=glencucm10-5;x-
nearenddevice=sep001795bdd16b;x-nearendaddr=9110001;x-farendrefci=38960749;x-
farendclusterid=glencucm10-5;x-farenddevice=sep0018195aa209;x-
farendaddr=9110006>;tag=73601~713e2333-4032-45f1-b1f5-e33cf471acec-38960754
To: <sip:8675309@14.48.32.170>
Date: Tue, 30 Sep 2014 00:21:09 GMT
Call-ID: abbb8e00-4291f775-204c-5a20300e@14.48.32.90
Supported: timer,resource-priority,replaces
Min-SE: 1800
User-Agent: Cisco-CUCM10.5
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
CSeq: 101 INVITE
Expires: 180

Allow-Events: presence, kpml
Supported: X-cisco-srtp-fallback
Supported: Geolocation
Call-Info: ;method="NOTIFY;Event=telephone-event;Duration=500"
Cisco-Guid: 2881195520-0000065536-0000000011-1512058894
Session-Expires: 1800
P-Asserted-Identity: <sip:9110001@14.48.32.90>
Remote-Party-ID: <sip:9110001@14.48.32.90>;party=calling;screen=yes;privacy=off
Contact: <sip:9110001@14.48.32.90:5060>;isFocus
Max-Forwards: 70
Content-Length: 0 ### BiB places second call to recording destination address (cn is calling party which is the BiB cn="b00223908001" and it is dialing the recordingdestination dd="8675309")
Note that the BiB number stayed the same (b00223908001) and so did the recordingdestination number

03797367.010 |20:21:09.344 |AppInfo |Digit analysis: patternUsage=5
03797367.011 |20:21:09.344 |AppInfo |Digit analysis: match(pi="1", fqcn="", cn="b00223908001", plv="5", pss="E911_PT:Phones_PT:EMERGENCY_PT:INTERNAL_PT:INFORMACAST_PT", TodFilteredPss="E911_PT:Phones_PT:EMERGENCY_PT:INTERNAL_PT:INFORMACAST_PT", dd="8675309", dac="0")
03797367.012 |20:21:09.344 |AppInfo |Digit analysis: analysis results
03797367.013 |20:21:09.344 |AppInfo ||PretransformCallingPartyNumber=b00223908001
|CallingPartyNumber=b00223908001
|DialingPartition=
|DialingPattern=8675309
|FullyQualifiedCalledPartyNumber=8675309
|DialingPatternRegularExpression=(8675309)
|DialingWhere=
|PatternType=Enterprise
|PotentialMatches=NoPotentialMatchesExist
|DialingSdlProcessId=(0,0,0)
|PretransformDigitString=8675309
|PretransformTagsList=SUBSCRIBER
|PretransformPositionalMatchList=8675309
|CollectedDigits=8675309 ### CUCM receives 200 OK in response to INVITE #1

03797390.001 |20:21:09.345 |AppInfo |//SIP/SIPUdp/wait_SdlDataInd: Incoming SIP UDP message size 737 from 14.48.32.170:[5060]:
[212232,NET]
SIP/2.0 200 OK
Via: SIP/2.0/UDP 14.48.32.90:5060;branch=z9hG4bK204d520fedb3
From: <sip:9110001@14.48.32.90;x-nearend;x-refci=38960750;x-nearendclusterid=glenscucm10-5;x-nearenddevice=sep001795bdd16b;x-nearendaddr=9110001;x-farendrefci=38960749;x-farendclusterid=glenscucm10-5;x-farenddevice=sep0018195aa209;x-farendaddr=9110006>;tag=73601~713e2333-4032-45f1-b1f5-e33cf471lacec-38960754
To: <sip:8675309@14.48.32.170>;tag=1
Call-ID: abbb8e00-4291f775-204c-5a20300e@14.48.32.90
CSeq: 101 INVITE
Contact: <sip:14.48.32.170:5060;transport=udp>
Content-Type: application/sdp
Content-Length: 135

v=0
o=user1 53655765 2353687637 IN IP4 14.48.32.170
s=-
c=IN IP4 14.48.32.170
t=0 0
m=audio 6000 RTP/AVP 0
a=rtpmap:0 PCMU/8000 ### CUCM sends INVITE #2 to recording server (14.48.32.170)

03797445.001 |20:21:09.348 |AppInfo |//SIP/SIPUdp/wait_SdlSPISignal: Outgoing SIP UDP message to 14.48.32.170:[5060]:

[212233,NET]

INVITE sip:8675309@14.48.32.170:5060 SIP/2.0

Via: SIP/2.0/UDP 14.48.32.90:5060;branch=z9hG4bK204e754eaeae

From: <sip:9110001@14.48.32.90;x-farend;x-refci=38960750;x-nearendclusterid=glenscucm10-5;x-nearenddevice=sep001795bdd16b;x-nearendaddr=9110001;x-farendrefci=38960749;x-farendclusterid=glenscucm10-5;x-farenddevice=sep0018195aa209;x-farendaddr=9110006>;tag=73602~713e2333-4032-45f1-b1f5-e33cf471acec-38960757

To: <sip:8675309@14.48.32.170>

Date: Tue, 30 Sep 2014 00:21:09 GMT

Call-ID: abbb8e00-4291f775-204d-5a20300e@14.48.32.90

Supported: timer,resource-priority,replaces

Min-SE: 1800

User-Agent: Cisco-CUCM10.5

Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY

CSeq: 101 INVITE

Expires: 180

Allow-Events: presence, kpml

Supported: X-cisco-srtp-fallback

Supported: Geolocation

Call-Info: ;method="NOTIFY;Event=telephone-event;Duration=500"

Cisco-Guid: 2881195520-0000065536-0000000012-1512058894

Session-Expires: 1800

P-Asserted-Identity: <sip:9110001@14.48.32.90>

Remote-Party-ID: <sip:9110001@14.48.32.90>;party=calling;screen=yes;privacy=off

Contact: <sip:9110001@14.48.32.90:5060>;isFocus

Max-Forwards: 70

Content-Length: 0 ### CUCM receives 200 OK in response to INVITE #2

03797498.001 |20:21:09.350 |AppInfo |//SIP/SIPUdp/wait_SdlDataInd: Incoming SIP UDP message size 736 from 14.48.32.170:[5060]:

[212235,NET]

SIP/2.0 200 OK

Via: SIP/2.0/UDP 14.48.32.90:5060;branch=z9hG4bK204e754eaeae

From: <sip:9110001@14.48.32.90;x-farend;x-refci=38960750;x-nearendclusterid=glenscucm10-5;x-nearenddevice=sep001795bdd16b;x-nearendaddr=9110001;x-farendrefci=38960749;x-farendclusterid=glenscucm10-5;x-farenddevice=sep0018195aa209;x-farendaddr=9110006>;tag=73602~713e2333-4032-45f1-b1f5-e33cf471acec-38960757

To: <sip:8675309@14.48.32.170>;tag=2

Call-ID: abbb8e00-4291f775-204d-5a20300e@14.48.32.90

CSeq: 101 INVITE

Contact: <sip:14.48.32.170:5060;transport=udp>

Content-Type: application/sdp

Content-Length: 135

v=0

o=user1 53655765 2353687637 IN IP4 14.48.32.170

s=-

c=IN IP4 14.48.32.170

t=0 0

m=audio 6000 RTP/AVP 0

a=rtpmap:0 PCMU/8000 ### CUCM sends outbound ACK in response to 200 OK #1

03797500.001 |20:21:09.351 |AppInfo |//SIP/SIPUdp/wait_SdlSPISignal: Outgoing SIP UDP message to 14.48.32.170:[5060]:

[212236,NET]

ACK sip:14.48.32.170:5060;transport=UDP SIP/2.0

Via: SIP/2.0/UDP 14.48.32.90:5060;branch=z9hG4bK204f50bef815

From: <sip:9110001@14.48.32.90;x-nearend;x-refci=38960750;x-nearendclusterid=glenscucm10-5;x-nearenddevice=sep001795bdd16b;x-nearendaddr=9110001;x-farendrefci=38960749;x-farendclusterid=glenscucm10-5;x-farenddevice=sep0018195aa209;x-farendaddr=9110006>;tag=73601~713e2333-4032-45f1-b1f5-e33cf471acec-38960754

To: <sip:8675309@14.48.32.170>;tag=1

Date: Tue, 30 Sep 2014 00:21:09 GMT

Call-ID: abbb8e00-4291f775-204c-5a20300e@14.48.32.90
User-Agent: Cisco-CUCM10.5
Max-Forwards: 70
CSeq: 101 ACK
Allow-Events: presence, kpml
Content-Type: application/sdp
Content-Length: 254

v=0
o=CiscoSystemsCCM-SIP 73601 1 IN IP4 14.48.32.90
s=SIP Call
c=IN IP4 14.48.32.33
b=TIAS:64000
b=CT:64
b=AS:64
t=0 0
m=audio 4000 RTP/AVP 0 101
a=ptime:20
a=rtpmap:0 PCMU/8000
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15 ### CUCM sends startMediaTransmission to the called (recorded) phone telling the phone to send RTP to recording server (14.48.32.170)

03797479.001 |20:21:09.350 |AppInfo |StationD: (0000114) startMediaTransmission
conferenceID=38960750 passThruPartyID=33554452 remoteIpAddress=IpAddr.type:0
ipAddr:0x0e3020aa000000000000000000000000(14.48.32.170) remotePortNumber=6000
milliSecondPacketSize=20 compressType=4(Media_Payload_G711Ulaw64k) RFC2833PayloadType=0
qualifierOut=?. myIP: IpAddr.type:0 ipv4Addr:0x0e302021(14.48.32.33)### CUCM sends
startMediaTransmission #2 to the called (recorded) phone telling the phone to send RTP to
recording server (14.48.32.170)

03797596.001 |20:21:09.354 |AppInfo |StationD: (0000114) startMediaTransmission
conferenceID=38960750 passThruPartyID=33554453 remoteIpAddress=IpAddr.type:0
ipAddr:0x0e3020aa000000000000000000000000(14.48.32.170) remotePortNumber=6000
milliSecondPacketSize=20 compressType=4(Media_Payload_G711Ulaw64k) RFC2833PayloadType=0
qualifierOut=?. myIP: IpAddr.type:0 ipv4Addr:0x0e302021(14.48.32.33)### CUCM sends outbound ACK
in response to 200 OK #2

03797615.001 |20:21:09.354 |AppInfo |//SIP/SIPUdp/wait_SdlSPISignal: Outgoing SIP UDP message
to 14.48.32.170:[5060]:

[212237,NET]

ACK sip:14.48.32.170:5060;transport=UDP SIP/2.0

Via: SIP/2.0/UDP 14.48.32.90:5060;branch=z9hG4bK2050183495f1

From: <sip:9110001@14.48.32.90;x-farend;x-refci=38960750;x-nearendclusterid=glenscucm10-5;x-
nearenddevice=sep001795bdd16b;x-nearendaddr=9110001;x-farendrefci=38960749;x-
farendclusterid=glenscucm10-5;x-farenddevice=sep0018195aa209;x-
farendaddr=9110006>;tag=73602~713e2333-4032-45f1-b1f5-e33cf471acec-38960757

To: <sip:8675309@14.48.32.170>;tag=2

Date: Tue, 30 Sep 2014 00:21:09 GMT

Call-ID: abbb8e00-4291f775-204d-5a20300e@14.48.32.90

User-Agent: Cisco-CUCM10.5

Max-Forwards: 70

CSeq: 101 ACK

Allow-Events: presence, kpml

Content-Type: application/sdp

Content-Length: 254

v=0
o=CiscoSystemsCCM-SIP 73602 1 IN IP4 14.48.32.90
s=SIP Call
c=IN IP4 14.48.32.33
b=TIAS:64000

b=CT:64
b=AS:64
t=0 0
m=audio 4000 RTP/AVP 0 101
a=ptime:20
a=rtpmap:0 PCMU/8000
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15 ### Calling phone sends CUCM the ORC ACK

03797634.001 |20:21:09.385 |AppInfo |StationInit: (0000109) OpenReceiveChannelAck Status=0, IpAddr=IpAddr.type:0 ipAddr:0x0e30201c000000000000000000000000(14.48.32.28), Port=17996, PartyID=33554450### CUCM sends startMediaTransmission to the called (recorded) phone telling the phone to send RTP to the calling phone (14.48.32.28)

03797642.001 |20:21:09.385 |AppInfo |StationD: (0000114) startMediaTransmission conferenceID=38960750 passThruPartyID=33554451 remoteIpAddress=IpAddr.type:0 ipAddr:0x0e30201c000000000000000000000000(14.48.32.28) remotePortNumber=17996 milliSecondPacketSize=20 compressType=4(Media_Payload_G711Ulaw64k) RFC2833PayloadType=0 qualifierOut=?. myIP: IpAddr.type:0 ipv4Addr:0x0e302021(14.48.32.33)### Called (recorded) phone sends CUCM the ORC ACK

03797643.001 |20:21:09.454 |AppInfo |StationInit: (0000114) OpenReceiveChannelAck Status=0, IpAddr=IpAddr.type:0 ipAddr:0x0e302021000000000000000000000000(14.48.32.33), Port=32588, PartyID=33554451### CUCM sends startMediaTransmission to the calling phone telling the phone to send RTP to the called phone (14.48.32.33)

03797655.001 |20:21:09.454 |AppInfo |StationD: (0000109) startMediaTransmission conferenceID=38960749 passThruPartyID=33554450 remoteIpAddress=IpAddr.type:0 ipAddr:0x0e302021000000000000000000000000(14.48.32.33) remotePortNumber=32588 milliSecondPacketSize=20 compressType=4(Media_Payload_G711Ulaw64k) RFC2833PayloadType=0 qualifierOut=?. myIP: IpAddr.type:0 ipv4Addr:0x0e30201c(14.48.32.28)

SIP

~~~~~  
Normal CCM Traces for SCCP phone to SIP phone with SIP Integrated Call Recording  
~~~~~

Calling phone places call

01314118.001 |11:18:44.472 |AppInfo |StationInit: (0000004) EnblocCall calledParty=9110011.
CUCM performs digit analysis against the dialed digits (dd="9110011")

01314127.001 |11:18:44.473 |AppInfo |Digit Analysis: star_DaReq: daReq.partitionSearchSpace(), filteredPartitionSearchSpaceString(), partitionSearchSpaceString()
01314127.002 |11:18:44.473 |AppInfo |Digit Analysis: star_DaReq: Matching Legacy Numeric, digits=9110011
01314127.003 |11:18:44.499 |AppInfo |Digit Analysis: getDaRes data: daRes.ssType=[0] Intercept DAMR.sstype=[0], TPcount=[0], DAMR.NotifyCount=[0], DaRes.NotifyCount=[0]
01314127.004 |11:18:44.499 |AppInfo |Digit Analysis: getDaRes - Remote Destination [] isURI[1]
01314127.005 |11:18:44.506 |AppInfo |Digit analysis: patternUsage=2
01314127.006 |11:18:44.506 |AppInfo |Digit analysis: match(pi="2", fqcn="9110006", cn="9110006", plv="5", pss="", TodFilteredPss="", dd="9110011", dac="1")
01314127.007 |11:18:44.506 |AppInfo |Digit analysis: analysis results
01314127.008 |11:18:44.506 |AppInfo ||PretransformCallingPartyNumber=9110006
|CallingPartyNumber=9110006
|DialingPartition=
|DialingPattern=9110011
|FullyQualifiedCalledPartyNumber=9110011
|DialingPatternRegularExpression=(9110011)
|DialingWhere=

|PatternType=Enterprise
|PotentialMatches=NoPotentialMatchesExist
|DialingSdlProcessId=(0,0,0)
|PretransformDigitString=9110011
|PretransformTagsList=SUBSCRIBER
|PretransformPositionalMatchList=9110011
|CollectedDigits=9110011 ### CUCM determines call must stay on same node and go to LineControl
(PID=LineControl(2,100,174,19))

01314129.001 |11:18:44.506 |AppInfo |Digit analysis: wait_DmPidRes- Partition=[]
Pattern=[9110011] Where=[],cmDeviceType=[UserDevice], OutsideDialtone =[0], DeviceOverride=[0],
PID=LineControl(2,100,174,19),CI=[47601637],Sender=Cdcc(2,100,219,1)### CUCM sends outbound
INVITE to called (recorded) phone

01314173.001 |11:18:44.754 |AppInfo |SIPTcp - wait_SdlSPISignal: Outgoing SIP TCP message to
14.48.32.17 on port 50841 index 17
[106316,NET]
INVITE sip:56ce4d7f-d3a2-40fd-a8b3-3f93c8832b9d@14.48.32.17:50841;transport=tcp SIP/2.0
Via: SIP/2.0/TCP 14.48.32.90:5060;branch=z9hG4bK203b13880683
From: <sip:9110006@14.48.32.90>;tag=38244~713e2333-4032-45f1-b1f5-e33cf471acec-47601638
To: <sip:9110011@14.48.32.90>
Date: Tue, 14 Oct 2014 15:18:44 GMT
Call-ID: 6198e780-43d13ed4-203c-5a20300e@14.48.32.90
Supported: timer,resource-priority,replaces
Min-SE: 1800
User-Agent: Cisco-CUCM10.5
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
CSeq: 101 INVITE
Expires: 180
Allow-Events: presence
Call-Info: ; security= Unknown; orientation= from; gci= 2-6001; isVoip; call-instance= 1
Send-Info: conference, x-cisco-conference
Alert-Info:
Remote-Party-ID: <sip:9110006@14.48.32.90;x-cisco-callback-
number=9110006>;party=calling;screen=yes;privacy=off
Contact: <sip:9110006@14.48.32.90:5060;transport=tcp>
Max-Forwards: 70
Content-Length: 0 ### Called (recorded) phone returns 100 Trying

01314174.002 |11:18:44.758 |AppInfo |SIPTcp - wait_SdlReadRsp: Incoming SIP TCP message from
14.48.32.17 on port 50841 index 17 with 802 bytes:
[106317,NET]
SIP/2.0 100 Trying
Via: SIP/2.0/TCP 14.48.32.90:5060;branch=z9hG4bK203b13880683
From: <sip:9110006@14.48.32.90>;tag=38244~713e2333-4032-45f1-b1f5-e33cf471acec-47601638
To: <sip:9110011@14.48.32.90>
Call-ID: 6198e780-43d13ed4-203c-5a20300e@14.48.32.90
Date: Tue, 14 Oct 2014 15:18:51 GMT
CSeq: 101 INVITE
Server: Cisco-CP8841/10.2.1
Contact: <sip:56ce4d7f-d3a2-40fd-a8b3-3f93c8832b9d@14.48.32.17:50841;transport=tcp>
Allow: ACK,BYE,CANCEL,INVITE,NOTIFY,OPTIONS,REFER,REGISTER,UPDATE,SUBSCRIBE,INFO
Supported: replaces,join,sdp-anat,norefersub,resource-priority,extended-refer,X-cisco-
callinfo,X-cisco-serviceuri,X-cisco-escapecodes,X-cisco-service-control,X-cisco-srtp-fallback,X-
cisco-monrec,X-cisco-config,X-cisco-sis-7.0.0,X-cisco-xsi-8.5.1
Allow-Events: kpml,dialog
Content-Length: 0 ### Called (recorded) phone returns 180 Ringing

01314178.002 |11:18:45.357 |AppInfo |SIPTcp - wait_SdlReadRsp: Incoming SIP TCP message from
14.48.32.17 on port 50841 index 17 with 950 bytes:
[106318,NET]
SIP/2.0 180 Ringing
Via: SIP/2.0/TCP 14.48.32.90:5060;branch=z9hG4bK203b13880683

From: <sip:9110006@14.48.32.90>;tag=38244~713e2333-4032-45f1-b1f5-e33cf471acec-47601638
To: <sip:9110011@14.48.32.90>;tag=b000b4d9e8cb0bba73e445ee-3cc7e650
Call-ID: 6198e780-43d13ed4-203c-5a20300e@14.48.32.90
Date: Tue, 14 Oct 2014 15:18:51 GMT
CSeq: 101 INVITE
Server: Cisco-CP8841/10.2.1
Contact: <sip:56ce4d7f-d3a2-40fd-a8b3-3f93c8832b9d@14.48.32.17:50841;transport=tcp>
Allow: ACK,BYE,CANCEL,INVITE,NOTIFY,OPTIONS,REFER,REGISTER,UPDATE,SUBSCRIBE,INFO
Remote-Party-ID: "9110011" <sip:9110011@14.48.32.90>;party=called;id-
type=subscriber;privacy=off;screen=yes
Supported: replaces,join,sdp-anat,norefersub,resource-priority,extended-refer,X-cisco-
callinfo,X-cisco-serviceuri,X-cisco-escapecodes,X-cisco-service-control,X-cisco-srtp-fallback,X-
cisco-monrec,X-cisco-config,X-cisco-sis-7.0.0,X-cisco-xsi-8.5.1
Allow-Events: kpml,dialog
Content-Length: 0 ### Called (recorded) phone returns 200 OK

01314217.002 |11:18:48.466 |AppInfo |SIPTcp - wait_SdlReadRsp: Incoming SIP TCP message from
14.48.32.17 on port 50841 index 17 with 1430 bytes:

[106319,NET]

SIP/2.0 200 OK

Via: SIP/2.0/TCP 14.48.32.90:5060;branch=z9hG4bK203b13880683

From: <sip:9110006@14.48.32.90>;tag=38244~713e2333-4032-45f1-b1f5-e33cf471acec-47601638

To: <sip:9110011@14.48.32.90>;tag=b000b4d9e8cb0bba73e445ee-3cc7e650

Call-ID: 6198e780-43d13ed4-203c-5a20300e@14.48.32.90

Date: Tue, 14 Oct 2014 15:18:54 GMT

CSeq: 101 INVITE

Server: Cisco-CP8841/10.2.1

Contact: <sip:56ce4d7f-d3a2-40fd-a8b3-3f93c8832b9d@14.48.32.17:50841;transport=tcp>

Allow: ACK,BYE,CANCEL,INVITE,NOTIFY,OPTIONS,REFER,REGISTER,UPDATE,SUBSCRIBE,INFO

Remote-Party-ID: "9110011" <sip:9110011@14.48.32.90>;party=called;id-

type=subscriber;privacy=off;screen=yes

Supported: replaces,join,sdp-anat,norefersub,resource-priority,extended-refer,X-cisco-
callinfo,X-cisco-serviceuri,X-cisco-escapecodes,X-cisco-service-control,X-cisco-srtp-fallback,X-
cisco-monrec,X-cisco-config,X-cisco-sis-7.0.0,X-cisco-xsi-8.5.1

Allow-Events: kpml,dialog

Content-Length: 404

Content-Type: application/sdp

Content-Disposition: session;handling=optional

v=0

o=Cisco-SIPUA 15076 0 IN IP4 14.48.32.17

s=SIP Call

t=0 0

m=audio 28354 RTP/AVP 0 8 18 102 9 116 124 101

c=IN IP4 14.48.32.17

a=rtpmap:0 PCMU/8000

a=rtpmap:8 PCMA/8000

a=rtpmap:18 G729/8000

a=fmtp:18 annexb=yes

a=rtpmap:102 L16/16000

a=rtpmap:9 G722/8000

a=rtpmap:116 iLBC/8000

a=fmtp:116 mode=20

a=rtpmap:124 ISAC/16000

a=rtpmap:101 telephone-event/8000

a=fmtp:101 0-15

a=sendrecv ### CUCM Tells the calling phone to open the logical channel

01314284.001 |11:18:48.599 |AppInfo |StationD: (0000004) SEP0018195AA209 ,
star_MediaExchangeAgenaOpenLogicalChannel packetSize=20, codec=4, ci=47601637### CUCM Tells the
calling phone to open the receive channel

01314294.002 |11:18:48.599 |AppInfo |StationD: (0000004) OpenReceiveChannel

conferenceID=47601637 passThruPartyID=33554433 millisecondPacketSize=20
compressionType=4(Media_Payload_G711Ulaw64k) RFC2833PayloadType=101 qualifierIn=?
sourceIpAddr=IpAddr.type:0 ipAddr:0x0e3020110000000000000000000000(14.48.32.17). myIP:
IpAddr.type:0 ipv4Addr:0x0e30201c(14.48.32.28)### CUCM sends startMediaTransmission to the
calling phone telling the phone to send RTP to the called (recorded) phone (14.48.32.17)

01314295.001 |11:18:48.599 |AppInfo |StationD: (0000004) startMediaTransmission
conferenceID=47601637 passThruPartyID=33554433 remoteIpAddress=IpAddr.type:0
ipAddr:0x0e3020110000000000000000000000(14.48.32.17) remotePortNumber=28354
milliSecondPacketSize=20 compressType=4(Media_Payload_G711Ulaw64k) RFC2833PayloadType=101
qualifierOut=?. myIP: IpAddr.type:0 ipv4Addr:0x0e30201c(14.48.32.28)### CUCM sends ACK to called
(recorded) phone telling the called phone to send media to the calling phone (14.48.32.28)

01314344.001 |11:18:48.652 |AppInfo |SIPTcp - wait_SdlSPISignal: Outgoing SIP TCP message to
14.48.32.17 on port 50841 index 17
[106320,NET]

ACK sip:56ce4d7f-d3a2-40fd-a8b3-3f93c8832b9d@14.48.32.17:50841;transport=tcp SIP/2.0
Via: SIP/2.0/TCP 14.48.32.90:5060;branch=z9hG4bK203c2831c118
From: <sip:9110006@14.48.32.90>;tag=38244~713e2333-4032-45f1-b1f5-e33cf471acec-47601638
To: <sip:9110011@14.48.32.90>;tag=b000b4d9e8cb0bba73e445ee-3cc7e650
Date: Tue, 14 Oct 2014 15:18:44 GMT
Call-ID: 6198e780-43d13ed4-203c-5a20300e@14.48.32.90
User-Agent: Cisco-CUCM10.5
Max-Forwards: 70
CSeq: 101 ACK
Allow-Events: presence
Content-Type: application/sdp
Content-Length: 243

v=0
o=CiscoSystemsCCM-SIP 38244 1 IN IP4 14.48.32.90
s=SIP Call
c=IN IP4 14.48.32.28
b=TIAS:64000
b=CT:64
b=AS:64
t=0 0
m=audio 17260 RTP/AVP 0 101
a=ptime:20
a=rtpmap:0 PCMU/8000
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15 ### CUCM allocates BiB on called (recorded) phone

01314383.000 |11:18:48.675 |SdlSig |MrmAllocateUcbResourceReq |waiting
|MediaResourceManager(2,100,138,1) |Cc(2,100,220,1)
|2,100,14,20.16735^14.48.32.28^SEP0018195AA209 |[R:N-H:0,N:3,L:1,V:0,Z:0,D:0] CI=47601639
SsType=33554461 SsKey=1 BridgeType=0 MRGLPkid= NumStream=1 Bib=c32d6714-48bd-43d7-b96f-
91363aff3aa0 BibTgCi=47601638 FeatId=159 PL=5 PLDmn=0 DeviceCapability=0 NumVideoCapable=0
requestDeviceType=0 requestDeviceLocale=64 forkingDevicePosition=2 playToneDir=3### CUCM sends
INVITE #1 to called (recorded) phone with record-invoker=auto in Call-Info field and original
Call-ID in Join field
Notice the SDP has a=inactive to tear down the media

01314446.001 |11:18:48.682 |AppInfo |SIPTcp - wait_SdlSPISignal: Outgoing SIP TCP message to
14.48.32.17 on port 50841 index 17
[106321,NET]

INVITE sip:56ce4d7f-d3a2-40fd-a8b3-3f93c8832b9d@14.48.32.17:50841;transport=tcp SIP/2.0
Via: SIP/2.0/TCP 14.48.32.90:5060;branch=z9hG4bK203d55363a7c
From: "Call Manager" ;tag=38246~713e2333-4032-45f1-b1f5-e33cf471acec-47601641
To: <sip:9110011@14.48.32.90>
Date: Tue, 14 Oct 2014 15:18:48 GMT
Call-ID: 63fb4180-43d13ed8-203d-5a20300e@14.48.32.90
Supported: timer,resource-priority,replaces

Min-SE: 1800
User-Agent: Cisco-CUCM10.5
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, SUBSCRIBE, NOTIFY
CSeq: 101 INVITE
Expires: 180
Allow-Events: presence
Call-Info: ; isVoip; record-invoker=auto
Join: 6198e780-43d13ed4-203c-5a20300e@14.48.32.90;from-tag=b000b4d9e8cb0bba73e445ee-3cc7e650;to-tag=38244~713e2333-4032-45f1-b1f5-e33cf471acec-47601638
Contact: <sip:14.48.32.90:5060;transport=tcp>
Remote-Party-ID: "Call Manager" ;party=calling;screen=yes;privacy=off
Max-Forwards: 70
Content-Type: application/sdp
Content-Length: 188

v=0
o=CiscoSystemsCCM-SIP 38246 1 IN IP4 14.48.32.90
s=SIP Call
c=IN IP4 14.48.32.90
t=0 0
m=audio 4000 RTP/AVP 0
a=label:X-relay-nearend
a=rtpmap:0 PCMU/8000
a=inactive
a=mid:1 ### Called (recorded) phone returns 200 OK
Notice the SDP has a=inactive to tear down the media

01314449.002 |11:18:48.702 |AppInfo |SIPTcp - wait_SdlReadRsp: Incoming SIP TCP message from 14.48.32.17 on port 50841 index 17 with 1235 bytes:
[106323,NET]
SIP/2.0 200 OK
Via: SIP/2.0/TCP 14.48.32.90:5060;branch=z9hG4bK203d55363a7c
From: "Call Manager" ;tag=38246~713e2333-4032-45f1-b1f5-e33cf471acec-47601641
To: <sip:9110011@14.48.32.90>;tag=b000b4d9e8cb0bbb4457e725-6869188a
Call-ID: 63fb4180-43d13ed8-203d-5a20300e@14.48.32.90
Date: Tue, 14 Oct 2014 15:18:55 GMT
CSeq: 101 INVITE
Server: Cisco-CP8841/10.2.1
Contact: <sip:56ce4d7f-d3a2-40fd-a8b3-3f93c8832b9d@14.48.32.17:50841;transport=tcp>
Allow: ACK, BYE, CANCEL, INVITE, NOTIFY, OPTIONS, REFER, REGISTER, UPDATE, SUBSCRIBE, INFO
Remote-Party-ID: "9110011" <sip:9110011@14.48.32.90>;party=called;id-type=subscriber;privacy=off;screen=yes
Supported: replaces, join, sdp-anat, norefersub, resource-priority, extended-refer, X-cisco-callinfo, X-cisco-serviceuri, X-cisco-escapecodes, X-cisco-service-control, X-cisco-srtp-fallback, X-cisco-monrec, X-cisco-config, X-cisco-sis-7.0.0, X-cisco-xsi-8.5.1
Allow-Events: kpml, dialog
Content-Length: 202
Content-Type: application/sdp
Content-Disposition: session;handling=optional

v=0
o=Cisco-SIPUA 4077 0 IN IP4 14.48.32.17
s=SIP Call
t=0 0
m=audio 28512 RTP/AVP 0 101
c=IN IP4 14.48.32.17
a=rtpmap:0 PCMU/8000
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
a=inactive ### CUCM responds to called (recorded) phone with ACK

01314452.001 |11:18:48.702 |AppInfo |SIPTcp - wait_SdlSPISignal: Outgoing SIP TCP message to 14.48.32.17 on port 50841 index 17

[106324,NET]

ACK sip:56ce4d7f-d3a2-40fd-a8b3-3f93c8832b9d@14.48.32.17:50841;transport=tcp SIP/2.0

Via: SIP/2.0/TCP 14.48.32.90:5060;branch=z9hG4bK203e9999fc7

From: "Call Manager" ;tag=38246~713e2333-4032-45f1-b1f5-e33cf471acec-47601641

To: <sip:9110011@14.48.32.90>;tag=b000b4d9e8cb0bbb4457e725-6869188a

Date: Tue, 14 Oct 2014 15:18:48 GMT

Call-ID: 63fb4180-43d13ed8-203d-5a20300e@14.48.32.90

User-Agent: Cisco-CUCM10.5

Max-Forwards: 70

CSeq: 101 ACK

Allow-Events: presence

Content-Length: 0 ### BiB places first call to recording destination address (cn is calling party which is the BiB cn="b0028310001" and it is dialing the recordingdestination dd="8675309")

01314484.003 |11:18:48.753 |AppInfo |Digit Analysis: getDaRes data: daRes.ssType=[0] Intercept DAMR.sstype=[0], TPcount=[0], DAMR.NotifyCount=[0], DaRes.NotifyCount=[0]

01314484.004 |11:18:48.753 |AppInfo |Digit Analysis: getDaRes - Remote Destination [8675309] isURI[0]

01314484.005 |11:18:48.765 |AppInfo |CMUtility routeCallThroughCTIRD: no matching RemDestDynamic record exists for remdest [8675309]

01314484.006 |11:18:48.765 |AppInfo |DbMobility: getMatchedRemDest starts: cnumber = 8675309

01314484.007 |11:18:48.765 |AppInfo |DbMobility: getMatchedRemDest: full match case

01314484.008 |11:18:48.765 |AppInfo |DbMobility SelectByDestination: no matching RemDestDynamic record exists for remdest [8675309]

01314484.009 |11:18:48.765 |AppInfo |DbMobility: can't find remdest 8675309 in map

01314484.010 |11:18:48.765 |AppInfo |Digit analysis: patternUsage=5

01314484.011 |11:18:48.765 |AppInfo |Digit analysis: match(pi="1", fqcn="", cn="b0028310001", plv="5", pss="E911_PT:Phones_PT:EMERGENCY_PT:INTERNAL_PT:INFORMACAST_PT", TodFilteredPss="E911_PT:Phones_PT:EMERGENCY_PT:INTERNAL_PT:INFORMACAST_PT", dd="8675309", dac="1")

01314484.012 |11:18:48.765 |AppInfo |Digit analysis: analysis results

01314484.013 |11:18:48.765 |AppInfo ||PretransformCallingPartyNumber=b0028310001

|CallingPartyNumber=b0028310001

|DialingPartition=

|DialingPattern=8675309

|FullyQualifiedCalledPartyNumber=8675309

|DialingPatternRegularExpression=(8675309)

|DialingWhere=

|PatternType=Enterprise

|PotentialMatches=NoPotentialMatchesExist

|DialingSdlProcessId=(0,0,0)

|PretransformDigitString=8675309

|PretransformTagsList=SUBSCRIBER

|PretransformPositionalMatchList=8675309

|CollectedDigits=8675309 ### CUCM sends INVITE #1 to configured recording server (14.48.32.170)

01314552.001 |11:18:48.795 |AppInfo |//SIP/SIPUdp/wait_SdlSPISignal: Outgoing SIP UDP message to 14.48.32.170:[5060]:

[106325,NET]

INVITE sip:8675309@14.48.32.170:5060 SIP/2.0

Via: SIP/2.0/UDP 14.48.32.90:5060;branch=z9hG4bK203f3135e715

From: <sip:9110011@14.48.32.90;x-nearend;x-refci=47601638;x-nearendclusterid=glenscucm10-5;x-

nearenddevice=sepb000b4d9e8cb;x-nearendaddr=9110011;x-farendrefci=47601637;x-

farendclusterid=glenscucm10-5;x-farenddevice=sep0018195aa209;x-

farendaddr=9110006>;tag=38248~713e2333-4032-45f1-b1f5-e33cf471acec-47601642

To: <sip:8675309@14.48.32.170>

Date: Tue, 14 Oct 2014 15:18:48 GMT

Call-ID: 63fb4180-43d13ed8-203e-5a20300e@14.48.32.90

Supported: timer,resource-priority,replaces

Min-SE: 1800

User-Agent: Cisco-CUCM10.5

Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY

CSeq: 101 INVITE
Expires: 180
Allow-Events: presence, kpml
Supported: X-cisco-srtp-fallback
Supported: Geolocation
Call-Info: ;method="NOTIFY;Event=telephone-event;Duration=500"
Call-Info: ;x-cisco-video-traffic-class=DESKTOP
Cisco-Guid: 1677410688-0000065536-0000000001-1512058894
Session-Expires: 1800
P-Asserted-Identity: <sip:9110011@14.48.32.90>
Remote-Party-ID: <sip:9110011@14.48.32.90>;party=calling;screen=yes;privacy=off
Contact: <sip:9110011@14.48.32.90:5060>;isFocus
Max-Forwards: 70
Content-Length: 0 ### CUCM sends INVITE #2 to called (recorded) phone with record-invoker=auto in Call-Info field and original Call-ID in Join field
Notice the SDP has a=inactive to tear down the media

01314575.001 |11:18:48.796 |AppInfo |SIPTcp - wait_SdlSPISignal: Outgoing SIP TCP message to 14.48.32.17 on port 50841 index 17
[106326,NET]

INVITE sip:56ce4d7f-d3a2-40fd-a8b3-3f93c8832b9d@14.48.32.17:50841;transport=tcp SIP/2.0
Via: SIP/2.0/TCP 14.48.32.90:5060;branch=z9hG4bK20401b237b36
From: "Call Manager" ;tag=38249~713e2333-4032-45f1-b1f5-e33cf471acec-47601644
To: <sip:9110011@14.48.32.90>
Date: Tue, 14 Oct 2014 15:18:48 GMT
Call-ID: 63fb4180-43d13ed8-203f-5a20300e@14.48.32.90
Supported: timer,resource-priority,replaces
Min-SE: 1800
User-Agent: Cisco-CUCM10.5
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, SUBSCRIBE, NOTIFY
CSeq: 101 INVITE
Expires: 180

Allow-Events: presence
Call-Info: ; isVoip; record-invoker=auto
Join: 6198e780-43d13ed4-203c-5a20300e@14.48.32.90;from-tag=b000b4d9e8cb0bba73e445ee-3cc7e650;to-tag=38244~713e2333-4032-45f1-b1f5-e33cf471acec-47601638
Contact: <sip:14.48.32.90:5060;transport=tcp>
Remote-Party-ID: "Call Manager" ;party=calling;screen=yes;privacy=off
Max-Forwards: 70
Content-Type: application/sdp
Content-Length: 187

v=0
o=CiscoSystemsCCM-SIP 38249 1 IN IP4 14.48.32.90
s=SIP Call
c=IN IP4 14.48.32.90
t=0 0
m=audio 4000 RTP/AVP 0
a=label:X-relay-farend
a=rtpmap:0 PCMU/8000
a=inactive
a=mid:1 ### CUCM receives 200 OK in response to INVITE #1 to recording server

01314583.001 |11:18:48.862 |AppInfo |//SIP/SIPUdp/wait_SdlDataInd: Incoming SIP UDP message size 737 from 14.48.32.170:[5060]:
[106328,NET]
SIP/2.0 200 OK
Via: SIP/2.0/UDP 14.48.32.90:5060;branch=z9hG4bK203f3135e715
From: <sip:9110011@14.48.32.90;x-nearend;x-refci=47601638;x-nearendclusterid=glenscucm10-5;x-nearenddevice=sepb000b4d9e8cb;x-nearendaddr=9110011;x-farendrefci=47601637;x-farendclusterid=glenscucm10-5;x-farenddevice=sep0018195aa209;x-farendaddr=9110006>;tag=38248~713e2333-4032-45f1-b1f5-e33cf471acec-47601642
To: <sip:8675309@14.48.32.170>;tag=1

Call-ID: 63fb4180-43d13ed8-203e-5a20300e@14.48.32.90

CSeq: 101 INVITE

Contact: <sip:14.48.32.170:5060;transport=udp>

Content-Type: application/sdp

Content-Length: 135

v=0
o=user1 53655765 2353687637 IN IP4 14.48.32.170
s=-
c=IN IP4 14.48.32.170
t=0 0
m=audio 6000 RTP/AVP 0
a=rtpmap:0 PCMU/8000 ### CUCM sends re-INVITE to called (recorded) phone for call #1 to invoke the BiB (notice there is no SDP)

01314644.001 |11:18:48.864 |AppInfo |SIPTcp - wait_SdlSPISignal: Outgoing SIP TCP message to 14.48.32.17 on port 50841 index 17

[106329,NET]

INVITE sip:56ce4d7f-d3a2-40fd-a8b3-3f93c8832b9d@14.48.32.17:50841;transport=tcp SIP/2.0

Via: SIP/2.0/TCP 14.48.32.90:5060;branch=z9hG4bK204176d717cd

From: "Call Manager" ;tag=38246~713e2333-4032-45f1-b1f5-e33cf471acec-47601641

To: <sip:9110011@14.48.32.90>;tag=b000b4d9e8cb0bbb4457e725-6869188a

Date: Tue, 14 Oct 2014 15:18:48 GMT

Call-ID: 63fb4180-43d13ed8-203d-5a20300e@14.48.32.90

Supported: timer,resource-priority,replaces

User-Agent: Cisco-CUCM10.5

Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, SUBSCRIBE, NOTIFY

CSeq: 102 INVITE

Max-Forwards: 70

Expires: 180

Allow-Events: presence

Call-Info: ; isVoip; record-invoker=auto

Min-SE: 1800

Remote-Party-ID: "Call Manager" ;party=calling;screen=yes;privacy=off

Contact: <sip:14.48.32.90:5060;transport=tcp>

Content-Length: 0 ### Called (recorded) phone returns 200 OK in response to INVITE #2 to invoke BiB

Notice the SDP has a=inactive to tear down the media

01314645.002 |11:18:48.865 |AppInfo |SIPTcp - wait_SdlReadRsp: Incoming SIP TCP message from 14.48.32.17 on port 50841 index 17 with 1236 bytes:

[106330,NET]

SIP/2.0 200 OK

Via: SIP/2.0/TCP 14.48.32.90:5060;branch=z9hG4bK20401b237b36

From: "Call Manager" ;tag=38249~713e2333-4032-45f1-b1f5-e33cf471acec-47601644

To: <sip:9110011@14.48.32.90>;tag=b000b4d9e8cb0bbc4d5b7fc6-3ab2172f

Call-ID: 63fb4180-43d13ed8-203f-5a20300e@14.48.32.90

Date: Tue, 14 Oct 2014 15:18:55 GMT

CSeq: 101 INVITE

Server: Cisco-CP8841/10.2.1

Contact: <sip:56ce4d7f-d3a2-40fd-a8b3-3f93c8832b9d@14.48.32.17:50841;transport=tcp>

Allow: ACK,BYE,CANCEL,INVITE,NOTIFY,OPTIONS,REFER,REGISTER,UPDATE,SUBSCRIBE,INFO

Remote-Party-ID: "9110011" <sip:9110011@14.48.32.90>;party=called;id-

type=subscriber;privacy=off;screen=yes

Supported: replaces,join,sdp-anat,norefersub,resource-priority,extended-refer,X-cisco-

callinfo,X-cisco-serviceuri,X-cisco-escapecodes,X-cisco-service-control,X-cisco-srtp-fallback,X-

cisco-monrec,X-cisco-config,X-cisco-sis-7.0.0,X-cisco-xsi-8.5.1

Allow-Events: kpml,dialog

Content-Length: 203

Content-Type: application/sdp

Content-Disposition: session;handling=optional

v=0

o=Cisco-SIPUA 11326 0 IN IP4 14.48.32.17
s=SIP Call
t=0 0
m=audio 19696 RTP/AVP 0 101
c=IN IP4 14.48.32.17
a=rtpmap:0 PCMU/8000
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

a=inactive ### CUCM responds with ACK for 200 OK for INVITE #2 to invoke the BiB

01314648.001 |11:18:48.866 |AppInfo |SIPTcp - wait_SdlSPISignal: Outgoing SIP TCP message to 14.48.32.17 on port 50841 index 17
[106331,NET]

ACK sip:56ce4d7f-d3a2-40fd-a8b3-3f93c8832b9d@14.48.32.17:50841;transport=tcp SIP/2.0

Via: SIP/2.0/TCP 14.48.32.90:5060;branch=z9hG4bK20424175effe

From: "Call Manager" ;tag=38249~713e2333-4032-45f1-b1f5-e33cf471acec-47601644

To: <sip:9110011@14.48.32.90>;tag=b000b4d9e8cb0bbc4d5b7fc6-3ab2172f

Date: Tue, 14 Oct 2014 15:18:48 GMT

Call-ID: 63fb4180-43d13ed8-203f-5a20300e@14.48.32.90

User-Agent: Cisco-CUCM10.5

Max-Forwards: 70

CSeq: 101 ACK

Allow-Events: presence

Content-Length: 0 ### BiB places second call to recording destination address (cn is calling party which is the BiB cn="b0028310001" and it is dialing the recordingdestination dd="8675309") Note that the BiB number stayed the same (b0028310001) and so did the recordingdestination number

01314680.003 |11:18:48.867 |AppInfo |Digit Analysis: getDaRes data: daRes.ssType=[0] Intercept DAMR.sstype=[0], TPcount=[0], DAMR.NotifyCount=[0], DaRes.NotifyCount=[0]

01314680.004 |11:18:48.867 |AppInfo |Digit Analysis: getDaRes - Remote Destination [8675309] isURI[0]

01314680.005 |11:18:48.867 |AppInfo |CMUtility routeCallThroughCTIRD: no matching RemDestDynamic record exists for remdest [8675309]

01314680.006 |11:18:48.867 |AppInfo |DbMobility: getMatchedRemDest starts: cnumber = 8675309

01314680.007 |11:18:48.867 |AppInfo |DbMobility: getMatchedRemDest: full match case

01314680.008 |11:18:48.867 |AppInfo |DbMobility SelectByDestination: no matching RemDestDynamic record exists for remdest [8675309]

01314680.009 |11:18:48.867 |AppInfo |DbMobility: can't find remdest 8675309 in map

01314680.010 |11:18:48.867 |AppInfo |Digit analysis: patternUsage=5

01314680.011 |11:18:48.867 |AppInfo |Digit analysis: match(pi="1", fqcn="", cn="b0028310001", plv="5", pss="E911_PT:Phones_PT:EMERGENCY_PT:INTERNAL_PT:INFORMACAST_PT", TodFilteredPss="E911_PT:Phones_PT:EMERGENCY_PT:INTERNAL_PT:INFORMACAST_PT", dd="8675309", dac="1")

01314680.012 |11:18:48.867 |AppInfo |Digit analysis: analysis results

01314680.013 |11:18:48.867 |AppInfo ||PretransformCallingPartyNumber=b0028310001

|CallingPartyNumber=b0028310001

|DialingPartition=

|DialingPattern=8675309

|FullyQualifiedCalledPartyNumber=8675309

|DialingPatternRegularExpression=(8675309)

|DialingWhere=

|PatternType=Enterprise

|PotentialMatches=NoPotentialMatchesExist

|DialingSdlProcessId=(0,0,0)

|PretransformDigitString=8675309

|PretransformTagsList=SUBSCRIBER

|PretransformPositionalMatchList=8675309

|CollectedDigits=8675309 ### CUCM sends INVITE #2 to configured recording server

01314731.001 |11:18:48.870 |AppInfo |//SIP/SIPUdp/wait_SdlSPISignal: Outgoing SIP UDP message to 14.48.32.170:[5060]:

[106333,NET]

INVITE sip:8675309@14.48.32.170:5060 SIP/2.0
Via: SIP/2.0/UDP 14.48.32.90:5060;branch=z9hG4bK20432a53d34c
From: <sip:9110011@14.48.32.90;x-farend;x-refci=47601638;x-nearendclusterid=glenscucm10-5;x-nearenddevice=sepb000b4d9e8cb;x-nearendaddr=9110011;x-farendrefci=47601637;x-farendclusterid=glenscucm10-5;x-farenddevice=sep0018195aa209;x-farendaddr=9110006>;tag=38251~713e2333-4032-45f1-b1f5-e33cf471acec-47601645
To: <sip:8675309@14.48.32.170>
Date: Tue, 14 Oct 2014 15:18:48 GMT
Call-ID: 63fb4180-43d13ed8-2040-5a20300e@14.48.32.90
Supported: timer,resource-priority,replaces
Min-SE: 1800
User-Agent: Cisco-CUCM10.5
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
CSeq: 101 INVITE
Expires: 180
Allow-Events: presence, kpml
Supported: X-cisco-srtp-fallback
Supported: Geolocation
Call-Info: ;method="NOTIFY;Event=telephone-event;Duration=500"
Call-Info: ;x-cisco-video-traffic-class=DESKTOP
Cisco-Guid: 1677410688-0000065536-0000000002-1512058894
Session-Expires: 1800
P-Asserted-Identity: <sip:9110011@14.48.32.90>
Remote-Party-ID: <sip:9110011@14.48.32.90>;party=calling;screen=yes;privacy=off
Contact: <sip:9110011@14.48.32.90:5060>;isFocus
Max-Forwards: 70
Content-Length: 0 ### CUCM receives 200 OK in response to INVITE #2 from configured recording server

01314751.001 |11:18:48.871 |AppInfo |//SIP/SIPUdp/wait_SdlDataInd: Incoming SIP UDP message size 736 from 14.48.32.170:[5060]:
[106335,NET]
SIP/2.0 200 OK
Via: SIP/2.0/UDP 14.48.32.90:5060;branch=z9hG4bK20432a53d34c
From: <sip:9110011@14.48.32.90;x-farend;x-refci=47601638;x-nearendclusterid=glenscucm10-5;x-nearenddevice=sepb000b4d9e8cb;x-nearendaddr=9110011;x-farendrefci=47601637;x-farendclusterid=glenscucm10-5;x-farenddevice=sep0018195aa209;x-farendaddr=9110006>;tag=38251~713e2333-4032-45f1-b1f5-e33cf471acec-47601645
To: <sip:8675309@14.48.32.170>;tag=2
Call-ID: 63fb4180-43d13ed8-2040-5a20300e@14.48.32.90
CSeq: 101 INVITE
Contact: <sip:14.48.32.170:5060;transport=udp>
Content-Type: application/sdp
Content-Length: 135

v=0
o=user1 53655765 2353687637 IN IP4 14.48.32.170
s=-
c=IN IP4 14.48.32.170
t=0 0
m=audio 6000 RTP/AVP 0
a=rtpmap:0 PCMU/8000 ### CUCM sends re-INVITE #2 to called (recorded) phone for second BiB invocation call
Notice there is no SDP

01314828.001 |11:18:48.875 |AppInfo |SIPTcp - wait_SdlSPISignal: Outgoing SIP TCP message to 14.48.32.17 on port 50841 index 17
[106336,NET]
INVITE sip:56ce4d7f-d3a2-40fd-a8b3-3f93c8832b9d@14.48.32.17:50841;transport=tcp SIP/2.0
Via: SIP/2.0/TCP 14.48.32.90:5060;branch=z9hG4bK20443475e621
From: "Call Manager" ;tag=38249~713e2333-4032-45f1-b1f5-e33cf471acec-47601644
To: <sip:9110011@14.48.32.90>;tag=b000b4d9e8cb0bbc4d5b7fc6-3ab2172f
Date: Tue, 14 Oct 2014 15:18:48 GMT

Call-ID: 63fb4180-43d13ed8-203f-5a20300e@14.48.32.90
Supported: timer,resource-priority,replaces
User-Agent: Cisco-CUCM10.5
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, SUBSCRIBE, NOTIFY
CSeq: 102 INVITE
Max-Forwards: 70
Expires: 180
Allow-Events: presence
Call-Info: ; isVoip; record-invoker=auto
Min-SE: 1800
Remote-Party-ID: "Call Manager" ;party=calling;screen=yes;privacy=off
Contact: <sip:14.48.32.90:5060;transport=tcp>
Content-Length: 0 ### Called (recorded) phone returns 200 OK to re-INVITE #1

01314829.002 |11:18:48.876 |AppInfo |SIPTcp - wait_SdlReadRsp: Incoming SIP TCP message from
14.48.32.17 on port 50841 index 17 with 1235 bytes:
[106337,NET]
SIP/2.0 200 OK
Via: SIP/2.0/TCP 14.48.32.90:5060;branch=z9hG4bK204176d717cd
From: "Call Manager" ;tag=38246~713e2333-4032-45f1-b1f5-e33cf471acec-47601641
To: <sip:9110011@14.48.32.90>;tag=b000b4d9e8cb0bbb4457e725-6869188a
Call-ID: 63fb4180-43d13ed8-203d-5a20300e@14.48.32.90
Date: Tue, 14 Oct 2014 15:18:55 GMT
CSeq: 102 INVITE
Server: Cisco-CP8841/10.2.1
Contact: <sip:56ce4d7f-d3a2-40fd-a8b3-3f93c8832b9d@14.48.32.17:50841;transport=tcp>
Allow: ACK,BYE,CANCEL,INVITE,NOTIFY,OPTIONS,REFER,REGISTER,UPDATE,SUBSCRIBE,INFO
Remote-Party-ID: "9110011" <sip:9110011@14.48.32.90>;party=called;id-
type=subscriber;privacy=off;screen=yes
Supported: replaces,join,sdp-anat,norefersub,resource-priority,extended-refer,X-cisco-
callinfo,X-cisco-serviceuri,X-cisco-escapecodes,X-cisco-service-control,X-cisco-srtp-fallback,X-
cisco-monrec,X-cisco-config,X-cisco-sis-7.0.0,X-cisco-xsi-8.5.1
Allow-Events: kpml,dialog
Content-Length: 202
Content-Type: application/sdp
Content-Disposition: session;handling=optional

v=0
o=Cisco-SIPUA 4077 1 IN IP4 14.48.32.17
s=SIP Call
t=0 0
m=audio 28512 RTP/AVP 0 101
c=IN IP4 14.48.32.17
a=rtpmap:0 PCMU/8000
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
a=sendrecv ### CUCM sends ACK to called (recorded) phone for re-INVITE #1

01314873.001 |11:18:48.880 |AppInfo |SIPTcp - wait_SdlSPISignal: Outgoing SIP TCP message to
14.48.32.17 on port 50841 index 17
[106338,NET]
ACK sip:56ce4d7f-d3a2-40fd-a8b3-3f93c8832b9d@14.48.32.17:50841;transport=tcp SIP/2.0
Via: SIP/2.0/TCP 14.48.32.90:5060;branch=z9hG4bK204521531f4b
From: "Call Manager" ;tag=38246~713e2333-4032-45f1-b1f5-e33cf471acec-47601641
To: <sip:9110011@14.48.32.90>;tag=b000b4d9e8cb0bbb4457e725-6869188a
Date: Tue, 14 Oct 2014 15:18:48 GMT
Call-ID: 63fb4180-43d13ed8-203d-5a20300e@14.48.32.90
User-Agent: Cisco-CUCM10.5
Max-Forwards: 70
CSeq: 102 ACK
Allow-Events: presence
Content-Type: application/sdp
Content-Length: 178

v=0
o=CiscoSystemsCCM-SIP 38246 3 IN IP4 14.48.32.90
s=SIP Call
c=IN IP4 14.48.32.170
b=TIAS:64000
b=AS:64
t=0 0
m=audio 6000 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=recvonly### CUCM sends ACK to configured recording server for INVITE #1

01314875.001 |11:18:48.880 |AppInfo |//SIP/SIPUdp/wait_SdlSPISignal: Outgoing SIP UDP message to 14.48.32.170:[5060]:

[106339,NET]
ACK sip:14.48.32.170:5060;transport=UDP SIP/2.0
Via: SIP/2.0/UDP 14.48.32.90:5060;branch=z9hG4bK20467ee6be7
From: <sip:9110011@14.48.32.90;x-nearend;x-refci=47601638;x-nearendclusterid=glenscucm10-5;x-nearenddevice=sepb000b4d9e8cb;x-nearendaddr=9110011;x-farendrefci=47601637;x-farendclusterid=glenscucm10-5;x-farenddevice=sep0018195aa209;x-farendaddr=9110006>;tag=38248-713e2333-4032-45f1-b1f5-e33cf471acec-47601642
To: <sip:8675309@14.48.32.170>;tag=1
Date: Tue, 14 Oct 2014 15:18:48 GMT
Call-ID: 63fb4180-43d13ed8-203e-5a20300e@14.48.32.90
User-Agent: Cisco-CUCM10.5
Max-Forwards: 70
CSeq: 101 ACK
Allow-Events: presence, kpml
Content-Type: application/sdp
Content-Length: 234

v=0
o=CiscoSystemsCCM-SIP 38248 1 IN IP4 14.48.32.90
s=SIP Call
c=IN IP4 14.48.32.17
b=TIAS:64000
b=AS:64
t=0 0
m=audio 28512 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15 ### Called (recorded) phone returns 200 OK for re-INVITE #2

01314878.005 |11:18:48.881 |AppInfo |SIPTcp - wait_SdlReadRsp: Incoming SIP TCP message from 14.48.32.17 on port 50841 index 17 with 1236 bytes:

[106341,NET]
SIP/2.0 200 OK
Via: SIP/2.0/TCP 14.48.32.90:5060;branch=z9hG4bK20443475e621
From: "Call Manager" ;tag=38249~713e2333-4032-45f1-b1f5-e33cf471acec-47601644
To: <sip:9110011@14.48.32.90>;tag=b000b4d9e8cb0bbc4d5b7fc6-3ab2172f
Call-ID: 63fb4180-43d13ed8-203f-5a20300e@14.48.32.90
Date: Tue, 14 Oct 2014 15:18:55 GMT
CSeq: 102 INVITE
Server: Cisco-CP8841/10.2.1
Contact: <sip:56ce4d7f-d3a2-40fd-a8b3-3f93c8832b9d@14.48.32.17:50841;transport=tcp>
Allow: ACK,BYE,CANCEL,INVITE,NOTIFY,OPTIONS,REFER,REGISTER,UPDATE,SUBSCRIBE,INFO
Remote-Party-ID: "9110011" <sip:9110011@14.48.32.90>;party=called;id-type=subscriber;privacy=off;screen=yes
Supported: replaces,join,sdp-anat,norefersub,resource-priority,extended-refer,X-cisco-callinfo,X-cisco-serviceuri,X-cisco-escapecodes,X-cisco-service-control,X-cisco-srtp-fallback,X-cisco-monrec,X-cisco-config,X-cisco-sis-7.0.0,X-cisco-xsi-8.5.1
Allow-Events: kpml,dialog

Content-Length: 203
Content-Type: application/sdp
Content-Disposition: session;handling=optional

v=0
o=Cisco-SIPUA 11326 1 IN IP4 14.48.32.17
s=SIP Call
t=0 0
m=audio 19696 RTP/AVP 0 101
c=IN IP4 14.48.32.17
a=rtpmap:0 PCMU/8000
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
a=sendrecv ### CUCM sends ACK to called (recorded) phone for re-INVITE #2

01314907.001 |11:18:48.883 |AppInfo |SIPTcp - wait_SdlSPISignal: Outgoing SIP TCP message to 14.48.32.17 on port 50841 index 17
[106342,NET]
ACK sip:56ce4d7f-d3a2-40fd-a8b3-3f93c8832b9d@14.48.32.17:50841;transport=tcp SIP/2.0
Via: SIP/2.0/TCP 14.48.32.90:5060;branch=z9hG4bK204755ae79c7
From: "Call Manager" ;tag=38249~713e2333-4032-45f1-b1f5-e33cf471acec-47601644
To: <sip:9110011@14.48.32.90>;tag=b000b4d9e8cb0bbc4d5b7fc6-3ab2172f
Date: Tue, 14 Oct 2014 15:18:48 GMT
Call-ID: 63fb4180-43d13ed8-203f-5a20300e@14.48.32.90
User-Agent: Cisco-CUCM10.5
Max-Forwards: 70
CSeq: 102 ACK
Allow-Events: presence
Content-Type: application/sdp
Content-Length: 178

v=0
o=CiscoSystemsCCM-SIP 38249 3 IN IP4 14.48.32.90
s=SIP Call
c=IN IP4 14.48.32.170
b=TIAS:64000
b=AS:64
t=0 0
m=audio 6000 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=recvonly ### CUCM sends ACK to configured recording server for INVITE #2

01314909.001 |11:18:48.883 |AppInfo |//SIP/SIPUdp/wait_SdlSPISignal: Outgoing SIP UDP message to 14.48.32.170:[5060]:
[106343,NET]
ACK sip:14.48.32.170:5060;transport=UDP SIP/2.0
Via: SIP/2.0/UDP 14.48.32.90:5060;branch=z9hG4bK204854e1b53f
From: <sip:9110011@14.48.32.90;x-farend;x-refci=47601638;x-nearendclusterid=glenscucm10-5;x-nearenddevice=sepb000b4d9e8cb;x-nearendaddr=9110011;x-farendrefci=47601637;x-farendclusterid=glenscucm10-5;x-farenddevice=sep0018195aa209;x-farendaddr=9110006>;tag=38251~713e2333-4032-45f1-b1f5-e33cf471acec-47601645
To: <sip:8675309@14.48.32.170>;tag=2
Date: Tue, 14 Oct 2014 15:18:48 GMT
Call-ID: 63fb4180-43d13ed8-2040-5a20300e@14.48.32.90
User-Agent: Cisco-CUCM10.5
Max-Forwards: 70
CSeq: 101 ACK
Allow-Events: presence, kpml
Content-Type: application/sdp
Content-Length: 234

v=0
o=CiscoSystemsCCM-SIP 38251 1 IN IP4 14.48.32.90

```
s=SIP Call
c=IN IP4 14.48.32.17
b=TIAS:64000
b=AS:64
t=0 0
m=audio 19696 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

トラブルシューティング

コーデックのネゴシエーション

下記は失敗を記録するコールのもっとも一般的な型の1つの例-記録された電話と記録サーバ間のコーデックのミスマッチです:

```
~~~~~
Codec Negotiation Failure
~~~~~

### Calling phone places call

00019629.001 |12:48:34.510 |AppInfo |StationInit: (0000005) EnblocCall calledParty=9110001.
### CUCM performs digit analysis against the dialed digits (dd="9110001")

00019638.001 |12:48:34.511 |AppInfo |Digit Analysis: star_DaReq: daReq.partitionSearchSpace(),
filteredPartitionSearchSpaceString(), partitionSearchSpaceString()
00019638.002 |12:48:34.511 |AppInfo |Digit Analysis: star_DaReq: Matching Legacy Numeric,
digits=9110001
00019638.003 |12:48:34.522 |AppInfo |Digit Analysis: getDaRes data: daRes.ssType=[0] Intercept
DAMR.sstype=[0], TPcount=[0], DAMR.NotifyCount=[0], DaRes.NotifyCount=[0]
00019638.004 |12:48:34.522 |AppInfo |Digit Analysis: getDaRes - Remote Destination [] isURI[1]
00019638.005 |12:48:34.522 |AppInfo |Digit analysis: patternUsage=2
00019638.006 |12:48:34.522 |AppInfo |Digit analysis: match(pi="2", fqcn="9110006",
cn="9110006",plv="5", pss="", TodFilteredPss="", dd="9110001",dac="1")
00019638.007 |12:48:34.522 |AppInfo |Digit analysis: analysis results
00019638.008 |12:48:34.522 |AppInfo ||PretransformCallingPartyNumber=9110006
|CallingPartyNumber=9110006
|DialingPartition=
|DialingPattern=9110001
|FullyQualifiedCalledPartyNumber=9110001
|DialingPatternRegularExpression=(9110001)
|DialingWhere=
|PatternType=Enterprise
|PotentialMatches=NoPotentialMatchesExist
|DialingSdlProcessId=(0,0,0)
|PretransformDigitString=9110001
|PretransformTagsList=SUBSCRIBER
|PretransformPositionalMatchList=9110001
|CollectedDigits=9110001 ### CUCM determines call must stay on same node and go to LineControl
(PID=LineControl(2,100,174,19))

00019640.001 |12:48:34.522 |AppInfo |Digit analysis: wait_DmPidRes- Partition=[]
Pattern=[9110001] Where=[],cmDeviceType=[UserDevice], OutsideDialtone =[0], DeviceOverride=[0],
PID=LineControl(2,100,174,7),CI=[49613637],Sender=Cdcc(2,100,219,1)### CUCM extends the call to
the called phone

00019657.003 |12:48:34.560 |AppInfo |StationD: (0000007) DEBUG whatToDo: line=1 calls=0
limit=4, busy=2. GCI=(2, 7001), cm_PL=(5, 0).
```


00019657.004 |12:48:34.560 |AppInfo |StationD: (0000007) DEBUG whatToDo: busy trigger not hit... send to open appearance

00019657.005 |12:48:34.560 |AppInfo |preFilterCapCount =[11], preFilterCaps :: (Cap)= (25) (6) (4) (2) (7) (8) (15) (16) (11) (12) (257) Filtering Caps due to Service Parameter Configuration postFilterCapCount =[8], postFilterCaps :: (Cap)= (25) (4) (2) (15) (16) (11) (12) (257)

00019657.006 |12:48:34.560 |AppInfo |preFilterCapCount =[0], preFilterCaps :: (Cap)= Filtering Caps due to Service Parameter Configuration postFilterCapCount =[0], postFilterCaps :: (Cap)=

00019657.007 |12:48:34.560 |Created | |
|StationCdpc(2,100,64,2) |StationD(2,100,63,7) |
|NumOfCurrentInstances: 2

00019657.008 |12:48:34.560 |AppInfo |StationD: (0000007) DEBUG- getLineRingSetting: retVal=4.

00019657.009 |12:48:34.560 |AppInfo |StationD: (0000007) DEBUG- saveRinger for: ci=49613638, line=1, mode=2, cm_precedence=5, callPhase=5.

00019657.010 |12:48:34.560 |AppInfo |StationD: (0000007) DEBUG- saveRinger: ci=49613638, line=1, mode=2, cm_precedence=5, callPhase=5, modifier=0

00019657.011 |12:48:34.560 |AppInfo |StationD: (0000007) INFO sendCallAcceptReq: Try to send StationLineCallAccept to cdpc=2 .

00019657.012 |12:48:34.560 |AppInfo |StationD: (0000007) playRinger for: ci=49613638.

00019657.013 |12:48:34.560 |AppInfo |StationD: (0000007) DEBUG- getLineRingSetting: retVal=4.

00019657.014 |12:48:34.560 |AppInfo |StationD: (0000007) DEBUG- getLineRingSetting: retVal=4.

00019657.015 |12:48:34.560 |AppInfo |StationD: (0000007) DEBUG- getLineRingSetting: retVal=4.### The Called (recorded) phone goes off hook

00019709.001 |12:48:36.042 |AppInfo |StationD: (0000007) restart0_StationOffHook - INFO: CI=49613638 on line=1, SPKMode=0, alwaysPrimeLine=0, alwaysUsePrimeLineForVM=0, fid=9999, offHookTrigger=1.### CUCM Tells the calling phone to open the logical channel

00019773.001 |12:48:36.061 |AppInfo |StationD: (0000005) SEP0018195AA209 , star_MediaExchangeAgenaOpenLogicalChannel packetSize=20, codec=4, ci=49613637### CUCM Tells the called (recorded) to open the logical channel

00019776.001 |12:48:36.061 |AppInfo |StationD: (0000007) SEP001795BDD16B , star_MediaExchangeAgenaOpenLogicalChannel packetSize=20, codec=4, ci=49613638### CUCM Tells the calling phone to open the receive channel

00019784.002 |12:48:36.062 |AppInfo |StationD: (0000005) OpenReceiveChannel conferenceID=49613637 passThruPartyID=33554433 millisecondPacketSize=20 compressionType=4 (Media_Payload_G711Ulaw64k) RFC2833PayloadType=0 qualifierIn=? sourceIpAddr=IpAddr.type:0 ipAddr:0x0e302021000000000000000000000000(14.48.32.33). myIP: IpAddr.type:0 ipv4Addr:0x0e30201c(14.48.32.28)### Codec locked due to recording on called (recorded) phone

00019785.003 |12:48:36.062 |AppInfo | StationCdpc: star_MediaExchangeAgenaQueryCapability - Device SEP001795BDD16B, codec locked due to recording, codecType=4### CUCM Tells the called (recorded) phone to open the receive channel

00019788.002 |12:48:36.062 |AppInfo |StationD: (0000007) OpenReceiveChannel conferenceID=49613638 passThruPartyID=33554434 millisecondPacketSize=20 compressionType=4 (Media_Payload_G711Ulaw64k) RFC2833PayloadType=0 qualifierIn=? sourceIpAddr=IpAddr.type:0 ipAddr:0x0e30201c000000000000000000000000(14.48.32.28). myIP: IpAddr.type:0 ipv4Addr:0x0e302021(14.48.32.33)### CUCM allocates the BiB on the called (recorded) phone

00019830.000 |12:48:36.074 |SdlSig |MrmAllocateUcbResourceReq |waiting
|MediaResourceManager(2,100,138,1) |Cc(2,100,220,1)
|2,100,14,19.206^14.48.32.33^SEP001795BDD16B |[R:N-H:0,N:1,L:0,V:0,Z:0,D:0] CI=49613639
SsType=33554461 SsKey=1 BridgeType=0 MRGLPkid= NumStream=1 Bib=89cdb152-4ef2-4d60-9e6b-ab8c77c22618 BibTgCi=49613638 FeatId=159 PL=5 PLDmn=0 DeviceCapability=0 NumVideoCapable=0 requestDeviceType=0 requestDeviceLocale=64 forkingDevicePosition=2 playToneDir=3### BiB places it's first call to recording destination address (cn is calling number which is the BiB cn="b00223906001" and it is dialing the recordingdestination dd="8675309")

00019889.001 |12:48:36.100 |AppInfo |Digit Analysis: star_DaReq: daReq.partitionSearchSpace(), filteredPartitionSearchSpaceString(), partitionSearchSpaceString()
00019889.002 |12:48:36.100 |AppInfo |Digit Analysis: star_DaReq: Matching Legacy Numeric, digits=8675309
00019889.003 |12:48:36.100 |AppInfo |Digit Analysis: getDaRes data: daRes.ssType=[0] Intercept DAMR.sstype=[0], TPcount=[0], DAMR.NotifyCount=[0], DaRes.NotifyCount=[0]
00019889.004 |12:48:36.100 |AppInfo |Digit Analysis: getDaRes - Remote Destination [8675309] isURI[0]
00019889.005 |12:48:36.100 |AppInfo |CMUtility routeCallThroughCTIRD: no matching RemDestDynamic record exists for remdest [8675309]
00019889.006 |12:48:36.100 |AppInfo |DbMobility: getMatchedRemDest starts: cnumber = 8675309
00019889.007 |12:48:36.100 |AppInfo |DbMobility: getMatchedRemDest: full match case
00019889.008 |12:48:36.100 |AppInfo |DbMobility SelectByDestination: no matching RemDestDynamic record exists for remdest [8675309]
00019889.009 |12:48:36.100 |AppInfo |DbMobility: can't find remdest 8675309 in map
00019889.010 |12:48:36.100 |AppInfo |Digit analysis: patternUsage=5
00019889.011 |12:48:36.100 |AppInfo |Digit analysis: match(pi="1", fqcn="", cn="b00223906001", plv="5", pss="E911_PT:Phones_PT:EMERGENCY_PT:INTERNAL_PT:INFORMACAST_PT", TodFilteredPss="E911_PT:Phones_PT:EMERGENCY_PT:INTERNAL_PT:INFORMACAST_PT", dd="8675309", dac="1")
00019889.012 |12:48:36.100 |AppInfo |Digit analysis: analysis results
00019889.013 |12:48:36.100 |AppInfo ||PretransformCallingPartyNumber=b00223906001
|CallingPartyNumber=b00223906001
|DialingPartition=
|DialingPattern=8675309
|FullyQualifiedCalledPartyNumber=8675309
|DialingPatternRegularExpression=(8675309)
|DialingWhere=
|PatternType=Enterprise
|PotentialMatches=NoPotentialMatchesExist
|DialingSdlProcessId=(0,0,0)
|PretransformDigitString=8675309
|PretransformTagsList=SUBSCRIBER
|PretransformPositionalMatchList=8675309
|CollectedDigits=8675309 ### Calling phone sends CUCM the ORC ACK

00019912.001 |12:48:36.139 |AppInfo |StationInit: (0000005) OpenReceiveChannelAck Status=0, IpAddr=IpAddr.type:0 ipAddr:0x0e30201c000000000000000000000000(14.48.32.28), Port=31678, PartyID=33554433### CUCM sends startMediaTransmission to the called (recorded) phone telling the phone to send RTP to the calling phone (14.48.32.28)

00019920.001 |12:48:36.139 |AppInfo |StationD: (0000007) startMediaTransmission conferenceID=49613638 passThruPartyID=33554434 remoteIpAddress=IpAddr.type:0 ipAddr:0x0e30201c000000000000000000000000(14.48.32.28) remotePortNumber=31678 milliSecondPacketSize=20 compressType=4(Media_Payload_G711Ulaw64k) RFC2833PayloadType=0 qualifierOut=?. myIP: IpAddr.type:0 ipv4Addr:0x0e302021(14.48.32.33)### Called (recorded) phone sends CUCM the ORC ACK

00019959.001 |12:48:36.145 |AppInfo |StationInit: (0000007) OpenReceiveChannelAck Status=0, IpAddr=IpAddr.type:0 ipAddr:0x0e302021000000000000000000000000(14.48.32.33), Port=28360, PartyID=33554434### CUCM sends startMediaTransmission to the calling phone telling the phone to send RTP to the called phone (14.48.32.33)

00019977.001 |12:48:36.146 |AppInfo |StationD: (0000005) startMediaTransmission conferenceID=49613637 passThruPartyID=33554433 remoteIpAddress=IpAddr.type:0 ipAddr:0x0e302021000000000000000000000000(14.48.32.33) remotePortNumber=28360 milliSecondPacketSize=20 compressType=4(Media_Payload_G711Ulaw64k) RFC2833PayloadType=0 qualifierOut=?. myIP: IpAddr.type:0 ipv4Addr:0x0e30201c(14.48.32.28)### BiB places second call to recording destination address (cn is calling number which is the BiB cn="b00223906001" and it is dialing the recordingdestination dd="8675309")
Note that the BiB number stayed the same (b00223906001) and so did the recordingdestination number 00020002.001 |12:48:36.147 |AppInfo |Digit Analysis: star_DaReq:

daReq.partitionSearchSpace(), filteredPartitionSearchSpaceString(), partitionSearchSpaceString()
00020002.002 |12:48:36.147 |AppInfo |Digit Analysis: star_DaReq: Matching Legacy Numeric,
digits=8675309 00020002.003 |12:48:36.147 |AppInfo |Digit Analysis: getDaRes data:
daRes.ssType=[0] Intercept DAMR.sstype=[0], TPcount=[0], DAMR.NotifyCount=[0],
DaRes.NotifyCount=[0] 00020002.004 |12:48:36.147 |AppInfo |Digit Analysis: getDaRes - Remote
Destination [8675309] isURI[0] 00020002.005 |12:48:36.147 |AppInfo |CMUtility
routeCallThroughCTIRD: no matching RemDestDynamic record exists for remdest [8675309]
00020002.006 |12:48:36.147 |AppInfo |DbMobility: getMatchedRemDest starts: cnumber = 8675309
00020002.007 |12:48:36.147 |AppInfo |DbMobility: getMatchedRemDest: full match case 00020002.008
|12:48:36.147 |AppInfo |DbMobility SelectByDestination: no matching RemDestDynamic record exists
for remdest [8675309] 00020002.009 |12:48:36.147 |AppInfo |DbMobility: can't find remdest
8675309 in map 00020002.010 |12:48:36.147 |AppInfo |Digit analysis: patternUsage=5 00020002.011
|12:48:36.147 |AppInfo |Digit analysis: match(pi="1", fqc=" ", cn="b00223906001", plv="5",
pss="E911_PT:Phones_PT:EMERGENCY_PT:INTERNAL_PT:INFORMACAST_PT",
TodFilteredPss="E911_PT:Phones_PT:EMERGENCY_PT:INTERNAL_PT:INFORMACAST_PT",
dd="8675309", dac="1") 00020002.012 |12:48:36.147 |AppInfo |Digit analysis: analysis results
00020002.013 |12:48:36.147 |AppInfo ||PretransformCallingPartyNumber=b00223906001
|CallingPartyNumber=b00223906001 |DialingPartition= |DialingPattern=8675309
|FullyQualifiedCalledPartyNumber=8675309 |DialingPatternRegularExpression=(8675309)
|DialingWhere= |PatternType=Enterprise |PotentialMatches=NoPotentialMatchesExist
|DialingSdlProcessId=(0,0,0) |PretransformDigitString=8675309 |PretransformTagsList=SUBSCRIBER
|PretransformPositionalMatchList=8675309 |CollectedDigits=8675309 |UnconsumedDigits=
|TagsList=SUBSCRIBER |PositionalMatchList=8675309 ### CUCM sends INVITE #1 to configured
recording server (14.48.32.170)

00020086.001 |12:48:36.156 |AppInfo |//SIP/SIPUdp/wait_SdlSPISignal: Outgoing SIP UDP message
to 14.48.32.170:[5060]:

[901,NET]

INVITE sip:8675309@14.48.32.170:5060 SIP/2.0

Via: SIP/2.0/UDP 14.48.32.90:5060;branch=z9hG4bK4f2a857d3d

From: <sip:9110001@14.48.32.90;x-nearend;x-refci=49613638;x-nearendclusterid=glenscucm10-5;x-
nearenddevice=sep001795bdd16b;x-nearendaddr=9110001;x-farendrefci=49613637;x-
farendclusterid=glenscucm10-5;x-farenddevice=sep0018195aa209;x-
farendaddr=9110006>;tag=351-713e2333-4032-45f1-b1f5-e33cf47lacec-49613642

To: <sip:8675309@14.48.32.170>

Date: Tue, 14 Oct 2014 16:48:36 GMT

Call-ID: ef7acf80-43d153e4-50-5a20300e@14.48.32.90

Supported: timer,resource-priority,replaces

Min-SE: 1800

User-Agent: Cisco-CUCM10.5

Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY

CSeq: 101 INVITE

Expires: 180

Allow-Events: presence, kpml

Supported: X-cisco-srtp-fallback

Supported: Geolocation

Call-Info: ;method="NOTIFY;Event=telephone-event;Duration=500"

Cisco-Guid: 4017803136-0000065536-0000000001-1512058894

Session-Expires: 1800

P-Asserted-Identity: <sip:9110001@14.48.32.90>

Remote-Party-ID: <sip:9110001@14.48.32.90>;party=calling;screen=yes;privacy=off

Contact: <sip:9110001@14.48.32.90:5060>;isFocus

Max-Forwards: 70

Content-Length: 0 ### CUCM sends INVITE #2 to configured recording server (14.48.32.170)

00020088.001 |12:48:36.157 |AppInfo |//SIP/SIPUdp/wait_SdlSPISignal: Outgoing SIP UDP message
to 14.48.32.170:[5060]:

[902,NET]

INVITE sip:8675309@14.48.32.170:5060 SIP/2.0

Via: SIP/2.0/UDP 14.48.32.90:5060;branch=z9hG4bK5014378d0b

From: <sip:9110001@14.48.32.90;x-farend;x-refci=49613638;x-nearendclusterid=glenscucm10-5;x-
nearenddevice=sep001795bdd16b;x-nearendaddr=9110001;x-farendrefci=49613637;x-
farendclusterid=glenscucm10-5;x-farenddevice=sep0018195aa209;x-

farendaddr=9110006>;tag=352-713e2333-4032-45f1-b1f5-e33cf471acec-49613645
To: <sip:8675309@14.48.32.170>
Date: Tue, 14 Oct 2014 16:48:36 GMT
Call-ID: ef7acf80-43d153e4-51-5a20300e@14.48.32.90
Supported: timer,resource-priority,replaces
Min-SE: 1800
User-Agent: Cisco-CUCM10.5
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
CSeq: 101 INVITE
Expires: 180
Allow-Events: presence, kpml
Supported: X-cisco-srtp-fallback
Supported: Geolocation
Call-Info: ;method="NOTIFY;Event=telephone-event;Duration=500"
Cisco-Guid: 4017803136-0000065536-0000000002-1512058894
Session-Expires: 1800
P-Asserted-Identity: <sip:9110001@14.48.32.90>
Remote-Party-ID: <sip:9110001@14.48.32.90>;party=calling;screen=yes;privacy=off
Contact: <sip:9110001@14.48.32.90:5060>;isFocus
Max-Forwards: 70
Content-Length: 0 ### CUCM receives a 200 OK from recording server for INVITE #1

00020089.001 |12:48:36.161 |AppInfo |//SIP/SIPUdp/wait_SdlDataInd: Incoming SIP UDP message size 731 from 14.48.32.170:[5060]:

[903,NET]

SIP/2.0 200 OK

Via: SIP/2.0/UDP 14.48.32.90:5060;branch=z9hG4bK4f2a857d3d

From: <sip:9110001@14.48.32.90;x-nearend;x-refci=49613638;x-nearendclusterid=glenscucm10-5;x-nearenddevice=sep001795bdd16b;x-nearendaddr=9110001;x-farendrefci=49613637;x-farendclusterid=glenscucm10-5;x-farenddevice=sep0018195aa209;x-farendaddr=9110006>;tag=351-713e2333-4032-45f1-b1f5-e33cf471acec-49613642

To: <sip:8675309@14.48.32.170>;tag=1

Call-ID: ef7acf80-43d153e4-50-5a20300e@14.48.32.90

CSeq: 101 INVITE

Contact: <sip:14.48.32.170:5060;transport=udp>

Content-Type: application/sdp

Content-Length: 135

v=0

o=user1 53655765 2353687637 IN IP4 14.48.32.170

s=-

c=IN IP4 14.48.32.170

t=0 0

m=audio 6000 RTP/AVP 0

a=rtpmap:0 PCMU/8000 ### CUCM receives a 200 OK from recording server for INVITE #2

00020092.001 |12:48:36.161 |AppInfo |//SIP/SIPUdp/wait_SdlDataInd: Incoming SIP UDP message size 730 from 14.48.32.170:[5060]:

[905,NET]

SIP/2.0 200 OK

Via: SIP/2.0/UDP 14.48.32.90:5060;branch=z9hG4bK5014378d0b

From: <sip:9110001@14.48.32.90;x-farend;x-refci=49613638;x-nearendclusterid=glenscucm10-5;x-nearenddevice=sep001795bdd16b;x-nearendaddr=9110001;x-farendrefci=49613637;x-farendclusterid=glenscucm10-5;x-farenddevice=sep0018195aa209;x-farendaddr=9110006>;tag=352-713e2333-4032-45f1-b1f5-e33cf471acec-49613645

To: <sip:8675309@14.48.32.170>;tag=2

Call-ID: ef7acf80-43d153e4-51-5a20300e@14.48.32.90

CSeq: 101 INVITE

Contact: <sip:14.48.32.170:5060;transport=udp>

Content-Type: application/sdp

Content-Length: 135

v=0

o=user1 53655765 2353687637 IN IP4 14.48.32.170
s=-
c=IN IP4 14.48.32.170
t=0 0
m=audio 6000 RTP/AVP 0
a=rtpmap:0 PCMU/8000 ### Region information for connecting audio for recording call, both appear to support G.711.
Note that the bandwidth capabilities printed is kbps=8 meaning the region relationship between the two regions is limited to codecs using 8kbps or less. 00020160.005 |12:48:36.190 |AppInfo |DET-RegionsServer::matchCapabilities-- savedOption=3, PREF_NONE, regionA=(null) regionB=(null) latentCaps(A=0, B=0) kbps=8, capACount=1, capBCount=1 00020160.006 |12:48:36.190 |AppInfo |DET-MediaManager-(2)::checkAudioPassThru, param(bPostMTPAllocation=0,chkTrp=1), capCount(1,1), mtpPT=1, aPT=2 00020160.007 |12:48:36.190 |AppInfo |DET-MediaManager-(2)::preCheckCapabilities, **region1=Default, region2=RecordingTrunk, Pty1** capCount=1 (Cap,ptime)= **(4,20), Pty2** capCount=1 (Cap,ptime)= **(4,20)**
00020160.008 |12:48:36.190 |AppInfo |DET-RegionsServer::matchCapabilities-- savedOption=0, PREF_NONE, regionA=(null) regionB=(null) latentCaps(A=0, B=0) **kbps=8**, capACount=1, capBCount=1### CUCM determines 2 transcoders are required and attempts to allocate
00020160.011 |12:48:36.190 |AppInfo |DET-MediaManager-(2)::preCheckCapabilities, **caps mismatch! Xcoder Req'd. kbps(8)**, filtered A[capCount=0 (Cap,ptime)=], B[capCount=0 (Cap,ptime)=] allowMTP=0 **numXcoderRequired=2** xcodingSide=0### CUCM determines 2 transcoders are required and attempts to allocate
00020160.011 |12:48:36.190 |AppInfo |DET-MediaManager-(2)::preCheckCapabilities, **caps mismatch! Xcoder Req'd. kbps(8)**, filtered A[capCount=0 (Cap,ptime)=], B[capCount=0 (Cap,ptime)=] allowMTP=0 **numXcoderRequired=2** xcodingSide=0### CUCM sendt the ACK and BYE to the recording server in response to INVITE #1
Note the Q.850 cause code
00020210.001 |12:48:36.216 |AppInfo |//SIP/SIPUdp/wait_SdlSPISignal: Outgoing SIP UDP message to 14.48.32.170:[5060]:
[906,NET]
ACK sip:14.48.32.170:5060;transport=UDP SIP/2.0
Via: SIP/2.0/UDP 14.48.32.90:5060;branch=z9hg4bK51257b2b47
From: <sip:9110001@14.48.32.90;x-nearend;x-refci=49613638;x-nearendclusterid=glenscucm10-5;x-nearenddevice=sep001795bdd16b;x-nearendaddr=9110001;x-farendrefci=49613637;x-farendclusterid=glenscucm10-5;x-farenddevice=sep0018195aa209;x-farendaddr=9110006>;tag=351-713e2333-4032-45f1-b1f5-e33cf47lacec-49613642
To: <sip:8675309@14.48.32.170>;tag=1
Date: Tue, 14 Oct 2014 16:48:36 GMT
Call-ID: ef7acf80-43d153e4-50-5a20300e@14.48.32.90
User-Agent: Cisco-CUCM10.5
Max-Forwards: 70
CSeq: 101 ACK
Allow-Events: presence, kpml
Content-Length: 0
00020211.001 |12:48:36.216 |AppInfo |//SIP/SIPUdp/wait_SdlSPISignal: Outgoing SIP UDP message to 14.48.32.170:[5060]:
[907,NET]
BYE sip:14.48.32.170:5060;transport=UDP SIP/2.0
Via: SIP/2.0/UDP 14.48.32.90:5060;branch=z9hg4bK526f3d2afa
From: <sip:9110001@14.48.32.90;x-nearend;x-refci=49613638;x-nearendclusterid=GlensCUCM10-5;x-nearenddevice=SEP001795BDD16B;x-nearendaddr=9110001;x-farendrefci=49613637;x-farendclusterid=GlensCUCM10-5;x-farenddevice=SEP0018195AA209;x-farendaddr=9110006>;tag=351-713e2333-4032-45f1-b1f5-e33cf47lacec-49613642
To: <sip:8675309@14.48.32.170>;tag=1
Date: Tue, 14 Oct 2014 16:48:36 GMT
Call-ID: ef7acf80-43d153e4-50-5a20300e@14.48.32.90
User-Agent: Cisco-CUCM10.5
Max-Forwards: 70

P-Asserted-Identity: <sip:9110001@14.48.32.90>

CSeq: 102 BYE

Reason: Q.850;cause=47

Content-Length: 0 ### CUCM sendt the ACK and BYE to the recording server in response to INVITE #2

Note the Q.850 cuase code in the BYE

00020248.001 |12:48:36.218 |AppInfo |//SIP/SIPUdp/wait_SdlSPISignal: Outgoing SIP UDP message to 14.48.32.170:[5060]:

[908,NET]

ACK sip:14.48.32.170:5060;transport=UDP SIP/2.0

Via: SIP/2.0/UDP 14.48.32.90:5060;branch=z9hG4bK531df920a6

From: <sip:9110001@14.48.32.90;x-farend;x-refci=49613638;x-nearendclusterid=glenscucm10-5;x-nearenddevice=sep001795bdd16b;x-nearendaddr=9110001;x-farendrefci=49613637;x-farendclusterid=glenscucm10-5;x-farenddevice=sep0018195aa209;x-farendaddr=9110006>;tag=352-713e2333-4032-45f1-b1f5-e33cf471acec-49613645

To: <sip:8675309@14.48.32.170>;tag=2

Date: Tue, 14 Oct 2014 16:48:36 GMT

Call-ID: ef7acf80-43d153e4-51-5a20300e@14.48.32.90

User-Agent: Cisco-CUCM10.5

Max-Forwards: 70

CSeq: 101 ACK

Allow-Events: presence, kpml

Content-Length: 0

00020249.001 |12:48:36.218 |AppInfo |//SIP/SIPUdp/wait_SdlSPISignal: Outgoing SIP UDP message to 14.48.32.170:[5060]: [909,NET] BYE sip:14.48.32.170:5060;transport=UDP SIP/2.0 Via: SIP/2.0/UDP

14.48.32.90:5060;branch=z9hG4bK5462aba807 From: <sip:9110001@14.48.32.90;x-farend;x-refci=49613638;x-nearendclusterid=glenscucm10-5;x-nearenddevice=sep001795bdd16b;x-nearendaddr=9110001;x-farendrefci=49613637;x-farendclusterid=glenscucm10-5;x-farenddevice=sep0018195aa209;x-farendaddr=9110006>;tag=352-713e2333-4032-45f1-b1f5-e33cf471acec-

49613645 To: <sip:8675309@14.48.32.170>;tag=2 Date: Tue, 14 Oct 2014 16:48:36 GMT Call-ID:

ef7acf80-43d153e4-51-5a20300e@14.48.32.90 User-Agent: Cisco-CUCM10.5 Max-Forwards: 70 P-

Asserted-Identity: <sip:9110001@14.48.32.90> CSeq: 102 BYE **Reason: Q.850;cause=47**

Content-Length: 0

CSS および PT 問題を含むミスコンフィギュレーション

コマンドは下記の記録コンフィギュレーションがの大半を呼び出しを記録していない電話の MAC アドレスを知っているとだけすぐに検討されるようにします。電話次の実際の MAC アドレスとコマンド「*MAC_of_Phone*」の一部を下記の例単に取り替えて下さい。

これは複数ある場合私達に検索している MAC のための DN を (すべて)、確認のための電話の MAC ちょうど、胸当て設定、プライバシー設定、レコードタイプ (リストされているラボからの例で値を参照して下さい) 電話によって、記録 CSS の名前使用中の、記録プロファイルその記録プロファイルのための記録宛先与え、宛先を記録して私達を MAC に基づいてと関連付けられることパーティションは検索しています:

'1'そして「自動」時'2'そして「選択的な」他の「NA」END、ケース devnumplanmap.tkpreferredmediasource 時'1'それから「ゲートウェイ」好んだときに'2'それから「電話をかける Recording_Media_Sourceとして優先する」他の「NA」ENDに時 recording_typeとして'0'それから「ディセーブルにされる」記録時'f'が is_privacy_onとして」他の「NA」ENDから離れて「プライバシーそれからいるとき「tプライバシーで」」がそれから「あるとき'0」「胸当て is_bib_onとして」が他の「NA」ENDから離れてそれからいるとき'1」「胸当てで」がそれからあるとき phone_dn、phone_macとして dev.name、ケース dev.tkstatus_builtinbridge、ケース dev.resettoggle、ケース recordynam.tkrecordingflag ように SQL 選定された n1.dnorpattern を実行して下さい、 css.pkid = rcrdpro.fkcallingsearchspace_callrecording および dev.name=」MAC_of_Phone」 recording_profile_nameとして rcrdpro.name、rcrdpro.recorderdestination

recording_route_pattern css_used_by_recording_profile css.name、css として rcrdpro 内部加入 callingsearchspace として recordingprofile からの required_partition_for_css_used_by_recording_profile rp.name 同様に devnumplanmap として RP として n としての n.dnorpattern = rcrdpro.recorderdestination 内部加入 routepartition の rp.pkid = n.fkroutepartition 内部加入 devicenumplanmap の numplan rcrdpro.fkcallingsearchspace_callrecording = css.pkid 内部加入開発として recordynam としての devnumplanmap.pkid = recordynam.fkdevicenumplanmap 内部加入 デバイスの recordingdynamic rcrdpro.pkid = devnumplanmap.fkrecordingprofile 内部加入 n1 としての numplan devnumplanmap.fkdevice = dev.pkid 内部加入 devnumplanmap.fknumplan = n1.pkid

これは私達にに対して検索している電話の MAC と関連付けられる記録プロファイルの記録 CSS と関連付けられるパーティションのリストを提示します。

RP として csm として css 内部加入 callingsearchspacemember として callingsearchspace から partitions_in_recording_css として name_of_the_recording_css として SQL 選定された css.name を、rp.name、csm.sortorder の csm.fkcallingsearchspace = css.pkid 内部加入 routepartition の開発として devnumplanmap として rcrdpro としての rcrdpro.fkcallingsearchspace_callrecording = css.pkid 内部加入 devicenumplanmap の rcrdpro.pkid = devnumplanmap.fkrecordingprofile 内部加入 デバイスの recordingprofile csm.fkroutepartition = rp.pkid 内部加入 devnumplanmap.fkdevice = dev.pkid ところで css.pkid = rcrdpro.fkcallingsearchspace_callrecording および dev.name= MAC_of_Phone 実行して下さい

MAC アドレス SEPC80084AA8743 の電話のためのラボからの出力の例はここにあります:

このコマンドで 2003 年ではあるかどれ電話にまたその 1 DN だけ胸当てがオンになっていることを、私達見ますあることを見る場合があります、プライバシーは消えています、レコードタイプは自動です、優先ソースは電話です、記録プロファイルはテスト記録プロファイルです、記録 Calling Search Space は INTERNAL_CSS です、記録された呼び出しのためのルートパターンは 8675309 であり、そのパターンはパーティション INTERNAL_PT によって関連付けられます。

```
### CUCM sendt the ACK and BYE to the recording server in response to INVITE #2
Note the Q.850 cuase code in the BYE
```

```
00020248.001 |12:48:36.218 |AppInfo |//SIP/SIPUdp/wait_SdlSPISignal: Outgoing SIP UDP message
to 14.48.32.170:[5060]:
[908,NET]
ACK sip:14.48.32.170:5060;transport=UDP SIP/2.0
Via: SIP/2.0/UDP 14.48.32.90:5060;branch=z9hG4bK531df920a6
From: <sip:9110001@14.48.32.90;x-farend;x-refci=49613638;x-nearendclusterid=glenscucm10-5;x-
nearenddevice=sep001795bdd16b;x-nearendaddr=9110001;x-farendrefci=49613637;x-
farendclusterid=glenscucm10-5;x-farenddevice=sep0018195aa209;x-
farendaddr=9110006>;tag=352-713e2333-4032-45f1-b1f5-e33cf471acec-49613645
To: <sip:8675309@14.48.32.170>;tag=2
Date: Tue, 14 Oct 2014 16:48:36 GMT
Call-ID: ef7acf80-43d153e4-51-5a20300e@14.48.32.90
User-Agent: Cisco-CUCM10.5
Max-Forwards: 70
CSeq: 101 ACK
Allow-Events: presence, kpml
Content-Length: 0
```

```
00020249.001 |12:48:36.218 |AppInfo |//SIP/SIPUdp/wait_SdlSPISignal: Outgoing SIP UDP message to
14.48.32.170:[5060]: [909,NET] BYE sip:14.48.32.170:5060;transport=UDP SIP/2.0 Via: SIP/2.0/UDP
14.48.32.90:5060;branch=z9hG4bK5462aba807 From: <sip:9110001@14.48.32.90;x-farend;x-
refci=49613638;x-nearendclusterid=glenscucm10-5;x-nearenddevice=sep001795bdd16b;x-
```

nearendaddr=9110001;x-farendrefci=49613637;x-farendclusterid=glenscucm10-5;x-farenddevice=sep0018195aa209;x-farendaddr=9110006>;tag=352~713e2333-4032-45f1-b1f5-e33cf471acec-49613645 To: <sip:8675309@14.48.32.170>;tag=2 Date: Tue, 14 Oct 2014 16:48:36 GMT Call-ID: ef7acf80-43d153e4-51-5a20300e@14.48.32.90 User-Agent: Cisco-CUCM10.5 Max-Forwards: 70 P-Asserted-Identity: <sip:9110001@14.48.32.90> CSeq: 102 BYE Reason: Q.850;cause=47 Content-Length: 0

このコマンドの出力によって対象の電話によって関連付けられる記録プロファイルの記録 CSS のパーティションすべてをチェックしています。場合がありますここに見るパーティション **INTERNAL_PT** が Calling Search Space **INTERNAL_CSS** と関連付けられるパーティションの 1 つであることを。これは記録ルートパターンを呼出せる電話の胸当てにおいての問題がないはずであることを意味します。

```
run sql select css.name as name_of_the_recording_css, rp.name as partitions_in_recording_css,
csm.sortorder from callingsearchspace as css inner join callingsearchspacemember as csm on
csm.fkcallingsearchspace = css.pkid inner join routepartition as rp on csm.fkroutepartition =
rp.pkid inner join recordingprofile as rcrdpro on rcrdpro.fkcallingsearchspace_callrecording =
css.pkid inner join devicenumplanmap as devnumplanmap on rcrdpro.pkid =
devnumplanmap.fkrecordingprofile inner join device as dev on devnumplanmap.fkdevice = dev.pkid
where css.pkid = rcrdpro.fkcallingsearchspace_callrecording and dev.name='SEPC80084AA8743'
name_of_the_recording_css partitions_in_recording_css sortorder
=====
INTERNAL_CSS          E911_PT              1
INTERNAL_CSS          Phones_PT            2
INTERNAL_CSS          EMERGENCY_PT        3
INTERNAL_CSS         INTERNAL_PT         4
INTERNAL_CSS          INFORMACAST_PT      5
```