



Configuring Seamless Integration of EVPN with L3VPN (MPLS SR)

This chapter contains the following sections:

- [Information About Configuring Seamless Integration of EVPN with L3VPN \(MPLS SR\), on page 1](#)
- [Guidelines and Limitations for Configuring Seamless Integration of EVPN with L3VPN \(MPLS SR\), on page 3](#)
- [Configuring Seamless Integration of EVPN with L3VPN \(MPLS SR\), on page 4](#)
- [Example Configuration for Configuring Seamless Integration of EVPN with L3VPN \(MPLS SR\), on page 8](#)

Information About Configuring Seamless Integration of EVPN with L3VPN (MPLS SR)


Data Center (DC) deployments have adopted VXLAN EVPN for its benefits such as EVPN control-plane learning, multitenancy, seamless mobility, redundancy, and easier POD additions. Similarly, the CORE is either an Label Distribution Protocol (LDP)-based MPLS L3VPN network or transitioning from the traditional MPLS L3VPN LDP-based underlay to a more sophisticated solution like Segment Routing (SR). Segment Routing is adopted for its benefits such as:

- Unified IGP and MPLS control planes
- Simpler traffic engineering methods
- Easier configuration
- SDN adoption

With two different technologies, one within the data center (DC) and one in the CORE, there is a natural necessity to handoff from VXLAN to an MPLS-based core at the DCI nodes, which sit on the edge of the DC domain, interfacing with the Core edge router.

Information About Configuring Seamless Integration of EVPN with L3VPN (MPLS SR)

Figure 1: Topology Overview

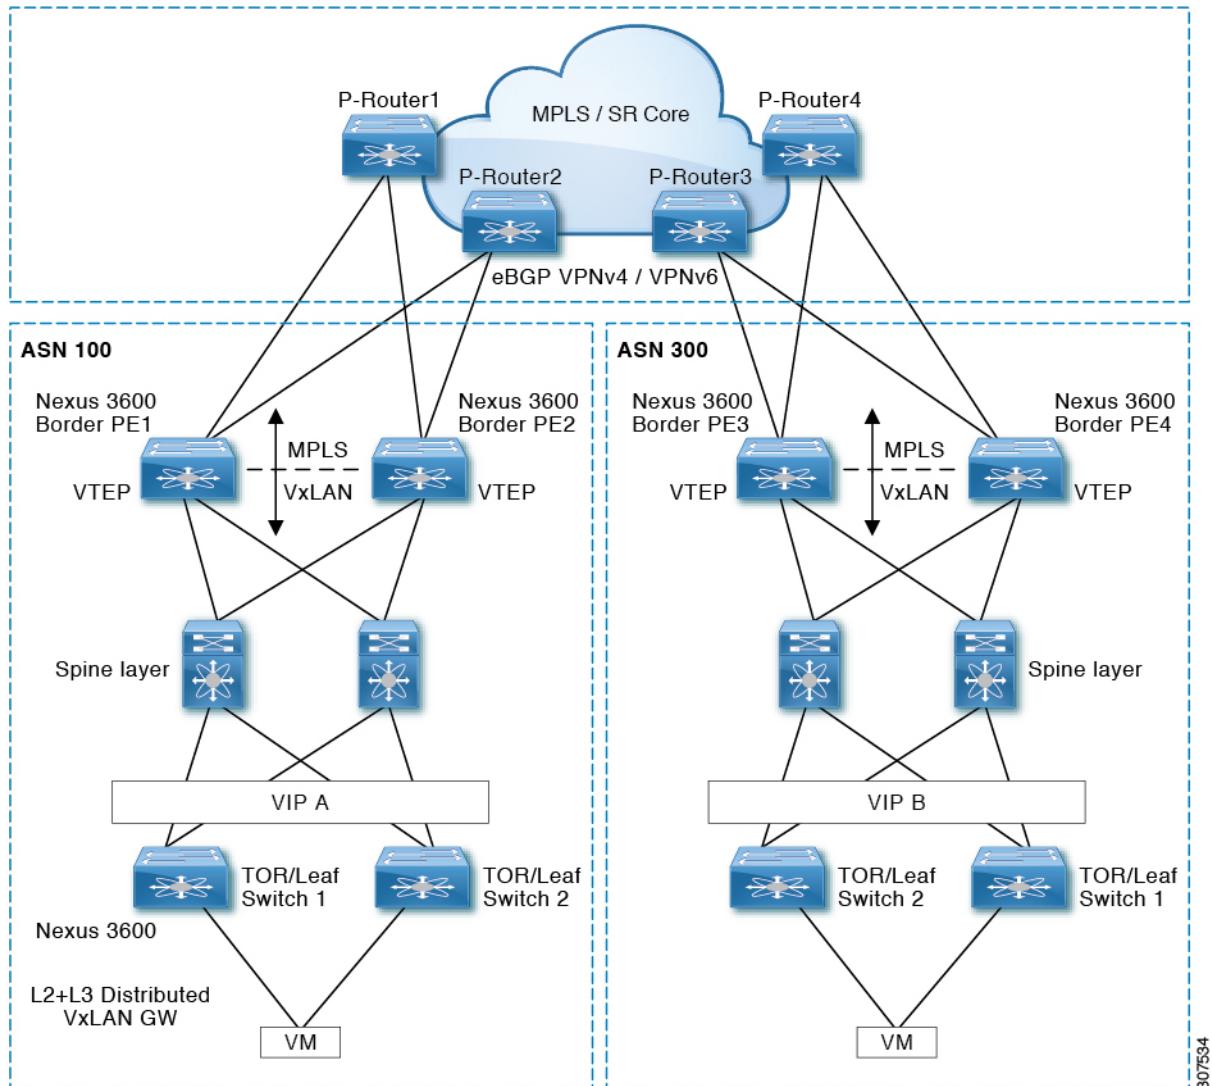

In the previous diagram, two DC pods, each running VXLAN, are being Layer 3 extended over a WAN/Core running MPLS/SR. Another method is classical MPLS L3VPN using LDP. The edge devices in the DC domain (border PE1, PE2, PE3, and PE4) are the DCI nodes doing the handoff between VXLAN and the MPLS-based Core network.

Guidelines and Limitations for Configuring Seamless Integration of EVPN with L3VPN (MPLS SR)

Feature	Cisco Nexus 3600	Comments
VXLAN EVPN to SR-L3VPN	Yes	Extend Layer 3 connectivity between different DC pods Underlay IGP/BGP with SR extensions.
VXLAN EVPN to SR-L3VPN	Yes	Extend Layer 3 connectivity between DC POD running VXLAN and any domain(DC or CORE) running SR.
VXLAN EVPN to MPLS L3VPN (LDP)	Yes	Underlay is LDP.

The following features are supported:

- Layer 3 orphans
- Layer 3 hand-off
- Layer 3 physical interfaces type for core-facing ports
- Per-VRF labels
- LDP
- Segment routing



Note Segment routing and LDP cannot co-exist.

The following features are not supported:

- vPC for redundancy
- Subnet stretches across the DC domain
- SVI/Subinterfaces configured MAC addresses
- Statistics
- SVI toward the MPLS core
- End-to-End Time to Live (TTL) support only in pipe mode for handoff scenario
- End-to-End Explicit Congestion Notification (ECN) for handoff scenario

Configuring Seamless Integration of EVPN with L3VPN (MPLS SR)

The following procedure imports and reoriginate the routes from the VXLAN domain to the MPLS domain and in the other direction.

Before you begin

SUMMARY STEPS

1. **configure terminal**
2. **feature-set mpls**
3. **nv overlay evpn**
4. **feature bgp**
5. **feature mpls l3vpn**
6. **feature mpls segment-routing**
7. **feature interface-vlan**
8. **feature vn-segment-vlan-based**
9. **feature nv overlay**
10. **router bgp *autonomous-system-number***
11. **address-family ipv4 unicast**
12. **redistribute direct route-map *route-map-name***
13. **network *address***
14. **exit**
15. **address-family l2vpn evpn**
16. **neighbor *address* remote-as *number***
17. **update-source *type/id***
18. **ebgp-multihop *number***
19. **address-family ipv4 unicast**
20. **send-community extended**
21. **exit**
22. **address-family vpng4 unicast**
23. **send-community extended**
24. **import l2vpn evpn reoriginate**
25. **neighbor *address* remote-as *number***
26. **address-family ipv4 unicast**
27. **send-community extended**
28. **exit**
29. **address-family ipv6 unicast**
30. **send-community extended**
31. **exit**
32. **address-family l2vpn evpn**
33. **send-community extended**
34. **exit**

35. import vpn unicast reoriginate

DETAILED STEPS

Procedure

	Command or Action	Purpose
Step 1	configure terminal Example: switch# configure terminal	Enters global configuration mode.
Step 2	feature-set mpls Example: switch(config)# feature-set mpls	Enable MPLS feature set.
Step 3	nv overlay evpn Example: switch(config)# nv overlay evpn	Enable VXLAN.
Step 4	feature bgp Example: switch(config)# feature bgp	Enable BGP.
Step 5	feature mpls l3vpn Example: switch(config)# feature mpls l3vpn	Enable Layer 3 VPN.
Step 6	feature mpls segment-routing Example: switch(config)# feature mpls segment-routing	Enable Segment Routing.
Step 7	feature interface-vlan Example: switch(config)# feature interface-vlan	Enable interface VLAN.
Step 8	feature vn-segment-vlan-based Example: Example: switch(config)# feature vn-segment-vlan-based	Enable VLAN based VN segment.
Step 9	feature nv overlay Example: Example: switch(config)# feature nv overlay	Enable VXLAN.

	Command or Action	Purpose
Step 10	router bgp <i>autonomous-system-number</i> Example: switch(config)# router bgp 1	Configure BGP. The value of <i>autonomous-system-number</i> is from 1 to 4294967295.
Step 11	address-family ipv4 unicast Example: switch(config-router)# address-family ipv4 unicast	Configure address family for IPv4.
Step 12	redistribute direct route-map <i>route-map-name</i> Example: switch(config-router-af)# redistribute direct route-map passall	Configure redistribution.
Step 13	network <i>address</i> Example: switch(config-router-af)# network 0.0.0.0/0	Injects prefixes into handoff BGP along with redistribution.
Step 14	exit Example: switch(config-router-af)# exit	Exit command mode.
Step 15	address-family l2vpn evpn Example: switch(config-router)# address-family l2vpn evpn	Configure L2VPN address family.
Step 16	neighbor <i>address remote-as number</i> Example: switch(config-router)# neighbor 108.108.108.108 remote-as 65535	Define eBGP neighbor IPv4 address and remote Autonomous-System (AS) number.
Step 17	update-source <i>type/id</i> Example: switch(config-router-af)# update-source loopback100	Define interface for eBGP peering.
Step 18	ebgp-multipath <i>number</i> Example: switch(config-router)# ebgp-multipath 10	Specifies multihop TTL for remote peer. The range of <i>number</i> is from 2 to 255.
Step 19	address-family ipv4 unicast Example: switch(config-router)# address-family ipv4 unicast	Configure the address family for IPv4.
Step 20	send-community extended Example:	Configures community for BGP neighbors.

	Command or Action	Purpose
	switch(config-router-af) # send-community extended	
Step 21	exit Example: switch(config-router-af) # exit	Exit command mode.
Step 22	address-family vpng4 unicast Example: switch(config-router) # address-family vpng4 unicast	Configure the address family for IPv4.
Step 23	send-community extended Example: switch(config-router-af) # send-community extended	Configures community for BGP neighbors.
Step 24	import l2vpn evpn reoriginate Example: switch(config-router) # import l2vpn evpn reoriginate	Reoriginate the route with new RT. Can be extended to use an optional route-map.
Step 25	neighbor address remote-as number Example: switch(config-router) # neighbor 175.175.175.2 remote-as 65535	Define eBGP neighbor IPv4 address and remote Autonomous-System (AS) number.
Step 26	address-family ipv4 unicast Example: switch(config-router) # address-family ipv4 unicast	Configure the address family for IPv4.
Step 27	send-community extended Example: switch(config-router-af) # send-community extended	Configures community for BGP neighbors.
Step 28	exit Example: switch(config-router-af) # exit	Exit command mode.
Step 29	address-family ipv6 unicast Example: switch(config-router) # address-family ipv6 unicast	Configure the IPv6 unicast address family. This is required for IPv6 over VXLAN with an IPv4 underlay.
Step 30	send-community extended Example: switch(config-router-af) # send-community extended	Configures community for BGP neighbors.

Example Configuration for Configuring Seamless Integration of EVPN with L3VPN (MPLS SR)

	Command or Action	Purpose
Step 31	exit Example: switch(config-router-af) # exit	Exit command mode.
Step 32	address-family l2vpn evpn Example: switch(config-router) # address-family l2vpn evpn	Configure L2VPN address family.
Step 33	send-community extended Example: switch(config-router-af) # send-community extended	Configures community for BGP neighbors.
Step 34	exit Example: switch(config-router-af) # exit	Exit command mode.
Step 35	import vpn unicast reoriginate Example: switch(config-router) # import vpn unicast reoriginate	Reoriginate the route with new RT. Can be extended to use an optional route-map.

Example Configuration for Configuring Seamless Integration of EVPN with L3VPN (MPLS SR)

The following is a sample CLI configuration that is required to import and reoriginate the routes from the VXLAN domain to the MPLS domain and in the reverse direction.

```
switch# sh running-config

!Command: show running-config
!Running configuration last done at: Sat Mar 17 10:00:40 2001
!Time: Sat Mar 17 12:50:12 2001

version 9.2(2) Bios:version 05.22
hardware profile multicast max-limit lpm-entries 0

hostname switch
install feature-set mpls
vdc Scrimshaw id 1
    allow feature-set mpls
    limit-resource vlan minimum 16 maximum 4094
    limit-resource vrf minimum 2 maximum 4096
    limit-resource port-channel minimum 0 maximum 511
    limit-resource u4route-mem minimum 248 maximum 248
    limit-resource u6route-mem minimum 96 maximum 96
    limit-resource m4route-mem minimum 90 maximum 90
    limit-resource m6route-mem minimum 8 maximum 8
feature-set mpls
```

```
feature telnet
feature bash-shell
feature sftp-server
nv overlay evpn
feature ospf
feature bgp
feature mpls l3vpn
feature mpls segment-routing
feature interface-vlan
feature vn-segment-vlan-based
feature bfd
feature nv overlay

no password strength-check
username admin password 5
$5$eEI.wtRs$txfevWxMj/upb/1dJeXy5rNvFYKymzz3Zmc.fpuxTp
1 role network-admin
ip domain-lookup
copp profile strict
snmp-server user admin network-admin auth md5 0x116815e4934ab1f854dce5dd673f33d7
    priv 0x116815e4934ab1f854dce5dd673f33d7 localizedkey
rmon event 1 description FATAL(1) owner PMON@FATAL
rmon event 2 description CRITICAL(2) owner PMON@CRITICAL
rmon event 3 description ERROR(3) owner PMON@ERROR
rmon event 4 description WARNING(4) owner PMON@WARNING
rmon event 5 description INFORMATION(5) owner PMON@INFO

mpls label range 30000 40000 static 6000 8000
vlan 1-2,100,200,555
segment-routing mpls
    global-block 30000 40000
vlan 555
    vn-segment 55500

route-map ALL permit 10
route-map SRmap permit 10
    set label-index 666
route-map ULAY_NETWORK permit 10
    set label-index 600
route-map passall permit 10
vrf context ch5_swap
    ip route 199.1.1.0/24 16.1.1.2
    ip route 200.1.1.0/24 16.1.1.2
vrf context evpn
    vni 55500
    rd auto
    address-family ipv4 unicast
        route-target import 100:55500
        route-target import 100:55500 evpn
        route-target import 6:6000
        route-target export 100:55500
        route-target export 100:55500 evpn
        route-target export 6:6000
    address-family ipv6 unicast
        route-target import 6:6000
        route-target export 6:6000
vrf context management
    ip route 0.0.0.0/0 172.31.144.1
hardware forwarding unicast trace
vlan configuration 2
    ip igmp snooping static-group 225.1.1.1 interface Ethernet1/9

interface Vlan1
```

Example Configuration for Configuring Seamless Integration of EVPN with L3VPN (MPLS SR)

```

interface Vlan555
  no shutdown
  vrf member evpn

interface nvel
  no shutdown
  host-reachability protocol bgp
  source-interface loopback1
  member vni 55500 associate-vrf

interface Ethernet1/12
  mpls ip forwarding
  no shutdown

interface Ethernet1/13

interface Ethernet1/14
  no shutdown

interface Ethernet1/15
  no shutdown

interface Ethernet1/16
  no shutdown

interface Ethernet1/17
  no shutdown

interface Ethernet1/18

interface Ethernet1/19

interface Ethernet1/20
  no shutdown

interface Ethernet1/21
  ip address 6.2.0.1/24
  mpls ip forwarding
  no shutdown

interface Ethernet1/21.1
  encapsulation dot1q 1211
  vrf member evpn
  ip address 6.22.0.1/24
  no shutdown

interface Ethernet1/21.2
  encapsulation dot1q 1212
  ip address 6.222.0.1/24
  no shutdown

interface Ethernet1/21.3
  encapsulation dot1q 1213
  vrf member ch5_swap
  ip address 16.1.1.1/24
  no shutdown

interface Ethernet1/22
  no shutdown

interface Ethernet1/23
  description underlay
  ip address 6.1.0.1/24
  mpls ip forwarding

```

```
no shutdown

interface Ethernet1/23.1
  encapsulation dot1q 1231
  vrf member evpn
  ip address 6.11.0.1/23
  no shutdown

interface Ethernet1/24
  no shutdown

interface Ethernet1/25
  no shutdown

interface Ethernet1/26
  description underlay
  ip address 6.0.0.1/24
  mpls ip forwarding
  no shutdown

interface Ethernet1/26.1
  encapsulation dot1q 1261
  ip address 7.0.0.1/24
  no shutdown

interface Ethernet1/27
  no shutdown

interface Ethernet1/28
  no shutdown

interface Ethernet1/29
  no shutdown

interface Ethernet1/30
  no shutdown

interface Ethernet1/31
  ip address 1.31.1.1/24
  no shutdown

interface Ethernet1/32
  no shutdown

interface Ethernet1/33
  ip address 87.87.87.1/24
  ip router ospf 100 area 0.0.0.0
  no shutdown

interface Ethernet1/34
  no shutdown

interface Ethernet1/35
  no shutdown

interface Ethernet1/36
  no shutdown

interface mgmt0
  vrf member management
  ip address 172.31.145.107/21

interface loopback1
  ip address 58.58.58.58/32
```

Example Configuration for Configuring Seamless Integration of EVPN with L3VPN (MPLS SR)

```

interface loopback6
    description used for SR underlay testing
    ip address 6.6.6.1/32
line console
line vty
monitor session 1
    source interface Ethernet1/21 rx
    source interface Ethernet1/23 both
    destination interface sup-eth0

mpls static configuration
    address-family ipv4 unicast
        lsp SL_AGG_BELL
            in-label 6001 allocate policy 88.1.1.0 255.255.255.0
            forward
                path 1 next-hop 6.0.0.2 out-label-stack implicit-null
router ospf 100
    redistribute direct route-map ALL
router bgp 600
    address-family ipv4 unicast
        network 6.6.6.1/32 route-map SRmap
        network 66.1.1.0/24 route-map ULAY_NETWORK
        redistribute direct route-map passall
        maximum-paths 32
        allocate-label all
    neighbor 6.0.0.2
        remote-as 50
        ebgp-multihop 255
        address-family ipv4 labeled-unicast
    neighbor 6.1.0.2
        remote-as 50
        ebgp-multihop 255
        address-family ipv4 labeled-unicast
    neighbor 6.6.6.3
        remote-as 300
        update-source loopback6
        ebgp-multihop 255
        address-family vpnv4 unicast
            send-community
            send-community extended
            next-hop-self
            import l2vpn evpn reoriginate
    neighbor 7.0.0.2
        remote-as 50
        ebgp-multihop 255
        address-family ipv4 labeled-unicast
    neighbor 21.21.21.21
        remote-as 600
        update-source loopback1
        address-family l2vpn evpn
            send-community
            send-community extended
            import vpn unicast reoriginate
vrf evpn
    address-family ipv4 unicast
        advertise l2vpn evpn
        redistribute direct route-map passall
        redistribute hmm route-map passall
    address-family ipv6 unicast
        redistribute direct route-map passall

```