

# Регистрация SPA922

## Содержание

[Введение](#)

[Как я регистрирую SPA922?](#)

[Дополнительные сведения](#)

## Введение


Эта статья входит в серию публикаций, которые помогают при установке, устранении проблем и обслуживании продуктов Cisco для малого бизнеса (в прошлом серии Linksys Business).

[Дополнительные сведения об условных обозначениях см. в документе Условные обозначения технических терминов Cisco.](#)


## Вопрос. . Как я регистрирую SPA922?

О. Следуйте приведенным ниже инструкциям:

1. Обратитесь к веб-странице настройки SPA922. Проверьте IP-адрес через жидкокристаллический дисплей. Нажмите **Menu** тогда нажимают **9**. Это должно показать вам IP-адрес DHCP. Откройте браузер и наберите в строке адреса следующее.

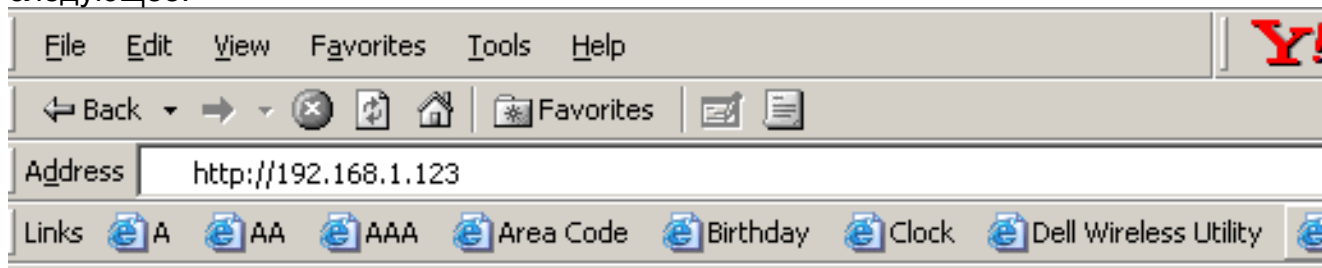

2. Нажмите **Admin Login** и затем **усовершенствованный**.

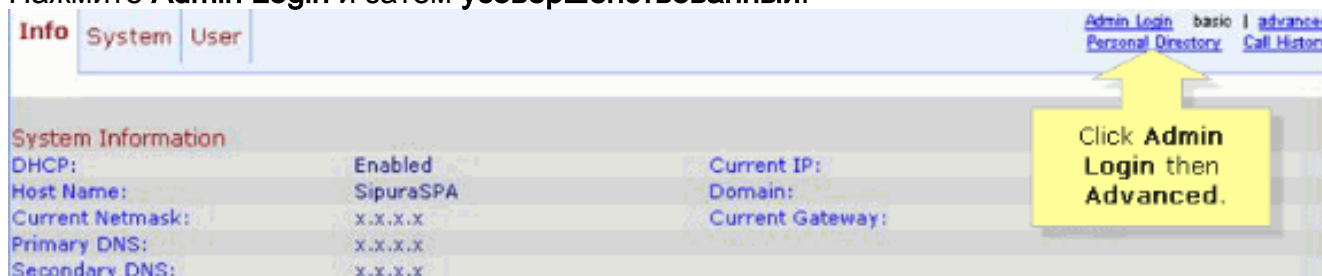

**Примечание:** SPA922 не имеет имени пользователя и пароля по умолчанию. Если вас просят относительно имени пользователя и пароля, и вы не настроили пароль, это означает, что SPA921 заблокирован вашим поставщиком VoIP. Необходимо получить пароль из поставщика VoIP.

3. Нажмите вкладку **EXT 1**. Под Прокси и Регистрацией>> Прокси, введите прокси-сервер.

Это должно быть дано вам вашим поставщиком VoIP. Существуют времена, когда поставщики VoIP требуют **Исходящего** прокси, проверьте адрес сервера с ними. Под Сведениями об абоненте введите Идентификатор пользователя и Пароль.

The screenshot shows the configuration interface for SIP registration, divided into two sections: 'Proxy and Registration' and 'Subscriber Information'. Yellow callouts with arrows point to specific fields:

- Proxy and Registration:**
  - Proxy:** 10.10.10.70:6060
  - Outbound Proxy:** (empty)
  - Register:** (empty)
  - Register Expires:** 00
  - Use DNS SRV:** no
  - Proxy Fallback Intvl:** 3600
  - Use Outbound Proxy:** no
  - Use OB Proxy In Dialog:** yes
  - Make Call Without Reg:** no
  - Ans Call Without Reg:** no
  - DNS SRV Auto Prefix:** no
  - Proxy Redundancy Method:** Normal
- Subscriber Information:**
  - Display Name:** (any name)
  - Password:** (empty)
  - Auth ID:** (empty)
  - Mini Certificate:** (empty)
  - SRTP Private Key:** (empty)
  - User ID:** 123456789
  - Use Auth ID:** no

Yellow callout boxes contain the following text:

- One pointing to the 'Outbound Proxy' field: **Enter Proxy server.**
- One pointing to the 'Password' field: **Enter Password.**
- One pointing to the 'Auth ID' field: **Enter User ID (usually your phone number).**

4. Нажмите **Submit All Changes**.

5. Проверьте Статус во вкладке Info. **Ext 1** должен сказать Зарегистрированный под Регистрационным Состоянием.

The screenshot shows the 'Info' tab selected in the top navigation bar. A yellow callout points to the 'Info' tab with the text: **Click Info.**

The main content area displays system and product information:

- System Information:**
  - DHCP: Static IP
  - Host Name: SipuraSPA
  - Current Netmask: 255.255.255.0
  - Primary DNS:
  - Secondary DNS:
  - Current IP: 10.10.10.78
  - Domain:
  - Current Gateway: 10.10.10.1
- Product Information:**
  - Product Name: SPA-942
  - Software Version: 5.1.5
  - MAC Address: 000E08DC404F
  - Customization: Open
  - Serial Number: 88019FA27084
  - Hardware Version: 1.0.0(273f)
  - Client Certificate: Installed
  - Licenses: None
- Phone Status:**
  - Current Time: 3/15/2007 20:39:49
  - Broadcast Pkts Sent: 0
  - Broadcast Pkts Recv: 1500
  - Broadcast Pkts Dropped: 0
  - RTP Packets Sent: 0
  - RTP Packets Recv: 0
  - SIP Messages Sent: 29
  - SIP Messages Recv: 24
  - External IP:
  - Elapsed Time: 00:06:50
  - Broadcast Bytes Sent: 0
  - Broadcast Bytes Recv: 90000
  - Broadcast Bytes Dropped: 0
  - RTP Bytes Sent: 0
  - RTP Bytes Recv: 0
  - SIP Bytes Sent: 12922
  - SIP Bytes Recv: 13117
  - Operational VLAN ID: n/a
- Ext 1 Status:**
  - Registration State: Registered
  - Next Registration In: 54 s
  - Mapped SIP Port:
  - Registration At: 3/15/2007 20:39:45
  - Waiting:
  - No

A yellow callout box with an arrow points to the 'Registration State: Registered' field, containing the text: **Registration State should be Registered.**

## Дополнительные сведения

- [Cisco Systems – техническая поддержка и документация](#)