

UCCX呼叫功能如被看到在CUCM和UCCX

Contents

[Introduction](#)

[Prerequisites](#)

[Requirements](#)

[Components Used](#)

[背景信息](#)

[流程图](#)

[CUCM透视图](#)

[阶段1.用户输入](#)

[阶段2.发出呼叫阶段](#)

[阶段3.呼叫重定向阶段](#)

[UCCX透视图](#)

[脚本1。](#)

[脚本2。](#)

[用于实验室的呼叫详细信息](#)

[CUCM日志分析](#)

[阶段1.用户输入](#)

[阶段2.发出呼叫](#)

[阶段3.呼叫重定向](#)

[UCCX日志分析](#)

[输入阶段](#)

[发出呼叫阶段](#)

Introduction

本文描述回拨UCCX (Cisco Unified Contact Center Express)功能如何运作。 本文着重对与使用的一次好工作的呼叫的分析UCCX和CUCM (Cisco Unified通信管理器)跟踪并且察觉在呼叫流的关键瞬间在日志分析帮助下。

Prerequisites

Requirements

Cisco 建议您了解以下主题：

- CUCM配置
- UCCX配置
- 读基本的CUCM SDI/SDL跟踪
- 读基本的UCCX日志

Components Used

本文档中的信息基于以下软件版本：

- CUCM版本：10.5.2.12900-14
- UCCX版本：10.6.1.11001-31

The information in this document was created from the devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. If your network is live, make sure that you understand the potential impact of any command.


Note: 一个基本脚本是available在UCCX脚本贮藏库在<http://www.cisco.com/c/en/us/support/customer-collaboration/unified-contact-center-express/products-implementation-design-guides-list.html>. You将查找压缩文件。在该压缩文件中有称为包含一个脚本您能使用作为一个基本脚本的BaseLineAdvQueueing的文件夹。也有描述的词文件脚本如何工作。

背景信息

当客户电话对UCCX队列和，如果所有可用的代理程序那时是繁忙的，并且不能接纳呼叫时，然后在预先设置超时，提示被演奏。如果他或她希望呼叫，这是为了问用户。用户能选择呼叫或留下消息。

- 如果用户选择留下消息消息然后被记录，并且呼叫是断开的。系统inturn轮呼叫另一台CTI (Cisco计算机电话集成)触发器或鬼魂触发器并且保持呼叫那里，代理程序任意是然后播放recored消息给他。
- 如果用户选择呼叫，则提示他或她输入呼叫过期杂志。在编号的确认以后，呼叫是断开的。系统inturn轮呼叫另一台CTI触发器或鬼魂触发器并且保持那里呼叫，代理程序是自由的，采取从代理程序的inout连接代理程序呼叫到用户的编号。

流程图

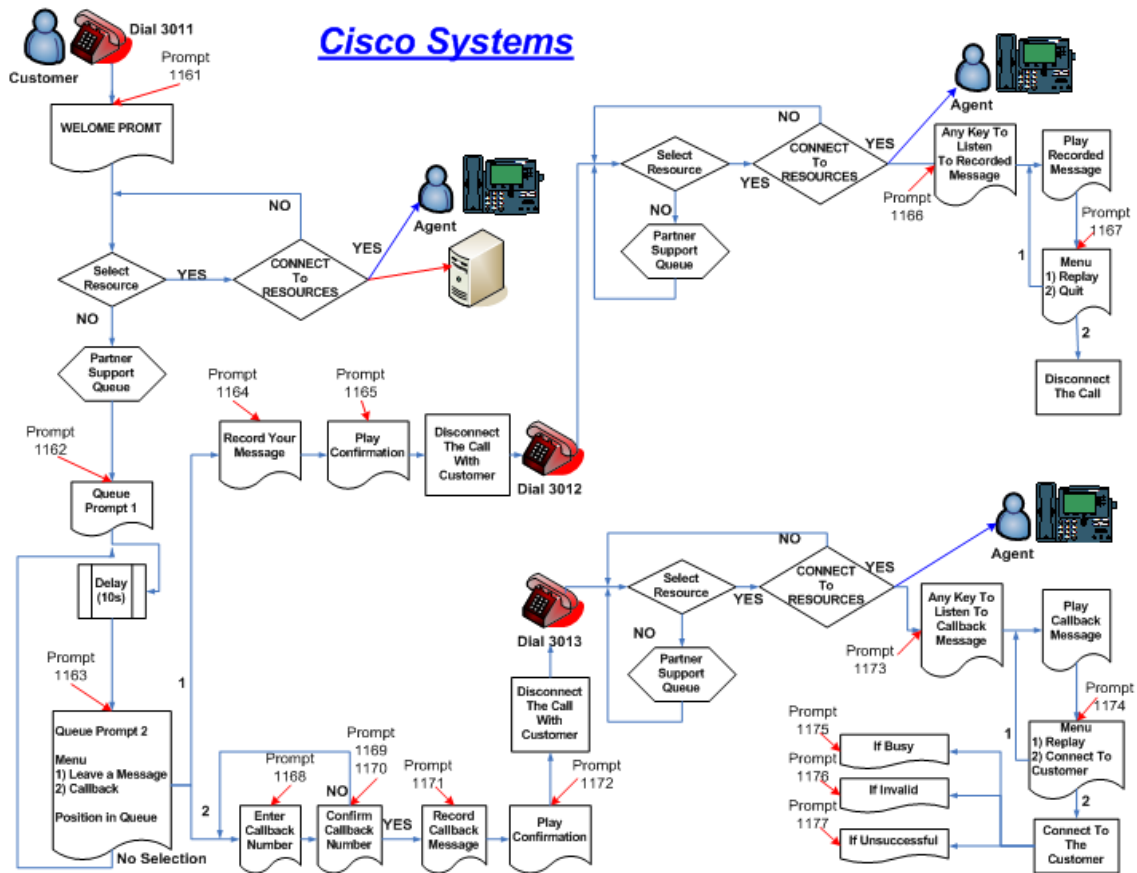

CUCM透视图

回叫功能可以被分解为3个阶段

阶段1.用户输入

阶段2.发出呼叫

阶段3.呼叫重定向

阶段1.用户输入

在此阶段在UCCX队列的客户电话和所有代理程序是繁忙的。给出用户呼叫的一个选项。一旦用户选择它，提示他或她输入呼叫过期杂志和记录消息。确认消息被播放，在后呼叫是断开的。

阶段2.发出呼叫阶段

在此阶段UCCX保留回叫号并且发起一次新的呼叫对有正常ICD的CTI触发器(交互式呼叫分配)路由并且保持鬼魂呼叫这里，代理程序是自由接纳呼叫。

此呼叫是鬼魂呼叫，因为发出呼叫步骤使用完全不同的套CTI端口(呼叫控制组标识是不同的)和新的媒体信道组，配置在UCCX和在脚本。

阶段3.呼叫重定向阶段

在此阶段，代理程序应答了呼叫，代理程序听呼叫人留下的消息，和他或她希望并且按键有系统呼叫从编号的呼叫人呼叫人最初一样多。UCCX系统当前将启动呼叫重定向。这用于转移呼叫在系统和代理程序之间到呼叫人在被输入的回叫号。

UCCX透视图

回叫功能被分解为有2个不同的应用程序和到达2台的触发器这些脚本的2个脚本。

脚本1。

客户电话到此脚本(主线编号)里，其中，如果代理程序是繁忙的提示输入回拨。

此脚本配置有对另一数字称为的一个发出呼叫步骤是与一个简单的ICD脚本的另一台触发器的回叫号。

脚本2。

回拨触发器的一个简单的ICD脚本有挑选资源到包含代理程序的池CSQ将选择为回拨。客户电话被断开，在他输入回叫号后，并且鬼魂呼叫在等待重定向对此脚本并且被保留。

当代理程序是可用为了回拨能启动时此呼叫桥接对用户的回叫号带有呼叫重定向脚本。

必须有用于这些脚本的2个不同的呼叫控制控制组在子系统> CM电话>呼叫控制组下。

必须有2条不同的介质信道被定义在Subsystems > Cisco媒体下。

例如：

脚本1：对此脚本的入局呼叫通过呼叫控制组标识1和媒体信道组1.将来。

在此脚本的发出呼叫步骤将使用呼叫控制组标识2和媒体信道组2。

脚本2：此脚本必须例如有触发器使用从脚本1.的一条不同的介质信道;媒体信道ID 2和呼叫控制组标识2。

用于实验室的呼叫详细信息

最初的用户呼叫号码：2161

UCCX主线队列编号：9999

UCCX呼叫触发：3999

回叫号：08062131

代理商编号：62151 (SIP电话)

CUCM日志分析

阶段1.用户输入

流入请从用户IP电话邀请：

```
####$ Invite for UCCX trigger $###
```

```
02302874.002 |10:14:27.152 |AppInfo |SIPtcp - wait_SdlReadRsp: Incoming SIP TCP message from
10.106.87.161 on port 52035 index 19 with 1475 bytes:
[83471,NET]
INVITE sip:9@10.106.87.135;user=phone SIP/2.0
Via: SIP/2.0/TCP 10.106.87.161:52035;branch=z9hG4bK0593f26a
From: "2161" <sip:2161@10.106.87.135>;tag=e8ba7006276f00792818f1b2-6550ea32
To: <sip:9@10.106.87.135>
Call-ID: e8ba7006-276f0004-3895b0cc-3fda7fb1@10.106.87.161
Max-Forwards: 70
Date: Fri, 08 Apr 2016 04:44:25 GMT
CSeq: 101 INVITE
User-Agent: Cisco-CP8961/9.4.2
Contact: <sip:849fe75d-ae74-8e22-d48e-c11feccbecf2@10.106.87.161:52035;transport=tcp>
Expires: 180
Accept: application/sdp
Allow: ACK,BYE,CANCEL,INVITE,NOTIFY,OPTIONS,REFER,REGISTER,UPDATE,SUBSCRIBE,INFO
Remote-Party-ID: "2161" <sip:2161@10.106.87.135>;party=calling;id-
type=subscriber;privacy=off;screen=yes
Supported: replaces,join,sdp-anat,norefersub,resource-priority,extended-refer,X-cisco-
callinfo,X-cisco-serviceuri,X-cisco-escapecodes,X-cisco-service-control,X-cisco-srtp-fallback,X-
cisco-monrec,X-cisco-config,X-cisco-sis-7.0.0,X-cisco-xsi-8.0.1
Allow-Events: kpml,dialog
Recv-Info: conference
Recv-Info: x-cisco-conference
Content-Length: 354
Content-Type: application/sdp
Content-Disposition: session;handling=optional
```

```
v=0
o=Cisco-SIPUA 23877 0 IN IP4 10.106.87.161
s=SIP Call
t=0 0
m=audio 17818 RTP/AVP 102 0 8 116 18 101
c=IN IP4 10.106.87.161
a=rtpmap:102 L16/16000
a=rtpmap:0 PCMU/8000
a=rtpmap:8 PCMA/8000
a=rtpmap:116 iLBC/8000
a=fmtp:116 mode=20
a=rtpmap:18 G729/8000
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
a=sendrecv
```

您看到数字分析为UCCX第9999发生：

```
####$ Digit Analysis happens for UCCX number 9999 $###
```

```
02302962.007 |10:14:27.832 |AppInfo |Digit analysis: match(pi="2", fqcn="2161",
cn="2161",plv="5", pss="", TodFilteredPss="", dd="9999",dac="0")
02302962.008 |10:14:27.832 |AppInfo |Digit analysis: analysis results
02302962.009 |10:14:27.832 |AppInfo ||PretransformCallingPartyNumber=2161
|CallingPartyNumber=2161
|DialingPartition=
```

```
|DialingPattern=9999
|FullyQualifiedCalledPartyNumber=9999
|DialingPatternRegularExpression=(9999)
|DialingWhere=
|PatternType=Enterprise
```

以回应发现9999应该路由的地方编号，您获得Linecontroller，并且这是处理呼叫的下一个进程：

```
02302964.000 |10:14:27.832 |SdlSig |DmPidRes
|wait |Da(1,100,211,1)
|DeviceManager(1,100,205,1) |1,100,14,94509.144^10.106.87.161^* |[R:N-
H:0,N:0,L:0,V:0,Z:0,D:0] Ccpn=4eebaf05-990d-7980-a79f-e4488fb75cec Id=3836477808 ccmType=4
DeviceName=9999: Pid=1,100,174,555,ad243d17-98b4-4118-8feb-5ff2e1b781ac
```

```
###$ PID=LineControl(1,100,174,555) is the response
```

```
02302964.001 |10:14:27.832 |AppInfo |Digit analysis: wait_DmPidRes- Partition=[] Pattern=[9999]
Where=[],cmDeviceType=[UserDevice], OutsideDialtone =[0], DeviceOverride=[0],
PID=LineControl(1,100,174,555),CI=[31614358],Sender=Cdcc(1,100,219,249)
```

这导致我们Linecontroller：

```
02302975.001 |10:14:27.833 |AppInfo |LineControl(555) - 0 calls, 0 CiReq, busyTrigger=10000,
maxCall=10000
02302975.002 |10:14:27.833 |Created |
| |LineCdpc(1,100,175,269)
|LineControl(1,100,174,555) |
|NumOfCurrentInstances: 2
02302975.003 |10:14:27.833 |AppInfo |LineControl(555) - Get call instance=1 for CI=31614359
02302975.004 |10:14:27.833 |AppInfo |LineControl(555): restart0_CcSetupReq update State of cdpc
(269) to receive7
```

Linecontroller当前导致我们设备(CTI端口)：

```
02302979.000 |10:14:27.834 |SdlSig |CcSetupReq
|null0 |LineCdpc(1,100,175,269)
|LineControl(1,100,174,555) |1,100,14,94509.144^10.106.87.161^* |[R:N-
H:0,N:1,L:0,V:0,Z:0,D:0] CI=31614359 CI.branch=0 sBPL.plid=65 sBPL.l=1 sBPL.pl=5 sBPL.msds=0
FDataType=0opId=0ssType=0 SsKey=0invokeId=0resultExp=Fpbda=F pi.piid=30 pi.l=0 pi2.piid=30
pi2.l=0 pi3.piid=30 pi3.l=0 FQCGPN=ti=1nd=2161pi=0sil preXCgpn=tn=0npi=0ti=1nd=2161pi=1sil
cgPart= cgPat=2161 cgpn=tn=0npi=0ti=1nd=2161pi=1sil cgpnVM= unXCgpn=tn=0npi=0ti=1nd=2161pi=1sil
cName=locale: 1 Name: UnicodeName: pi: 1
DD=tn=0npi=1ti=1nd=9999User=9999Host=10.106.87.135Port=5060PassWord=Madder=Transport=4mDisplayNa
me=RawUrl=sip:9@10.106.87.135;user=phoneOrigPort=0pi=0sil
origDD=tn=0npi=1ti=1nd=9999User=9999Host=10.106.87.135Port=5060PassWord=Madder=Transport=4mDispl
ayName=RawUrl=sip:9@10.106.87.135;user=phoneOrigPort=0pi=0sil
preXCdpc=tn=0npi=0ti=1nd=9999pi=0sil preXTagsList=SUBSCRIBER preXPosMatchList=9999 cdPart=
cdPat=9999 cdpn=tn=0npi=0ti=1nd=9999pi=1sil cdpnVMbox= localPatternUsage=2
connectedPatternUsage=2 itrPart= itrPat= LRPart= LRPat=9999 LR=tn=0npi=0ti=1nd=9999pi=0sil LRVM=
LRName=locale: 1 Name: UnicodeName: pi: 0 FQOCpdn=ti=1nd=9999pi=0sil
fFQLRNum=ti=1nd=9999pi=0sil oPart= oPat=9999 oCpdn=tn=0npi=0ti=1nd=9999pi=0sil oCdpnVM= oRFR=0
oName=locale: 1 Name: UnicodeName: pi: 0 ts=SUBSCRIBER posMatches=9999 withTags= withValues=
rdn.l=0IpAddrMode=0 ipAddrType=0 ipv4=10.106.87.161:52035 region=Default capCount=5 ctiActive=F
ctiFarEndDev=1 ctiCCMId=1 cgPtyDev=SEPE8BA7006276F callInst=1 confCallInst=0 OLF=1Supp
DTMF=3DTMF Cfg=1DTMF Payload=101lisOffNetDev=F bc.l=3 bc.itr=1 bc.itc=0 bc.trm=0 bc.tm=16
maxForwards=69 cgpnMaskedByRedirect=F callingDP=1b1b9eb6-7803-11d3-bdf0-00108302ead1
featCallType=0 callingUserId= UnicodeName: muteEnabled=0 associatedCallCI=0 featurePriority=1
nonTargetPolicy=0 unconsumedDigits= suppressMOH=F numPlanPkid =4eebaf05-990d-7980-a79f-
e4488fb75cec networkDomain= bitMask=0 SetupReason=0 routeClass=1 sideACmDeviceType=4 protected=1
ControlProcessType=0 tokens=0 isPresent=F transitCount=0 geolocInfo={geolocPkid=, filterPkid=,
geolocVal=, devType=4} locPkid=29c5c1c4-8871-4d1e-8394-0b9181e8c54d locName=Hub_None deductBW=F
```

fateShareId=StandAloneCluster:31614358 videoTrafficClass=Desktop oFromAnalogDvc=F
bridgeParticipantID= callingUsr= remoteClusterID= isEMCCDevice=F lHPMemCEPN= CHPMemCEPN=
uri=ti=1User=Host=Port=0Password=Madder=Transport=4mDisplayName=RawUrl=<sip:849fe75d-ae74-8e22-
d48e-c11fecbcefc2@10.106.87.161:52035;transport=tcp>OrigPort=0pi=0sil isParamSet=T M=Unknown
;rc=0 Hdrs= CanSupportSIPtandN=true TransId=0 AllowBitMask=0x7bf UserAgentOrServer=Cisco-
CP8961/9.4.2 OrigDDName=locale: 1 Name: UnicodeName: pi: 0 mCallerId=
mCallerName=LatentCaps=null icidVal= icidGenAddr= oioi= tioi= ptParams= receivedPAID= routeHdr=
routeCepn= requestURI= PCVFlag=F originallyHadISUP=F isIMSFinalRoute=F IMSMode=0
SideABibEnabled= 3 isCgpnNonPreemptable=F isCdpnNonPreemptable=F origDP=1b1b9eb6-7803-11d3-bdf0-
00108302ead1 lastRedirectingDP=1b1b9eb6-7803-11d3-bdf0-00108302ead1 originalLRG=
lastRedirectingLRG= nwLoc=0 rstr= FarEndDeviceName=SEPE8BA7006276F hdrMOH=0 CAL={v=ffffff, m=ffffff, tDev=F, res=F, devType=0}
02302979.001 |10:14:27.834 |AppInfo |LineCdpc(269): -dispatchToAllDevices-, sigName=CcSetupReq,
device=TRG2

呼叫当前被提交到CTI端口，并且端口应答呼叫：

02303167.000 |10:14:27.874 |SdlSig-I |CtiLineCallAnswerReq
|restart0 |StationD(1,100,63,520)
|CTIDeviceLineMgr(1,200,25,1) |1,200,13,273912.572^10.106.87.133^TEST_543210 |[R:N-
H:0,N:0,L:0,V:0,Z:0,D:0] mAsyncResponse=6043 CH=1|31614360 LH=1|1063 MediaDeviceName =
MediaDevicePid = (0,0,0,0) resource ID=0
02303167.001 |10:14:27.874 |AppInfo |StationD(520): StationCtiD-CtiLineCallAnswerReq LH=1|1063
02303167.002 |10:14:27.874 |AppInfo |StationD(520): StationCtiD-CtiLineCallAnswerReq LH=1|1063
02303168.000 |10:14:27.874 |SdlSig |StationOffHook
|restart0 |StationD(1,100,63,520)
|StationD(1,100,63,520) |1,200,13,273912.572^10.106.87.133^TEST_543210 |[R:N-
H:0,N:1,L:0,V:0,Z:0,D:0] Line=1 CI=31614360 GCI.node=0 GCI.ci=0 mDialedDigits= mPrimaryCi=0
cgpn= cgpnVMBx= trigger=0 mSpooofCgp=F fp=1 fid=9999 FDataType=0opId=0ssType=0
SsKey=0invokeId=0resultExp=Fbpda=F

CTI Port Answered the call or Call is now in Queue

02303168.001 |10:14:27.874 |AppInfo |StationD: (0000520) restart0_StationOffHook - INFO:
CI=31614360 on line=1, SPKMode=0, alwaysPrimeLine=0, alwaysUsePrimeLineForVM=0, fid=9999,
offHookTrigger=0.
02303168.002 |10:14:27.874 |AppInfo |StationD: (0000520) restart0_StationOffHook - INFO:
CI=31614360 on line=1, SPKMode=0. Answer.
02303168.003 |10:14:27.874 |AppInfo |StationD: (0000520) preProcessing - INFO: Please Send
the signal now.
02303168.004 |10:14:27.874 |AppInfo |StationD: (0000520) INFO- sendSignalNow,
sigName=StationOffHook, cdpc=240

这时呼叫人是在队列，并且announcemet被演奏。在预先设置时光之后，用户选择呼叫功能并且开始输入呼叫过期杂志作为DTMF位0,8,0,6,2,1,3,1,#。

Digit 0

02303407.000 |10:14:46.625 |SdlSig-O |CtiDTMFNotify |NA
RemoteSignal |UnknownProcessName(1,200,25,1) |StationCdpc(1,100,64,240)
|1,100,14,94509.150^10.106.87.161^* |[R:N-H:0,N:1,L:0,V:0,Z:0,D:0] LH=1|1063
CH=1|31614360 GCH=1|29124
02303408.000 |10:14:46.625 |SdlSig |StationOutputKeypadButton
|restart0 |StationD(1,100,63,520)
|StationCdpc(1,100,64,240) |1,100,14,94509.150^10.106.87.161^* |[R:N-
H:0,N:0,L:0,V:0,Z:0,D:0] Digit=0 CI=31614360Line=1

Digit 8

02303430.000 |10:14:47.243 |SdlSig-O |CtiDTMFNotify |NA
RemoteSignal |UnknownProcessName(1,200,25,1) |StationCdpc(1,100,64,240)
|1,100,14,94509.151^10.106.87.161^* |[R:N-H:0,N:1,L:0,V:0,Z:0,D:0] LH=1|1063

CH=1|31614360 GCH=1|29124
02303431.000 |10:14:47.243 |SdlSig |StationOutputKeypadButton
|restart0 |StationD(1,100,63,520)
|StationCdpc(1,100,64,240) |1,100,14,94509.151^10.106.87.161^* |[R:N-
H:0,N:0,L:0,V:0,Z:0,D:0] Digit=8 CI=31614360Line=1

###\$ Digit 0 \$###

02303446.000 |10:14:47.791 |SdlSig-O |CtiDTMFNotify |NA
RemoteSignal |UnknownProcessName(1,200,25,1) |StationCdpc(1,100,64,240)
|1,100,14,94509.152^10.106.87.161^* |[R:N-H:0,N:1,L:0,V:0,Z:0,D:0] LH=1|1063
CH=1|31614360 GCH=1|29124
02303447.000 |10:14:47.791 |SdlSig |StationOutputKeypadButton
|restart0 |StationD(1,100,63,520)
|StationCdpc(1,100,64,240) |1,100,14,94509.152^10.106.87.161^* |[R:N-
H:0,N:0,L:0,V:0,Z:0,D:0] Digit=0 CI=31614360Line=

###\$ Digit 6 \$###

02303465.000 |10:14:48.962 |SdlSig-O |CtiDTMFNotify |NA
RemoteSignal |UnknownProcessName(1,200,25,1) |StationCdpc(1,100,64,240)
|1,100,14,94509.153^10.106.87.161^* |[R:N-H:0,N:1,L:0,V:0,Z:0,D:0] LH=1|1063
CH=1|31614360 GCH=1|29124
02303466.000 |10:14:48.962 |SdlSig |StationOutputKeypadButton
|restart0 |StationD(1,100,63,520)
|StationCdpc(1,100,64,240) |1,100,14,94509.153^10.106.87.161^* |[R:N-
H:0,N:0,L:0,V:0,Z:0,D:0] Digit=6 CI=31614360Line=1

###\$ Digit 2 \$###

02303481.000 |10:14:49.520 |SdlSig-O |CtiDTMFNotify |NA
RemoteSignal |UnknownProcessName(1,200,25,1) |StationCdpc(1,100,64,240)
|1,100,14,94509.154^10.106.87.161^* |[R:N-H:0,N:1,L:0,V:0,Z:0,D:0] LH=1|1063
CH=1|31614360 GCH=1|29124
02303482.000 |10:14:49.520 |SdlSig |StationOutputKeypadButton
|restart0 |StationD(1,100,63,520)
|StationCdpc(1,100,64,240) |1,100,14,94509.154^10.106.87.161^* |[R:N-
H:0,N:0,L:0,V:0,Z:0,D:0] Digit=2 CI=31614360Line=1

###\$ Digit 1 \$###

02303499.000 |10:14:50.014 |SdlSig-O |CtiDTMFNotify |NA
RemoteSignal |UnknownProcessName(1,200,25,1) |StationCdpc(1,100,64,240)
|1,100,14,94509.155^10.106.87.161^* |[R:N-H:0,N:1,L:0,V:0,Z:0,D:0] LH=1|1063
CH=1|31614360 GCH=1|29124
02303500.000 |10:14:50.014 |SdlSig |StationOutputKeypadButton
|restart0 |StationD(1,100,63,520)
|StationCdpc(1,100,64,240) |1,100,14,94509.155^10.106.87.161^* |[R:N-
H:0,N:0,L:0,V:0,Z:0,D:0] Digit=1 CI=31614360Line=1

###\$ Digit 3 \$###

02303516.000 |10:14:50.431 |SdlSig-O |CtiDTMFNotify |NA
RemoteSignal |UnknownProcessName(1,200,25,1) |StationCdpc(1,100,64,240)
|1,100,14,94509.156^10.106.87.161^* |[R:N-H:0,N:1,L:0,V:0,Z:0,D:0] LH=1|1063
CH=1|31614360 GCH=1|29124
02303517.000 |10:14:50.431 |SdlSig |StationOutputKeypadButton
|restart0 |StationD(1,100,63,520)
|StationCdpc(1,100,64,240) |1,100,14,94509.156^10.106.87.161^* |[R:N-
H:0,N:0,L:0,V:0,Z:0,D:0] Digit=3 CI=31614360Line=1

###\$ Digit 1 \$###


```

02303532.000 |10:14:50.858 |SdlSig-O |CtiDTMFNotify |NA
RemoteSignal |UnknownProcessName(1,200,25,1) |StationCdpc(1,100,64,240)
|1,100,14,94509.157^10.106.87.161^* |[R:N-H:0,N:1,L:0,V:0,Z:0,D:0] LH=1|1063
CH=1|31614360 GCH=1|29124
02303533.000 |10:14:50.858 |SdlSig |StationOutputKeypadButton
|restart0 |StationD(1,100,63,520)
|StationCdpc(1,100,64,240) |1,100,14,94509.157^10.106.87.161^* |[R:N-
H:0,N:0,L:0,V:0,Z:0,D:0] Digit=1 CI=31614360Line=1

#### Digit # pressed to confirm the call back ####

02303549.000 |10:14:51.558 |SdlSig-O |CtiDTMFNotify |NA
RemoteSignal |UnknownProcessName(1,200,25,1) |StationCdpc(1,100,64,240)
|1,100,14,94509.158^10.106.87.161^* |[R:N-H:0,N:1,L:0,V:0,Z:0,D:0] LH=1|1063
CH=1|31614360 GCH=1|29124
02303550.000 |10:14:51.558 |SdlSig |StationOutputKeypadButton
|restart0 |StationD(1,100,63,520)
|StationCdpc(1,100,64,240) |1,100,14,94509.158^10.106.87.161^* |[R:N-
H:0,N:0,L:0,V:0,Z:0,D:0] Digit=# CI=31614360Line=1

#### CTI/UCCX disconnect the call ####

```

```

02303553.000 |10:14:51.561 |SdlSig-I |CtiLineCallDisconnectReq
|restart0 |StationD(1,100,63,520)
|CTIDeviceLineMgr(1,200,25,1) |1,200,13,273912.574^10.106.87.133^TEST_543210 |[R:N-
H:0,N:0,L:0,V:0,Z:0,D:0] mAsyncResponse=6045 CH=1|31614360 LH=1|1063
02303553.001 |10:14:51.561 |AppInfo |StationD(520): StationCtiD-CtiLineCallDisconnectReq
LH=1|1063
02303553.002 |10:14:51.561 |AppInfo |StationD(520): StationCtiD-CtiLineCallDisconnectReq
LH=1|1063

```

使用此消息，与PSTN (公共交换电话网)的呼叫是断开的并且演出1或用户输入阶段完成。

阶段2.发出呼叫

您看到系统发起呼叫对回拨CTI触发器3999。

```

#### CTI redirect to Call back trigger (Stage 2 )

02303675.000 |10:14:51.772 |SdlSig-I |CtiLineCallInitiateReq
|restart0 |StationD(1,100,63,520)
|CTIDeviceLineMgr(1,200,25,1) |1,200,13,273912.576^10.106.87.133^TEST_543210 |[R:N-
H:0,N:0,L:0,V:0,Z:0,D:0] AsyncResponse=6046 LH=1|1063 GCH=1|29125 CalledPartyInfo=3999
MediaDeviceName = MediaDevicePid = (0,0,0,0) resource ID=0 FetaurePriority=1

#### Digit Analysis for CTI call back number ####

02303722.006 |10:14:51.778 |AppInfo |Digit analysis: match(pi="2", fqcn="543210",
cn="543210",plv="5", pss="", TodFilteredPss="", dd="3999",dac="0")
02303722.007 |10:14:51.778 |AppInfo |Digit analysis: analysis results
02303722.008 |10:14:51.778 |AppInfo ||PretransformCallingPartyNumber=543210
|CallingPartyNumber=543210
|DialingPartition=
|DialingPattern=3999
|FullyQualifiedCalledPartyNumber=3999
|DialingPatternRegularExpression=(3999)

#### Call is offered to CTI Ports (This is the Queue for Busy application)

02303783.006 |10:14:51.803 |AppInfo |Digit analysis: match(pi="1", fqcn="543210",

```

```
cn="543210",plv="5", pss="", TodFilteredPss="", dd="4003",dac="0")
02303783.007 |10:14:51.803 |AppInfo |Digit analysis: analysis results
02303783.008 |10:14:51.803 |AppInfo ||PretransformCallingPartyNumber=543210
|CallingPartyNumber=543210
|DialingPartition=
|DialingPattern=4003
|FullyQualifiedCalledPartyNumber=4003
```

CTI port accepts the call or Answers the call

```
02303916.000 |10:14:51.855 |SdlSig |StationOffHook
|call_received7 |StationCdpc(1,100,64,243)
|StationD(1,100,63,509) |1,200,13,273912.579^10.106.87.133^ICD_4003 |[R:N-
H:0,N:0,L:0,V:0,Z:0,D:0] Line=1 CI=31614363 GCI.node=0 GCI.ci=0 mDialedDigits= mPrimaryCi=0
cgpn= cgpnVMBx= trigger=0 mSpooferCgp=F fp=1 fid=0 FDataType=0opId=0ssType=0
SsKey=0invokeId=0resultExp=Fbpda=F
02303916.001 |10:14:51.855 |AppInfo |StationCdpc(243): StationCtiCdpc-StationOffHook
CH=1|31614363
02303916.002 |10:14:51.855 |AppInfo |StationCdpc(243): StationCtiCdpc-StationOffHook
CH=1|31614363
```

一旦代理程序是自由接受呼叫，CTI当前执行一次转移到代理程序：

CTI Initiating Transfer to Agent is now available to take the call

```
02304085.000 |10:14:53.429 |SdlSig-I |CtiLineCallTransferSetupReq
|restart0 |StationD(1,100,63,509)
|CTIDeviceLineMgr(1,200,25,1) |1,200,13,273912.583^10.106.87.133^ICD_4003 |[R:N-
H:0,N:0,L:0,V:0,Z:0,D:0] AsyncResponse=6054 LH=1|1041 CH=1|31614363 DN=62151
ConsultWithoutMedia=T
02304085.001 |10:14:53.429 |AppInfo |StationD(509): StationCtiID-CtiLineCallTransferSetupReq
CH=1|31614363 cdpn=62151
02304085.002 |10:14:53.429 |AppInfo |StationD(509): StationCtiID-CtiLineCallTransferSetupReq
CH=1|31614363 cdpn=62151
```

DD for Agent

```
02304237.006 |10:14:53.440 |AppInfo |Digit analysis: match(pi="2", fqcn="4003",
cn="4003",plv="5", pss="", TodFilteredPss="", dd="62151",dac="0")
02304237.007 |10:14:53.440 |AppInfo |Digit analysis: analysis results
02304237.008 |10:14:53.440 |AppInfo ||PretransformCallingPartyNumber=4003
|CallingPartyNumber=4003
|DialingPartition=
|DialingPattern=62151
|FullyQualifiedCalledPartyNumber=62151
|DialingPatternRegularExpression=(62151)
```

Invite for the Agent

```
INVITE sip:b16b6893-445d-6407-2a23-83e6ff6fb4f7@10.106.87.164:52242;transport=tcp SIP/2.0
Via: SIP/2.0/TCP 10.106.87.135:5060;branch=z9hG4bK3fc859136cc1
From: "Busy Application" <sip:4003@10.106.87.135>;tag=32711~54aff7a7-042a-4733-9a99-
8a2f7027a30d-31614366
To: <sip:62151@10.106.87.135>
Date: Fri, 08 Apr 2016 04:44:53 GMT
Call-ID: a13f5600-70713745-3da4-87576a0a@10.106.87.135
Supported: timer,resource-priority,replaces
Min-SE: 1800
User-Agent: Cisco-CUCM10.5
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
CSeq: 101 INVITE
Expires: 180
```

Allow-Events: presence
Call-Info: <urn:x-cisco-remotec:callinfo>; security= Unknown; orientation= from; gci= 1-29126;
isVoip; call-instance= 1
Send-Info: conference, x-cisco-conference
Alert-Info: <file://Bellcore-drl/>
Remote-Party-ID: "Busy Application" <sip:4003@10.106.87.135;x-cisco-callback-
number=4003>;party=calling;screen=yes;privacy=off
Contact: <sip:4003@10.106.87.135:5060;transport=tcp>
Max-Forwards: 70
Content-Length: 0

在此以后代理程序由繁忙连接到繁忙的脚本，并且阶段3呼叫重定向开始。

阶段3.呼叫重定向

代理程序听存在的选项。选项1接受呼叫并且告诉用户。

代理程序按软键填充的位1：

```
###$ Digit 1 pressed by the agent
```

```
NOTIFY sip:10.106.87.135:5060 SIP/2.0  
Via: SIP/2.0/TCP 10.106.87.164:52242;branch=z9hG4bK187640df  
To: "Busy Application" <sip:4003@10.106.87.135>;tag=32711~54aff7a7-042a-4733-9a99-8a2f7027a30d-  
31614366  
From: <sip:62151@10.106.87.135>;tag=e8ba70fb6e0a20544386b963-4947235a  
Call-ID: a13f5600-70713745-3da4-87576a0a@10.106.87.135  
Date: Fri, 08 Apr 2016 04:45:01 GMT  
CSeq: 102 NOTIFY  
Event: kpml  
Subscription-State: active; expires=7200  
Max-Forwards: 70  
Contact: <sip:b16b6893-445d-6407-2a23-83e6ff6fb4f7@10.106.87.164:52242;transport=tcp>  
Allow: ACK,BYE,CANCEL,INVITE,NOTIFY,OPTIONS,REFER,REGISTER,UPDATE,SUBSCRIBE  
Content-Length: 201  
Content-Type: application/kpml-response+xml  
Content-Disposition: session;handling=required
```

```
<?xml version="1.0" encoding="UTF-8"?>
```

```
<kpml-response xmlns="urn:ietf:params:xml:ns:kpml-response" version="1.0" code="200" text="OK"  
suppressed="false" forced_flush="false" digits="1" tag="dtmf"/>
```

这时系统当前将起“呼叫重定向”。它用于转移呼叫在系统和代理程序之间到呼叫人在被输入的回叫号。

```
###$ CfRedirectingDestinationRegister
```

```
02305081.000 |10:15:07.835 |SdlSig |CfRedirectingDestinationRegister  
|tcc_idle0 |Cdcc(1,100,219,256)  
|Cdcc(1,100,219,251) |1,100,14,94475.134^10.106.87.164^* |[R:N-  
H:0,N:5,L:0,V:0,Z:0,D:0] orphanedCI= 31614361 collectCodeIfNeeded= 0  
02305082.000 |10:15:07.835 |SdlSig |CcOrphanPauseReq  
|call_active10 |LineCdpc(1,100,175,271)  
|LineControl(1,100,174,554) |1,100,14,94475.134^10.106.87.164^* |[R:N-  
H:0,N:5,L:0,V:0,Z:0,D:0] CI= 31614361  
02305082.001 |10:15:07.835 |AppInfo |LineCdpc(271): -dispatchToOnlySCCPSIPDevices-,  
sigName=CcOrphanPauseReq, device=TEST_543210  
02305083.000 |10:15:07.835 |SdlSig |CcNotifyReq  
|newpaused |LineCdpc(1,100,175,271)  
|LineControl(1,100,174,554) |1,100,14,94475.134^10.106.87.164^* |[R:N-
```

H:0,N:5,L:0,V:0,Z:0,D:0] CI=31614361 CI.branch=0 lPart= lPatt= lModNum=pi=0sil lName=locale: 1
Name: UnicodeName: pi: 0 cName=locale: 1 Name: UnicodeName: pi: 0 cn:pi=0sil cVMbox=
localPatternUsage=2 connectedPatternUsage=2 lCnPart= lCnPatt= rn:pi=0sil lLRPart= lLRPatt=
lOCdpnPart= lOCdpnPatt= oCdpn:pi=0sil oRFR =0 lBridgePartID= lCnBridgePartID= lHPMemCEPN=
cHPMemCEPN= onBehalf=CctiLine whichSide=0 holdFlag=0 notifyMsg=locale: 1 Name: UnicodeName:
promptMsg=locale: 1 Name: UnicodeName: apply Instr=0 s.sv=0 promptMsg.userLocale=1
cgDevName=TEST_543210 ctiActive=F ctiFarEndDev=0 ctiCCMId=0 CTI event not set.
secureStatus=(T,0) callState=5 media=1 bitMask=4000000 Supp DTMF=3DTMF Cfg=1DTMF Payload=101
notifiedDName= connType=0 connStatus=0newPL=5newPLDmn=0 networkDomain= suppressMOH=F
triggerByJoin=F NotifInd= ni.niid=39 ni.l=0 ni.nnd=0deviceCepn= partitionSearchSpace=
geolocInfo={geolocPkid=, filterPkid=, geolocVal=, devType=4} locPkid= locName= deductBW=F
fateShareId= videoTrafficClass=Desktop dtmMcNodeId=0 dtmCurrentCi=0 isOffNetDevice=F ignCntH=F
cmDeviceType=4 ssCause=0TransparentData=null CanSupportSIPTandN=false TransId=0 AllowBitMask=0x0
UserAgentOrServer= OrigDDName=locale: 1 Name: UnicodeName: pi: 0 mCallerId= mCallerName=
FDataType=0opId=0ssType=0 SsKey=0invokeId=0resultExp=FbpdA=F isParamSet=F mobilityEventType=0x0
BibEnabled = 3 MMCap=0x1 CAL={v=-1, m=-1, tDev=F, res=F, devType=0} CAL={v=-10, m=-1, tDev=F,
res=F, devType=0} CallInstanceNumber=0 farEndDevName=SEPE8BA70FB6E0A hdrMOH=0
02305083.001 |10:15:07.835 |AppInfo |LineCdpc(271): -dispatchToAllDevices-,
sigName=CcNotifyReq, device=TEST_543210

02305084.000 |10:15:07.835 |SdlSig |CcNotifyReq
|call_active10 |LineCdpc(1,100,175,275)
|LineControl(1,100,174,577) |1,100,14,94475.134^10.106.87.164^* |[R:N-
H:0,N:5,L:0,V:0,Z:0,D:0] CI=31614366 CI.branch=0 lPart= lPatt= lModNum=pi=0sil lName=locale: 1
Name: UnicodeName: pi: 0 cName=locale: 1 Name: UnicodeName: pi: 0 cn:pi=0sil cVMbox=
localPatternUsage=2 connectedPatternUsage=2 lCnPart= lCnPatt= rn:pi=0sil lLRPart= lLRPatt=
lOCdpnPart= lOCdpnPatt= oCdpn:pi=0sil oRFR =0 lBridgePartID= lCnBridgePartID= lHPMemCEPN=
cHPMemCEPN= onBehalf=CctiLine whichSide=0 holdFlag=0 notifyMsg=locale: 1 Name: UnicodeName:
promptMsg=locale: 1 Name: UnicodeName: apply Instr=0 s.sv=0 promptMsg.userLocale=1
cgDevName=TEST_543210 ctiActive=F ctiFarEndDev=0 ctiCCMId=0 CTI event not set.
secureStatus=(T,0) callState=5 media=1 bitMask=4000000 Supp DTMF=1DTMF Cfg=1DTMF Payload=0
notifiedDName= connType=0 connStatus=0newPL=5newPLDmn=0 networkDomain= suppressMOH=F
triggerByJoin=F NotifInd= ni.niid=39 ni.l=0 ni.nnd=0deviceCepn= partitionSearchSpace=
geolocInfo={geolocPkid=, filterPkid=, geolocVal=, devType=4} locPkid=29c5c1c4-8871-4d1e-8394-
0b9181e8c54d locName=Hub_None deductBW=F fateShareId=StandAloneCluster:31614361
videoTrafficClass=Unspecified dtmMcNodeId=0 dtmCurrentCi=0 isOffNetDevice=F ignCntH=F
cmDeviceType=4 ssCause=0TransparentData=null CanSupportSIPTandN=false TransId=0 AllowBitMask=0x0
UserAgentOrServer= OrigDDName=locale: 1 Name: UnicodeName: pi: 0 mCallerId= mCallerName=
FDataType=0opId=0ssType=0 SsKey=0invokeId=0resultExp=FbpdA=F isParamSet=F mobilityEventType=0x0
BibEnabled = 0 MMCap=0x1 CAL={v=-1, m=-1, tDev=F, res=F, devType=0} CAL={v=-10, m=-1, tDev=F,
res=F, devType=0} CallInstanceNumber=0 farEndDevName=TEST_543210 hdrMOH=0
02305084.001 |10:15:07.835 |AppInfo |LineCdpc(275): -dispatchToAllDevices-,
sigName=CcNotifyReq, device=SEPE8BA70FB6E0A

02305085.000 |10:15:07.836 |SdlSig |RSVPsSplitSessionReq
|wait |RSVPsSession(1,100,107,251)
|ReservationMgr(1,100,110,1) |1,100,14,94475.134^10.106.87.164^* |[R:N-
H:0,N:5,L:0,V:0,Z:0,D:0] CI= 31614361 aCI=31614361 bCI=31614366 isASerCI=F isBSerCI=F aNodeId=0
bNodeId=0 callState=5 aCacSpecificInfo= CAC_PT_CONNECTED bCacSpecificInfo= CAC_PT_CONNECTED
02305086.000 |10:15:07.836 |SdlSig |LBMSplitSessionReq
|active |LBMSInterface(1,100,176,1)
|ReservationMgr(1,100,110,1) |1,100,14,94475.134^10.106.87.164^* |[T:N-
H:0,N:0,L:0,V:0,Z:0,D:0] CI= 31614361 aCI=31614361 bCI=31614366 isASerCI=F isBSerCI=F aNodeId=0
bNodeId=0 callState=5 aCacSpecificInfo= CAC_PT_CONNECTED bCacSpecificInfo= CAC_PT_CONNECTED

###\$ CfRedirectingDestinationRegister

02305081.000 |10:15:07.835 |SdlSig |CfRedirectingDestinationRegister
|tcc_idle0 |Cdcc(1,100,219,256)
|Cdcc(1,100,219,251) |1,100,14,94475.134^10.106.87.164^* |[R:N-
H:0,N:5,L:0,V:0,Z:0,D:0] orphanedCI= 31614361 collectCodeIfNeeded= 0
02305082.000 |10:15:07.835 |SdlSig |CcOrphanPauseReq
|call_active10 |LineCdpc(1,100,175,271)
|LineControl(1,100,174,554) |1,100,14,94475.134^10.106.87.164^* |[R:N-
H:0,N:5,L:0,V:0,Z:0,D:0] CI= 31614361

```

02305082.001 |10:15:07.835 |AppInfo |LineCdpc(271): -dispatchToOnlySCCPSIPDevices-,
sigName=CcOrphanPauseReq, device=TEST_543210
02305083.000 |10:15:07.835 |SdlSig |CcNotifyReq
|newpaused |LineCdpc(1,100,175,271)
|LineControl(1,100,174,554) |1,100,14,94475.134^10.106.87.164^* |[R:N-
H:0,N:5,L:0,V:0,Z:0,D:0] CI=31614361 CI.branch=0 lPart= lPatt= lModNum=pi=0sil lName=locale: 1
Name: UnicodeName: pi: 0 cName=locale: 1 Name: UnicodeName: pi: 0 cn:pi=0sil cVMbox=
localPatternUsage=2 connectedPatternUsage=2 lCnPart= lCnPatt= rn:pi=0sil lLRPart= lLRPatt=
lOCdnpPart= lOCdnpPatt= oCdnp:pi=0sil oRFR =0 lBridgePartID= lCnBridgePartID= lHPMemCEPN=
cHPMemCEPN= onBehalf=CctiLine whichSide=0 holdFlag=0 notifyMsg=locale: 1 Name: UnicodeName:
promptMsg=locale: 1 Name: UnicodeName: apply Instr=0 s.sv=0 promptMsg.userLocale=1
cgDevName=TEST_543210 ctiActive=F ctiFarEndDev=0 ctiCCMId=0 CTI event not set.
secureStatus=(T,0) callState=5 media=1 bitMask=4000000 Supp DTMF=3DTMF Cfg=1DTMF Payload=101
notifiedDName= connType=0 connStatus=0newPL=5newPLDmn=0 networkDomain= suppressMOH=F
triggerByJoin=F NotifInd= ni.niid=39 ni.l=0 ni.nnd=0deviceCepn= partitionSearchSpace=
geolocInfo={geolocPkid=, filterPkid=, geolocVal=, devType=4} locPkid= locName= deductBW=F
fateShareId= videoTrafficClass=Desktop dtmMcNodeId=0 dtmCurrentCi=0 isOffNetDevice=F ignCntH=F
cmDeviceType=4 ssCause=0TransparentData=null CanSupportSIPTandN=false TransId=0 AllowBitMask=0x0
UserAgentOrServer= OrigDDName=locale: 1 Name: UnicodeName: pi: 0 mCallerId= mCallerName=
FDataType=0opId=0ssType=0 SsKey=0invokeId=0resultExp=Fbpda=F isParamSet=F mobilityEventType=0x0
BibEnabled = 3 MMCap=0x1 CAL={v=-1, m=-1, tDev=F, res=F, devType=0} CAL={v=-10, m=-1, tDev=F,
res=F, devType=0} CallInstanceNumber=0 farEndDevName=SEPE8BA70FB6E0A hdrMOH=0
02305083.001 |10:15:07.835 |AppInfo |LineCdpc(271): -dispatchToAllDevices-,
sigName=CcNotifyReq, device=TEST_543210
02305084.000 |10:15:07.835 |SdlSig |CcNotifyReq
|call_active10 |LineCdpc(1,100,175,275)
|LineControl(1,100,174,577) |1,100,14,94475.134^10.106.87.164^* |[R:N-
H:0,N:5,L:0,V:0,Z:0,D:0] CI=31614366 CI.branch=0 lPart= lPatt= lModNum=pi=0sil lName=locale: 1
Name: UnicodeName: pi: 0 cName=locale: 1 Name: UnicodeName: pi: 0 cn:pi=0sil cVMbox=
localPatternUsage=2 connectedPatternUsage=2 lCnPart= lCnPatt= rn:pi=0sil lLRPart= lLRPatt=
lOCdnpPart= lOCdnpPatt= oCdnp:pi=0sil oRFR =0 lBridgePartID= lCnBridgePartID= lHPMemCEPN=
cHPMemCEPN= onBehalf=CctiLine whichSide=0 holdFlag=0 notifyMsg=locale: 1 Name: UnicodeName:
promptMsg=locale: 1 Name: UnicodeName: apply Instr=0 s.sv=0 promptMsg.userLocale=1
cgDevName=TEST_543210 ctiActive=F ctiFarEndDev=0 ctiCCMId=0 CTI event not set.
secureStatus=(T,0) callState=5 media=1 bitMask=4000000 Supp DTMF=1DTMF Cfg=1DTMF Payload=0
notifiedDName= connType=0 connStatus=0newPL=5newPLDmn=0 networkDomain= suppressMOH=F
triggerByJoin=F NotifInd= ni.niid=39 ni.l=0 ni.nnd=0deviceCepn= partitionSearchSpace=
geolocInfo={geolocPkid=, filterPkid=, geolocVal=, devType=4} locPkid=29c5c1c4-8871-4dle-8394-
0b9181e8c54d locName=Hub_None deductBW=F fateShareId=StandAloneCluster:31614361
videoTrafficClass=Unspecified dtmMcNodeId=0 dtmCurrentCi=0 isOffNetDevice=F ignCntH=F
cmDeviceType=4 ssCause=0TransparentData=null CanSupportSIPTandN=false TransId=0 AllowBitMask=0x0
UserAgentOrServer= OrigDDName=locale: 1 Name: UnicodeName: pi: 0 mCallerId= mCallerName=
FDataType=0opId=0ssType=0 SsKey=0invokeId=0resultExp=Fbpda=F isParamSet=F mobilityEventType=0x0
BibEnabled = 0 MMCap=0x1 CAL={v=-1, m=-1, tDev=F, res=F, devType=0} CAL={v=-10, m=-1, tDev=F,
res=F, devType=0} CallInstanceNumber=0 farEndDevName=TEST_543210 hdrMOH=0
02305084.001 |10:15:07.835 |AppInfo |LineCdpc(275): -dispatchToAllDevices-,
sigName=CcNotifyReq, device=SEPE8BA70FB6E0A
02305085.000 |10:15:07.836 |SdlSig |RSVPsSplitSessionReq
|wait |RSVPsSession(1,100,107,251)
|ReservationMgr(1,100,110,1) |1,100,14,94475.134^10.106.87.164^* |[R:N-
H:0,N:5,L:0,V:0,Z:0,D:0] CI= 31614361 aCI=31614361 bCI=31614366 isASerCI=F isBSerCI=F aNodeId=0
bNodeId=0 callState=5 aCacSpecificInfo= CAC_PT_CONNECTED bCacSpecificInfo= CAC_PT_CONNECTED
02305086.000 |10:15:07.836 |SdlSig |LBMSplitSessionReq
|active |LBMSInterface(1,100,176,1)
|ReservationMgr(1,100,110,1) |1,100,14,94475.134^10.106.87.164^* |[T:N-
H:0,N:0,L:0,V:0,Z:0,D:0] CI= 31614361 aCI=31614361 bCI=31614366 isASerCI=F isBSerCI=F aNodeId=0
bNodeId=0 callState=5 aCacSpecificInfo= CAC_PT_CONNECTED bCacSpecificInfo= CAC_PT_CONNECTED
在让呼叫的此阶段PSTN用户或用户以后过期杂志连接代理程序

```

UCCX日志分析

被分析的日志- CCX引擎日志(MIVR)从RTMT。

呼叫在触发器9999收到从用户2161。

Call received on UCCX trigger 9999 - Mainline number

```
51269: Apr 08 10:14:27.842 IST %MIVR-SS_TEL-7-UNK:Call.received()
JTAPICallContact[id=11,type=Cisco JTAPI
Call,implId=29124/1,active=true,state=CALL_RECEIVED,inbound=true,handled=false,locale=en_US,aborting=false,app=App[name=AA,type=Cisco Script Application,id=4,desc=AA,enabled=true,max=4,valid=true,cfg=[ApplicationConfig[schema=ApplicationConfig,time=2016-04-07 07:10:40.0,recordId=53,desc=AA,name=AA,type=Cisco Script Application,id=4,enabled=true,sessions=4,script=SCRIPT[callback.aef],defaultScript=,vars=[<java.lang.String CSQ>,<java.lang.Integer DelayWhileQueued>,<java.lang.String Trigg>],defaultVars=null]]],task=null,session=null,seqNum=-1,time=1460090667841,cn=9999,dn=9999,cgn=2161,ani=null,dnis=null,clid=null,atype=DIRECT,lrd=null,ocn=9999,odn=null,uui=null,aniii=null,ced=null,OrigProtocolCallRef=0000000000071C401E265970000000,DestProtocolCallRef=null,route=RP[num=9999],port=null,aborting=false,transferring=false,disconnecting=false]
```

回拨脚本是有一接受的简单脚本， Select Resource步骤到其中一个回拨代理程序队列(从哪些代理程序为回拨呼叫选择)。

呼叫击中回拨主线编号。

脚本1执行开始。

实施ID= 29125，任务ID= 3400000019

Call received on UCCX trigger 9999 - Mainline number

```
51269: Apr 08 10:14:27.842 IST %MIVR-SS_TEL-7-UNK:Call.received()
JTAPICallContact[id=11,type=Cisco JTAPI
Call,implId=29124/1,active=true,state=CALL_RECEIVED,inbound=true,handled=false,locale=en_US,aborting=false,app=App[name=AA,type=Cisco Script Application,id=4,desc=AA,enabled=true,max=4,valid=true,cfg=[ApplicationConfig[schema=ApplicationConfig,time=2016-04-07 07:10:40.0,recordId=53,desc=AA,name=AA,type=Cisco Script Application,id=4,enabled=true,sessions=4,script=SCRIPT[callback.aef],defaultScript=,vars=[<java.lang.String CSQ>,<java.lang.Integer DelayWhileQueued>,<java.lang.String Trigg>],defaultVars=null]]],task=null,session=null,seqNum=-1,time=1460090667841,cn=9999,dn=9999,cgn=2161,ani=null,dnis=null,clid=null,atype=DIRECT,lrd=null,ocn=9999,odn=null,uui=null,aniii=null,ced=null,OrigProtocolCallRef=0000000000071C401E265970000000,DestProtocolCallRef=null,route=RP[num=9999],port=null,aborting=false,transferring=false,disconnecting=false]
```

呼叫归因于，并且代理程序为回拨选择：

Call received on UCCX trigger 9999 - Mainline number

```
51269: Apr 08 10:14:27.842 IST %MIVR-SS_TEL-7-UNK:Call.received()
JTAPICallContact[id=11,type=Cisco JTAPI
Call,implId=29124/1,active=true,state=CALL_RECEIVED,inbound=true,handled=false,locale=en_US,aborting=false,app=App[name=AA,type=Cisco Script Application,id=4,desc=AA,
```

```
enabled=true,max=4,valid=true,cfg=[ApplicationConfig[schema=ApplicationConfig,time=2016-04-07
07:10:40.0,recordId=53,desc=AA,name=AA,type=Cisco Script
Application,id=4,enabled=true,sessions=4,script=SCRIPT[callback.aef],defaultScript=,vars=[<java.
lang.String CSQ>,<java.lang.Integer DelayWhileQueued>,<java.lang.String
Triggy>],defaultVars=null]]],
task=null,session=null,seqNum=-
1,time=1460090667841,cn=9999,dn=9999,cgn=2161,ani=null,dnis=null,clid=null,atype=DIRECT,lrd=null
,ocn=9999,odn=null,uui=null,aniii=null,
ced=null,OrigProtocolCallRef=0000000000071C401E265970000000,DestProtocolCallRef=null,route=RP[
num=9999],port=null,aborting=false,transferring=false,disconnecting=false]
```

提示用户输入回叫号。您看到提示管理器示出提示符给用户：

Call received on UCCX trigger 9999 - Mainline number

```
51269: Apr 08 10:14:27.842 IST %MIVR-SS_TEL-7-UNK:Call.received()
JTAPICallContact[id=11,type=Cisco JTAPI
Call,implId=29124/1,active=true,state=CALL_RECEIVED,inbound=true,handled=false,locale=en_US,abor
ting=false,app=App[name=AA,type=Cisco Script Application,id=4,desc=AA,
enabled=true,max=4,valid=true,cfg=[ApplicationConfig[schema=ApplicationConfig,time=2016-04-07
07:10:40.0,recordId=53,desc=AA,name=AA,type=Cisco Script
Application,id=4,enabled=true,sessions=4,script=SCRIPT[callback.aef],defaultScript=,vars=[<java.
lang.String CSQ>,<java.lang.Integer DelayWhileQueued>,<java.lang.String
Triggy>],defaultVars=null]]],
task=null,session=null,seqNum=-
1,time=1460090667841,cn=9999,dn=9999,cgn=2161,ani=null,dnis=null,clid=null,atype=DIRECT,lrd=null
,ocn=9999,odn=null,uui=null,aniii=null,
ced=null,OrigProtocolCallRef=0000000000071C401E265970000000,DestProtocolCallRef=null,route=RP[
num=9999],port=null,aborting=false,transferring=false,disconnecting=false]
```

输入阶段

用户然后输入回叫号。位收到了在脚本的消息。

Call received on UCCX trigger 9999 - Mainline number

```
51269: Apr 08 10:14:27.842 IST %MIVR-SS_TEL-7-UNK:Call.received()
JTAPICallContact[id=11,type=Cisco JTAPI
Call,implId=29124/1,active=true,state=CALL_RECEIVED,inbound=true,handled=false,locale=en_US,abor
ting=false,app=App[name=AA,type=Cisco Script Application,id=4,desc=AA,
enabled=true,max=4,valid=true,cfg=[ApplicationConfig[schema=ApplicationConfig,time=2016-04-07
07:10:40.0,recordId=53,desc=AA,name=AA,type=Cisco Script
Application,id=4,enabled=true,sessions=4,script=SCRIPT[callback.aef],defaultScript=,vars=[<java.
lang.String CSQ>,<java.lang.Integer DelayWhileQueued>,<java.lang.String
Triggy>],defaultVars=null]]],
task=null,session=null,seqNum=-
1,time=1460090667841,cn=9999,dn=9999,cgn=2161,ani=null,dnis=null,clid=null,atype=DIRECT,lrd=null
,ocn=9999,odn=null,uui=null,aniii=null,
ced=null,OrigProtocolCallRef=0000000000071C401E265970000000,DestProtocolCallRef=null,route=RP[
num=9999],port=null,aborting=false,transferring=false,disconnecting=false]
```

```
Line 4161: 51675: Apr 08 10:14:51.560 IST %MIVR-STEP_MEDIA_CONTROL-7-UNK:Task:3400000019
GetDigitStringStep (ParseInputStep)(or Extended): Normal Keys collected: 08062131
```

呼叫人从UCCX然后被断开。呼叫在脚本被终止。

```
Line 4162: 51676: Apr 08 10:14:51.560 IST %MIVR-ENG-7-UNK:Execute step of Task 3400000019 :
Terminate (--Triggering Contact--)
```

```
Line 4165: 51679: Apr 08 10:14:51.566 IST %MIVR-SS_TEL-7-UNK:CallID:11 MediaId:29124/1
```

Task:3400000019 com.cisco.jtapi.CiscoRTPInputStoppedEvImpl received

发出呼叫阶段

呼叫发出对触发器(回拨ICD脚本)

```
### makecall() is called with the new CTI port (543210) in a different call control group ###  
### trigger 3999 (callback trigger) ###
```

```
51700: Apr 08 10:14:51.570 IST %MIVR-ENG-7-UNK:Execute step of Task 3400000019 : cOutbound =  
Place Call (to Triggy)  
51704: Apr 08 10:14:51.570 IST %MIVR-STEP_CALL_CONTROL-7-UNK:Task:3400000019 CreateCall Step  
Execution  
51723: Apr 08 10:14:51.772 IST %MIVR-SS_TEL-7-UNK:CallID:12 MediaId:29125/1 Task:3400000019  
makeCall(543210,3999,10000)  
51744: Apr 08 10:14:51.778 IST %MIVR-SS_TEL-7-UNK:CallID:12 MediaId:29125/1 Task:3400000019 Got  
CallActiveEv, ConnCreatedEv 543210::1, ConnConnectedEv 543210::1, CallCtlConnInitiatedEv  
543210::1, TermConnCreatedEv TEST_543210, TermConnActiveEv TEST_543210, CallCtlTermConnTalkingEv  
TEST_543210, events on the AddressCallObserver.  
51752: Apr 08 10:14:51.779 IST %MIVR-SS_TEL-7-UNK:CallID:12 MediaId:29125/1 Task:3400000019 Got  
CallCtlConnDialingEv 543210::1, events on the AddressCallObserver.  
51758: Apr 08 10:14:51.783 IST %MIVR-SS_TEL-7-UNK:CallID:12 MediaId:29125/1 Task:3400000019 Got  
CallCtlConnEstablishedEv 543210::1, events on the AddressCallObserver.  
51763: Apr 08 10:14:51.787 IST %MIVR-SS_TEL-7-UNK:CallID:12 MediaId:29125/1 Task:3400000019  
connect returns
```

发出呼叫是成功的与另外媒体信道组和不同的呼叫控制组从来源呼叫。

```
### makecall() is called with the new CTI port (543210) in a different call control group ###  
### trigger 3999 (callback trigger) ###
```

```
51700: Apr 08 10:14:51.570 IST %MIVR-ENG-7-UNK:Execute step of Task 3400000019 : cOutbound =  
Place Call (to Triggy)  
51704: Apr 08 10:14:51.570 IST %MIVR-STEP_CALL_CONTROL-7-UNK:Task:3400000019 CreateCall Step  
Execution  
51723: Apr 08 10:14:51.772 IST %MIVR-SS_TEL-7-UNK:CallID:12 MediaId:29125/1 Task:3400000019  
makeCall(543210,3999,10000)  
51744: Apr 08 10:14:51.778 IST %MIVR-SS_TEL-7-UNK:CallID:12 MediaId:29125/1 Task:3400000019 Got  
CallActiveEv, ConnCreatedEv 543210::1, ConnConnectedEv 543210::1, CallCtlConnInitiatedEv  
543210::1, TermConnCreatedEv TEST_543210, TermConnActiveEv TEST_543210, CallCtlTermConnTalkingEv  
TEST_543210, events on the AddressCallObserver.  
51752: Apr 08 10:14:51.779 IST %MIVR-SS_TEL-7-UNK:CallID:12 MediaId:29125/1 Task:3400000019 Got  
CallCtlConnDialingEv 543210::1, events on the AddressCallObserver.  
51758: Apr 08 10:14:51.783 IST %MIVR-SS_TEL-7-UNK:CallID:12 MediaId:29125/1 Task:3400000019 Got  
CallCtlConnEstablishedEv 543210::1, events on the AddressCallObserver.  
51763: Apr 08 10:14:51.787 IST %MIVR-SS_TEL-7-UNK:CallID:12 MediaId:29125/1 Task:3400000019  
connect returns
```

脚本2执行开始。这是鬼魂呼叫。

实施ID= 29125 , 任务ID= 3400000023

CTI端口接受步骤= 4003

```
### makecall() is called with the new CTI port (543210) in a different call control group ###  
### trigger 3999 (callback trigger) ###
```

```
51700: Apr 08 10:14:51.570 IST %MIVR-ENG-7-UNK:Execute step of Task 3400000019 : cOutbound =  
Place Call (to Triggy)  
51704: Apr 08 10:14:51.570 IST %MIVR-STEP_CALL_CONTROL-7-UNK:Task:3400000019 CreateCall Step
```


Execution

```
51723: Apr 08 10:14:51.772 IST %MIVR-SS_TEL-7-UNK:CallID:12 MediaId:29125/1 Task:3400000019  
makeCall(543210,3999,10000)  
51744: Apr 08 10:14:51.778 IST %MIVR-SS_TEL-7-UNK:CallID:12 MediaId:29125/1 Task:3400000019 Got  
CallActiveEv, ConnCreatedEv 543210::1, ConnConnectedEv 543210::1, CallCtlConnInitiatedEv  
543210::1, TermConnCreatedEv TEST_543210, TermConnActiveEv TEST_543210, CallCtlTermConnTalkingEv  
TEST_543210, events on the AddressCallObserver.  
51752: Apr 08 10:14:51.779 IST %MIVR-SS_TEL-7-UNK:CallID:12 MediaId:29125/1 Task:3400000019 Got  
CallCtlConnDialingEv 543210::1, events on the AddressCallObserver.  
51758: Apr 08 10:14:51.783 IST %MIVR-SS_TEL-7-UNK:CallID:12 MediaId:29125/1 Task:3400000019 Got  
CallCtlConnEstablishedEv 543210::1, events on the AddressCallObserver.  
51763: Apr 08 10:14:51.787 IST %MIVR-SS_TEL-7-UNK:CallID:12 MediaId:29125/1 Task:3400000019  
connect returns
```

代理程序agent5在就绪状态并且准备接受呼叫。咨询传输到座席的电话62151。

```
### makecall() is called with the new CTI port (543210) in a different call control group ###  
### trigger 3999 (callback trigger) ###
```

```
51700: Apr 08 10:14:51.570 IST %MIVR-ENG-7-UNK:Execute step of Task 3400000019 : cOutbound =  
Place Call (to Triggly)  
51704: Apr 08 10:14:51.570 IST %MIVR-STEP_CALL_CONTROL-7-UNK:Task:3400000019 CreateCall Step  
Execution  
51723: Apr 08 10:14:51.772 IST %MIVR-SS_TEL-7-UNK:CallID:12 MediaId:29125/1 Task:3400000019  
makeCall(543210,3999,10000)  
51744: Apr 08 10:14:51.778 IST %MIVR-SS_TEL-7-UNK:CallID:12 MediaId:29125/1 Task:3400000019 Got  
CallActiveEv, ConnCreatedEv 543210::1, ConnConnectedEv 543210::1, CallCtlConnInitiatedEv  
543210::1, TermConnCreatedEv TEST_543210, TermConnActiveEv TEST_543210, CallCtlTermConnTalkingEv  
TEST_543210, events on the AddressCallObserver.  
51752: Apr 08 10:14:51.779 IST %MIVR-SS_TEL-7-UNK:CallID:12 MediaId:29125/1 Task:3400000019 Got  
CallCtlConnDialingEv 543210::1, events on the AddressCallObserver.  
51758: Apr 08 10:14:51.783 IST %MIVR-SS_TEL-7-UNK:CallID:12 MediaId:29125/1 Task:3400000019 Got  
CallCtlConnEstablishedEv 543210::1, events on the AddressCallObserver.  
51763: Apr 08 10:14:51.787 IST %MIVR-SS_TEL-7-UNK:CallID:12 MediaId:29125/1 Task:3400000019  
connect returns
```

代理程序从CTI端口4003收到呼叫。座席电话是62151。

```
### makecall() is called with the new CTI port (543210) in a different call control group ###  
### trigger 3999 (callback trigger) ###
```

```
51700: Apr 08 10:14:51.570 IST %MIVR-ENG-7-UNK:Execute step of Task 3400000019 : cOutbound =  
Place Call (to Triggly)  
51704: Apr 08 10:14:51.570 IST %MIVR-STEP_CALL_CONTROL-7-UNK:Task:3400000019 CreateCall Step  
Execution  
51723: Apr 08 10:14:51.772 IST %MIVR-SS_TEL-7-UNK:CallID:12 MediaId:29125/1 Task:3400000019  
makeCall(543210,3999,10000)  
51744: Apr 08 10:14:51.778 IST %MIVR-SS_TEL-7-UNK:CallID:12 MediaId:29125/1 Task:3400000019 Got  
CallActiveEv, ConnCreatedEv 543210::1, ConnConnectedEv 543210::1, CallCtlConnInitiatedEv  
543210::1, TermConnCreatedEv TEST_543210, TermConnActiveEv TEST_543210, CallCtlTermConnTalkingEv  
TEST_543210, events on the AddressCallObserver.  
51752: Apr 08 10:14:51.779 IST %MIVR-SS_TEL-7-UNK:CallID:12 MediaId:29125/1 Task:3400000019 Got  
CallCtlConnDialingEv 543210::1, events on the AddressCallObserver.  
51758: Apr 08 10:14:51.783 IST %MIVR-SS_TEL-7-UNK:CallID:12 MediaId:29125/1 Task:3400000019 Got  
CallCtlConnEstablishedEv 543210::1, events on the AddressCallObserver.  
51763: Apr 08 10:14:51.787 IST %MIVR-SS_TEL-7-UNK:CallID:12 MediaId:29125/1 Task:3400000019  
connect returns
```

```
Line 4953: 52392: Apr 08 10:14:59.245 IST %MIVR-SS_TEL-7-UNK:OrigCall=CallID:13  
MediaId:29125/1 Task:3400000023, ConsultEvent= CallObservationEndedEv
```

```
Line 4955: 52394: Apr 08 10:14:59.245 IST %MIVR-SS_TEL-7-UNK:CallID:13 MediaId:29125/1  
Task:3400000023, transfer(62151, consultCall)
```

```
52678: Apr 08 10:14:59.325 IST %MIVR-SS_TEL-7-UNK:Call.transferred(62151) - transferring
JTAPICallContact[id=13,type=Cisco JTAPI
Call,implId=29125/1,active=false,state=CALL_CONNECTED,inbound=true,handled=false,locale=en,abort
ing=false,app=App[name=ICD,type=Cisco Script
Application,id=0,desc=ICD,enabled=true,max=10,valid=true,cfg=[ApplicationConfig[schema=Applicati
onConfig,time=2016-03-22 17:58:01.0,recordId=43,desc=ICD,name=ICD,type=Cisco Script
Application,id=0,enabled=true,sessions=10,script=SSSCRIPT[icd.aef],defaultScript=,vars=[<java.lan
g.String CSQ>],defaultVars=null]]],task=3400000023,session=null,seqNum=-
1,time=1460090691790,cn=3999,dn=3999,cgn=543210,ani=null,dnis=null,clid=null,atype=DIRECT,lrd=nu
ll,ocn=3999,odn=null,uui=null,aniii=null,ced=null,OrigProtocolCallRef=0000000000071C501E2659E00
000000,DestProtocolCallRef=null,route=RP[num=3999],port=TP[type=Cisco CTI
Port,id=5,implId=4003,active=false,state=IDLE],aborting=false,transferring=true,disconnecting=fa
lse]
52679: Apr 08 10:14:59.326 IST %MIVR-SS_TEL-7-UNK:CallID:13 MediaId:29125/1 Task:3400000023,
released TP[type=Cisco CTI Port,id=5,implId=4003,active=false,state=IDLE] from 3999, and
releasing udpPort 24694
52680: Apr 08 10:14:59.326 IST %MIVR-SS_TEL-7-UNK:CallID:13 MediaId:29125/1 Task:3400000023
com.cisco.jtapi.TermObservationEndedEvImpl received
这时，代理程序当前被连接到鬼魂CTI端口543210，并且脚本1等待代理程序按所有键做呼叫对用户
。代理程序这时在与CTI端口的一通话状态。
```

随意地在此阶段，脚本能也播放消息回到关于用户的代理程序。然而，脚本1等待位被按执行呼叫重定向到被输入和被保存的呼叫人的回叫号。

将被输入的脚本1等待的位：

```
52678: Apr 08 10:14:59.325 IST %MIVR-SS_TEL-7-UNK:Call.transferred(62151) - transferring
JTAPICallContact[id=13,type=Cisco JTAPI
Call,implId=29125/1,active=false,state=CALL_CONNECTED,inbound=true,handled=false,locale=en,abort
ing=false,app=App[name=ICD,type=Cisco Script
Application,id=0,desc=ICD,enabled=true,max=10,valid=true,cfg=[ApplicationConfig[schema=Applicati
onConfig,time=2016-03-22 17:58:01.0,recordId=43,desc=ICD,name=ICD,type=Cisco Script
Application,id=0,enabled=true,sessions=10,script=SSSCRIPT[icd.aef],defaultScript=,vars=[<java.lan
g.String CSQ>],defaultVars=null]]],task=3400000023,session=null,seqNum=-
1,time=1460090691790,cn=3999,dn=3999,cgn=543210,ani=null,dnis=null,clid=null,atype=DIRECT,lrd=nu
ll,ocn=3999,odn=null,uui=null,aniii=null,ced=null,OrigProtocolCallRef=0000000000071C501E2659E00
000000,DestProtocolCallRef=null,route=RP[num=3999],port=TP[type=Cisco CTI
Port,id=5,implId=4003,active=false,state=IDLE],aborting=false,transferring=true,disconnecting=fa
lse]
52679: Apr 08 10:14:59.326 IST %MIVR-SS_TEL-7-UNK:CallID:13 MediaId:29125/1 Task:3400000023,
released TP[type=Cisco CTI Port,id=5,implId=4003,active=false,state=IDLE] from 3999, and
releasing udpPort 24694
52680: Apr 08 10:14:59.326 IST %MIVR-SS_TEL-7-UNK:CallID:13 MediaId:29125/1 Task:3400000023
com.cisco.jtapi.TermObservationEndedEvImpl received
代理程序按一个键。按位1确认回拨起动：
```

```
52678: Apr 08 10:14:59.325 IST %MIVR-SS_TEL-7-UNK:Call.transferred(62151) - transferring
JTAPICallContact[id=13,type=Cisco JTAPI
Call,implId=29125/1,active=false,state=CALL_CONNECTED,inbound=true,handled=false,locale=en,abort
ing=false,app=App[name=ICD,type=Cisco Script
Application,id=0,desc=ICD,enabled=true,max=10,valid=true,cfg=[ApplicationConfig[schema=Applicati
onConfig,time=2016-03-22 17:58:01.0,recordId=43,desc=ICD,name=ICD,type=Cisco Script
Application,id=0,enabled=true,sessions=10,script=SSSCRIPT[icd.aef],defaultScript=,vars=[<java.lan
g.String CSQ>],defaultVars=null]]],task=3400000023,session=null,seqNum=-
1,time=1460090691790,cn=3999,dn=3999,cgn=543210,ani=null,dnis=null,clid=null,atype=DIRECT,lrd=nu
ll,ocn=3999,odn=null,uui=null,aniii=null,ced=null,OrigProtocolCallRef=0000000000071C501E2659E00
000000,DestProtocolCallRef=null,route=RP[num=3999],port=TP[type=Cisco CTI
Port,id=5,implId=4003,active=false,state=IDLE],aborting=false,transferring=true,disconnecting=fa
```

lse]
52679: Apr 08 10:14:59.326 IST %MIVR-SS_TEL-7-UNK:CallID:13 MediaId:29125/1 Task:3400000023,
released TP[type=Cisco CTI Port,id=5,implId=4003,active=false,state=IDLE] from 3999, and
releasing udpPort 24694

52680: Apr 08 10:14:59.326 IST %MIVR-SS_TEL-7-UNK:CallID:13 MediaId:29125/1 Task:3400000023
com.cisco.jtapi.TermObservationEndedEvImpl received

呼叫重定向对回叫号：

52678: Apr 08 10:14:59.325 IST %MIVR-SS_TEL-7-UNK:Call.transferred(62151) - transferring
JTAPICallContact[id=13,type=Cisco JTAPI
Call,implId=29125/1,active=false,state=CALL_CONNECTED,inbound=true,handled=false,locale=en,abort
ing=false,app=App[name=ICD,type=Cisco Script
Application,id=0,desc=ICD,enabled=true,max=10,valid=true,cfg=[ApplicationConfig[schema=Applicati
onConfig,time=2016-03-22 17:58:01.0,recordId=43,desc=ICD,name=ICD,type=Cisco Script
Application,id=0,enabled=true,sessions=10,script=SSSCRIPT[icd.aef],defaultScript=,vars=[<java.lan
g.String CSQ>],defaultVars=null]]],task=3400000023,session=null,seqNum=-
1,time=1460090691790,cn=3999,dn=3999,cgn=543210,ani=null,dnis=null,clid=null,atype=DIRECT,lrd=nu
ll,ocn=3999,odn=null,uui=null,aniii=null,ced=null,OrigProtocolCallRef=0000000000071C501E2659E00
000000,DestProtocolCallRef=null,route=RP[num=3999],port=TP[type=Cisco CTI
Port,id=5,implId=4003,active=false,state=IDLE],aborting=false,transferring=true,disconnecting=fa
lse]

52679: Apr 08 10:14:59.326 IST %MIVR-SS_TEL-7-UNK:CallID:13 MediaId:29125/1 Task:3400000023,
released TP[type=Cisco CTI Port,id=5,implId=4003,active=false,state=IDLE] from 3999, and
releasing udpPort 24694

52680: Apr 08 10:14:59.326 IST %MIVR-SS_TEL-7-UNK:CallID:13 MediaId:29125/1 Task:3400000023
com.cisco.jtapi.TermObservationEndedEvImpl received

座席电话和回叫号被连接到互相：

52678: Apr 08 10:14:59.325 IST %MIVR-SS_TEL-7-UNK:Call.transferred(62151) - transferring
JTAPICallContact[id=13,type=Cisco JTAPI
Call,implId=29125/1,active=false,state=CALL_CONNECTED,inbound=true,handled=false,locale=en,abort
ing=false,app=App[name=ICD,type=Cisco Script
Application,id=0,desc=ICD,enabled=true,max=10,valid=true,cfg=[ApplicationConfig[schema=Applicati
onConfig,time=2016-03-22 17:58:01.0,recordId=43,desc=ICD,name=ICD,type=Cisco Script
Application,id=0,enabled=true,sessions=10,script=SSSCRIPT[icd.aef],defaultScript=,vars=[<java.lan
g.String CSQ>],defaultVars=null]]],task=3400000023,session=null,seqNum=-
1,time=1460090691790,cn=3999,dn=3999,cgn=543210,ani=null,dnis=null,clid=null,atype=DIRECT,lrd=nu
ll,ocn=3999,odn=null,uui=null,aniii=null,ced=null,OrigProtocolCallRef=0000000000071C501E2659E00
000000,DestProtocolCallRef=null,route=RP[num=3999],port=TP[type=Cisco CTI
Port,id=5,implId=4003,active=false,state=IDLE],aborting=false,transferring=true,disconnecting=fa
lse]

52679: Apr 08 10:14:59.326 IST %MIVR-SS_TEL-7-UNK:CallID:13 MediaId:29125/1 Task:3400000023,
released TP[type=Cisco CTI Port,id=5,implId=4003,active=false,state=IDLE] from 3999, and
releasing udpPort 24694

52680: Apr 08 10:14:59.326 IST %MIVR-SS_TEL-7-UNK:CallID:13 MediaId:29125/1 Task:3400000023
com.cisco.jtapi.TermObservationEndedEvImpl received

52678: Apr 08 10:14:59.325 IST %MIVR-SS_TEL-7-UNK:Call.transferred(62151) - transferring
JTAPICallContact[id=13,type=Cisco JTAPI
Call,implId=29125/1,active=false,state=CALL_CONNECTED,inbound=true,handled=false,locale=en,abort
ing=false,app=App[name=ICD,type=Cisco Script
Application,id=0,desc=ICD,enabled=true,max=10,valid=true,cfg=[ApplicationConfig[schema=Applicati
onConfig,time=2016-03-22 17:58:01.0,recordId=43,desc=ICD,name=ICD,type=Cisco Script
Application,id=0,enabled=true,sessions=10,script=SSSCRIPT[icd.aef],defaultScript=,vars=[<java.lan
g.String CSQ>],defaultVars=null]]],task=3400000023,session=null,seqNum=-
1,time=1460090691790,cn=3999,dn=3999,cgn=543210,ani=null,dnis=null,clid=null,atype=DIRECT,lrd=nu
ll,ocn=3999,odn=null,uui=null,aniii=null,ced=null,OrigProtocolCallRef=0000000000071C501E2659E00
000000,DestProtocolCallRef=null,route=RP[num=3999],port=TP[type=Cisco CTI
Port,id=5,implId=4003,active=false,state=IDLE],aborting=false,transferring=true,disconnecting=fa
lse]

52679: Apr 08 10:14:59.326 IST %MIVR-SS_TEL-7-UNK:CallID:13 MediaId:29125/1 Task:3400000023, released TP[type=Cisco CTI Port,id=5,implId=4003,active=false,state=IDLE] from 3999, and releasing udpPort 24694

52680: Apr 08 10:14:59.326 IST %MIVR-SS_TEL-7-UNK:CallID:13 MediaId:29125/1 Task:3400000023 com.cisco.jtapi.TermObservationEndedEvImpl received

52678: Apr 08 10:14:59.325 IST %MIVR-SS_TEL-7-UNK:Call.transferred(62151) - transferring JTAPICallContact[id=13,type=Cisco JTAPI Call,implId=29125/1,active=false,state=CALL_CONNECTED,inbound=true,handled=false,locale=en,aborting=false,app=App[name=ICD,type=Cisco Script Application,id=0,desc=ICD,enabled=true,max=10,valid=true,cfg=[ApplicationConfig[schema=ApplicationConfig,time=2016-03-22 17:58:01.0,recordId=43,desc=ICD,name=ICD,type=Cisco Script Application,id=0,enabled=true,sessions=10,script=SSSCRIPT[icd.aef],defaultScript=,vars=[<java.lang.String CSQ>],defaultVars=null]]],task=3400000023,session=null,seqNum=-1,time=1460090691790,cn=3999,dn=3999,cgn=543210,ani=null,dnis=null,clid=null,atype=DIRECT,lrd=null,ocn=3999,odn=null,uii=null,aniii=null,ced=null,OrigProtocolCallRef=00000000000071C501E2659E0000000,DestProtocolCallRef=null,route=RP[num=3999],port=TP[type=Cisco CTI Port,id=5,implId=4003,active=false,state=IDLE],aborting=false,transferring=true,disconnecting=false]

52679: Apr 08 10:14:59.326 IST %MIVR-SS_TEL-7-UNK:CallID:13 MediaId:29125/1 Task:3400000023, released TP[type=Cisco CTI Port,id=5,implId=4003,active=false,state=IDLE] from 3999, and releasing udpPort 24694

52680: Apr 08 10:14:59.326 IST %MIVR-SS_TEL-7-UNK:CallID:13 MediaId:29125/1 Task:3400000023 com.cisco.jtapi.TermObservationEndedEvImpl received