



Appendix

- [Appendix, on page 1](#)

Appendix


Deploy Cluster on a Single Host

This appendix provides step-by-step tasks for manual network creation for a Datacenter or cluster with one host.

Datacenter or Cluster with One Host

Follow these steps to create the required vSwitch and Port Group for HxBench.

1. Create a vSwitch with or without any uplinks using vSphere Web Client. Alternatively, you can select an existing vSwitch to create the HxBench Private **Port Group**.
2. Create a **Port Group** labeled *HxBench Private* (as shown in the following diagram).

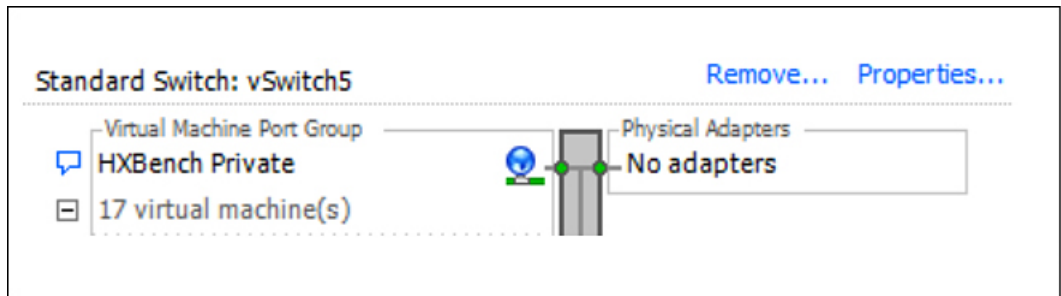

3. During OVA deployment, map NIC-2 of the HxBench Controller to the newly created **HxBench Private Port Group**. Or, the DVS port switch can be used with the proper uplink configured on all the hosts.

Troubleshooting Section

Network Issues

- [Uplink Error, on page 2](#)


- [Missing Host Error](#), on page 2
- [VLAN ID Host Error](#), on page 3
- [Network Type Configuration Error](#), on page 4
- [Password Configuration Error](#), on page 4

VM Deployment Failure

- [VM Deployment Failure](#), on page 5

Uplink Error

The following error message is displayed:

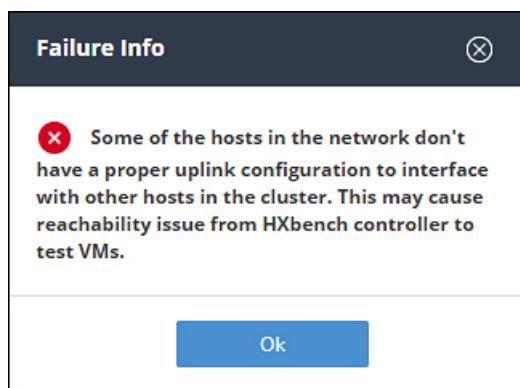


Steps to resolve this error:

- Please check if all the Host in the Cluster are connected to HXBench Private network and necessary VLAN ID is assigned.

(For VLAN ID details, please contact the Networking team.)

Missing Host Error

This issue occurs when some of the hosts in the cluster are not connected to HXBench Private network.

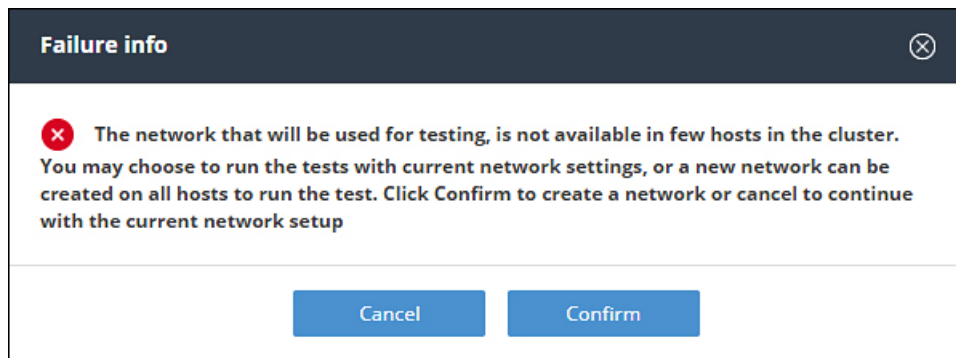

Steps to resolve this issue:

- To continue to run the tests on all the hosts in the cluster, click on **Confirm** button which creates the network on all the hosts.



Note For VLAN ID details, contact the Networking team.

VLAN ID Host Error

This issue occurs when the HXBench Private network is mapped to different VLAN ID in different hosts in the cluster. The following error message is displayed:

Steps to resolve this issue:

- To continue to run the tests on all the hosts in the cluster, please click on the **Confirm** button which creates the network on all the hosts.

Create Network ✕


VLAN ID	<input style="width: 90%;" type="text" value="410"/>	i	
Host Name	Switches		
ucs-507.eng.storvisor.com	<input style="width: 90%;" type="text" value="vswitch-hx-vm-network"/>		v
ucs-508.eng.storvisor.com	<input style="width: 90%;" type="text" value="vswitch-hx-vm-network"/>		v
ucs-509.eng.storvisor.com	<input style="width: 90%;" type="text" value="vswitch-hx-vm-network"/>		v



Note For VLAN ID details, contact the Networking team.

Network Type Configuration Error

The following error message is displayed:

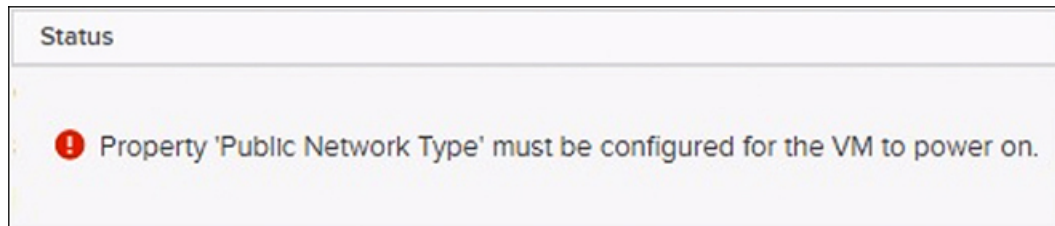


The issue may occur if either the Public Network Type property or DHCP/static option is not selected in the **Network Type** selection during the deployment.

Steps to resolve this error:

Redeploy the HxBench controller. During deployment, select Public Network Type property from the drop-down menu.

Password Configuration Error

The following error message is displayed:

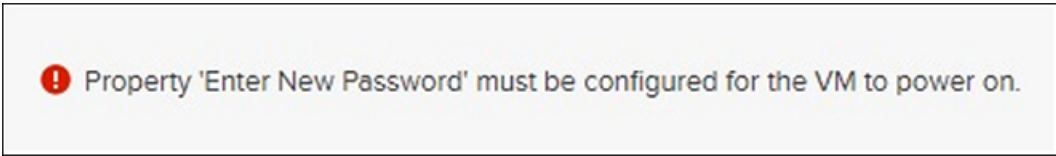A rectangular box with a light gray background and a thin black border. On the left side, there is a red circular icon containing a white exclamation mark. To the right of the icon, the text reads: "Property 'Enter New Password' must be configured for the VM to power on." data-bbox="253 136 866 155"/>

Property 'Enter New Password' must be configured for the VM to power on.

The issue may occur if the password is not changed in the System password section during the deployment.

Steps to resolve this error:

Redeploy the HxBench controller. During deployment, under **System password**, enter the password that you would like to use to access the HxBench controller

VM Deployment Failure

The following error message is displayed:

```
Unable to copy files to x.x.x.x
```

Steps to resolve this issue:

- Click on the **Retry** button to reboot the VM.
- Copy the files again.

If the files are copied successfully, then you can continue to use the same VM group to run the future tests.

