

如何执行一远程出厂在Cisco IP电话7800和8800多平台系列重置了

客观

重置Cisco IP电话7800或8800系列多平台电话对默认设置允许您恢复电话的所有配置到工厂默认设置。这典型地执行，如果要去除电话的现有的设置，并且重新配置它第一次请喜欢。

在您的Cisco IP电话7800系列和Cisco IP电话打算显示您如何执行一远程出厂重置的此条款8800系列通过Web浏览器。

可适用的设备

- 7800系列的IP电话
- 8800系列的IP电话


软件版本


- 11.0.1

如何执行远程出厂重置


第 1 步：在您的IP电话上，请通过按应用程序按钮确定其IP地址。



Step 2.使用定位簇  按钮，请连接对状态并且按挑选Softkey。

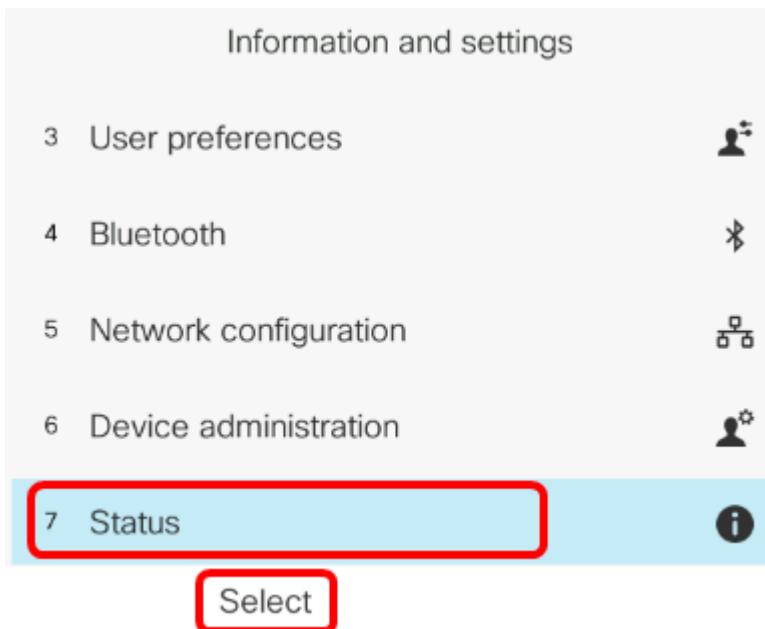

步骤3.连接对**网络状态**并且按**挑选**Softkey。

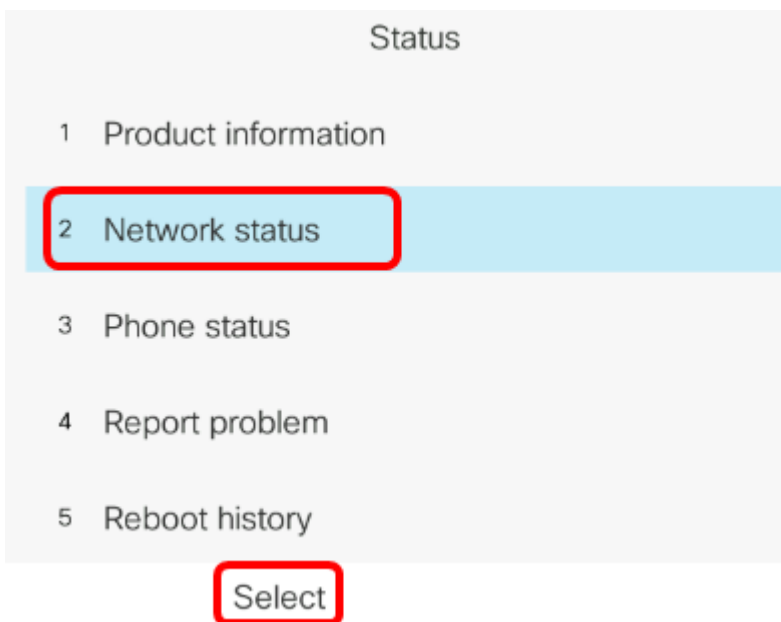

步骤4.寻找IP地址并且注意到它。在本例中，IP地址是192.168.2.139。

Network status	
Network type	Ethernet
Network status	Connected
IP address	192.168.2.139
VLAN ID	4095
Addressing type	DHCP

第 5 步：在您的计算机上，请启动Web浏览器并且输入以下格式在地址栏：http:// <Phone IP>/admin/factory-reset然后按enter键。

Note:在本例中，电话在地址栏因而有192.168.2.139的IP地址，http://192.168.2.139/admin/factory-reset被输入。

<http://192.168.2.139/admin/factory-reset>

步骤6. 点击**确认出厂RESET**链路继续进行重置过程。

Click **CONFIRM FACTORY RESET** to reset phone
You will be redirected to configuration page in 10 seconds.
If you are not redirected automatically, you can click [here](#) to return to the configuration page.

步骤7.，当电话重置时，请等待一些瞬间。您也注意电话将重新启动，在重置过程完成了后。

Phone will be factory reset and reboot.
You will be redirected to configuration page in 60 seconds.
If you are not redirected automatically, you can click [here](#) to return to the configuration page.

在您的Cisco IP电话7800系列或Cisco IP电话应该顺利地当前执行一远程出厂重置的您8800系列。