

# 安装激活和功能键在思科网真ISDN网关(ISDN GW)

## 目录

[简介](#)

[先决条件](#)

[使用的组件](#)

[配置](#)

[通过Web接口添加产品激活或功能键](#)

[配置](#)

[验证](#)

[故障排除](#)

## 简介

本文描述激活密钥和功能键的安装到思科网真ISDN网关(ISDN GW)通过Web接口。

## [先决条件](#)

### [要求](#)

Cisco 建议您了解以下主题：

顺利地安装ISDN GW和应用通过Web接口是可达的有效IP地址。

应用为并且接收**激活密钥**和或**功能键**有效为ISDN GW序列号。

访问与管理员帐户的ISDN GW由Web接口。

使用Web接口，有多种平台的知识ISDN GW 3241和思科网真MSE ISDN GW 8321。

使用了一Web浏览器例如Firefox，Internet Explorer或者镀铬物。

**注意：**可以找到ISDN GW安装指南此处：

<http://www.cisco.com/c/en/us/support/conferencing/telepresence-isdn-gateway/products-installation-guides-list.html>

## 使用的组件

本文档中的信息基于以下软件版本：

Cisco ISDN GW 8321版本2.2(1.114)

Cisco ISDN GW 3241和思科网真MSE ISDN GW 8321全部版本

许可证电子邮件用**激活密钥或功能键**。

—Web浏览器例如Firefox，Internet Explorer或者镀铬物。

本文档中的信息都是基于特定实验室环境中的设备编写的。本文档中使用的所有设备最初均采用原始（默认）配置。如果您使用的是真实网络，请确保您已经了解所有命令的潜在影响。

## 配置

### 通过Web接口添加产品激活或功能键

此Web接口示例视频补充本文：

#### 配置

步骤1:一旦安装您的ISDN GW，请有您的序列号，并且应用为您的**激活密钥或功能键**使用您的PAK和序列号，您收到从思科许可授权的团队的一许可证电子邮件。

**注意：**在本文的范围之外，PAK示例是。

#### 电子邮件示例

\*\*\* IMPORTANT - DO NOT DISCARD THIS E-MAIL \*\*\*

You have received this email because your email address was provided to Cisco Systems during the Serial Number Lookup process for software license activation key/file. Please read this email carefully and forward it with any attachments to the proper system administrator if you are not the correct person.

```
System Serial Number      : SM011A5A
Hardware Serial Number    : SM011A5A
MAC Address               : 000D7C0234B4
Service Contract         : 3630730
SC End Date              : 09/27/2017

Software Part Name       : LIC-TB-198321SW:
Tandberg Item No        : 198321SW:SW, MSE8321 ISDN GW Blade Software
Shipped Version         : 2.0(1.51)P
Shipped Version Key     : MVR55-Y7M23-UWK91-R7YRT
Shipped Image URL      : -
Upgrade To              : 2.1(1.49)
Upgrade To Key         : MVR55-Y7M23-UWK91-R7YRT
Upgrade To Image URL   :
```

Activation Key

```
Options
Cisco Option Name       :LIC-AESCDN-K9:
Tandberg Option Name   :194200AES:KEY, Encryption Option Key
Option Key             : VX8G5-Y09U5-2UF5M-EG3FR
```

Feature Key

CAUTION: If the Unified Messaging for Exchange and Domino license file is misplaced or lost, it can take up to one business day to get another copy.


PLEASE READ THIS SOFTWARE LICENSE AGREEMENT CAREFULLY BEFORE DOWNLOADING, INSTALLING OR USING CISCO OR CISCO-SUPPLIED SOFTWARE.

BY DOWNLOADING OR INSTALLING THE SOFTWARE, OR USING THE EQUIPMENT THAT CONTAINS THIS SOFTWARE, YOU ARE BINDING THE BUSINESS ENTITY THAT YOU REPRESENT ("CUSTOMER") TO THIS AGREEMENT. IF YOU DO NOT AGREE TO ALL OF THE TERMS OF THIS AGREEMENT, THEN (A) DO NOT DOWNLOAD, INSTALL OR USE THE SOFTWARE, AND (B) YOU MAY RETURN THE SOFTWARE FOR A FULL REFUND, OR, IF THE SOFTWARE IS SUPPLIED AS PART OF ANOTHER PRODUCT, YOU MAY RETURN THE ENTIRE PRODUCT FOR A FULL REFUND. YOUR RIGHT TO RETURN AND REFUND EXPIRES 30 DAYS AFTER PURCHASE FROM CISCO OR AN AUTHORIZED CISCO RESELLER, AND APPLIES ONLY IF CUSTOMER IS THE ORIGINAL END USER PURCHASER.


The following terms of this Software License Agreement ("Agreement") govern Customer's access and use of the Software, except to the extent (a) there is a separate signed agreement between Customer and Cisco governing Customer's use of the Software or (b) the Software includes a separate "click-accept" license

步骤2.输入ISDN GW的IP地址在您的Web浏览器的并且登陆对与管理员帐户的ISDN GW Web接口。  
。导航对**设置>升级**

:

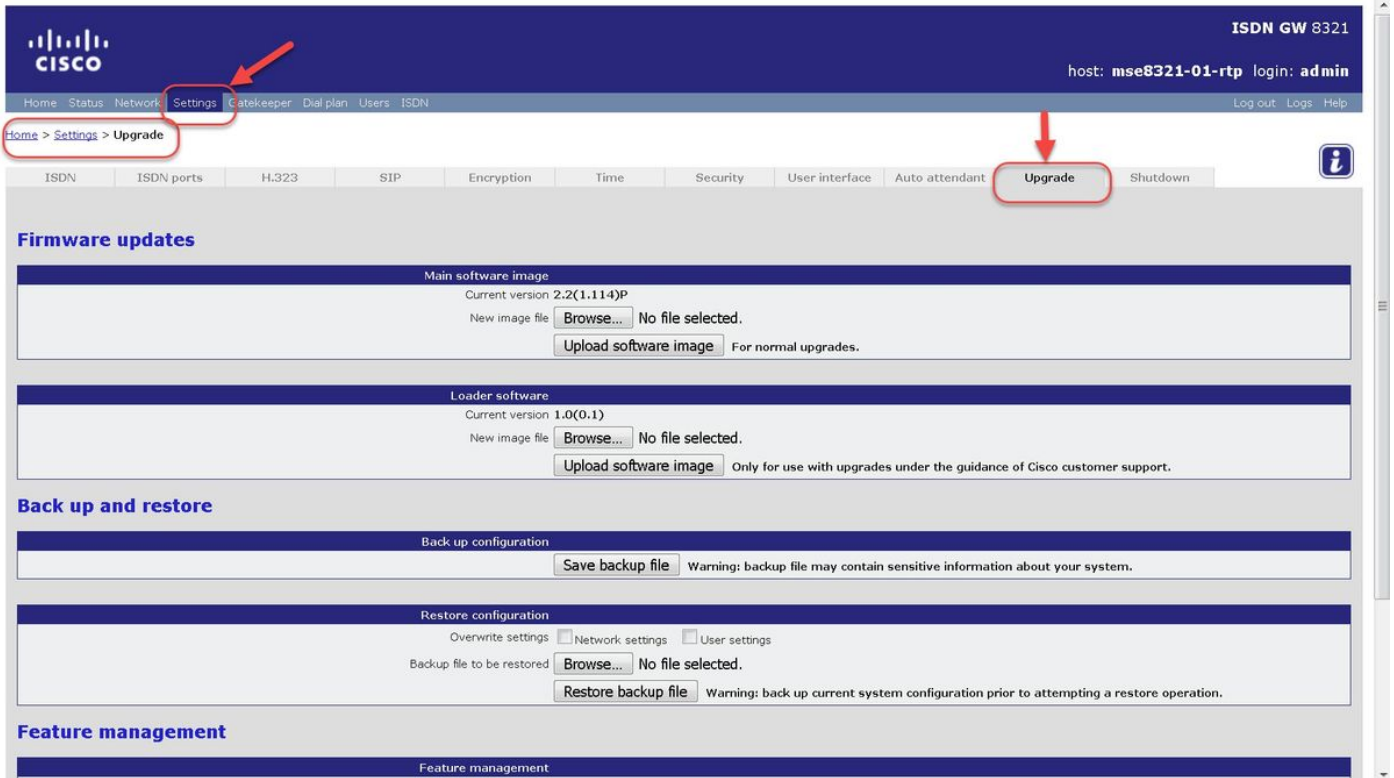

步骤3. 找出在 Upgrade 页的功能 management section。在激活代码字段输入激活密钥值或功能键值：

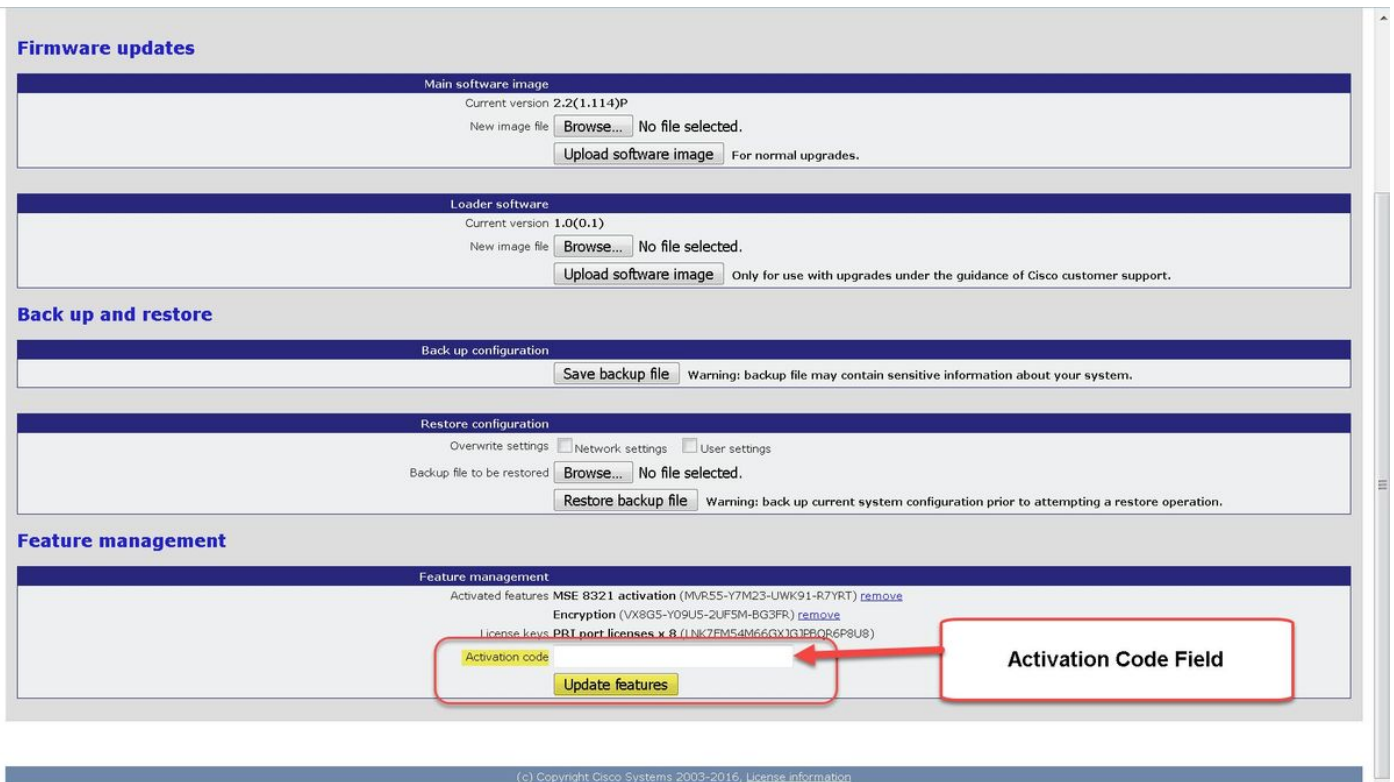


**注意：**完全照原样添加**激活密钥或功能键**在许可证电子邮件。请务必包括所有破折号，并且确保没有额外空间或字符。

**注意：**一旦添加，密钥立即生效。重新启动没有要求。

**注意：**思科建议您在安全位置记录**激活密钥和功能键**，万一需要在将来重新输入他们。

## 验证

导航对**设置>升级**并且移下来对**功能管理部分**。注意显示安装的**激活密钥和功能键**的**激活的特征部分**：

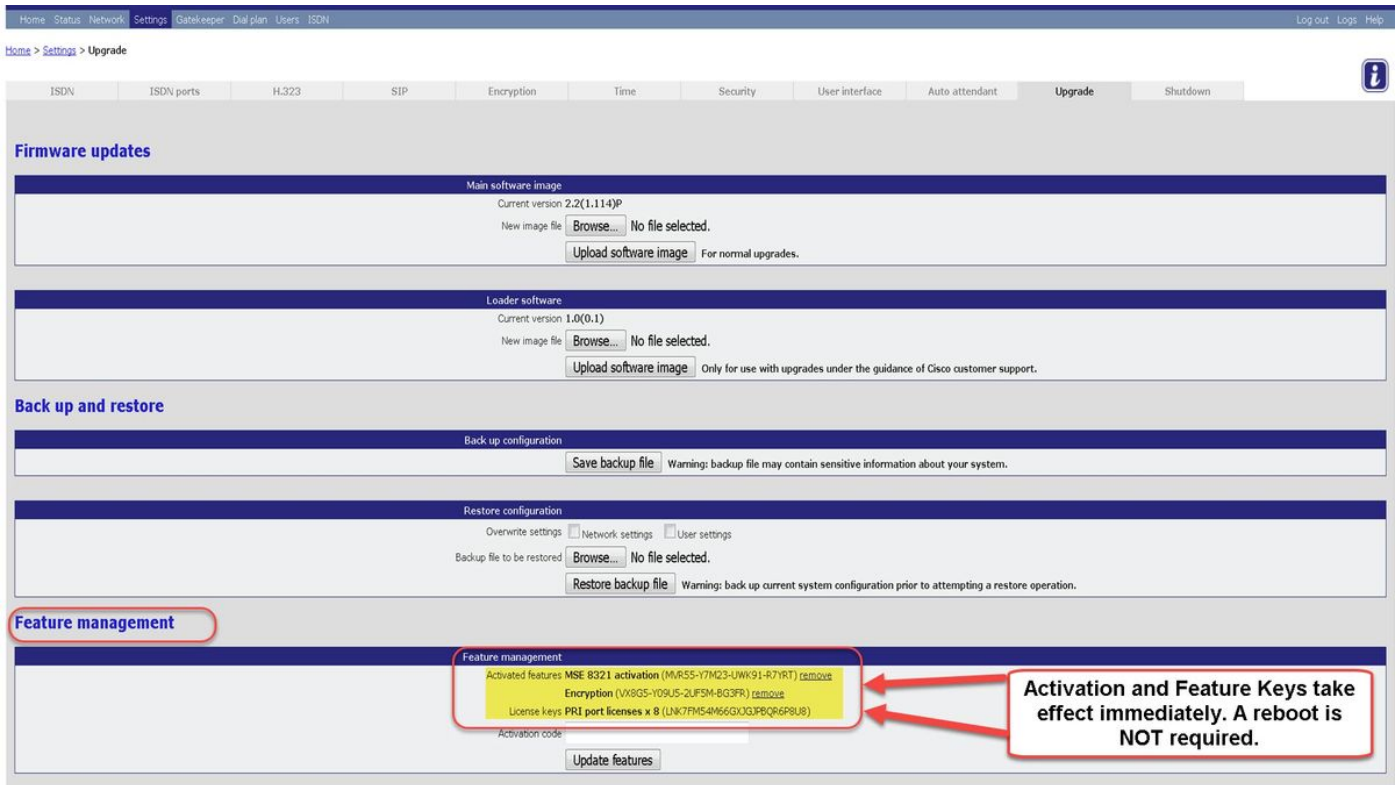

## 故障排除

**步骤 1：**检查**功能键**或接收的**激活密钥**，保证它是为正确**产品号(PID)**和发出为您的**ISDN GW**正确序列号。

**步骤 2：**保证您安装您的**ISDN GW**正确序列号的正确密钥。

**步骤 3：**在**激活代码设置的功能管理部分领域**保证您回车关键值**> Upgrade**页。

**步骤 4：**再估计步骤一至三。如果所有正确，更加请添加密钥。保证那里是没有额外空间或字符被输入的值并且是肯定包括所有破折号。

如果在遵从在此指南的在此指南的**Troubleshoot**部分的**步骤**和**步骤一**以后遇到任何错误至四，请从事Cisco TAC。