



## Cisco Umbrella Integration

---

The Cisco Umbrella Integration feature enables cloud-based security service by inspecting the Domain Name System (DNS) query that is sent to the DNS server through the device. The security administrator configures policies on the Cisco Umbrella portal to either allow or deny traffic towards the fully qualified domain name (FQDN). Cisco device acts as a DNS forwarder on the network edge, transparently intercepts DNS traffic, and forwards the DNS queries to the Cisco Umbrella portal. This feature is available on Cisco IOS XE Denali 16.3 and later releases.

- [Restrictions for Cisco Umbrella Integration](#) , on page 1
- [Prerequisites for Cisco Umbrella Integration](#), on page 2
- [Cloud-based Security Service Using Cisco Umbrella Integration](#), on page 2
- [Encrypting the DNS Packet](#), on page 5
- [Benefits of Cisco Umbrella Integration](#), on page 6
- [Configure the Cisco Umbrella Connector](#) , on page 6
- [Registering the Cisco Umbrella Tag](#), on page 7
- [Configuring Cisco Device as a Pass-through Server](#), on page 7
- [DNSEncrypt, Resolver, and Public-key](#), on page 8
- [Verifying the Cisco Umbrella Connector Configuration](#), on page 9
- [Show Commands](#), on page 10
- [Troubleshooting Cisco Umbrella Integration](#), on page 14
- [Configuration Examples](#), on page 15
- [Deploying Cisco Umbrella Integration Using Cisco Prime CLI Templates](#), on page 15
- [Additional References for Cisco Umbrella Integration](#), on page 16
- [Feature Information for Cisco Umbrella Integration](#) , on page 16

## Restrictions for Cisco Umbrella Integration

- If an application or host uses IP address directly instead of DNS to query domain names, policy enforcement is not applied.
- When the client is connected to a web proxy, the DNS query does not pass through the Cisco device. In this case, the connector does not detect any DNS request and the connection to the web server bypasses any policy from the Cisco Umbrella portal.
- When the Cisco Umbrella Integration policy blocks a DNS query, the client is redirected to a Cisco Umbrella block page. HTTPS servers provide these block pages and the IP address range of these block pages is defined by the Cisco Umbrella portal.

- User authentication and identity is not supported in this release.
- The type A, AAAA, and TXT queries are the only records that are redirected. Other types of query bypasses the connector. Cisco Umbrella Connector maintains a list of IP address that is known for malicious traffic. When the Cisco Umbrella roaming client detects the destination of packets to those addresses, it forwards those addresses to Cisco Umbrella cloud for further inspection.
- Only the IPv4 address of the host is conveyed in the EDNS option.
- A maximum of 64 local domains can be configured, and the allowed domain name length is 100 characters.

## Prerequisites for Cisco Umbrella Integration

Before you configure the Cisco Umbrella Integration feature, ensure that the following are met:


- The device has a security K9 license to enable Cisco Umbrella Integration.
- The device runs the Cisco IOS XE Denali 16.3 software image or later.
- Cisco Umbrella subscription license is available.
- The device is set as the default DNS server gateway and needs to ensure that the DNS traffic goes through the Cisco device.
- Communication for device registration to the Cisco Umbrella server is via HTTPS. This requires a root certificate to be installed on the router. To download this certificate directly from a link instead of pasting it in, you can find the certificate here: <https://www.digicert.com/CACerts/DigiCertSHA2SecureServerCA.crt>.

## Cloud-based Security Service Using Cisco Umbrella Integration

The Cisco Umbrella Integration feature provides cloud-based security service by inspecting the DNS query that is sent to the DNS server through the device. When a host initiates the traffic and sends a DNS query, the Cisco Umbrella Connector in the device intercepts and inspects the DNS query. If the DNS query is for a local domain, it forwards the query without changing the DNS packet to the DNS server in the enterprise network. If it is for an external domain, it adds an Extended DNS (EDNS) record to the query and sends it to Cisco Umbrella Resolver. An EDNS record includes the device identifier information, organization ID and client IP. Based on this information, Cisco Umbrella Cloud applies different policies to the DNS query.

The Umbrella Integration cloud, based on the policies configured on the portal and the reputation of the DNS Fully Qualified Domain Name (FQDN) may take one of the following actions:

- If FQDN is found to be malicious or blocked by the customized Enterprise Security policy, then the IP address of the Umbrella Cloud's blocked landing page is returned in the DNS response. This is called a blocked list action at Umbrella Cloud.
- If FQDN is found to be non-malicious, then the IP address of the content provider is returned in the DNS response. This is called a whitelist action at Umbrella Cloud.
- If the FQDN is suspicious, then the intelligent proxy unicast IP addresses are returned in the DNS response. This is referred to as grey list action at Umbrella cloud.

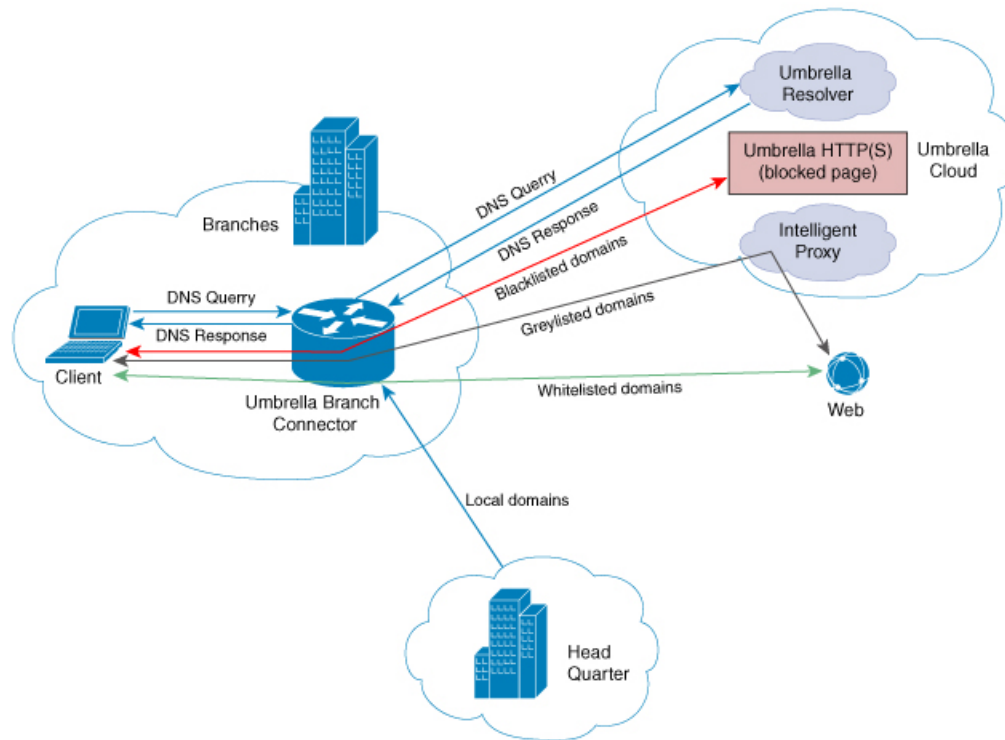

355196

When the DNS response is received, the device forwards the response back to the host. The host will extract the IP address from the response and send the HTTP / HTTPS requests to this IP.



**Note** The intelligent proxy option has to be enabled in the Umbrella dashboard for the Umbrella Resolver to return the intelligent proxy unicast IP addresses in the DNS response when an attempt is made to access the domains in the grey list.

The screenshot shows the Cisco Umbrella interface. On the left is a navigation sidebar with options like Overview, Identities, Policies, Reporting, Settings, and Investigate. The main area displays the 'Policy List' for 'SIG Umbrella Test Policy'. The policy is applied to 8414 identities and contains 3 policy settings. The configuration details include:

- Policy Name:** SIG Umbrella Test Policy
- 8414 Identities Affected:** 8414 Network Devices
- 2 Destination Lists Enforced:** 1 Block List, 1 Allow List
- Security Setting Applied: Default Settings:** Command and Control Callbacks, Malware, Phishing Attacks, plus 2 more will be blocked. No integration is enabled.
- File Inspection Not Enabled:** Inspects downloaded files for malware on suspicious domains and blocks malicious files.
- Content Setting Applied: sig\_umbrella\_test:** No categories will be blocked.
- Custom Block Page Applied:** Default Settings

The 'ADVANCED SETTINGS' section is expanded, showing:

- Enable Intelligent Proxy:** This toggle is turned on (highlighted with a red box). It is used to gain visibility into threats that bypass DNS lookups by tunneling suspect IP connections.
- SSL Decryption:** This toggle is checked. It enhances security by performing inspection of HTTPS traffic for deeper security insight. A warning states: 'The Cisco Umbrella root certificate must be installed on all computers configured in this policy. Without the certificate installed, users will not be able to connect to some HTTPS sites and some SSL connections will be broken. Please read our guide for distributing the root certificate. >>' with a 'DOWNLOAD CERTIFICATE' button.
- Enable IP-Layer Enforcement:** This toggle is unchecked. It gains visibility into threats that bypass DNS lookups by tunneling suspect IP connections. Note: this is only available for Roaming Computer identities.

At the bottom, the 'ALLOW-ONLY MODE' section shows the 'Allow-Only Mode' toggle is turned off. A note states: 'In this mode, access to sites needs to be specifically granted, otherwise connections will be blocked by default.'

## Handling HTTP and HTTPs Traffic

With Cisco Umbrella Integration, HTTP and HTTPs client requests are handled in the following ways:

- If the Fully Qualified Domain Name (FQDN) in the DNS query is malicious (falls under blacklisted domains), Umbrella Cloud returns the IP address of the blocked landing page in the DNS response. When the HTTP client sends a request to this IP, Umbrella Cloud displays a page that informs the user that the requested page was blocked and the reason for blocking the page.

If the FQDN in the DNS query is non-malicious (falls under whitelisted domains), Umbrella Cloud returns the IP address of the content provider. The HTTP client sends the request to this IP address and gets the desired content.

If the FQDN in the DNS query falls under grey-listed domains, Umbrella Resolver returns the unicast IP addresses of intelligent proxy in the DNS response. All HTTP traffic from the host to the grey domain gets proxied through the intelligent proxy and undergo URL filtering.

One potential limitation in using intelligent proxy unicast IP addresses is the probability of the datacenter going down when the client is trying to send the traffic to the intelligent proxy unicast IP address. This is a scenario where a client has completed DNS resolution for a domain which falls under grey-listed domain and client's HTTP(S) traffic is being sent to one of the obtained intelligent proxy unicast IP address. If that datacenter is down, then the client has no way of knowing it.

The Umbrella Connector does not act on the HTTP and HTTPS traffic. The connector does not redirect any web traffic or alter any HTTP(S) packets.

## Encrypting the DNS Packet

The DNS packet sent from the Cisco device to Cisco Umbrella Integration server must be encrypted if the EDNS information in the packet contains information such as user IDs, internal network IP addresses, and so on. When the DNS response is sent back from the DNS server, device decrypts the packet and forwards it to the host.


You can encrypt DNS packets only when the DNSCrypt feature is enabled on the Cisco device.

The Cisco device uses the following Anycast recursive Cisco Umbrella Integration servers:

- 208.67.222.222
- 208.67.220.220
- 2620:119:53::53
- 2620:119:35::35

The Figure 1 describes the Cisco Umbrella Integration topology.

**Figure 1: Cisco Umbrella Integration Topology**

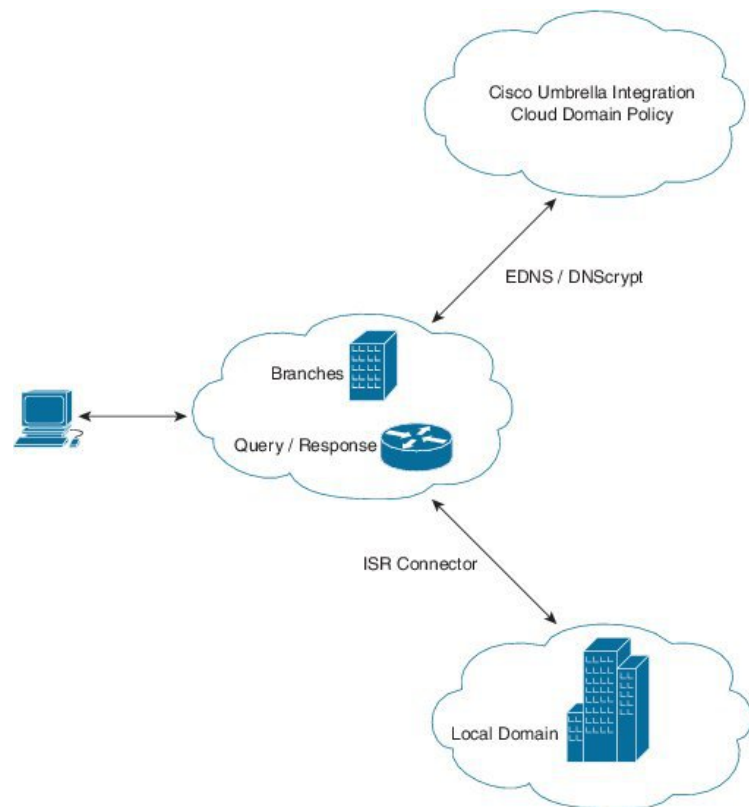



## Registering the Cisco Umbrella Tag

To register the Cisco Umbrella tag, perform these steps:

1. Configure the umbrella parameter map as shown in the previous section.
2. Configure **umbrella out** on the WAN interface:

```
interface gigabitEthernet 0/0/1
  umbrella out
```

3. Configure **umbrella in** on the LAN interface:

```
interface gigabitEthernet 0/0/0.4
  umbrella in mydevice_tag
```



---

**Note** For the Cisco devices, the length of the hostname and umbrella tag should not exceed 49 characters.

---

4. After you configure **umbrella in** with a tag using the **umbrella in mydevice\_tag** command, the device registers the tag to the Cisco Umbrella Integration portal.
5. The device initiates the registration process by resolving *api.opendns.com*. You need to have a name server (*ip name-server x.x.x.x*) and domain lookup (*ip domain-lookup*) configured on the device to successfully resolve the FQDN.



---

**Note** You should configure the **umbrella out** command before you configure **umbrella in** command. Registration is successful only when the port 443 is in *open* state and allows the traffic to pass through the existing firewall.

---

## Configuring Cisco Device as a Pass-through Server

You can identify the traffic to be bypassed using domain names. In the Cisco device, you can define these domains in the form of regular expressions. If the DNS query that is intercepted by the device matches one of the configured regular expressions, then the query is bypassed to the specified DNS server without redirecting to the Cisco Umbrella cloud. This sample configuration shows how to define a regex parameter-map with a desired domain name and regular expressions:

```
Device# configure terminal
Device(config)# parameter-map type regex dns_bypass
Device(config)# pattern www.fisco.com
Device(config)# pattern .*engineering.fisco.*
```

Attach the regex param-map with the openDNS global configuration as shown below:

```
Device(config)# parameter-map type umbrella global
Device(config-profile)# token AADDD5FF6E510B28921A20C9B98EEFF
Device(config-profile)# local-domain dns_bypass
```

# DNSCrypt, Resolver, and Public-key

When you configure the device using the **parameter-map type umbrella global** command, the following values are auto-populated:

- DNSCrypt
- Resolver IP
- Public-Key

We recommend that you change the above parameters only when you perform certain tests in the lab. These parameters are reserved for future use. If you modify these parameters, it can affect the normal functioning of the device.

## Resolver

The following commands change the redirection of DNS packets from the Cisco device to Cisco Umbrella cloud:

- **resolver ipv4 1.1.1.1**
- **resolver ipv4 1.1.1.2**
- **resolver ipv6 1234::1**
- **resolver ipv6 2345::1**

In this example, all the IPv4 DNS packets are redirected to 1.1.1.1 or 1.1.1.2 and IPv6 DNS packets are redirected to 1234::1 or 2345::1. You should remove the IP address to restore to the default values of the resolver.

With the default values of **208.67.222.222** and **208.67.220.220**, all DNS packets are redirected to Cisco Umbrella Anycast resolvers. The device uses the first default resolver IP address for all its redirection. When the Cisco device does not receive a response for three consecutive DNS queries, the device automatically switches to a different resolver IP address. This behavior remains the same for IPv6 resolver addresses.



---

**Note** IPv6 redirection is deferred and all IPV6 DNS packets are not redirected to Cisco Umbrella Anycast servers.

---

## Public-key

Public-key is used to download the DNSCrypt certificate from Cisco Umbrella Integration cloud. This value is preconfigured to

**B735:1140:206F:225D:3E2B:D822:D7FD:691E:A1C3:3CC8:D666:8DOC:BE04:BFAB:CA43:FB79** which is the public-key of Cisco Umbrella Integration Anycast servers. If there is a change in the public-key and if you modify this command, then you have to remove the modified command to restore the default value. If you modify the value, the DNSCrypt certificate download may fail.



## DNSCrypt

DNSCrypt is an encryption protocol to authenticate communications between the Cisco device and the Cisco Umbrella Integration. When the **parameter-map type umbrella** is configured and **umbrella out** is enabled on WAN interface, DNSCrypt gets triggered and a certificate is downloaded, validated, and parsed. A shared secret key is then negotiated, which is used to encrypt the DNS queries. For every hour this certificate is automatically downloaded and verified for an upgrade, a new shared secret key is negotiated to encrypt the DNS queries.

To disable DNSCrypt, use the **no dnsencrypt** command and to re-enable DNSCrypt, use the **dnsencrypt** command.

When the DNSCrypt is used, the DNS request packets size is more than 512 bytes. Ensure that these packets are allowed through the intermediary devices; otherwise, the response may not reach the intended recipients.

# Verifying the Cisco Umbrella Connector Configuration

Verify the Cisco Umbrella Connector configuration using the following commands:

```
Router# show umbrella config
Umbrella Configuration
=====
Token: AAC1A2555C11B2B798FFF3AF27C2FB8F001CB7B2
OrganizationID: 1882034
Local Domain Regex parameter-map name: NONE
DNSCrypt: Enabled
Public-key: B735:1140:206F:225D:3E2B:D822:D7FD:691E:A1C3:3CC8:D666:8D0C:BE04:BFAB:CA43:FB79

UDP Timeout: 5 seconds
Resolver address:
 1. 208.67.220.220
 2. 208.67.222.222
 3. 2620:119:53::53
 4. 2620:119:35::35
Umbrella Interface Config:
Number of interfaces with "opendns out" config: 1
 1. GigabitEthernet0/0/0
    Mode      : OUT
    VRF       : global(Id: 0)
Number of interfaces with "opendns in" config: 1
 1. GigabitEthernet0/0/1
    Mode      : IN
    Tag       : test
    Device-id : 010a6aef0b443f0f
    VRF       : global(Id: 0)

Device# show umbrella deviceid
Device registration details
Interface Name      Tag      Status  Device-id
GigabitEthernet0/0/1  guest   200 SUCCESS 010a7ba73bd216d1

Device#show umbrella dnsencrypt
DNSCrypt: Enabled
Public-key: B735:1140:206F:225D:3E2B:D822:D7FD:691E:A1C3:3CC8:D666:8D0C:BE04:BFAB:CA43:FB79
Certificate Update Status:
Last Successful Attempt : 10:55:40 UTC Apr 14 2016
Last Failed Attempt    : 10:55:10 UTC Apr 14 2016
Certificate Details:
Certificate Magic      : DNSC
Major Version         : 0x0001
```

```

Minor Version : 0x0000
Query Magic : 0x717744506545635A
Serial Number : 1435874751
Start Time : 1435874751 (22:05:51 UTC Jul 2 2015)
End Time : 1467410751 (22:05:51 UTC Jul 1 2016)
Server Public Key :
ABA1:F000:D394:8045:672D:73E0:EAE6:F181:19D0:2A62:3791:EFAD:B04E:40B7:B6F9:C40B
Client Secret Key Hash :
BBC3:409F:5CB5:C3F3:06BD:A385:78DA:4CED:62BC:3985:1C41:BCCE:1342:DF13:B71E:F4CF
Client Public key :
ECE2:8295:2157:6797:6BE2:C563:A5A9:C5FC:C20D:ADAF:EB3C:A1A2:C09A:40AD:CAEA:FF76
NM key Hash :
F9C2:2C2C:330A:1972:D484:4DD8:8E5C:71FF:6775:53A7:0344:5484:B78D:01B1:B938:E884

```

```

Device# show umbrella deviceid detailed
Device registration details
 1.GigabitEthernet0/0/1
   Tag           : guest
   Device-id     : 010a6aef0b443f0f
   Description   : Device Id received successfully
   WAN interface : GigabitEthernet0/0/0
   WAN VRF used  : global(Id: 0)

```

## Show Commands

### Show Commands at FP Layer

#### show platform software umbrella f0 local-domain Command

The **show platform software umbrella f0 local-domain** command displays all the local domains configured for Open DNS in the FP Layer.

```

Device# show platform software umbrella f0 local-domain
01. .*engineering.cisco.*
02. www.cisco.com
03. abc1
04. abc3

```

#### show platform software umbrella f0 config Command

The **show platform software umbrella f0 config** command shows whether the Umbrella global configurations performed at the control plane are propagated to the FP layer.

```

Device# show platform software umbrella f0 config
+++ Umbrella Config +++

```

```

Umbrella feature:
-----
Init      : Enabled
Dnscrypt: Enabled

Timeout:
-----
udp timeout: 5

Resolver config:

```

```

RESOLVER IP's
-----
208.67.220.220
208.67.222.222
2620:119:35::35
2620:119:53::53

Dnscrypt Info:

public_key   :
6A:1A:E6:1D:AE:9A:8A:52:4E:74:EC:8A:A2:57:B9:13:A4:73:33:95:70:8D:E9:9F:91:56:7B:64:B9:E0:FC:7D
magic_key    : 71 74 73 65 4A 61 49 70
serial number : 1463092899

```

### show platform software umbrella f0 interface-info Command

The **show platform software umbrella f0 interface-info** command shows whether the Umbrella interface configurations performed at the control plane are propagated to the FP layer.

```

Device# show platform software umbrella f0 interface-info
Umbrella Interface Config:
InterfaceID      Name           Mode   DeviceID      Tag
-----
06 GigabitEthernet0/0/0    OUT
08 GigabitEthernet0/0/2    IN    010adb13752caabd  guest
07 GigabitEthernet0/0/1    IN    010a0d9bfce516e3  test

```

## Show Commands at CPP Layer

### show platform hardware qfp active feature umbrella client config Command

The **show platform hardware qfp active feature umbrella client config** command displays the client configuration information at the CPP layer.

```

Device# show platform hardware qfp active feature umbrella client config
+++ Umbrella Config +++

Umbrella feature:

-----

Init       : Enabled
Dnscrypt   : Enabled

Timeout:

-----

udp timeout: 5

Orgid:

-----

orgid: 1892929

Resolver config:

-----

```

```

RESOLVER IP's
208.67.220.220
208.67.222.222
2620:119:53::53
2620:119:35::35

Dnscrypt Info:
-----

public_key   :
45:B1:D2:43:F9:A4:42:4A:B8:4E:CF:E7:5A:AE:CE:F2:81:43:F2:4F:E9:B9:7C:4D:6A:B5:90:93:07:9B:72:13
magic_key    : 71 31 56 77 44 57 30 6E
serial number: 1490391488

Umbrella Interface Config:
-----

08 GigabitEthernet0/0/1 :
   Mode      : OUT

```

## Data Path Show Commands

### show platform hardware qfp active feature umbrella datapath runtime Command

The **show platform hardware qfp active feature umbrella datapath runtime** command displays the runtime umbrella configuration in dataplane.

```

Device# show platform hardware qfp active feature umbrella datapath runtime
udpflow_ageout: 5
ipv4_count: 2
ipv6_count: 2
ipv4_index: 0
ipv6_index: 0
Umbrella IPv4 Anycast Address
IP Anycast Address0: 208.67.220.220
IP Anycast Address1: 208.67.222.222
Umbrella IPv6 Anycast Address
IP Anycast Address0: 2620:119:53:0:0:0:0:53
IP Anycast Address1: 2620:119:35:0:0:0:0:35
=DNSCrypt=
key index: 0
-key[0]-
  sn    : 1463092899
  ref   : 0
  magic : 717473654a614970
  Client Public Key :
ECE2:8295:2157:6797:6BE2:C563:A5A9:C5FC:C20D:ADAF:EB3C:A1A2:C09A:40AD:CAEA:FF76
  NM Key Hash :
F9C2:2C2C:330A:1972:D484:4DD8:8E5C:71FF:6775:53A7:0344:5484:B78D:01B1:B938:E884
-key[1]-
  sn    : 0
  ref cnt : 0
  magic : 0000000000000000
  Client Public Key :
0000:0000:0000:0000:0000:0000:0000:0000:0000:0000:0000:0000:0000:0000:0000:0000
  NM Key Hash :
0000:0000:0000:0000:0000:0000:0000:0000:0000:0000:0000:0000:0000:0000:0000:0000

```

**show platform hardware qfp active feature umbrella datapath interface**

The **show platform hardware qfp active feature umbrella datapath interface** command displays the interface configuration in datapath.

```
Device# show platform hardware qfp active feature umbrella datapath interface g0/0/0
uidb handle: 0xffff9
device id raw: 0x1, 0xa, 0x5b, 0x62, 0xc6, 0x5e, 0x6e 0xe7
```

**show platform hardware qfp active feature umbrella datapath stats**

The **show platform hardware qfp active feature umbrella datapath stats** command displays the Umbrella connector statistics in datapath.

```
Device# show platform hardware qfp active feature umbrella datapath stats
Umbrella Connector Stats:
  Parser statistics:
    parser unknown pkt: 3867
    parser fmt error: 0
    parser count nonzero: 6
    parser pa error: 0
    parser non query: 0
    parser multiple name: 0
    parser dns name err: 0
    parser matched ip: 0
    parser umbrella redirect: 6
    local domain bypass: 0
    parser dns others: 0
    no device id on interface: 0
    drop erc dnscrypt: 0
    regex locked: 0
    regex not matched: 0
    parser malformed pkt: 0
  Flow statistics:
    feature object allocs : 6
    feature object frees  : 6
    flow create requests  : 6
    flow create successful: 6
    flow create failed, CFT handle: 0
    flow create failed, getting FO: 0
    flow create failed, malloc FO : 0
    flow create failed, attach FO : 0
    flow create failed, match flow: 0
    flow create failed, set aging : 0
    flow lookup requests  : 8
    flow lookup successful: 5
    flow lookup failed, CFT handle: 3
    flow lookup failed, getting FO: 0
    flow lookup failed, no match  : 0
    flow detach requests  : 6
    flow detach successful: 6
    flow detach failed, CFT handle: 0
    flow detach failed, getting FO: 0
    flow detach failed freeing FO : 0
    flow detach failed, no match  : 0
    flow ageout requests  : 0
    flow ageout failed, freeing FO: 0
    flow ipv4 ageout requests : 0
    flow ipv6 ageout requests : 0
    flow update requests  : 0
    flow update successful: 0
    flow update failed, CFT handle: 0
    flow update failed, getting FO: 0
    flow update failed, no match  : 0
```

```

DNSCrypt statistics:
bypass pkt: 4847
clear sent: 0
enc sent: 0
clear rcvd: 1
dec rcvd: 0
pa err: 0
enc lib err: 0
padding err: 0
nonce err: 0
flow bypass: 3
disabled: 9591
flow not enc: 5773
DCA statistics:
dca match success: 0
dca match failure: 8

```

## Clear Command

### **clear platform hardware qfp active feature umbrella datapath stats**

The **clear platform hardware qfp active feature umbrella datapath stats** command clears the Umbrella connector statistics in datapath.

```

Device# clear platform hardware qfp active feature umbrella datapath stats
Umbrella Connector Stats Cleared

```

## Troubleshooting Cisco Umbrella Integration

Troubleshoot issues that are related to enabling Cisco Umbrella Integration feature using these commands:

- **debug umbrella device-registration**
- **debug umbrella config**
- **debug umbrella dnscrypt**

Depending on the OS, run either of these two commands from the client device:

- The **nslookup -type=txt debug.umbrella.com** command from the command prompt of the Windows machine
- The **nslookup -type=txt debug.umbrella.com** command from the terminal window or shell of the Linux machine

```

nslookup -type=txt debug.opendns.com 8.8.8.8
Server: 8.8.8.8
Address: 8.8.8.8#53
Non-authoritative answer:
debug.opendns.com text = "server r6.mum1"
debug.opendns.com text = "device 010A826AAABB6C3D"
debug.opendns.com text = "organization id 1892929"
debug.opendns.com text = "remoteip 171.168.1.7"
debug.opendns.com text = "flags 436 0 6040 39FF0000000000000000"
debug.opendns.com text = "originid 119211936"
debug.opendns.com text = "orgid 1892929"
debug.opendns.com text = "orgflags 3"

```

```
debug.opendns.com text = "actype 0"  
debug.opendns.com text = "bundle 365396"  
debug.opendns.com text = "source 72.163.220.18:36914"  
debug.opendns.com text = "dnscrypt enabled (713156774457306E)"
```

## Configuration Examples

This example shows how to enable Cisco Umbrella Integration:

```
Device# configure terminal  
Device# configure terminal  
Device(config)# parameter-map type umbrella global  
Device(config-profile)# dnscrypt  
Device(config-profile)# token AABBA59A0BDE1485C912AFE472952641001EEEECC  
Device(config-if)# exit  
Device(config)# interface GigabitEthernet 0/0/1  
Device(config-if)# umbrella in guest  
Device(config)# interface gigabitEthernet 0/0/0  
Device(config-if)# umbrella out
```

## Deploying Cisco Umbrella Integration Using Cisco Prime CLI Templates

You can use the Cisco Prime CLI templates to provision the Cisco Umbrella Integration deployment. The Cisco Prime CLI templates make provisioning Cisco Umbrella Integration deployment simple.



---

**Note** The Cisco Prime CLI templates is supported only on Cisco Prime version 3.1 or later.

---

To use the Cisco Prime CLI templates to provision the Cisco Umbrella Integration deployment, perform these steps:

- 
- Step 1** Download the Cisco Prime templates corresponding to the Cisco IOS XE version running on your system.
  - Step 2** Unzip the file, if it is a zipped version.
  - Step 3** From Cisco Prime Web UI, choose **Configuration > Templates > Features and Technologies**, and then select **CLI Templates (User Defined)**.
  - Step 4** Click **Import**.
  - Step 5** Select the folder where you want to import the templates and click **Select Templates** and choose the templates that you just downloaded.
  - Step 6** The following Cisco Umbrella Integration templates are available:
    - **Umbrella**—Use this template to provision Umbrella Connector on the device.
    - **Umbrella Cleanup**—Use this template to remove previously configured Umbrella Connector.
-

## Additional References for Cisco Umbrella Integration

### Related Documents

Related Topic	Document Title
IOS commands	<a href="#">Cisco IOS Master Command List, All Releases</a>
Security commands	<ul style="list-style-type: none"> <li>• <a href="#">Cisco IOS Security Command Reference: Commands A to C</a></li> <li>• <a href="#">Cisco IOS Security Command Reference: Commands D to L</a></li> <li>• <a href="#">Cisco IOS Security Command Reference: Commands M to R</a></li> <li>• <a href="#">Cisco IOS Security Command Reference: Commands S to Z</a></li> </ul>

### Technical Assistance

Description	Link
<p>The Cisco Support website provides extensive online resources, including documentation and tools for troubleshooting and resolving technical issues with Cisco products and technologies.</p> <p>To receive security and technical information about your products, you can subscribe to various services, such as the Product Alert Tool (accessed from Field Notices), the Cisco Technical Services Newsletter, and Really Simple Syndication (RSS) Feeds.</p> <p>Access to most tools on the Cisco Support website requires a Cisco.com user ID and password.</p>	<a href="http://www.cisco.com/support">http://www.cisco.com/support</a>

## Feature Information for Cisco Umbrella Integration

The following table provides release information about the feature or features described in this module. This table lists only the software release that introduced support for a given feature in a given software release train. Unless noted otherwise, subsequent releases of that software release train also support that feature.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to [www.cisco.com/go/cfn](http://www.cisco.com/go/cfn). An account on Cisco.com is not required.



**Table 1: Feature Information for Cisco Umbrella Integration**

<b>Feature Name</b>	<b>Releases</b>	<b>Feature Information</b>
Cisco Umbrella Integration	Cisco IOS XE Everest Release 16.6.1	The Cisco Umbrella Integration feature enables cloud-based security service by inspecting the DNS query that is sent to any DNS server through Cisco devices. The security administrator configures policies on the Umbrella cloud to either allow or deny traffic towards the fully qualified domain name (FQDN). This feature is supported only on Cisco ISRs.

