



Card Protection

This chapter explains the Cisco ONS 15454 SDH card protection configurations. To provision card protection, refer to the *Cisco ONS 15454 SDH Procedure Guide*.

Chapter topics include:

- [6.1 Electrical Card Protection, page 6-1](#)
- [6.2 Optical Card Protection, page 6-5](#)
- [6.3 TXP_MR_10G or MXP_2.5G_10G Card Protection, page 6-5](#)

6.1 Electrical Card Protection

The ONS 15454 SDH provides a variety of electrical card protection methods. This section describes the protection options. [Figure 6-1 on page 6-2](#) shows an unprotected scheme, [Figure 6-2 on page 6-3](#) shows a 1:1 protection scheme and [Figure 6-3 on page 6-4](#) shows a 1:N protection scheme.



Note

For EIA descriptions and installation, refer to the *Cisco ONS 15454 SDH Procedure Guide*.



Note

When a protection switch moves traffic from the DS3i-N-12 working/active card to the DS3i-N-12 protect/standby card, ports on the new active/standby card cannot be taken out of service. Lost traffic can result when a port is taken out of service even if the DS3i-N-12 active/standby card no longer carries traffic.

6.1.1 1:0 Protection (Unprotected Cards)




Note

The term 1:0 protection is sometimes used for an unprotected configuration.

Unprotected cards are not included in a protection scheme; therefore, a card failure or a signal error results in lost data. An unprotected configuration is sometimes called 1:0 protection. Because no bandwidth is reserved for protection, unprotected schemes maximize the available ONS 15454 SDH bandwidth. [Figure 6-1 on page 6-2](#) shows the ONS 15454 SDH in an unprotected configuration. All cards are in a working state.


Figure 6-1 ONS 15454 SDH Cards in an Unprotected Configuration

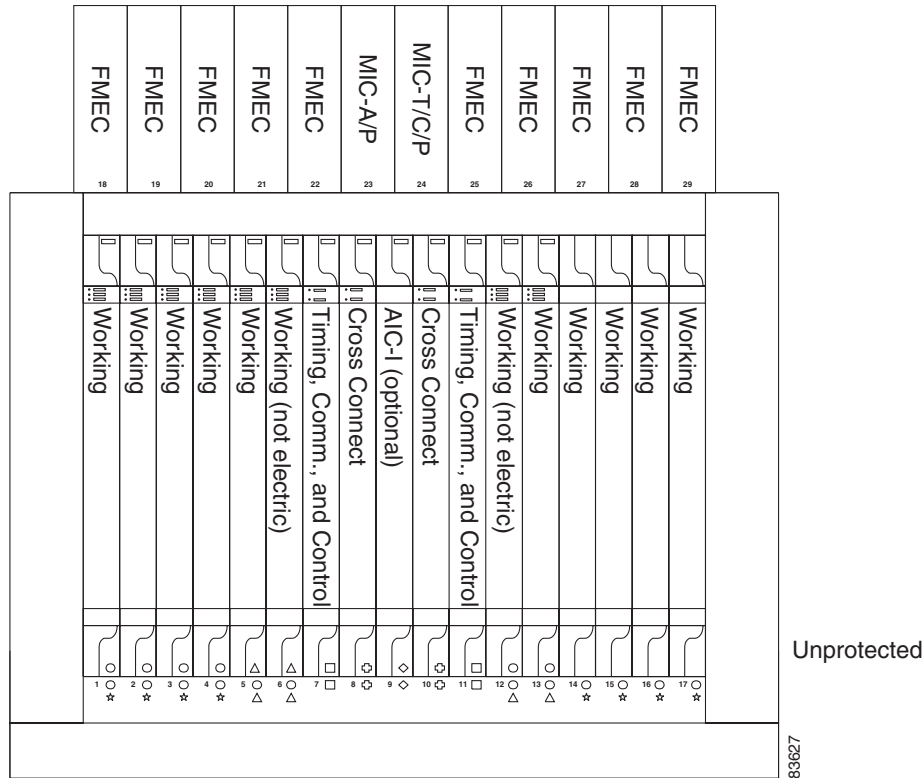

6.1.2 1:1 Protection

In 1:1 protection, a working card is paired with a protect card of the same type. If the working card fails, the traffic from the working card switches to the protect card. When the failure on the working card is resolved, traffic automatically reverts to the working card. [Figure 6-2 on page 6-3](#) shows the ONS 15454 SDH in a 1:1 protection configuration; Slot 1 is protecting Slot 2, Slot 3 is protecting Slot 4, Slot 17 is protecting Slot 16, and Slot 15 is protecting Slot 14. Each working card is paired with a protect card. Slots 6 and 12 are not used for electrical cards. They have no corresponding FMEC slots.

Figure 6-3 ONS 15454 SDH Cards in a 1:N Protection Configuration

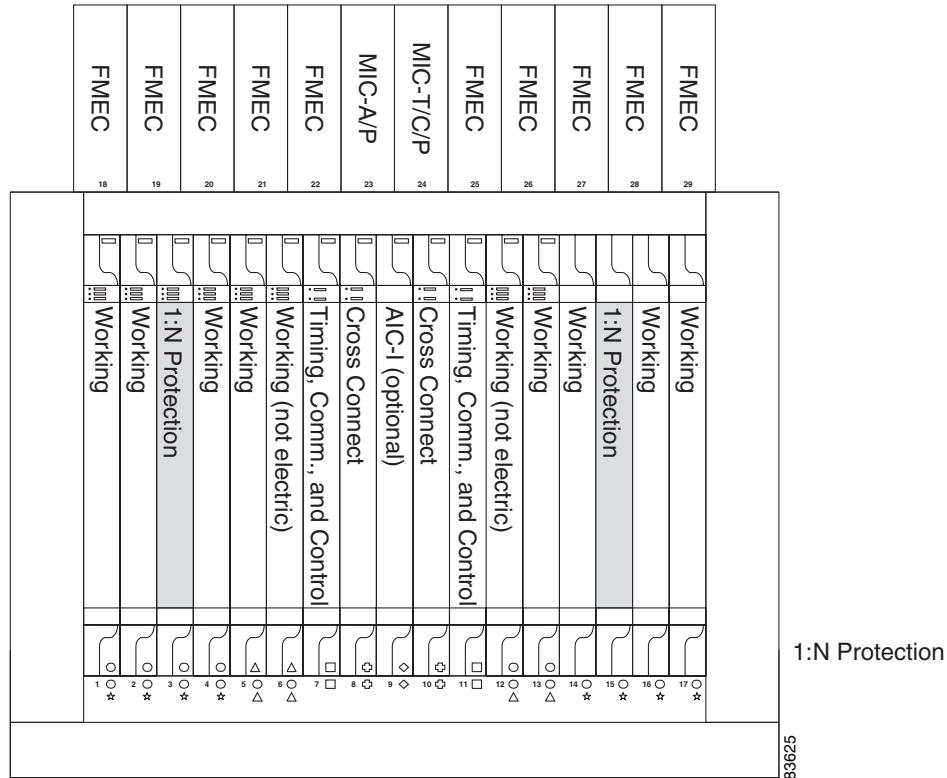

6.1.3.1 Revertive Switching

1:N protection supports revertive switching. Revertive switching sends the electrical interfaces back to the original working card after the card comes back online. Detecting an active working card triggers the reversion process. There is a variable time period for the lag between detection and reversion, called the revertive delay, which you can set using Cisco Transport Controller (CTC). For instructions, refer to the *Cisco ONS 15454 SDH Procedure Guide*. All cards in a protection group share the same reversion settings. 1:N protection groups default to automatic reversion.

6.1.3.2 1:N Protection Guidelines

Several rules apply to 1:N protection groups in the ONS 15454 SDH:

- Working and protect card groups must reside in the same card bank (A or B).
- The 1:N protect card must reside in Slot 3 for side A and Slot 15 for side B.
- Working cards might sit on either or both sides of the protect card.

The ONS 15454 SDH supports 1:N equipment protection for all add/drop multiplexer configurations (ring, linear, and terminal), as specified by ITU-T G.841.

The ONS 15454 SDH automatically detects and identifies a 1:N protection card when the card is installed in Slot 3 or Slot 15. However, the slot containing the 1:N card in a protection group must be manually provisioned as a protect slot because by default, all cards are working cards.

6.2 Optical Card Protection

With 1+1 port-to-port protection, any number of ports on the protect card can be assigned to protect the corresponding ports on the working card. The working and protect cards do not have to be placed side by side in the node. A working card must be paired with a protect card of the same type and number of ports. For example, a single-port STM-4 must be paired with another single-port STM-4, and a four-port STM-4 must be paired with another four-port STM-4. You cannot create a 1+1 protection group if one card is single-port and the other is multi-port, even if the OC-N rates are the same. The protection takes place on the port level, any number of ports on the protect card can be assigned to protect the corresponding ports on the working card.

For example, on a four-port card, you can assign one port as a protection port on the protect card (protecting the corresponding port on the working card) and leave three ports unprotected. Conversely, you can assign three ports as protection ports and leave one port unprotected.

With 1:1 or 1:N protection (electrical cards), the protect card must protect an entire slot. In other words, all the ports on the protect card will be used in the protection scheme.

1+1 span protection can be either revertive or nonrevertive. With nonrevertive 1+1 protection, when a failure occurs and the signal switches from the working card to the protect card, the signal stays switched to the protect card until it is manually switched back. Revertive 1+1 protection automatically switches the signal back to the working card when the working card comes back online.

You create and modify protection schemes using CTC software. For more information, refer to the *Cisco ONS 15454 SDH Procedure Guide*.

6.3 TXP_MR_10G or MXP_2.5G_10G Card Protection

For the TXP_MR_10G or the MXP_2.5G_10G card, protection is done using Y-cable protection. Two TXP_MR_10G cards can be joined in a Y-cable protection group. In Y-cable protection, the client ports of the two cards are joined by Y-cables. A single client signal is injected into the receive (RX) Y-cable and is split between the two TXP_MR_10G cards. The two transmit (TX) client signals from the TXP_MR_10G cards are summed in the TX Y-cable into a single client signal.

A MXP_2.5G_10G card can have four protect groups, one for each client port. A protect group consists only of like-numbered ports. Port 1 on one MXP_2.5G_10G card can only protect port 1 on another MXP_2.5G_10G card. If an MXP_2.5G_10G card has more than one protect group, either all the ports on the card are protect ports, or all the ports on the card are working ports.

**Note**

If the near end or the far end has Y-cable protection provisioned and the other end does not, there is no alarm. There is no traffic flow in that case because without the Y-cable protection group provisioned, the client transmitter is turned on for both cards. Y-cable provisioning is required to ensure that only one transmitter is turned on at a time. When two client transmitter signals are combined using the Y-cable, it results in a corrupted optical signal.

