



IPv6 Virtual Tunnel Interface

Cisco IOS IPv6 security features for your Cisco networking devices can protect your network against degradation or failure and also against data loss or compromise resulting from intentional attacks and from unintended but damaging mistakes by well-meaning network users.

Cisco IOS IPsec functionality provides network data encryption at the IP packet level, offering robust, standards-based security. IPsec provides data authentication and antireplay services in addition to data confidentiality services.

IPsec is a mandatory component of IPv6 specification. IPv6 IPsec tunnel mode and encapsulation is used to protect IPv6 unicast and multicast traffic. This document provides information about implementing IPsec in IPv6 security.

- [Information About IPv6 Virtual Tunnel Interface, on page 1](#)
- [How to Configure IPv6 Virtual Tunnel Interface, on page 3](#)
- [Configuration Examples for IPv6 Virtual Tunnel Interface, on page 13](#)
- [Additional References, on page 14](#)
- [Feature Information for IPv6 Virtual Tunnel Interface, on page 15](#)

Information About IPv6 Virtual Tunnel Interface

IPsec for IPv6

IP Security, or IPsec, is a framework of open standards developed by the Internet Engineering Task Force (IETF) that provide security for transmission of sensitive information over unprotected networks such as the Internet. IPsec acts at the network layer, protecting and authenticating IP packets between participating IPsec devices (peers), such as Cisco routers. IPsec provides the following optional network security services. In general, local security policy will dictate the use of one or more of these services:

- Data confidentiality--The IPsec sender can encrypt packets before sending them across a network.
- Data integrity--The IPsec receiver can authenticate packets sent by the IPsec sender to ensure that the data has not been altered during transmission.
- Data origin authentication--The IPsec receiver can authenticate the source of the IPsec packets sent. This service depends upon the data integrity service.
- Antireplay--The IPsec receiver can detect and reject replayed packets.

With IPsec, data can be sent across a public network without observation, modification, or spoofing. IPsec functionality is similar in both IPv6 and IPv4; however, site-to-site tunnel mode only is supported in IPv6.

In IPv6, IPsec is implemented using the AH authentication header and the ESP extension header. The authentication header provides integrity and authentication of the source. It also provides optional protection against replayed packets. The authentication header protects the integrity of most of the IP header fields and authenticates the source through a signature-based algorithm. The ESP header provides confidentiality, authentication of the source, connectionless integrity of the inner packet, antireplay, and limited traffic flow confidentiality.

The Internet Key Exchange (IKE) protocol is a key management protocol standard that is used in conjunction with IPsec. IPsec can be configured without IKE, but IKE enhances IPsec by providing additional features, flexibility, and ease of configuration for the IPsec standard.


IKE is a hybrid protocol that implements the Oakley key exchange and Skeme key exchange inside the Internet Security Association Key Management Protocol (ISAKMP) framework (ISAKMP, Oakley, and Skeme are security protocols implemented by IKE) (see the figure below). This functionality is similar to the security gateway model using IPv4 IPsec protection.

IPv6 IPsec Site-to-Site Protection Using Virtual Tunnel Interface

The IPsec virtual tunnel interface (VTI) provides site-to-site IPv6 crypto protection of IPv6 traffic. Native IPv6 IPsec encapsulation is used to protect all types of IPv6 unicast and multicast traffic.

The IPsec VTI allows IPv6 routers to work as security gateways, establish IPsec tunnels between other security gateway routers, and provide crypto IPsec protection for traffic from internal networks when it is sent across the public IPv6 Internet (see the figure below). This functionality is similar to the security gateway model using IPv4 IPsec protection.


Figure 1: IPsec Tunnel Interface for IPv6

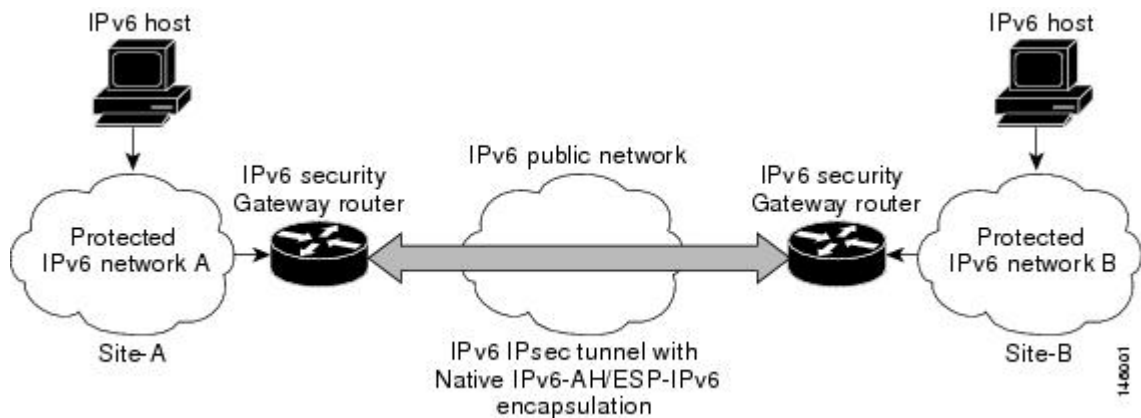

When the IPsec tunnel is configured, IKE and IPsec security associations (SAs) are negotiated and set up before the line protocol for the tunnel interface is changed to the UP state. The remote IKE peer is the same as the tunnel destination address; the local IKE peer will be the address picked from tunnel source interface which has the same IPv6 address scope as tunnel destination address.

The following figures shows the IPsec packet format.

Figure 2: IPv6 IPsec Packet Format

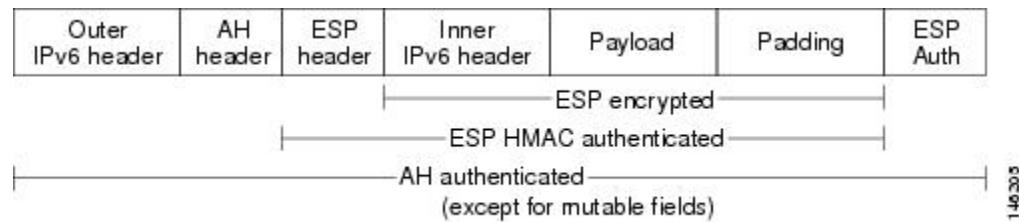

How to Configure IPv6 Virtual Tunnel Interface

Configuring a VTI for Site-to-Site IPv6 IPsec Protection

Defining an IKE Policy and a Preshared Key in IPv6

Because IKE negotiations must be protected, each IKE negotiation begins by agreement of both peers on a common (shared) IKE policy. This policy states which security parameters will be used to protect subsequent IKE negotiations and mandates how the peers are authenticated.

After the two peers agree upon a policy, the security parameters of the policy are identified by an SA established at each peer, and these SAs apply to all subsequent IKE traffic during the negotiation.

You can configure multiple, prioritized policies on each peer--each with a different combination of parameter values. However, at least one of these policies must contain exactly the same encryption, hash, authentication, and Diffie-Hellman parameter values as one of the policies on the remote peer. For each policy that you create, you assign a unique priority (1 through 10,000, with 1 being the highest priority).



Note If you are interoperating with a device that supports only one of the values for a parameter, your choice is limited to the value supported by the other device. Aside from this limitation, there is often a trade-off between security and performance, and many of these parameter values represent such a trade-off. You should evaluate the level of security risks for your network and your tolerance for these risks.

When the IKE negotiation begins, IKE searches for an IKE policy that is the same on both peers. The peer that initiates the negotiation will send all its policies to the remote peer, and the remote peer will try to find a match. The remote peer looks for a match by comparing its own highest priority policy against the policies received from the other peer. The remote peer checks each of its policies in order of its priority (highest priority first) until a match is found.

A match is made when both policies from the two peers contain the same encryption, hash, authentication, and Diffie-Hellman parameter values, and when the remote peer's policy specifies a lifetime that is less than or equal to the lifetime in the policy being compared. (If the lifetimes are not identical, the shorter lifetime--from the remote peer's policy--will be used.)

If a match is found, IKE will complete negotiation, and IPsec security associations will be created. If no acceptable match is found, IKE refuses negotiation and IPsec will not be established.



Note Depending on which authentication method is specified in a policy, additional configuration might be required. If a peer's policy does not have the required companion configuration, the peer will not submit the policy when attempting to find a matching policy with the remote peer.

You should set the ISAKMP identity for each peer that uses preshared keys in an IKE policy.

When two peers use IKE to establish IPsec SAs, each peer sends its identity to the remote peer. Each peer sends either its hostname or its IPv6 address, depending on how you have set the ISAKMP identity of the router.

By default, a peer's ISAKMP identity is the IPv6 address of the peer. If appropriate, you could change the identity to be the peer's hostname instead. As a general rule, set the identities of all peers the same way--either all peers should use their IPv6 addresses or all peers should use their hostnames. If some peers use their hostnames and some peers use their IPv6 addresses to identify themselves to each other, IKE negotiations could fail if the identity of a remote peer is not recognized and a DNS lookup is unable to resolve the identity.

Perform this task to create an IKE policy and a preshared key in IPv6.

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **crypto isakmp policy** *priority*
4. **authentication** {*rsa-sig* | *rsa-encr* | **pre-share**}
5. **hash** {*sha* | **md5**}
6. **group** {**1** | **2** | **5**}
7. **encryption** {*des* | **3des** | **aes** | **aes 192** | **aes 256**}
8. **lifetime** *seconds*
9. **exit**
10. **crypto isakmp key** *password-type* *keystring* *keystring* { **address** *peer-address* | **ipv6** {*ipv6-address* / *ipv6-prefix*} | **hostname** *hostname*} [**no-xauth**]
11. **crypto keyring** *keyring-name* [**vrf** *vrf-name*]
12. **pre-shared-key** {**address** *address* [*mask*] | **hostname** *hostname* | **ipv6** {*ipv6-address* | *ipv6-prefix*}}
key *key*

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: <pre>Router> enable</pre>	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.
Step 2	configure terminal Example: <pre>Router# configure terminal</pre>	Enters global configuration mode.

	Command or Action	Purpose
Step 3	crypto isakmp policy <i>priority</i> Example: <pre>Router(config)# crypto isakmp policy 15</pre>	Defines an IKE policy, and enters ISAKMP policy configuration mode. <ul style="list-style-type: none"> Policy number 1 indicates the policy with the highest priority. The smaller the <i>priority</i> argument value, the higher the priority.
Step 4	authentication { <i>rsa-sig</i> <i>rsa-encr</i> <i>pre-share</i> } Example: <pre>Router(config-isakmp-policy)# authentication pre-share</pre>	Specifies the authentication method within an IKE policy. <ul style="list-style-type: none"> The <i>rsa-sig</i> and <i>rsa-encr</i> keywords are not supported in IPv6.
Step 5	hash { <i>sha</i> <i>md5</i> } Example: <pre>Router(config-isakmp-policy)# hash md5</pre>	Specifies the hash algorithm within an IKE policy.
Step 6	group { <i>1</i> <i>2</i> <i>5</i> } Example: <pre>Router(config-isakmp-policy)# group 2</pre>	Specifies the Diffie-Hellman group identifier within an IKE policy.
Step 7	encryption { <i>des</i> <i>3des</i> <i>aes</i> <i>aes 192</i> <i>aes 256</i> } Example: <pre>Router(config-isakmp-policy)# encryption 3des</pre>	Specifies the encryption algorithm within an IKE policy.
Step 8	lifetime <i>seconds</i> Example: <pre>Router(config-isakmp-policy)# lifetime 43200</pre>	Specifies the lifetime of an IKE SA. <ul style="list-style-type: none"> Setting the IKE lifetime value is optional.
Step 9	exit Example: <pre>Router(config-isakmp-policy)# exit</pre>	Exits ISAKMP policy configuration mode and enter global configuration mode.
Step 10	crypto isakmp key password-type kestring <i>kestring</i> { address <i>peer-address</i> } ipv6 { <i>ipv6-address</i> / <i>ipv6-prefix</i> } hostname <i>hostname</i> } [no-xauth] Example: <pre>Router(config)# crypto isakmp key 0 my-preshare-key-0 address ipv6 3ffe:1001::2/128</pre>	Configures a preshared authentication key.
Step 11	crypto keyring <i>keyring-name</i> [vrf <i>fvrif-name</i>] Example:	Defines a crypto keyring to be used during IKE authentication and enters config-keyring mode.

	Command or Action	Purpose
	Router(config)# crypto keyring keyring1	
Step 12	<p>pre-shared-key {address <i>address</i> [<i>mask</i>] hostname <i>hostname</i> ipv6 {<i>ipv6-address</i> <i>ipv6-prefix</i>}} key <i>key</i></p> <p>Example:</p> <pre>Router (config-keyring)# pre-shared-key ipv6 3FFE:2002::A8BB:CCFF:FE01:2C02/128</pre>	Defines a preshared key to be used for IKE authentication.

Configuring ISAKMP Aggressive Mode

You likely do not need to configure aggressive mode in a site-to-site scenario. The default mode is typically used.

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **crypto isakmp peer** {address {*ipv4-address* | **ipv6** *ipv6-address* *ipv6-prefix-length*} | hostname *fqdn-hostname*}
4. **set aggressive-mode client-endpoint** {*client-endpoint* | **ipv6** *ipv6-address*}
5. **end**

DETAILED STEPS

	Command or Action	Purpose
Step 1	<p>enable</p> <p>Example:</p> <pre>Router> enable</pre>	<p>Enables privileged EXEC mode.</p> <ul style="list-style-type: none"> • Enter your password if prompted.
Step 2	<p>configure terminal</p> <p>Example:</p> <pre>Router# configure terminal</pre>	Enters global configuration mode.
Step 3	<p>crypto isakmp peer {address {<i>ipv4-address</i> ipv6 <i>ipv6-address</i> <i>ipv6-prefix-length</i>} hostname <i>fqdn-hostname</i>}</p> <p>Example:</p> <pre>Router(config)# crypto isakmp peer address ipv6 3FFE:2002::A8BB:CCFF:FE01:2C02/128</pre>	Enables an IPsec peer for IKE querying for tunnel attributes.
Step 4	<p>set aggressive-mode client-endpoint {<i>client-endpoint</i> ipv6 <i>ipv6-address</i>}</p> <p>Example:</p>	Defines the remote peer's IPv6 address, which will be used by aggressive mode negotiation. The remote peer's address is usually the client side's end-point address.

	Command or Action	Purpose
	<pre>Router(config-isakmp-peer)# set aggressive mode client-endpoint ipv6 3FFE:2002::A8BB:CCFF:FE01:2C02/128</pre>	
Step 5	<p>end</p> <p>Example:</p> <pre>Router(config-isakmp-peer)# end</pre>	Exits crypto ISAKMP peer configuration mode and returns to privileged EXEC mode.

Defining an IPsec Transform Set and IPsec Profile

Perform this task to define an IPsec transform set. A transform set is a combination of security protocols and algorithms that is acceptable to the IPsec routers.

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **crypto ipsec transform-set** *transform-set-name transform1* [*transform2*] [*transform3*] [*transform4*]
4. **crypto ipsec profile** *name*
5. **set transform-set** *transform-set-name* [*transform-set-name2...transform-set-name6*]

DETAILED STEPS

	Command or Action	Purpose
Step 1	<p>enable</p> <p>Example:</p> <pre>Router> enable</pre>	<p>Enables privileged EXEC mode.</p> <ul style="list-style-type: none"> • Enter your password if prompted.
Step 2	<p>configure terminal</p> <p>Example:</p> <pre>Router# configure terminal</pre>	Enters global configuration mode.
Step 3	<p>crypto ipsec transform-set <i>transform-set-name transform1</i> [<i>transform2</i>] [<i>transform3</i>] [<i>transform4</i>]</p> <p>Example:</p> <pre>Router(config)# crypto ipsec transform-set myset0 ah-sha-hmac esp-3des</pre>	Defines a transform set, and places the router in crypto transform configuration mode.
Step 4	<p>crypto ipsec profile <i>name</i></p> <p>Example:</p> <pre>Router(config)# crypto ipsec profile profile0</pre>	Defines the IPsec parameters that are to be used for IPsec encryption between two IPsec routers.

	Command or Action	Purpose
Step 5	set transform-set <i>transform-set-name</i> [<i>transform-set-name2...transform-set-name6</i>] Example: Router (config-crypto-transform)# set-transform-set myset0	Specifies which transform sets can be used with the crypto map entry.

Defining an ISAKMP Profile in IPv6

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **crypto isakmp profile** *profile-name* [**accounting** *aaalist*]
4. **self-identity** {**address** | **address ipv6**} | **fqdn** | **user-fqdn** *user-fqdn*}
5. **match identity** {**group** *group-name* | **address** {*address* [*mask*] [*fvrfl*] | **ipv6** *ipv6-address*} | **host** *host-name* | **host domain** *domain-name* | **user** *user-fqdn* | **user domain** *domain-name*}
6. **end**

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Router> enable	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.
Step 2	configure terminal Example: Router# configure terminal	Enters global configuration mode.
Step 3	crypto isakmp profile <i>profile-name</i> [accounting <i>aaalist</i>] Example: Router(config)# crypto isakmp profile profile1	Defines an ISAKMP profile and audits IPsec user sessions.
Step 4	self-identity { address address ipv6 } fqdn user-fqdn <i>user-fqdn</i> }	Defines the identity that the local IKE uses to identify itself to the remote peer.
	Example: Router(config-isakmp-profile)# self-identity address ipv6	

	Command or Action	Purpose
Step 5	<p>match identity {group <i>group-name</i> address {<i>address</i> [<i>mask</i>] [<i>vrf</i>] ipv6 <i>ipv6-address</i>} host <i>host-name</i> host domain <i>domain-name</i> user <i>user-fqdn</i> user domain <i>domain-name</i>}</p> <p>Example:</p> <pre>Router(config-isakmp-profile)# match identity address ipv6 3FFE:2002::A8BB:CCFF:FE01:2C02/128</pre>	Matches an identity from a remote peer in an ISAKMP profile.
Step 6	<p>end</p> <p>Example:</p> <pre>Router(config-isakmp-profile)# end</pre>	Exits ISAKMP profile configuration mode and returns to privileged EXEC mode.

Configuring IPv6 IPsec VTI

Before you begin

Use the **ipv6 unicast-routing** command to enable IPv6 unicast routing.

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **ipv6 unicast-routing**
4. **interface tunnel** *tunnel-number*
5. **ipv6 address** *ipv6-address/prefix*
6. **ipv6 enable**
7. **tunnel source** {*ip-address* | *ipv6-address* | *interface-type interface-number*}
8. **tunnel destination** {*host-name* | *ip-address* | *ipv6-address*}
9. **tunnel mode** {*aurp* | *cayman* | *dvmrp* | *eon* | *gre* | **gre multipoint** | **gre ipv6** | **ipip** [*decapsulate-any*] | **ipsec ipv4** | **iptalk** | **ipv6** | **ipsec ipv6** | **mpls** | **nos** | **rbscp**}
10. **tunnel protection ipsec profile** *name* [*shared*]
11. **end**

DETAILED STEPS

	Command or Action	Purpose
Step 1	<p>enable</p> <p>Example:</p> <pre>Router> enable</pre>	<p>Enables privileged EXEC mode.</p> <ul style="list-style-type: none"> • Enter your password if prompted.
Step 2	<p>configure terminal</p> <p>Example:</p>	Enters global configuration mode.

	Command or Action	Purpose
	Router# configure terminal	
Step 3	ipv6 unicast-routing Example: Router(config)# ipv6 unicast-routing	Enables IPv6 unicast routing. You only need to enable IPv6 unicast routing once, not matter how many interface tunnels you want to configure.
Step 4	interface tunnel <i>tunnel-number</i> Example: Router(config)# interface tunnel 0	Specifies a tunnel interface and number, and enters interface configuration mode.
Step 5	ipv6 address <i>ipv6-address/prefix</i> Example: Router(config-if)# ipv6 address 3FFE:C000:0:7::/64 eui-64	Provides an IPv6 address to this tunnel interface, so that IPv6 traffic can be routed to this tunnel.
Step 6	ipv6 enable Example: Router(config-if)# ipv6 enable	Enables IPv6 on this tunnel interface.
Step 7	tunnel source {<i>ip-address</i> <i>ipv6-address</i> <i>interface-type interface-number</i>} Example: Router(config-if)# tunnel source ethernet0	Sets the source address for a tunnel interface.
Step 8	tunnel destination {<i>host-name</i> <i>ip-address</i> <i>ipv6-address</i>} Example: Router(config-if)# tunnel destination 2001:DB8:1111:2222::1	Specifies the destination for a tunnel interface.
Step 9	tunnel mode {<i>aurp</i> <i>cayman</i> <i>dvmrp</i> <i>eon</i> <i>gre</i> gre multipoint gre ipv6 ipip [<i>decapsulate-any</i>] ipsec ipv4 <i>iptalk</i> <i>ipv6</i> ipsec ipv6 <i>mpls</i> <i>nos</i> <i>rbscp</i>} Example: Router(config-if)# tunnel mode ipsec ipv6	Sets the encapsulation mode for the tunnel interface. For IPsec, only the ipsec ipv6 keywords are supported.
Step 10	tunnel protection ipsec profile <i>name</i> [<i>shared</i>] Example: Router(config-if)# tunnel protection ipsec profile profile1	Associates a tunnel interface with an IPsec profile. IPv6 does not support the shared keyword.

	Command or Action	Purpose
Step 11	end Example: Router(config-if)# end	Exits interface configuration mode and returns to privileged EXEC mode.

Verifying IPsec Tunnel Mode Configuration

SUMMARY STEPS

1. **show adjacency** [**summary** [*interface-type interface-number*]] | [**prefix**] [**interface** *interface-number*] [**connectionid** *id*] [**link** {**ipv4** **ipv6** | **mpls**}] [**detail**]
2. **show crypto engine** {**accelerator** | **brief** | **configuration** | **connections** [**active** | **dh** | **dropped-packet** | **show**] | **qos**}
3. **show crypto ipsec sa** [**ipv6**] [*interface-type interface-number*] [**detailed**]
4. **show crypto isakmp peer** [**config** | **detail**]
5. **show crypto isakmp policy**
6. **show crypto isakmp profile** [**tag** *profilename* | **vrf** *vrfname*]
7. **show crypto map** [**interface** *interface* | **tag** *map-name*]
8. **show crypto session** [**detail**] | [**local** *ip-address* [**port** *local-port*] | [**remote** *ip-address* [**port** *remote-port*]]] | [**detail**] | [**fvfr** *vrf-name* | **ivrf** *vrf-name*]
9. **show crypto socket**
10. **show ipv6 access-list** [*access-list-name*]
11. **show ipv6 cef** [*ipv6-prefix / prefix-length*] | [*interface-type interface-number*] [**longer-prefixes** | **similar-prefixes** | **detail** | **internal** | **platform** | **epoch** | **source**]
12. **show interface** *type number* **stats**

DETAILED STEPS

	Command or Action	Purpose
Step 1	show adjacency [summary [<i>interface-type interface-number</i>]] [prefix] [interface <i>interface-number</i>] [connectionid <i>id</i>] [link { ipv4 ipv6 mpls }] [detail] Example: Router# show adjacency detail	Displays information about the Cisco Express Forwarding adjacency table or the hardware Layer 3-switching adjacency table.
Step 2	show crypto engine { accelerator brief configuration connections [active dh dropped-packet show] qos } Example: Router# show crypto engine connection active	Displays a summary of the configuration information for the crypto engines.
Step 3	show crypto ipsec sa [ipv6] [<i>interface-type interface-number</i>] [detailed]	Displays the settings used by current SAs in IPv6.

	Command or Action	Purpose
	Example: <pre>Router# show crypto ipsec sa ipv6</pre>	
Step 4	show crypto isakmp peer [config detail] Example: <pre>Router# show crypto isakmp peer detail</pre>	Displays peer descriptions.
Step 5	show crypto isakmp policy Example: <pre>Router# show crypto isakmp policy</pre>	Displays the parameters for each IKE policy.
Step 6	show crypto isakmp profile [tag <i>profilename</i> vrf <i>vrfname</i>] Example: <pre>Router# show crypto isakmp profile</pre>	Lists all the ISAKMP profiles that are defined on a router.
Step 7	show crypto map [interface <i>interface</i> tag <i>map-name</i>] Example: <pre>Router# show crypto map</pre>	Displays the crypto map configuration. The crypto maps shown in this command output are dynamically generated. The user does not have to configure crypto maps.
Step 8	show crypto session [detail] [local <i>ip-address</i> [port <i>local-port</i>] [remote <i>ip-address</i> [port <i>remote-port</i>]] detail] fvrf <i>vrf-name</i> ivrf <i>vrf-name</i>] Example: <pre>Router# show crypto session</pre>	Displays status information for active crypto sessions. IPv6 does not support the fvrf or ivrf keywords or the <i>vrf-name</i> argument.
Step 9	show crypto socket Example: <pre>Router# show crypto socket</pre>	Lists crypto sockets.
Step 10	show ipv6 access-list [<i>access-list-name</i>] Example: <pre>Router# show ipv6 access-list</pre>	Displays the contents of all current IPv6 access lists.
Step 11	show ipv6 cef [<i>ipv6-prefix / prefix-length</i>] [<i>interface-type interface-number</i>] [longer-prefixes similar-prefixes detail internal platform epoch source] Example: <pre>Router# show ipv6 cef</pre>	Displays entries in the IPv6 Forwarding Information Base (FIB).

	Command or Action	Purpose
Step 12	show interface <i>type number</i> stats Example: Router# show interface fddi 3/0/0 stats	Displays numbers of packets that were process switched, fast switched, and distributed switched.

Troubleshooting IPsec for IPv6 Configuration and Operation

SUMMARY STEPS

1. enable
2. debug crypto ipsec
3. debug crypto engine packet [detail]

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Router# enable	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.
Step 2	debug crypto ipsec Example: Router# debug crypto ipsec	Displays IPsec network events.
Step 3	debug crypto engine packet [detail] Example: Router# debug crypto engine packet	Displays the contents of IPv6 packets. Caution Using this command could flood the system and increase CPU usage if several packets are being encrypted.

Configuration Examples for IPv6 Virtual Tunnel Interface

Example: Configuring a VTI for Site-to-Site IPv6 IPsec Protection

```

crypto isakmp policy 1
  encryption aes
  authentication pre-share
  group 14
!
crypto isakmp key myPreshareKey0 address ipv6 3FFE:2002::A8BB:CCFF:FE01:2C02/128
crypto isakmp keepalive 30 30
!

```

```

crypto ipsec transform-set Trans1 ah-sha-hmac esp-aes
!
crypto ipsec profile profile0
  set transform-set Trans1
!
ipv6 cef
!
interface Tunnel0
  ipv6 address 3FFE:1001::/64 eui-64
  ipv6 enable
  ipv6 cef
  tunnel source Ethernet2/0
  tunnel destination 3FFE:2002::A8BB:CCFF:FE01:2C02
  tunnel mode ipsec ipv6
  tunnel protection ipsec profile profile0

```

Additional References

Related Documents

Related Topic	Document Title
Security commands	Cisco IOS Security Command Reference
QoS Commands	Cisco IOS Quality of Service Solutions Command Reference
Weighted Fair Queuing	Configuring Weighted Fair Queuing feature module.

MIBs

MIB	MIBs Link
None	To locate and download MIBs for selected platforms, Cisco software releases, and feature sets, use Cisco MIB Locator found at the following URL: http://www.cisco.com/go/mibs

Technical Assistance

Description	Link
The Cisco Support and Documentation website provides online resources to download documentation, software, and tools. Use these resources to install and configure the software and to troubleshoot and resolve technical issues with Cisco products and technologies. Access to most tools on the Cisco Support and Documentation website requires a Cisco.com user ID and password.	http://www.cisco.com/cisco/web/support/index.html

Feature Information for IPv6 Virtual Tunnel Interface

The following table provides release information about the feature or features described in this module. This table lists only the software release that introduced support for a given feature in a given software release train. Unless noted otherwise, subsequent releases of that software release train also support that feature.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Table 1: Feature Information for IPv6 Virtual Tunnel Interface

Feature Name	Releases	Feature Information
IPv6 Virtual Tunnel Interface	Cisco IOS XE Release 2.4	<p>IPsec is a framework of open standards that provide security for transmission of sensitive information over unprotected networks such as the Internet. IPsec acts at the network layer, protecting and authenticating IP packets between participating IPsec devices (peers), such as Cisco routers.</p> <p>The following commands were introduced or modified:</p> <p>authentication (IKE policy), crypto ipsec profile, crypto isakmp key, crypto isakmp peer, crypto isakmp policy, crypto isakmp profile, crypto keyring, debug crypto ipv6 ipsec, encryption (IKE policy), group (IKE policy), hash (IKE policy), lifetime (IKE policy), match identity, pre-shared-key, self-identity, set aggressive-mode client-endpoint, set transform-set, show adjacency, show crypto engine, show crypto ipsec sa, show crypto isakmp peers, show crypto isakmp policy, show crypto isakmp profile, show crypto map, show crypto session, show crypto socket, show ipv6 access-list, show ipv6 cef, tunnel destination, tunnel mode, tunnel source.</p>

