



Configuring SONET

This module describes how to configure Synchronous Optical Network (SONET). SONET defines optical signals and a synchronous frame structure for multiplexed digital traffic. SONET equipment is generally used in North America.

The transport network using SONET provides much more powerful networking capabilities than existing asynchronous systems.

- [Overview of SONET, on page 1](#)
- [Restrictions for SONET, on page 2](#)
- [SONET Switching , on page 3](#)
- [SONET Hierarchy, on page 4](#)
- [SONET Line and Section Configuration Parameters, on page 5](#)
- [SONET Path Level Configuration Parameters, on page 6](#)
- [SONET T1 Configuration Parameters, on page 6](#)
- [SONET T3 Configuration Parameters, on page 6](#)
- [SONET VT Configuration Parameters, on page 7](#)
- [How to Configure SONET, on page 7](#)
- [Configuring Port Rate and Verifying Pluggables, on page 34](#)
- [Loopback Remote on T1 and T3 Interfaces, on page 36](#)
- [Configuring POS Scrambling, on page 38](#)
- [Associated Commands, on page 39](#)

Overview of SONET

SONET is a set of standards that define the rates and formats for optical networks specified in GR-253-CORE. SONET is based on a structure that has a basic frame format and speed. The frame format used by SONET is the Synchronous Transport Signal (STS), with STS-1 as the base-level signal at 51.84 Mbps. An STS-1 frame can be carried in an OC-1 signal.

SONET has a hierarchy of signaling speeds.

Restrictions for SONET

- With Synchronous Transport Signal (STS) Circuit Emulation over Packet (CEP) or STS concatenated CEP mode, if you receive a B3 error, then the Remote Error Indication (REI) won't be generated. Request for Comments (RFC) reference—RFC 4842.
- Prior to Cisco IOS XE Cupertino 17.9.1 release, in V-15 or VC1x mode without or with CEM (SAtOP/CEP/CESoP), overhead TX_V5 default value is 1.
- From Cisco IOS XE Cupertino 17.9.1 release onwards, when CEM (SAtOP (framed or Unframed) and CESoP) is configured for VT-15 or VC1x mode, overhead TX_V5 default value is 2. If CEM isn't configured or VT CEP is configured, then the default value for V5 Overhead is 1. V5 byte value can be modified according to need using configuration `vt <> vt <> overhead v5 <>`.
- Rate combinations are one port of OC-48 or four ports of OC-12 or OC-3.
- Only 16 BERT Patterns can be configured at a time.
- VT1.5 VT can't be configured if VT1.5 T1/DS1 is configured with the same KLM value.
- PMON fields aren't supported for VT1.5 VT and DS3 or T3.
- PMON Far-end parameters aren't supported.

Restrictions on Bandwidth

- Total available bandwidth is 10G.

The following configuration is blocked and an error message is displayed after the maximum bandwidth is utilized:

```
rate OC3| OC12| OC48| OC192
```

The bandwidth of adjacent ports shouldn't exceed OC-48.

The following table shows the bandwidth used by different rates:

Table 1: Bandwidth Used by Different Rates

| Rate | Bandwidth |
|-------|-------------|
| OC-3 | 155.52 Mbps |
| OC-12 | 622.08 Mbps |
| OC-48 | 2.4 Gbps |

Restrictions for Clock Source Configuration

- Only four ports can be configured in SONET line for clock source configuration per chassis.
- You should configure the clock source line and network-clock sync together to receive the clock from a remote port that is connected to the SONET port.

Restrictions for BER Threshold

- The BER threshold value 10e-9 is not supported for the following line, path, and VT BER CLIs on the following interface modules:
 - Line BER CLIs **threshold b2-tca**, **threshold sd-ber** and **threshold sf-ber**.
 - PATH BER CLIs **threshold b3-ber_sd**, **threshold b3-ber_sf**, and **threshold b3-tca**.
 - VT BER CLIs **threshold bip2-sd**, **threshold bip2-sf**, and **threshold bip2-tca**.
 - **Not Supported Interface Modules for the Above BER CLIs**
 - NCS4200-48T3E3-CE
 - NCS4200-3GMS
 - NCS4200-1T8S-20CS
 - NCS4200-1T8S-10CS

SONET Switching

SONET Switching is achieved on optical interface modules by circuit emulation. Circuit Emulation (CEM) is a way to carry TDM circuits over packet switched network. CEM embeds TDM bits into packets, encapsulates them into an appropriate header and then sends that through Packet Switched Network (PSN). The receiver side of CEM restores the TDM bit stream from packets.

Modes of CEM:

- **Structure Agnostic TDM over Packet (SAToP)** (RFC 4553) – Structure-Agnostic TDM over Packet (SAToP) mode is used to encapsulate T1 or T3 unstructured (unchannelized) services over packet switched networks. In SAToP mode, the bytes are sent out as they arrive on the TDM line. Bytes do not have to be aligned with any framing.

In this mode, the interface is considered as a continuous framed bit stream. The packetization of the stream is done according to IETF RFC 4553. All signaling is carried transparently as a part of a bit stream.

- **Circuit Emulation Service over Packet (CEP)** (RFC 4842) - CEP mode is used to encapsulate SONET payload envelopes (SPEs) like VT1.5 or VT2 or STS-1 or STS-Nc over packet switched networks. In this mode, the bytes from the corresponding SPE are sent out as they arrive on the TDM line. The interface is considered as a continuous framed bit stream. The packetization of the stream is done according to IETF RFC 4842.


Table 2: Modes of CEM

| Mode | CEM | Ports |
|---------|-----|----------------------------|
| STS-48C | CEP | OC-48, OC-192 |
| STS-12C | CEP | OC-12, OC-48, OC-192 |
| STS-3C | CEP | OC-3, OC-12, OC-48, OC-192 |
| STS-1 | CEP | OC-3, OC-12, OC-48, OC-192 |

| Mode | CEM | Ports |
|--------|-------|----------------------------|
| DS3 | SAToP | OC-3, OC-12, OC-48, OC-192 |
| DS3-T1 | SAToP | OC-3, OC-12, OC-48, OC-192 |
| VT 1.5 | CEP | OC-3, OC-12, OC-48, OC-192 |
| VT DS1 | SAToP | OC-3, OC-12, OC-48, OC-192 |

SONET Hierarchy

Figure 1: A SONET Link

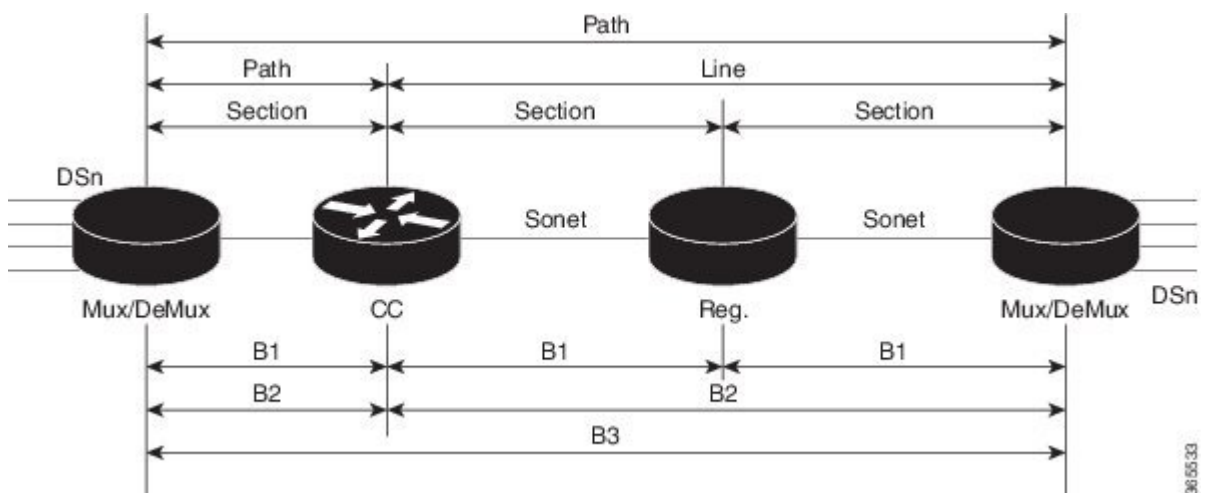

Each level of the SONET hierarchy terminates its corresponding fields in the SONET payload, as follows:

Section

A section is a single fiber run that can be terminated by a network element (Line or Path) or an optical regenerator.

The main function of the section layer is to properly format the SONET frames, and to convert the electrical signals to optical signals. Section Terminating Equipment (STE) can originate, access, modify, or terminate the section header overhead.

Line

Line-Terminating Equipment (LTE) originates or terminates one or more sections of a line signal. The LTE does the synchronization and multiplexing of information on SONET frames. Multiple lower-level SONET signals can be mixed together to form higher-level SONET signals. An Add/Drop Multiplexer (ADM) is an example of LTE.

Path

Path-Terminating Equipment (PTE) interfaces non-SONET equipment to the SONET network. At this layer, the payload is mapped and demapped into the SONET frame. For example, an STS PTE can assemble 25 1.544 Mbps DS1 signals and insert path overhead to form an STS-1 signal.

This layer is concerned with end-to-end transport of data.

SONET Line and Section Configuration Parameters

The following parameters affect SONET configuration at the line and section levels:

- **Overhead** — Sets the SONET overhead bytes in the frame header to a specific standards requirement, or to ensure interoperability with equipment from another vendors.
- **J0** — Sets the J0 or C1 byte value in the SONET section overhead.



Note

1 byte, 16 bytes, and 64 bytes are the supported values for J0.

- **S1S0** — Sets the SS bits value of the H1 byte in the SONET line overhead.
- **Loopback** — Sets a loopback to test the SONET port.
- **AIS-Shut** — Configures the SONET port to send the Alarm Indication Signal (AIS) at shutdown.
- **Shut** — Disables an interface.
- **Alarm Reporting** — Enables reporting for all or selected alarms.
 - **lias** — Enables line alarm indication signal.
 - **lrdi** — Enables line remote defect indication signal.
 - **pais** — Enables path alarm indication signal.
 - **plop** — Enables loss of pointer failure signal for a path.
 - **pplm** — Enables path payload mismatch indication.
 - **prdi** — Enables path remote defect indication signal.
 - **sd-ber** — Sets Signal Degrade BER threshold.
- **Clock** — Specifies the clock source, where:
 - **line** — The link uses the recovered clock from the line.
 - **internal** — The link uses the internal clock source. This is the default setting.

SONET Path Level Configuration Parameters

The following parameters affect SONET configuration at the path level:

- **BERT** — Starts the BERT test.
- **Clock** — Specifies the clock source for a path.
- **Exit** — Exits from SONET path configuration mode.
- **Loopback** — Sets the entire path in the loopback mode.
- **Mode** — Specifies the path operation mode.
- **No** — Negates a command or sets its defaults.
- **Overhead** — Configures SONET path overhead flags.
- **Shutdown** — Disables the SONET path.
- **Threshold** — Sets the path BER threshold values.
- **vtg** — Sets the VT-15 configuration.

SONET T1 Configuration Parameters

The following parameters affect SONET T1 configuration:

- **BERT** — Starts the BERT test.
- **Clock** — Specifies the clock source for T1 interface.
- **Description** — Specifies the description of the controller.
- **Framing** — Specifies the type of a framing on T1 interface.
- **Loopback** — Sets the T1 interface in the loopback mode.
- **Shutdown** — Disables the T1 interface.

SONET T3 Configuration Parameters

The following parameters affect SONET T3 configuration:

- **Clock** — Specifies the clock source for T3 link.
- **Description** — Specifies the description of the controller.
- **Framing** — Specifies the type of a framing on T3 interface.
- **Loopback** — Sets the T3 link in the loopback mode.
- **Shutdown** — Disables the T3 interface.

SONET VT Configuration Parameters

The following parameters affect SONET VT configuration:

- **BERT** — Starts the BERT test.
- **CEM Group** — Specifies the time slots for CEM group mapping.
- **Clock** — Specifies the clock source for VT.
- **Description** — Specifies the description of the controller.
- **Loopback** — Sets the VT in the loopback mode.
- **Overhead** — Configures VT line path overhead flags.
- **Shutdown** — Disables the VT interface.
- **Threshold** — Configures the VT threshold values.

How to Configure SONET

This section describes how to configure SONET.

Each SFP port (0-7) can be configured as OC-3, OC-12, OC-48, or Gigabit Ethernet. SFP+ port (8) can be configured as OC-192 or 10 Gigabit Ethernet.

Prerequisites for Configuring SONET

You must select the MediaType controller to configure and enter the controller configuration mode.

You must configure the controller as a SONET port.

Configuring MediaType Controller

To configure MediaType Controller, use the following commands:

```
enable
configure terminal
controller MediaType 0/0/16
mode sonet
end
```

Configuring SONET Ports

To configure SONET ports, use the following commands:

```
enable
configure terminal
controller MediaType 0/0/16
mode sonet
controller sonet 0/0/16
```

```
rate OC12
end
```

The above example shows how to configure SONET ports in OC-12 mode.

Managing and Monitoring SONET Line

This section describes how to manage and monitor SONET.

Configuring Line and Section Overhead

To configure line and section overhead, use the following commands:

```
enable
configure terminal
controller MediaType 0/0/16
mode sonet
controller sonet 0/0/16
overhead s1s0 2
overhead j0 tx length 1-byte
end
```



Note To restore the system to its default condition, use the **no** form of the command.

Configuring Line Loopback

To configure loopback, use the following commands:

```
enable
configure terminal
controller sonet 0/0/16
loopback local
end
```



Note To restore the system to its default condition, use the **no** form of the command.

Configuring AIS Shut

To configure AIS-Shut, use the following commands:

```
enable
configure terminal
controller sonet 0/0/16
ais-shut
end
```



Note The **no ais-shut** command will not send AIS.

Configuring Shut

To configure Shut, use the following commands:

```
enable
configure terminal
controller sonet 0/0/16
shutdown
end
```



Note Use the **no shutdown** command to disable the interface.

Configuring Alarm Reporting

To configure alarm reporting, use the following commands:

```
enable
configure terminal
controller sonet 0/0/16
alarm-report b2-tcs
end
```



Note To restore the system to its default condition, use the **no** form of the command.

Configuring Clock

To configure clock, use the following commands:

```
enable
configure terminal
controller MediaType 0/0/16
mode sonet
controller sonet 0/0/16
clock source line
end
```



Note The default mode is internal.



Note To restore the system to its default condition, use the **no** form of the command.

Configuring Network-Clock SONET

To configure network-clock SONET, use the following commands:

```
enable
configure terminal
network-clock input-source 1 controller sonet 0/0/16
end
```

Configuring STS-1 Modes

To configure STS-1 modes, use the following commands:

```
enable
configure terminal
controller sonet 0/0/16
sts-1 1
mode vt-15
end
```



Note There is no default mode. The following modes are supported:

- mode vt-15
- mode ct3
- mode t3
- mode unframed



Note To restore the system to its default condition, use the **no** form of the command.

Configuring DS1/T1 CT3 mode of STS-1

To configure DS1/T1 CT3 mode of STS-1, you can configure the T1 link using the following steps:

```
enable
configure terminal
controller sonet 0/0/16
sts-1 1
mode ct3
t1 1 clock source internal
t1 1 framing unframed
end
```



Note To restore the system to its default condition, use the **no** form of the command.

Configuring STS-Nc - Contiguous Concatenation

To configure STS-Nc - contiguous concatenation, use the following commands:

```
enable
configure terminal
controller sonet 0/0/16
sts-1 1-3 mode sts-3c
end
```



Note To restore the system to its default condition, use the **no** form of the command.



Note To configure STS-3c or STS-12c, use the numbers as multiples for 3 or 12, respectively.

Verification of SONET Configuration

The following sample output shows the verification of SONET configuration:

```
Router#show controllers sonet 0/0/16
SONET 0/0/16 is up.                      =====> this is the controller/port
status.
  Hardware is  A900-IMA3G-IMSG

  Port configured rate: OC3                =====> this is the rate the port is configured
  on it.
  Applique type is Channelized Sonet / SDH
  Clock Source is Line                    ==> the clocking config
Medium info:
  Type: Sonet, Line Coding: NRZ,
  SECTION:
    LOS = 0          LOF = 0              =====> the section level alarm
  counter (from last clear counters)

SONET Section Tables
  INTERVAL      CV   ES   SES   SEFS
  12:15-12:30   0    0    0     0
  12:00-12:15   0    0    0     0
  11:45-12:00   15   1    0     0

Total of Data in Current and Previous Intervals
15    1    0    0                      ==> PMON for the port

LINE:
  AIS = 0          RDI = 0          REI = 0          BIP(B2) = 0      =====> the line level
  alarm counter (from last clear counters)
Active Defects: None
Detected Alarms: None
Asserted/Active Alarms: None            =====> present active
  alarms on the port.
Alarm reporting enabled for: SLOS SLOF SF B2-TCA
BER thresholds:  SF = 10e-3  SD = 10e-6              =====> ber thresholds
TCA thresholds:  B2 = 10e-6
Rx: S1S0 = 00
  K1 = 00,  K2 = 00                      ==> k1k2 values
  J0 = 00
  RX S1 = 00
Tx: S1S0 = 00
  K1 = 00,  K2 = 00
  J0 = 00

Tx J0 Length : 64
Tx J0 Trace :

  52 6F 75 74 65 72 20 20 20 20 20 20 20 20 20 20  Router
  20 20 20 20 20 20 20 20 20 20 20 20 20 20 20 20
  20 20 20 20 20 20 20 20 20 20 20 20 20 20 20 20
  20 20 20 20 20 20 20 20 20 20 20 20 20 00 00      ..

Expected J0 Length : 64
Expected J0 Trace :

  52 6F 75 74 65 72 20 20 20 20 20 20 20 20 20 20  Router
```

```

20 20 20 20 20 20 20 20 20 20 20 20 20 20 20 20
20 20 20 20 20 20 20 20 20 20 20 20 20 20 20 20
20 20 20 20 20 20 20 20 20 20 20 20 20 20 00 00
..

```

Rx J0 Length : 64

Rx J0 Trace :

```

01 01 01 01 01 01 01 01 01 01 01 01 01 01 01 01 .....
01 01 01 01 01 01 01 01 01 01 01 01 01 01 01 01 .....
01 01 01 01 01 01 01 01 01 01 01 01 01 01 01 01 .....
01 01 01 01 01 01 01 01 01 01 01 01 01 01 01 00 .....

```

SONET Line Tables

| INTERVAL | CV | ES | SES | UAS | CVFE | ESFE | SESFE | UASFE |
|---|----|----|-----|-----|------|------|-------|-------|
| 12:15-12:30 | 0 | 0 | 0 | 50 | 0 | 0 | 0 | 0 |
| 12:00-12:15 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 11:45-12:00 | 48 | 1 | 0 | 0 | 53 | 1 | 0 | 0 |
| Total of Data in Current and Previous Intervals | | | | | | | | |
| 48 | 1 | 0 | 50 | 53 | 1 | 0 | 0 | 0 |

High Order Path:

PATH 1:

Clock Source is internal =====> path level clock

```

AIS = 0          RDI = 0          REI = 0          BIP(B3) = 0          =====> path
layer alarms counter
LOP = 0          PSE = 0          NSE = 0          NEWPTR = 0
LOM = 0          PLM = 0          UNEQ = 0

```

Active Defects: None

Detected Alarms: None

Asserted/Active Alarms: None =====> present alarms on the path.

Alarm reporting enabled for: PAIS PRDI PUNEQ PLOP PPLM LOM B3-TCA

TCA threshold: B3 = 10e-6

Rx: C2 = 00 =====> rx and tx C2 byte..

Tx: C2 = 02

PATH TRACE BUFFER : UNSTABLE

```

00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 ..... =====> path trace of the
path
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....

```

SONET Path Tables

| INTERVAL | CV | ES | SES | UAS | CVFE | ESFE | SESFE | UASFE |
|---|----|----|-----|-----|------|------|-------|-------|
| 12:15-12:30 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 389 |
| 12:00-12:15 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 11:45-12:00 | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 900 |
| Total of Data in Current and Previous Intervals | | | | | | | | |
| 0 | 1 | 1 | 0 | 0 | 0 | 1289 | | |

PATH 2:

Clock Source is internal

```

AIS = 0          RDI = 0          REI = 0          BIP(B3) = 0
LOP = 0          PSE = 0          NSE = 0          NEWPTR = 0
LOM = 0          PLM = 0          UNEQ = 0

```

Active Defects: None

Detected Alarms: None
 Asserted/Active Alarms: PLOP
 Alarm reporting enabled for: PAIS PRDI PUNEQ PLOP PPLM LOM B3-TCA

TCA threshold: B3 = 10e-6

Rx: C2 = 00

Tx: C2 = 04

```
52 6F 75 74 65 72 20 30 2F 32 2F 30 2E 32 00 00 Router 0/2/0.2..
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
```

Expected J1 Length : 64

Expected J1 Trace

```
52 6F 75 74 65 72 20 30 2F 32 2F 30 2E 32 00 00 Router 0/2/0.2..
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
```

PATH TRACE BUFFER : UNSTABLE

Rx J1 Length : 0

Rx J1 Trace

SONET Path Tables

| INTERVAL | CV | ES | SES | UAS | CVFE | ESFE | SESFE | UASFE |
|-------------|----|----|-----|-----|------|------|-------|-------|
| 12:15-12:30 | 0 | 0 | 0 | 389 | 0 | 0 | 0 | 0 |
| 12:00-12:15 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 11:45-12:00 | 0 | 0 | 0 | 900 | 0 | 0 | 0 | 0 |

Total of Data in Current and Previous Intervals

```
0 0 0 1289 0 0 0 0 0
```

PATH 3:

Clock Source is internal

| | | | |
|---------|---------|----------|-------------|
| AIS = 0 | RDI = 0 | REI = 0 | BIP(B3) = 0 |
| LOP = 1 | PSE = 0 | NSE = 0 | NEWPTR = 0 |
| LOM = 0 | PLM = 0 | UNEQ = 1 | |

Active Defects: None

Detected Alarms: PLOP LOM

Asserted/Active Alarms: PLOP

Alarm reporting enabled for: PAIS PRDI PUNEQ PLOP PPLM LOM B3-TCA

TCA threshold: B3 = 10e-6

Rx: C2 = 00

Tx: C2 = 02

Tx J1 Length : 64

Tx J1 Trace

```
52 6F 75 74 65 72 20 30 2F 32 2F 30 2E 33 00 00 Router 0/2/0.3..
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
```

Expected J1 Length : 64

Expected J1 Trace

```
52 6F 75 74 65 72 20 30 2F 32 2F 30 2E 33 00 00 Router 0/2/0.3..
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
```

```
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
```

PATH TRACE BUFFER : UNSTABLE

Rx J1 Length : 0

Rx J1 Trace

SONET Path Tables

| INTERVAL | CV | ES | SES | UAS | CVFE | ESFE | SESFE | UASFE |
|-------------|----|----|-----|-----|------|------|-------|-------|
| 12:15-12:30 | 0 | 0 | 0 | 389 | 0 | 0 | 0 | 0 |
| 12:00-12:15 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 11:45-12:00 | 0 | 0 | 0 | 894 | 0 | 0 | 0 | 0 |

Total of Data in Current and Previous Intervals

| | | | | | | | | |
|---|---|---|------|---|---|---|---|---|
| 0 | 0 | 0 | 1283 | 0 | 0 | 0 | 0 | 0 |
|---|---|---|------|---|---|---|---|---|

OC3.STS1 0/0/16 is up. =====> present status of the path

Hardware is A900-IMA3G-IMSG

Applique type is VT1.5 =====> mode of the path

STS-1 1, VTG 1, T1 1 (VT1.5 1/1/1) is down =====> status of the SPE (t1)

VT Receiver has no alarm.

Receiver is getting AIS.

=====> alarm of the SPE (t1)

Framing is unframed, Clock Source is Internal =====> framing of the T1, clock of the t1

Data in current interval (230 seconds elapsed):

Near End

0 Line Code Violations, 0 Path Code Violations
 0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
 0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 0 Unavailable Secs
 0 Path Failures, 0 SEF/AIS Secs

Far End

0 Line Code Violations, 0 Path Code Violations
 0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
 0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 0 Unavailable Secs
 0 Path Failures

Data in Interval 1:

Near End

0 Line Code Violations, 0 Path Code Violations
 0 Slip Secs, 0 Fr Loss Secs, 14 Line Err Secs, 0 Degraded Mins
 0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 15 Unavailable Secs
 1 Path Failures, 0 SEF/AIS Secs

Far End Data

0 Line Code Violations, 0 Path Code Violations
 0 Slip Secs, 4 Fr Loss Secs, 2 Line Err Secs, 0 Degraded Mins
 4 Errored Secs, 0 Bursty Err Secs, 4 Severely Err Secs, 0 Unavailable Secs
 0 Path Failures

Total Data (last 1 15 minute intervals):

Near End

0 Line Code Violations, 0 Path Code Violations,
 0 Slip Secs, 0 Fr Loss Secs, 14 Line Err Secs, 0 Degraded Mins,
 0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 15 Unavailable Secs
 1 Path Failures, 0 SEF/AIS Secs

Far End

0 Line Code Violations, 0 Path Code Violations,
 0 Slip Secs, 4 Fr Loss Secs, 2 Line Err Secs, 0 Degraded Mins,
 4 Errored Secs, 0 Bursty Err Secs, 4 Severely Err Secs, 0 Unavailable Secs
 0 Path Failures

STS-1 1, VTG 1, T1 2 (VT1.5 1/1/2) is down

VT Receiver has no alarm.

Receiver is getting AIS.

The following table shows each field and its description.

Table 3: Field Description

| Field | Description |
|---|---|
| SONET 0/0/16 is up | Shows that the SONET controller is operating. The controller's state can be up, down, or administratively down. |
| Port configured rate: OC3 | Shows the rate configured on the port. |
| SECTION: LOS = 0 LOF = 0 BIP = 0 | Shows the section level alarm counters. |
| SONET Section Tables: INTERVAL CV ES SES SEFS 05:50-05:58 0 0 0 0 | Shows the PMON for the port. |
| LINE: AIS = 0 RDI = 0 REI = 0 BIP(B2) = 0 | Shows the line level alarm counters. |
| Asserted/Active Alarms: None | Shows the active alarms on the port. |
| BER thresholds: SF = 10e-3 SD = 10e-6 | Shows BER thresholds. |
| K1 = 00, K2 = 00 | Shows the K1 and K2 values. |
| PATH 1: Clock Source is internal | Shows the path level clock. |
| AIS = 0 RDI = 0 REI = 0 BIP(B3) = 0 LOP = 0 PSE = 0 NSE = 0 NEWPTR = 0 LOM = 0 PLM = 0 UNEQ = 0 | Shows the path layer alarm counters. |
| Active Defects: None Detected Alarms: None Asserted/Active Alarms: None Alarm reporting enabled for: PLOP LOM B3-TCA | Shows the alarms on the path. |
| TCA threshold: B3 = 10e-6 Rx: C2 = 00 =====> rx and tx C2 byte.. Tx: C2 = 02 PATH TRACE BUFFER : UNSTABLE | shows the Rx and Tx C2 bytes. |
| 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 | Shows the path trace. |
| OC3.STS1 0/3/3.1 is up. | Shows the status of the path. |
| Applique type is VT1.5 | Shows the mode of the path. |

| Field | Description |
|---|--|
| STS-1 1, VTG 1, T1 1 (VT1.5 1/1/1) is down | Shows the status of SPE (T1). |
| Receiver is getting AIS. | Shows the alarm of SPE (T1). |
| Framing is unframed, Clock Source is Internal | Shows the framing of T1 and clock of the T1. |

Configuring CEM Group for Framed SAToP

To configure a CEM group for Framed SAToP:

```
enable
configure terminal
controller mediatype 0/4/16
mode sonet
controller sonet 0/4/16
rate oc12
sts-1 1
mode vt-15
vtg 1 t1 1 cem-group 0 framed
end
```

Configuring VT-15 mode of STS-1 for Framed SAToP

To configure VT-15 mode of STS-1 for framed SAToP:

```
enable
configure terminal
controller mediatype 0/0/16
mode sonet
controller sonet 0/0/16
rate oc3
sts-1 1
mode vt-15
vtg 1 t1 1 cem-group 0 framed
end
```

Configuring DS1/T1 CT3 mode of STS-1 for Framed SAToP

To configure DS1/T1 CT3 mode of STS-1 for framed SAToP:

```
enable
configure terminal
controller mediatype 0/0/16
mode sonet
controller sonet 0/0/16
rate oc3
sts-1 2
mode ct3
t3 framing c-bit
t1 1 cem-group 1 framed
end
```


Performance Monitoring Use Cases or Deployment Scenarios for SONET

You can view the statistics or error count generated on the TDM lines.

To view the statistics or error count generated, use the **show controller sonet** command:

```
Router# show controller sonet 0/2/0
SONET 0/2/0 is up.
  Hardware is NCS4200-1T8S-10CS

  Port configured rate: OC3
  Applique type is Channelized Sonet
  Clock Source is Internal
Medium info:
  Type: Sonet, Line Coding: NRZ,
  Alarm Throttling: OFF
SECTION:
  LOS = 0          LOF = 0          BIP(B1) = 0

SONET Section Tables
  INTERVAL      CV      ES      SES      SEFS
  12:00-12:07   0       0       0       0
  11:45-12:00   15      1       0       0
Total of Data in Current and Previous Intervals
              15      1       0       0

LINE:
  AIS = 0          RDI = 0          REI = 0          BIP(B2) = 0
Active Defects: None
Detected Alarms: None
Asserted/Active Alarms: None
Alarm reporting enabled for: SLOS SLOF LAIS SF SD LRDI B1-TCA B2-TCA
BER thresholds:  SF = 10e-3  SD = 10e-6
TCA thresholds:  B1 = 10e-6  B2 = 10e-6
Rx: S1S0 = 00
   K1 = 00,    K2 = 00
   J0 = 00

   RX S1 = 00

Tx: S1S0 = 00
   K1 = 00,    K2 = 00
   J0 = 04

Tx J0 Length : 64
Tx J0 Trace :

  52 6F 75 74 65 72 20 20 20 20 20 20 20 20 20 20  Router
  20 20 20 20 20 20 20 20 20 20 20 20 20 20 20 20
  20 20 20 20 20 20 20 20 20 20 20 20 20 20 20 20
  20 20 20 20 20 20 20 20 20 20 20 20 20 00 00 00  ..

Expected J0 Length : 64
Expected J0 Trace :

  52 6F 75 74 65 72 20 20 20 20 20 20 20 20 20 20  Router
  20 20 20 20 20 20 20 20 20 20 20 20 20 20 20 20
  20 20 20 20 20 20 20 20 20 20 20 20 20 20 20 20
  20 20 20 20 20 20 20 20 20 20 20 20 20 00 00 00  ..

Rx J0 Length : 64
Rx J0 Trace :
```

```

01 01 01 01 01 01 01 01 01 01 01 01 01 01 01 01 .....
01 01 01 01 01 01 01 01 01 01 01 01 01 01 01 01 .....
01 01 01 01 01 01 01 01 01 01 01 01 01 01 01 01 .....
01 01 01 01 01 01 01 01 01 01 01 01 01 01 01 00 .....

```

SONET Line Tables

| INTERVAL | CV | ES | SES | UAS | CVFE | ESFE | SESFE | UASFE |
|---|----|----|-----|-----|------|------|-------|--------------------|
| 12:15-12:30 | 0 | 0 | 0 | 50 | 0 | 0 | 0 | 0 |
| 12:00-12:15 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 11:45-12:00 | 48 | 1 | 0 | 0 | 53 | 1 | 0 | 0 (NE, FE Invalid) |
| Total of Data in Current and Previous Intervals | 48 | 1 | 0 | 50 | 53 | 1 | 0 | 0 (NE, FE Invalid) |

High Order Path:

PATH 1:

Clock Source is internal

```

AIS = 0          RDI = 0          REI = 41350871    BIP(B3) = 9
LOP = 0          PSE = 0          NSE = 0          NEWPTR = 0
LOM = 0          PLM = 0          UNEQ = 1

```

Active Defects: None

Detected Alarms: None

Asserted/Active Alarms: None

Alarm reporting enabled for: PAIS PRDI PUNEQ PLOP PPLM LOM B3-TCA

TCA threshold: B3 = 10e-6

Rx: C2 = 04

Tx: C2 = 04

Tx J1 Length : 64

Tx J1 Trace

```

52 6F 75 74 65 72 20 30 2F 32 2F 30 2E 31 00 00 Router 0/2/0.1..
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....

```

Expected J1 Length : 64

Expected J1 Trace

```

52 6F 75 74 65 72 20 30 2F 32 2F 30 2E 31 00 00 Router 0/2/0.1..
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....

```

PATH TRACE BUFFER : UNSTABLE

Rx J1 Length : 64

Rx J1 Trace

```

BB 43 45 5F 31 5F 31 20 30 2F 34 2F 33 2E 31 00 .CE_1_1 0/4/3.1.
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....

```

SONET Path Tables

| INTERVAL | CV | ES | SES | UAS | CVFE | ESFE | SESFE | UASFE |
|-------------|----|----|-----|-----|------|------|-------|----------------------|
| 12:15-12:30 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 389 |
| 12:00-12:15 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 11:45-12:00 | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 900 (NE, FE Invalid) |

```

Total of Data in Current and Previous Intervals
      0      1      1      0      0      0      0      1289 (NE, FE Invalid)

```

```

PATH 2:
Clock Source is internal

```

```

      AIS = 0      RDI = 0      REI = 0      BIP(B3) = 0
      LOP = 1      PSE = 0      NSE = 0      NEWPTR = 0
      LOM = 0      PLM = 0      UNEQ = 1

```

```

Active Defects: None
Detected Alarms: PLOP
Asserted/Active Alarms: PLOP
Alarm reporting enabled for: PAIS PRDI PUNEQ PLOP PPLM LOM B3-TCA

```

```

TCA threshold: B3 = 10e-6
Rx: C2 = 00
Tx: C2 = 04

```

```

Tx J1 Length : 64
Tx J1 Trace

```

```

      52 6F 75 74 65 72 20 30 2F 32 2F 30 2E 32 00 00      Router 0/2/0.2..
      00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00      .....
      00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00      .....
      00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00      .....

```

```

Expected J1 Length : 64
Expected J1 Trace

```

```

      52 6F 75 74 65 72 20 30 2F 32 2F 30 2E 32 00 00      Router 0/2/0.2..
      00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00      .....
      00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00      .....
      00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00      .....

```

```

PATH TRACE BUFFER : UNSTABLE

```

```

Rx J1 Length : 0
Rx J1 Trace

```

```

SONET Path Tables

```

| INTERVAL | CV | ES | SES | UAS | CVFE | ESFE | SESFE | UASFE |
|-------------|----|----|-----|-----|------|------|-------|--------------------|
| 12:15-12:30 | 0 | 0 | 0 | 389 | 0 | 0 | 0 | 0 |
| 12:00-12:15 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 11:45-12:00 | 0 | 0 | 0 | 900 | 0 | 0 | 0 | 0 (NE, FE Invalid) |

```

Total of Data in Current and Previous Intervals
      0      0      0      1289      0      0      0      0 (NE, FE Invalid)

```

```

PATH 3:
Clock Source is internal

```

```

      AIS = 0      RDI = 0      REI = 0      BIP(B3) = 0
      LOP = 1      PSE = 0      NSE = 0      NEWPTR = 0
      LOM = 0      PLM = 0      UNEQ = 1

```

```

Active Defects: None
Detected Alarms: PLOP LOM
Asserted/Active Alarms: PLOP
Alarm reporting enabled for: PAIS PRDI PUNEQ PLOP PPLM LOM B3-TCA

```

```

TCA threshold: B3 = 10e-6
Rx: C2 = 00
Tx: C2 = 02

```

Tx J1 Length : 64

Tx J1 Trace

```

52 6F 75 74 65 72 20 30 2F 32 2F 30 2E 33 00 00 Router 0/2/0.3..
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....

```

Expected J1 Length : 64

Expected J1 Trace

```

52 6F 75 74 65 72 20 30 2F 32 2F 30 2E 33 00 00 Router 0/2/0.3..
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....

```

PATH TRACE BUFFER : UNSTABLE

Rx J1 Length : 0

Rx J1 Trace

SONET Path Tables

| INTERVAL | CV | ES | SES | UAS | CVFE | ESFE | SESFE | UASFE |
|---|----|----|-----|------|------|------|-------|-------|
| 12:15-12:30 | 0 | 0 | 0 | 389 | 0 | 0 | 0 | 0 |
| 12:00-12:15 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 11:45-12:00 | 0 | 0 | 0 | 900 | 0 | 0 | 0 | 0 |
| Total of Data in Current and Previous Intervals | | | | | | | | |
| | 0 | 0 | 0 | 1289 | 0 | 0 | 0 | 0 |

SONET 0/2/0.1 T3 is down.

NCS4200-1T8S-10CS

Applique type is T3

Receiver is getting AIS.

MDL transmission is disabled

FEAC code received: No code is being received

Framing is C-BIT Parity, Cablelength is 224

BER thresholds: SF = 10e-3 SD = 10e-6

Clock Source is internal

Equipment customer loopback

Data in current interval (390 seconds elapsed):

Near End

```

0 Line Code Violations, 0 P-bit Coding Violations
0 C-bit Coding Violations, 0 P-bit Err Secs
0 P-bit Severely Err Secs, 0 Severely Err Framing Secs
389 Unavailable Secs, 0 Line Errored Secs
0 C-bit Errored Secs, 0 C-bit Severely Errored Secs
0 Severely Errored Line Secs, 0 Path Failures
0 AIS Defect Secs, 0 LOS Defect Secs

```

Far End

```

0 Errored Secs, 0 Severely Errored Secs
0 C-bit Unavailable Secs, 0 Path Failures
0 Code Violations, 0 Service Affecting Secs

```

Data in Interval 1:

Near End

```

0 Line Code Violations, 0 P-bit Coding Violations
0 C-bit Coding Violations, 0 P-bit Err Secs
0 P-bit Severely Err Secs, 0 Severely Err Framing Secs
910 Unavailable Secs, 0 Line Errored Secs
0 C-bit Errored Secs, 0 C-bit Severely Errored Secs

```

```

    0 Severely Errored Line Secs, 1 Path Failures
    0 AIS Defect Secs, 0 LOS Defect Secs
Far End
    0 Errored Secs, 0 Severely Errored Secs
    0 C-bit Unavailable Secs, 0 Path Failures
    0 Code Violations, 0 Service Affecting Secs
Total Data (last 1 15 minute intervals):
Near End
    0 Line Code Violations, 0 P-bit Coding Violations,
    0 C-bit Coding Violations, 0 P-bit Err Secs,
    0 P-bit Severely Err Secs, 0 Severely Err Framing Secs,
    910 Unavailable Secs, 0 Line Errored Secs,
    0 C-bit Errored Secs, 0 C-bit Severely Errored Secs
    0 Severely Errored Line Secs, 1 path failures
    0 AIS Defect Secs, 0 LOS Defect Secs
Far End
    0 Errored Secs, 0 Severely Errored Secs
    0 C-bit Unavailable Secs, 0 Path Failures
    0 Code Violations, 0 Service Affecting Secs

T1 1 is up
timeslots:
FDL per AT&T 54016 spec.
No alarms detected.
Framing is ESF, Clock Source is Internal
Data in current interval (250 seconds elapsed):
Near End
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs
    0 Unavailable Secs, 0 Stuffed Secs
    0 Path Failures, 0 SEF/AIS Secs
Far End
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs
    0 Unavailable Secs 0 Path Failures
Data in Interval 1:
Near End
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 2 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
    2 Errored Secs, 0 Bursty Err Secs, 2 Severely Err Secs
    0 Unavailable Secs, 0 Stuffed Secs
    1 Path Failures, 2 SEF/AIS Secs
Far End
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 2 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
    3 Errored Secs, 0 Bursty Err Secs, 3 Severely Err Secs
    0 Unavailable Secs 0 Path Failures
Total Data (last 1 15 minute intervals):
Near End
    0 Line Code Violations,0 Path Code Violations,
    0 Slip Secs, 2 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins,
    2 Errored Secs, 0 Bursty Err Secs, 2 Severely Err Secs
    0 Unavailable Secs, 0 Stuffed Secs
    1 Path Failures, 2 SEF/AIS Secs
Far End
    0 Line Code Violations,0 Path Code Violations
    0 Slip Secs, 2 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins,
    3 Errored Secs, 0 Bursty Err Secs, 3 Severely Err Secs
    0 Unavailable Secs, 0 Path Failures

SONET 0/2/0.2 T3 is down.
Hardware is NCS4200-1T8S-10CS

```

```

Applique type is Channelized T3 to T1
Receiver is getting AIS.
MDL transmission is disabled

FEAC code received: No code is being received
Framing is C-BIT Parity, Cablelength is 224
BER thresholds: SF = 10e-3 SD = 10e-6
Clock Source is internal
Equipment customer loopback
Data in current interval (400 seconds elapsed):
Near End
    0 Line Code Violations, 0 P-bit Coding Violations
    0 C-bit Coding Violations, 0 P-bit Err Secs
    0 P-bit Severely Err Secs, 0 Severely Err Framing Secs
    399 Unavailable Secs, 0 Line Errored Secs
    0 C-bit Errored Secs, 0 C-bit Severely Errored Secs
    0 Severely Errored Line Secs, 0 Path Failures
    0 AIS Defect Secs, 0 LOS Defect Secs
Far End
    0 Errored Secs, 0 Severely Errored Secs
    0 C-bit Unavailable Secs, 0 Path Failures
    0 Code Violations, 0 Service Affecting Secs
Data in Interval 1:
Near End
    0 Line Code Violations, 0 P-bit Coding Violations
    0 C-bit Coding Violations, 0 P-bit Err Secs
    0 P-bit Severely Err Secs, 0 Severely Err Framing Secs
    910 Unavailable Secs, 0 Line Errored Secs
    0 C-bit Errored Secs, 0 C-bit Severely Errored Secs
    0 Severely Errored Line Secs, 1 Path Failures
    0 AIS Defect Secs, 0 LOS Defect Secs
Far End
    0 Errored Secs, 0 Severely Errored Secs
    0 C-bit Unavailable Secs, 0 Path Failures
    0 Code Violations, 0 Service Affecting Secs
Total Data (last 1 15 minute intervals):
Near End
    0 Line Code Violations, 0 P-bit Coding Violations,
    0 C-bit Coding Violations, 0 P-bit Err Secs,
    0 P-bit Severely Err Secs, 0 Severely Err Framing Secs,
    910 Unavailable Secs, 0 Line Errored Secs,
    0 C-bit Errored Secs, 0 C-bit Severely Errored Secs
    0 Severely Errored Line Secs, 1 path failures
    0 AIS Defect Secs, 0 LOS Defect Secs
Far End
    0 Errored Secs, 0 Severely Errored Secs
    0 C-bit Unavailable Secs, 0 Path Failures
    0 Code Violations, 0 Service Affecting Secs
T1 1 is up
timeslots:
FDL per AT&T 54016 spec.
No alarms detected.
Framing is ESF, Clock Source is Internal
Data in current interval (250 seconds elapsed):
Near End
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs
    0 Unavailable Secs, 0 Stuffed Secs
    0 Path Failures, 0 SEF/AIS Secs
Far End
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins

```

```

    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs
    0 Unavailable Secs 0 Path Failures
Data in Interval 1:
Near End
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 2 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
    2 Errored Secs, 0 Bursty Err Secs, 2 Severely Err Secs
    0 Unavailable Secs, 0 Stuffed Secs
    1 Path Failures, 2 SEF/AIS Secs
Far End
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 2 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
    3 Errored Secs, 0 Bursty Err Secs, 3 Severely Err Secs
    0 Unavailable Secs 0 Path Failures
Total Data (last 1 15 minute intervals):
Near End
    0 Line Code Violations,0 Path Code Violations,
    0 Slip Secs, 2 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins,
    2 Errored Secs, 0 Bursty Err Secs, 2 Severely Err Secs
    0 Unavailable Secs, 0 Stuffed Secs
    1 Path Failures, 2 SEF/AIS Secs
Far End
    0 Line Code Violations,0 Path Code Violations
    0 Slip Secs, 2 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins,
    3 Errored Secs, 0 Bursty Err Secs, 3 Severely Err Secs
    0 Unavailable Secs, 0 Path Failures
STS-1 2, T1 1 (CT3 2-1) is down
timeslots:
FDL per ANSI T1.403 and AT&T 54016 spec.
Receiver is getting AIS.
Framing is ESF, Clock Source is Internal
Data in current interval (390 seconds elapsed):
Near End
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs
    389 Unavailable Secs, 0 Stuffed Secs
Far End
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs
    0 Unavailable Secs
Data in Interval 1:
Near End
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs
    900 Unavailable Secs, 0 Stuffed Secs
Far End
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs
    0 Unavailable Secs
Total Data (last 1 15 minute intervals):
Near End
    0 Line Code Violations,0 Path Code Violations,
    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins,
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs
    900 Unavailable Secs, 0 Stuffed Secs
Far End
    0 Line Code Violations,0 Path Code Violations
    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins,

```

[illegible]

SONET Line Tables

| INTERVAL | CV-L | ES-L | SES-L | UAS-L | CV-LFE | ES-LFE | SES-LFE | UAS-LFE |
|-------------|------|------|-------|-------|--------|--------|---------|---------|
| 11:33-11:47 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

APS

BERSF = 0 BERSD = 0
Active Alarms: None

PATH 1:

Clock Source is internal

| | | | |
|---------|---------|----------|-------------|
| AIS = 0 | RDI = 0 | REI = 0 | BIP(B3) = 0 |
| LOM = 0 | PLM = 0 | UNEQ = 0 | LOP = 0 |

Active Defects: None

Detected Alarms: None

Asserted/Active Alarms: None

Alarm reporting enabled for: PAIS PRDI PUNEQ PLOP PPLM LOM B3-SF B3-SD B3-TCA

BER threshold: SF = 10e-3 SD = 10e-6

TCA threshold: B3 = 10e-6

Rx: C2 = 04

Tx: C2 = 04

Tx J1 Length : 64

Tx J1 Trace

| | |
|---|------------------|
| 50 45 32 20 30 2F 37 2F 31 39 2E 31 00 00 00 00 | PE2 0/7/19.1.... |
| 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 | |
| 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 | |
| 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 | |

Expected J1 Length : 64

Expected J1 Trace

| | |
|---|------------------|
| 50 45 32 20 30 2F 37 2F 31 39 2E 31 00 00 00 00 | PE2 0/7/19.1.... |
| 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 | |
| 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 | |
| 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 | |

Rx J1 Length : 64

Rx J1 Trace

| | |
|---|-----------------|
| 50 45 32 20 30 2F 39 2F 37 2E 31 00 00 00 00 00 | PE2 0/9/7.1.... |
| 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 | |
| 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 | |
| 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 | |

SONET Path Tables

| INTERVAL | CV-P | ES-P | SES-P | UAS-P | CV-PFE | ES-PFE | SES-PFE | UAS-PFE |
|-------------|------|------|-------|-------|--------|--------|---------|---------|
| 11:33-11:47 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

PATH 2:

Clock Source is internal

| | | | |
|---------|---------|----------|-------------|
| AIS = 0 | RDI = 0 | REI = 0 | BIP(B3) = 0 |
| LOM = 0 | PLM = 0 | UNEQ = 0 | LOP = 0 |

Active Defects: None

Detected Alarms: None

Asserted/Active Alarms: None

Alarm reporting enabled for: PAIS PRDI PUNEQ PLOP PPLM LOM B3-SF B3-SD B3-TCA

```

BER threshold: SF = 10e-3 SD = 10e-6
TCA threshold: B3 = 10e-6
Rx: C2 = 00
Tx: C2 = 00

```

```

Tx J1 Length : 64
Tx J1 Trace

```

```

50 45 32 20 30 2F 37 2F 31 39 2E 32 00 00 00 00 PE2 0/7/19.2....
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....

```

```

Expected J1 Length : 64
Expected J1 Trace

```

```

50 45 32 20 30 2F 37 2F 31 39 2E 32 00 00 00 00 PE2 0/7/19.2....
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....

```

```

Rx J1 Length : 0
Rx J1 Trace

```

SONET Path Tables

| INTERVAL | CV-P | ES-P | SES-P | UAS-P | CV-PFE | ES-PFE | SES-PFE | UAS-PFE |
|-------------|------|------|-------|-------|--------|--------|---------|---------|
| 11:47-11:47 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

```

PATH 3:
Clock Source is internal

```

| | | | |
|---------|---------|----------|-------------|
| AIS = 0 | RDI = 0 | REI = 0 | BIP(B3) = 0 |
| LOM = 0 | PLM = 0 | UNEQ = 0 | LOP = 0 |

```

Active Defects: None
Detected Alarms: None
Asserted/Active Alarms: None
Alarm reporting enabled for: PAIS PRDI PUNEQ PLOP PPLM LOM B3-SF B3-SD B3-TCA

```

```

BER threshold: SF = 10e-3 SD = 10e-6
TCA threshold: B3 = 10e-6
Rx: C2 = 00
Tx: C2 = 00

```

```

Tx J1 Length : 64
Tx J1 Trace

```

```

50 45 32 20 30 2F 37 2F 31 39 2E 33 00 00 00 00 PE2 0/7/19.3....
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....

```

```

Expected J1 Length : 64
Expected J1 Trace

```

```

50 45 32 20 30 2F 37 2F 31 39 2E 33 00 00 00 00 PE2 0/7/19.3....
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....

```

```

Rx J1 Length : 0
Rx J1 Trace

```

SONET Path Tables

```

INTERVAL      CV-P  ES-P  SES-P  UAS-P  CV-PFE  ES-PFE  SES-PFE  UAS-PFE
11:47-11:47   0    0    0      0      0       0       0       0

```

SONET 0/7/19.1 T3 is up.

Hardware is NCS4200-3GMS

Applique type is T3

No alarms detected.

MDL transmission is disabled

FEAC code received: No code is being received

Framing is C-BIT Parity, Cablelength is 224

BER thresholds: SF = 10e-3 SD = 10e-6

Clock Source is internal

Equipment customer loopback

Near End Data

```

INTERVAL      CV-L  ES-L  SES-L  LOSS-L  CVP-P  CVCP-P  ESP-P  ESCP-P  SESP-P  SESP-P  SAS-P
AISS-P  FC-P  UASP-P  UASCP-P
11:33-11:47   0    0    0      0      0      0      0      0      0      0      0
0          0    0      0

```

Far End Data

```

INTERVAL      CVCP-PFE  ESCP-PFE  SESP-PFE  UASCP-PFE  FCCP-PFE  SASCP-PFE
11:33-11:47   0          0          0          0          0          0

```

Table 4: Feature History

| Feature Name | Release Information | Description |
|---|-------------------------------|---|
| GR-820-CORE specific Performance Monitoring | Cisco IOS XE Bengaluru 17.5.1 | The show controller tabular enables you to view the performance monitoring details in tabular form as per GR-820-Core standards. |

To view the performance monitoring details on T3 interface, use the **show controller t3 tabular** command:

```
Router#show controllers t3 0/7/12 tabular
```

T3 0/7/12 is down.

Hardware is A900-IMA3G-IMSG NCS4200-3GMS

Applique type is Subrate T3

Receiver has loss of signal.

MDL transmission is disabled

FEAC code received: No code is being received

Framing is C-BIT Parity, Line Code is B3ZS, Cablelength Short less than 225ft

BER thresholds: SF = 10e-3 SD = 10e-6

Clock Source is internal

Equipment customer loopback

Near End Data

```

INTERVAL      CV-L  ES-L  SES-L  LOSS-L  CVP-P  CVCP-P  ESP-P  ESCP-P  SESP-P  SESP-P  SAS-P
AISS-P  FC-P  UASP-P  UASCP-P
11:33-11:46   0    779  779    779      0      0      0      0      0      0      0
0          0    779  779

```

Far End Data

```

INTERVAL      CVCP-PFE  ESCP-PFE  SESP-PFE  UASCP-PFE  FCCP-PFE  SASCP-PFE
11:33-11:46   0          0          0          0          0          0

```

To view the performance monitoring details on T1 interface, use the **show controller t1 tabular** command:

```
Router#show controllers t1 0/7/0 tabular
```

T1 0/7/0 is down

```

Applique type is A900-IMA3G-MSG NCS4200-3GMS
Receiver has loss of signal.
alarm-trigger is not set
Soaking time: 3, Clearance time: 10
Framing is ESF, Line Code is B8ZS, Clock Source is Line.
BER thresholds: SF = 10e-3 SD = 10e-6
Near End Data
INTERVAL    CV-L    ES-L    CV-P    ES-P    SES-P    CSS-P    SAS-P    UAS-P    FC-P
10:48-10:57    0    530    0    0    0    0    0    530    1
Far End Data
INTERVAL    ES-LFE    ES-PFE    SES-PFE    SEFS-PFE    CSS-PFE    UAS-PFE    FC-PFE
10:48-10:57    0    0    0    0    0    0    0

```

Starting with Cisco IOS XE 17.11.1, you can view the previous day performance monitoring details using the following **show controller** commands for the T1 or E1, T3 or E3, and SONET controllers.

- **show controllers sonet**
- **show controllers sonet tabular**
- **show controllers sonet remote performance**
- **show controllers sonet remote performance tabular**

```

router#show controllers sonet 0/3/0

SONET 0/3/0 is down.
Hardware is A900-IMA1Z8S-CXNCS4200-1T8S-10CS

Port configured rate: OC3
Applique type is Channelized Sonet
Clock Source is Internal
Medium info:
Type: Sonet, Line Coding: NRZ,
Alarm Throttling: OFF
SECTION:
LOS = 1          LOF = 0          BIP(B1) = 0

SONET Section Tables
INTERVAL    CV    ES    SES    SEFS
06:14-06:24    0    611    611    611
05:59-06:14    0    901    901    901
.....
06:29-06:44    0    901    901    901
06:14-06:29    0    901    901    901
Total of Data in Current and Previous Intervals
0 87107 87107 87107
Total (Previous Day)
05:29-05:29    0 86494 86494 86494

LINE:
AIS = 0          RDI = 0          REI = 0          BIP(B2) = 0
Active Defects: None
Detected Alarms: SLOS SLOF LAIS
Asserted/Active Alarms: SLOS
.....
SONET Line Tables
INTERVAL    CV    ES    SES    UAS    CVFE    ESFE    SESFE    UASFE
06:14-06:24    0    0    0    611    0    0    0    0
05:59-06:14    0    0    0    901    0    0    0    0
05:44-05:59    0    0    0    901    0    0    0    0
05:29-05:44    0    0    0    901    0    0    0    0
.....

```

```

06:14-06:29      0      0      0  901      0      0      0      0
Total of Data in Current and Previous Intervals
06:14-06:29      0      0      0 87107      0      0      0      0
Total (Previous Day)
05:29-05:29      0      0      0 86494      0      0      0      0

```

```

PATH 1:
Clock Source is internal

```

```

AIS = 0          RDI = 0          REI = 0          BIP(B3) = 8
LOM = 0          PLM = 0          UNEQ = 0         LOP = 0

```

```

.....

```

SONET Path Tables

```

INTERVAL      CV      ES      SES      UAS      CVFE      ESFE      SESFE      UASFE
06:14-06:24    0      0      0    609      0      0      0      0
05:59-06:14    0      0      0    901      0      0      0      0
05:44-05:59    0      0      0    900      0      0      0      0
05:29-05:44    0      0      0    901      0      0      0      0
.....
06:29-06:44    0      0      0    900      0      0      0      0
06:14-06:29    0      0      0    900      0      0      0      0
Total of Data in Current and Previous Intervals
06:14-06:29    0      0      0 87045      0      0      0      0
Total (Previous Day)
05:29-05:29    0      0      0 86435      0      0      0      0

```

```

PATH 2:
Clock Source is internal

```

```

.....

```

```

SONET 0/3/0.1 PATH is down.
Hardware is A900-IMA1Z8S-CXNCS4200-1T8S-10CS

```

```

Applique type is VT1.5

```

```

STS-1 1, VTG 1, VT 1 (SONET 0/3/0.1/1/1 VT) is down

```

```

VT Receiver has LP_AIS.

```

```

cep is configured: FALSE cem_id (0)

```

```

fwd_alarm_ais :0 fwd_alarm_rai :0, Clock Source is Internal

```

```

BIP2-tca:6, BIP2-sf:3, BIP2-sd:6

```

```

Tx V5:2

```

```

Rx V5:0

```

```

Tx J2 Length=64

```

```

TX J2 Trace Buffer:

```

```

00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....

```

```

Expected J2 Length=64

```

```

Expected J2 Trace Buffer:

```

```

00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....

```

```

Rx J2 Length=16

```

```

RX J2 Trace Buffer:

```

```

CRC-7: 0x60 ERROR

```

```

C9 79 F7 0F 5F D8 5D D2 D2 7C F6 0E 53 B2 0E 00 .y.._.]..|..S...

```

```

Data in current interval (610 seconds elapsed)
Near End
  0 CodeViolations, 0 ErrorSecs, 0 Severly Err Secs, 609 Unavailable Secs
Far End
  0 CodeViolations, 0 ErrorSecs, 0 Severly Err Secs, 0 Unavailable Secs
Data in Interval 1:
Near End
  0 CodeViolations, 0 ErrorSecs, 0 Severly Err Secs, 901 Unavailable Secs
Far End
  0 CodeViolations, 0 ErrorSecs, 0 Severly Err Secs, 0 Unavailable Secs
.....
Data in Interval 96:
Near End
  0 CodeViolations, 0 ErrorSecs, 0 Severly Err Secs, 900 Unavailable Secs
Far End
  0 CodeViolations, 0 ErrorSecs, 0 Severly Err Secs, 0 Unavailable Secs
Total Data (last 96 fifteen minute intervals):
Near End
  0 CodeViolations, 0 ErrorSecs, 0 Severly Err Secs, 86436 Unavailable Secs
Far End
  0 CodeViolations, 0 ErrorSecs, 0 Severly Err Secs, 0 Unavailable Secs
Total (Previous Day):
Near End
  0 CodeViolations, 0 ErrorSecs, 0 Severly Err Secs, 86435 Unavailable Secs
Far End
  0 CodeViolations, 0 ErrorSecs, 0 Severly Err Secs, 0 Unavailable Secs

STS-1 1, VTG 1, T1 1 (SONET 0/3/0.1/1/1 T1) is down
timeslots: 1-4
FDL per AT&T 54016 spec.
Receiver is getting AIS.
Framing is ESF, Clock Source is Internal
Data in current interval (610 seconds elapsed):
Near End
  0 Line Code Violations, 0 Path Code Violations
  0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
  0 Errored Secs, 0 Bursty Err Secs, 0 Severly Err Secs
  609 Unavail Secs, 0 Stuffed Secs
Far End
  0 Line Code Violations, 0 Path Code Violations
  0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
  0 Errored Secs, 0 Bursty Err Secs, 0 Severly Err Secs
  0 Unavail Secs
Data in Interval 1:
Near End
  0 Line Code Violations, 0 Path Code Violations
.....
Far End
  0 Line Code Violations, 0 Path Code Violations
  0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
  0 Errored Secs, 0 Bursty Err Secs, 0 Severly Err Secs
  0 Unavail Secs
Data in Interval 96:
Near End
  0 Line Code Violations, 0 Path Code Violations
  0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
  0 Errored Secs, 0 Bursty Err Secs, 0 Severly Err Secs
  900 Unavail Secs, 0 Stuffed Secs
Far End
  0 Line Code Violations, 0 Path Code Violations
  0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
  0 Errored Secs, 0 Bursty Err Secs, 0 Severly Err Secs
  0 Unavail Secs

```

```

Total Data (last 24 hours)
Near End
  0 Line Code Violations,0 Path Code Violations,
  0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins,
  0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs
  86436 Unavail Secs, 0 Stuffed Secs
Far End
  0 Line Code Violations,0 Path Code Violations
  0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins,
  0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs
  0 Unavailable Secs
Total (Previous Day)
Near End
  0 Line Code Violations,0 Path Code Violations,
  0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins,
  0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs
  86435 Unavail Secs, 0 Stuffed Secs
Far End
  0 Line Code Violations,0 Path Code Violations
  0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins,
  0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs
  0 Unavailable Secs

STS-1 1, VTG 1, VT 2 (SONET 0/3/0.1/1/2 VT) is down
VT Receiver has LP_AIS.

router#show controllers sonet 0/3/0 tabular

Section/Line/Path same as previous.

SONET 0/3/0.1 PATH is down.
  Hardware is A900-IMA1Z8S-CXNCS4200-1T8S-10CS

Applique type is VT1.5

STS-1 1, VTG 1, VT 1 (SONET 0/3/0.1/1/1 VT) is down
VT Receiver has LP_AIS.
  cep is configured: FALSE cem_id (0)
  fwd_alarm_ais :0      fwd_alarm_rai :0, Clock Source is Internal
  BIP2-tca:6, BIP2-sf:3, BIP2-sd:6
  Tx V5:2
  Rx V5:0
  Tx J2 Length=64
  TX J2 Trace Buffer:
  00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
  00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
  00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
  00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....

Expected J2 Length=64
Expected J2 Trace Buffer:
  00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
  00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
  00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....
  00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 .....

Rx J2 Length=16
RX J2 Trace Buffer:
CRC-7: 0x60 ERROR

C9 79 F7 0F 5F D8 5D D2 D2 7C F6 0E 53 B2 0E 00 .y.._]...|...S...

INTERVAL      CV-V  ES-V  SES-V  UAS-V  CV-VFE  ES-VFE  SES-VFE  UAS-VFE
06:14-06:24    0      0      0    619      0      0      0      0

```

```

05:59-06:14      0      0      0      901      0      0      0      0
05:44-05:59      0      0      0      900      0      0      0      0
05:29-05:44      0      0      0      901      0      0      0      0
05:14-05:29      0      0      0      900      0      0      0      0
04:59-05:14      0      0      0      900      0      0      0      0
.....
06:44-06:59      0      0      0      901      0      0      0      0
06:29-06:44      0      0      0      900      0      0      0      0
06:14-06:29      0      0      0      900      0      0      0      0
Total            0      0      0 86436      0      0      0      0
Total (Previous Day):
05:29-05:29      0      0      0 86435      0      0      0      0

```

STS-1 1, VTG 1, T1 1 (SONET 0/3/0.1/1/1 T1) is down

timeslots: 1-4

FDL per AT&T 54016 spec.

Receiver is getting AIS.

Framing is ESF, Clock Source is Internal

Near End Data

| INTERVAL | CV-L | ES-L | CV-P | ES-P | SES-P | CSS-P | SAS-P | UAS-P | FC-P |
|-------------|------|------|------|------|-------|-------|-------|-------|------|
| 06:14-06:24 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 619 | 0 |
| 05:59-06:14 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 901 | 0 |

```

.....
06:44-06:59      0      0      0      0      0      0      0      0 901      0
06:29-06:44      0      0      0      0      0      0      0      0 900      0
06:14-06:29      0      0      0      0      0      0      0      0 900      0
Total            0      0      0      0      0      0      0      0 86436      0
Total (Previous Day):
05:29-05:29      0      0      0      0      0      0      0      0 86435      0

```

Far End Data

| INTERVAL | ES-LFE | ES-PFE | SES-PFE | SEFS-PFE | CSS-PFE | UAS-PFE | FC-PFE |
|-------------|--------|--------|---------|----------|---------|---------|--------|
| 06:14-06:24 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 05:59-06:14 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

```

.....
06:29-06:44      0      0      0      0      0      0      0
06:14-06:29      0      0      0      0      0      0      0
Total            0      0      0      0      0      0      0
Total (Previous Day):
05:29-05:29      0      0      0      0      0      0      0

```

STS-1 1, VTG 1, VT 2 (SONET 0/3/0.1/1/2 VT) is down

VT Receiver has LP_AIS.

cep is configured: FALSE cem_id (0)

fwd_alarm_ais :0 fwd_alarm_rai :0, Clock Source is Internal

router#show controllers sonet 0/3/0 remote performance

Section/Line/Path same as previous.

SONET 0/3/0.1 PATH is down.

Hardware is A900-IMA1Z8S-CXNCS4200-1T8S-10CS

STS-1 1, VTG 1, VT 1 (VT1.5 1/1/1) - Remote Performance Data

Far end MIB Data:

Data in current interval (630 seconds elapsed)

0 CodeViolations , 0 ErrorSecs,0 Severly Err Secs, 0 Unavail Secs

FarEnd VT Interval data:

Total Data (last 96 15 minute intervals):

0 CodeViolations, 0 ErrorSec, 0 Severly Err Secs, 0 Unavail Secs

Total (Previous Day):

0 CodeViolations, 0 ErrorSec, 0 Severly Err Secs, 0 Unavail Secs


```

STS-1 1, VTG 1, T1 1 (SONET 0/3/0.1/1/1 T1) - Remote Performance Data
Data in current interval (630 seconds elapsed):
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs
    0 Unavail Secs
Data in Interval 1:
.....
Data in Interval 96:
    0 Line Code Violations, 0 Path Code Violations
    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs
    0 Unavail Secs
Total Data (last 24 hours)
    0 Path Code Violations
    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins,
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs
    0 Unavail Secs
Total (Previous Day)
    0 Path Code Violations
    0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins,
    0 Errored Secs, 0 Bursty Err Secs, 0 Severely Err Secs
    0 Unavail Secs

STS-1 1, VTG 1, VT 2 (VT1.5 1/1/2) - Remote Performance Data
Far end MIB Data:
Data in current interval (630 seconds elapsed)
0 CodeViolations , 0 ErrorSecs,0 Severly Err Secs, 0 Unavail Secs
FarEnd VT Interval data:
Total Data (last 96 15 minute intervals):
0 CodeViolations, 0 ErrorSec, 0 Severly Err Secs, 0 Unavail Secs

Total (Previous Day):
0 CodeViolations, 0 ErrorSec, 0 Severly Err Secs, 0 Unavail Secs

router#show controllers sonet 0/3/0 remote performance tabular

Section/Line/Path same as previous.

SONET 0/3/0.1 PATH is down.
Hardware is A900-IMA1Z8S-CXNCS4200-1T8S-10CS

```

```

STS-1 1, VTG 1, VT 1 (VT1.5 1/1/1) - Remote Performance Data
Far end MIB Data:
INTERVAL      CV      ES      SES      UAS
06:14-06:24    0      0      0      0
FarEnd VT Interval data:
INTERVAL      CV      ES      SES      UAS
05:59-06:14    0      0      0      0

05:44-05:59    0      0      0      0

05:29-05:44    0      0      0      0

05:14-05:29    0      0      0      0
.....
06:29-06:44    0      0      0      0

06:14-06:29    0      0      0      0

```

```

Total
CV      ES      SES      UAS      0      0      0      0

Total (Previous Day)
CV      ES      SES      UAS      0      0      0      0

STS-1 1, VTG 1, T1 1 (SONET 0/3/0.1/1/1 T1) - Remote Performance Data
INTERVAL      LCV      PCV      CSS      SELS      LES      DM      ES      BES      SES      UAS
06:14-06:24    0        0        0        0        0        0        0        0        0        0
05:59-06:14    0        0        0        0        0        0        0        0        0        0
05:44-05:59    0        0        0        0        0        0        0        0        0        0
.....
06:44-06:59    0        0        0        0        0        0        0        0        0        0
06:29-06:44    0        0        0        0        0        0        0        0        0        0
06:14-06:29    0        0        0        0        0        0        0        0        0        0
Total          0        0        0        0        0        0        0        0        0        0
Total (Previous Day)
05:29-05:29    0        0        0        0        0        0        0        0        0        0

STS-1 1, VTG 1, VT 2 (VT1.5 1/1/2) - Remote Performance Data
Far end MIB Data:
INTERVAL      CV      ES      SES      UAS
06:14-06:24    0        0        0        0
FarEnd VT Interval data:
INTERVAL      CV      ES      SES      UAS
05:59-06:14    0        0        0        0

```

Configuring Port Rate and Verifying Pluggables

A comprehensive range of pluggable optical modules is available. For more information, see *Cisco NCS 4200 Series - Supported Optics*.

Configuring Port Rate for SONET

To configure port rate for SONET, use the following commands:

```

enable
configure terminal
controller mediatype 0/0/16
mode sonet
exit
controller sonet 0/0/16
rate oc3

```

Verifying the Pluggables

Before you configure the pluggables, use the following commands to verify the supported pluggables:

show hw-module subslot <slot/bay> transceiver <port> status:

```

The Transceiver in slot 0 subslot 7 port 4 is enabled.
Module temperature                = +46.636 C
Transceiver Tx supply voltage     = 3291.5 mVolts
Transceiver Tx bias current       = 17264 uAmps
Transceiver Tx power              = -2.9 dBm
Transceiver Rx optical power      = -7.4 dBm

```



Note The `show hw-module subslot <slot/bay> transceiver <port> status` displays as **Enabled** if the pluggables are supported and the command displays as **Disabled** if the pluggables are not supported.

show hw-module subslot <slot/bay> transceiver <port> idprom:

```
show hw-module subslot 0/7 transceiver 6 idprom detail
IDPROM for transceiver SPA-1T8S-10CS_7/6:
  Description                               = SFP or SFP+ optics (type 3)
  Transceiver Type:                         = ONS SE Z1 (406)
  Product Identifier (PID)                   = ONS-SE-Z1
  Vendor Revision                           = A
  Serial Number (SN)                        = FNS19251NPM
  Vendor Name                               = CISCO-FINISAR
  Vendor OUI (IEEE company ID)              = 00.90.65 (36965)
  CLEI code                                 = WMOTCZPAAA
  Cisco part number                         = 10-1971-04
  Device State                              = Enabled.
  Date code (yy/mm/dd)                     = 15/06/19
  Connector type                             = LC.
  Encoding                                  = 8B10B
                                           NRZ
                                           Manchester
  Nominal bitrate                           = OC48/STM16 (2500 Mbits/s)
  Minimum bit rate as % of nominal bit rate = not specified
  Maximum bit rate as % of nominal bit rate = not specified
  The transceiver type is 406
  Link reach for 9u fiber (km)               = IR-1(15km) (15)
                                           = SR(2km) (0)
                                           IR-1(15km) (0)
                                           IR-2(40km) (0)
                                           LR-1(40km) (0)
                                           LR-2(80km) (0)
                                           LR-3(80km) (0)
                                           DX(40KM) (0)
                                           HX(40km) (0)
                                           ZX(80km) (0)
                                           VX(100km) (0)
                                           1xFC, 2xFC-SM(10km) (0)
                                           ESCON-SM(20km) (0)
  Link reach for 50u fiber (m)               = SR(2km) (0)
                                           IR-1(15km) (0)
                                           IR-2(40km) (0)
                                           LR-1(40km) (0)
                                           LR-2(80km) (0)
                                           LR-3(80km) (0)
                                           DX(40KM) (0)
                                           HX(40km) (0)
                                           ZX(80km) (0)
                                           VX(100km) (0)
                                           1xFC, 2xFC-SM(10km) (0)
                                           ESCON-SM(20km) (0)
  Nominal laser wavelength                   = 1310 nm.
  DWDM wavelength fraction                   = 1310.0 nm.
  Supported options                          = Tx disable
                                           Tx fault signal
                                           Loss of signal (standard implementation)
  Supported enhanced options                 = Alarms for monitored parameters
                                           Software Rx LOS monitoring
  Diagnostic monitoring                      = Digital diagnostics supported
                                           Diagnostics are externally calibrated
                                           Rx power measured is "Average power"
```

```

Transceiver temperature operating range = -40 C to 85 C (industrial)
Minimum operating temperature          = -40 C
Maximum operating temperature          = 85 C
High temperature alarm threshold       = +90.000 C
High temperature warning threshold     = +85.000 C
Low temperature warning threshold      = -40.000 C
Low temperature alarm threshold        = -45.000 C
High voltage alarm threshold           = 3630.0 mVolts
High voltage warning threshold         = 3470.0 mVolts
Low voltage warning threshold          = 3140.0 mVolts
Low voltage alarm threshold            = 2971.2 mVolts
High laser bias current alarm threshold = 85.000 mAmps
High laser bias current warning threshold = 65.000 mAmps
Low laser bias current warning threshold = 4.000 mAmps
Low laser bias current alarm threshold  = 2.000 mAmps
High transmit power alarm threshold    = 4.0 dBm
High transmit power warning threshold  = 2.0 dBm
Low transmit power warning threshold    = -7.0 dBm
Low transmit power alarm threshold      = -9.0 dBm
High receive power alarm threshold      = 1.0 dBm
Low receive power alarm threshold       = -26.0 dBm
High receive power warning threshold    = -1.0 dBm
Low receive power warning threshold     = -24.9 dBm
External Calibration: bias current slope = 1.000
External Calibration: bias current offset = 0

```

show hw-module subslot <slot/bay> transceiver <port> idprom brief:

```

sh hw-module subslot 0/7 transceiver 6 idprom brief
IDPROM for transceiver SPA-1T8S-10CS_7/6:
  Description                      = SFP or SFP+ optics (type 3)
  Transceiver Type:                = ONS SE Z1 (406)
  Product Identifier (PID)         = ONS-SE-Z1
  Vendor Revision                  = A
  Serial Number (SN)              = FNS19251NQ0
  Vendor Name                     = CISCO-FINISAR
  Vendor OUI (IEEE company ID)    = 00.90.65 (36965)
  CLEI code                       = WMOTCZPAAA
  Cisco part number                = 10-1971-04
  Device State                    = Enabled.
  Date code (yy/mm/dd)            = 15/06/19
  Connector type                  = LC.
  Encoding                        = 8B10B
                                NRZ
                                Manchester
  Nominal bitrate                  = OC48/STM16 (2500 Mbits/s)
  Minimum bit rate as % of nominal bit rate = not specified
  Maximum bit rate as % of nominal bit rate = not specified

```

Loopback Remote on T1 and T3 Interfaces

The remote loopback configuration attempts to put the far-end T1 or T3 into a loopback.

The remote loopback setting loops back the far-end at line or payload, using IBOC (inband bit-orientated CDE) or the ESF loopback codes to communicate the request to the far-end.

Restrictions for Loopback Remote

- E1 and E3 loopback remote are not supported until Cisco IOS XE Fuji 16.9.4 release. Starting from Cisco IOS XE Fuji 16.9.5 release, E1 and E3 loopback remote are supported.

- IBOC loopcode configuration is not supported when CESoP or SATOP (framed or unframed) is configured.
- ESF loopcode configuration is not supported when SAToP is configured.

Configuring Loopback Remote in Sonet

To set T1 loopback remote iboc fac1/fac2/csu for OCX sonet, perform the following tasks in global configuration mode:

```
enable
configure terminal
controller sonet 0/0/1
mode ct3
t1 1 loopback remote iboc {fac1 | fac2 | csu}
mode vt-15
vtg 1 t1 1 loopback remote iboc {fac1 | fac2 | csu}
```

To set T1 loopback remote iboc esf line csu/esf payload for OCX sonet, perform the following tasks in global configuration mode:

```
enable
configure terminal
controller sonet 0/0/1
mode ct3
t1 1 loopback remote iboc esf {line csu | payload}
mode vt-15
vtg 1 t1 1 loopback remote esf {line csu | payload}
```

To set T3 loopback remote line/payload for OCX in sonet, perform the following tasks in global configuration mode:

```
enable
configure terminal
controller sonet 0/0/1
mode t3
t3 loopback remote {line | payload}
```



Note loopback remote esf line niu is not supported.

Verifying the Loopback Remote Configuration

Use the following command to check the T1 loopback remote configuration:

```
router# show run | sec 0/0/1
controller SONET 0/0/1
rate OC3
no ais-shut
alarm-report all
clock source internal
!
sts-1 1
!
sts-1 2
    clock source internal
```

```

mode ct3
t3 framing c-bit
t3 clock source internal
t1 1 Loopback remote iboc fac1
t1 1 framing SF

```

Use the following command to verify the T1 loopback remote configuration:

```

Router(config-ctrlr-sts1)# show controller sonet 0/0/1 | b STS-1 2, T1 1
STS-1 2, T1 1 (CT3 2-1) is up
timeslots:
Configured for NIU FAC1 Line Loopback with IBOC
Currently in Inband Remotely Line Looped
Receiver has no alarms.
Framing is SF, Clock Source is Internal

```

Use the following command to check T3 loopback remote configuration:

```

Router# show run | sec 0/0/1
controller SONET 0/0/1
rate OC3
no ais-shut
alarm-report all
clock source internal
!
sts-1 1
!
sts-1 2
!
sts-1 3
    clock source internal
    mode t3
    t3 framing c-bit
    t3 loop remote line
    t3 clock source internal

```

Use the following command to verify T3 loopback remote configuration:

```

Router(config-ctrlr-sts1)# do show controller sonet 0/0/1 | b Path 3
OC3.STS1 0/0/1 Path 3 is up. (Configured for Remotely Looped)
Currently in Remotely Line Looped
Hardware is NCS4200-1T8S-10CS

Applique type is T3
Receiver has no alarms.
MDL transmission is disabled

```

Configuring POS Scrambling

Scrambling is designed to randomize the pattern of 1s and 0s carried in the physical layer frame. Randomizing the digital bits can prevent continuous, non-variable bit patterns. SONET payload scrambling applies a self-synchronous scrambler to the Synchronous Payload Envelope (SPE) of the interface to ensure sufficient bit transition density. You can enable or disable SONET payload scrambling on a concatenated serial interface (POS).

To configure SONET controller, enter the following commands:

```

Router(config)#controller media 0/4/3
Router(config-controller)#mode sonet
Router(config-controller)#controller sonet 0/4/3
Router(config-controller)#rate oc3
Router(config-controller)#sts
Router(config-controller)#sts 1 - 3 mode sts-3c
Router(config-ctrlr-sts3c)#channel-group 0
Router(config-ctrlr-sts3c)#end

```

To enable scrambling on a serial interface for the SONET controller, enter the following commands:

```

Router(config)#interface Serial0/4/3.1
Router(config-if)#pos scramble
Router(config-if)#end

```

To disable scrambling on a serial interface for the SONET controller, enter the following commands:

```

Router(config)#interface Serial0/4/3.1
Router(config-if)#no pos scramble
Router(config-if)#end

```

Verifying POS Scrambling

Use the following commands to verify the POS scrambling configuration:

```

Router#show ip interface brief

```

| Interface | IP-Address | OK? | Method | Status | Protocol |
|----------------------|-------------------|------------|---------------|-----------|-----------|
| GigabitEthernet0/0/0 | unassigned | YES | unset | down | down |
| GigabitEthernet0/0/1 | unassigned | YES | unset | down | down |
| GigabitEthernet0/0/2 | unassigned | YES | unset | down | down |
| GigabitEthernet0/0/3 | unassigned | YES | unset | up | up |
| GigabitEthernet0/0/4 | unassigned | YES | unset | down | down |
| GigabitEthernet0/0/5 | unassigned | YES | unset | down | down |
| GigabitEthernet0/0/6 | unassigned | YES | unset | down | down |
| GigabitEthernet0/0/7 | unassigned | YES | unset | down | down |
| GigabitEthernet0/5/0 | unassigned | YES | unset | up | up |
| GigabitEthernet0/5/1 | unassigned | YES | unset | down | down |
| GigabitEthernet0/5/2 | unassigned | YES | unset | down | down |
| GigabitEthernet0/5/3 | unassigned | YES | unset | down | down |
| GigabitEthernet0/5/4 | unassigned | YES | unset | down | down |
| GigabitEthernet0/5/5 | unassigned | YES | unset | down | down |
| GigabitEthernet0/5/6 | unassigned | YES | unset | down | down |
| GigabitEthernet0/5/7 | unassigned | YES | unset | down | down |
| GigabitEthernet0 | 7.19.26.14 | YES | manual | up | up |
| Serial0/4/3.1 | 30.30.30.1 | YES | manual | up | up |

Associated Commands

The following table shows the Associated Commands for SONET configuration:

| Commands | Links |
|-----------------|---|
| ais-shut | http://www.cisco.com/c/en/us/td/docs/ios-xml/ios/interface/command/ir-cr-book/ir-a1.html#wp7654966010 |

| Commands | Links |
|---|---|
| alarm-report | http://www.cisco.com/c/en/us/td/docs/ios-xml/ios/interface/command/ir-cr-book/ir-a1.html#wp2800999060 |
| aps adm | http://www.cisco.com/c/en/us/td/docs/ios-xml/ios/interface/command/ir-cr-book/ir-a1.html#wp8015117230 |
| aps group | http://www.cisco.com/c/en/us/td/docs/ios-xml/ios/interface/command/ir-cr-book/ir-a1.html#wp1674734739 |
| aps protect | http://www.cisco.com/c/en/us/td/docs/ios-xml/ios/interface/command/ir-cr-book/ir-a1.html#wp2073867702 |
| aps revert | http://www.cisco.com/c/en/us/td/docs/ios-xml/ios/interface/command/ir-cr-book/ir-a1.html#wp4063780600 |
| aps unidirectional | http://www.cisco.com/c/en/us/td/docs/ios-xml/ios/interface/command/ir-cr-book/ir-a1.html#wp5340799170 |
| aps working | http://www.cisco.com/c/en/us/td/docs/ios-xml/ios/interface/command/ir-cr-book/ir-a1.html#wp8949584630 |
| cem-group <i>cem-group-number</i> cep | http://www.cisco.com/c/en/us/td/docs/ios-xml/ios/interface/command/ir-cr-book/ir-c1.html#wp2440628600 |
| controller mediatype | http://www.cisco.com/c/en/us/td/docs/ios-xml/ios/interface/command/ir-cr-book/ir-c2.html#wp1201337639 |
| controller protection-group | http://www.cisco.com/c/en/us/td/docs/ios-xml/ios/mcl/allreleasemcl/all-book/all-03.html |
| controller sonet | http://www.cisco.com/c/en/us/td/docs/ios-xml/ios/interface/command/ir-cr-book/ir-c2.html#wp2020468554 |
| clock source | http://www.cisco.com/c/en/us/td/docs/ios-xml/ios/interface/command/ir-cr-book/ir-c2.html#wp3604380959 |
| loopback | http://www.cisco.com/c/en/us/td/docs/ios-xml/ios/interface/command/ir-cr-book/ir-l2.html#wp2735045490 |
| mode sonet | http://www.cisco.com/c/en/us/td/docs/ios-xml/ios/interface/command/ir-cr-book/ir-l2.html#wp2327088950 |

| Commands | Links |
|---|---|
| mode sts-nc | http://www.cisco.com/c/en/us/td/docs/ios-xml/ios/interface/command/ir-cr-book/ir-l2.html#wp1791424945 |
| mode vt-15 | http://www.cisco.com/c/en/us/td/docs/ios-xml/ios/interface/command/ir-cr-book/ir-l2.html#wp1137973905 |
| overhead c2 | http://www.cisco.com/c/en/us/td/docs/ios-xml/ios/interface/command/ir-cr-book/ir-o1.html#wp1973678817 |
| overhead j0 | http://www.cisco.com/c/en/us/td/docs/ios-xml/ios/interface/command/ir-cr-book/ir-o1.html#wp4338698890 |
| overhead j1 | http://www.cisco.com/c/en/us/td/docs/ios-xml/ios/interface/command/ir-cr-book/ir-o1.html#wp1987243836 |
| overhead s1s0 | http://www.cisco.com/c/en/us/td/docs/ios-xml/ios/interface/command/ir-cr-book/ir-o1.html#wp2779929239 |
| protection-group | http://www.cisco.com/c/en/us/td/docs/ios-xml/ios/mcl/allreleasemcl/all-book/all-10.html |
| protection-group [working protect] | http://www.cisco.com/c/en/us/td/docs/ios-xml/ios/mcl/allreleasemcl/all-book/all-10.html |
| rate [OC3 OC12 OC48 OC192] | http://www.cisco.com/c/en/us/td/docs/ios-xml/ios/interface/command/ir-cr-book/ir-o1.html#wp4442889730 |
| shutdown | http://www.cisco.com/c/en/us/td/docs/ios-xml/ios/interface/command/ir-cr-book/ir-s6.html#wp3364503641 |
| show controllers sonet | http://www.cisco.com/c/en/us/td/docs/ios-xml/ios/interface/command/ir-cr-book/ir-s3.html#wp1341372847 |
| show hw-module subslot transceiver | http://www.cisco.com/c/en/us/td/docs/ios-xml/ios/interface/command/ir-cr-book/ir-s4.html#wp6553420000 |
| show protection-group | http://www.cisco.com/c/en/us/td/docs/ios-xml/ios/mcl/allreleasemcl/all-book/all-14.html |
| sts-1 | http://www.cisco.com/c/en/us/td/docs/ios-xml/ios/interface/command/ir-cr-book/ir-s6.html#wp2423232697 |
| t1 t1-line-number framing | http://www.cisco.com/c/en/us/td/docs/ios-xml/ios/interface/command/ir-cr-book/ir-t1.html#wp2623191253 |

| Commands | Links |
|---|---|
| t1 <i>t1-line-number</i> clock source | http://www.cisco.com/c/en/us/td/docs/ios-xml/ios/interface/command/ir-cr-book/ir-t1.html#wp3480850667 |
| threshold | http://www.cisco.com/c/en/us/td/docs/ios-xml/ios/interface/command/ir-cr-book/ir-t1.html#wp2311589330 |
| type sts48c | http://www.cisco.com/c/en/us/td/docs/ios-xml/ios/mcl/allreleasemcl/all-book/all-15.html |
| vtg <i>vtg-line-number</i> t1 <i>t1-line-number</i> loopback | http://www.cisco.com/c/en/us/td/docs/ios-xml/ios/interface/command/ir-cr-book/ir-t2.html#wp3494199143 |