



## **QoS: Classification Configuration Guide, Cisco IOS XE 17 (Cisco NCS 4200 Series)**

**First Published:** 2019-11-26

### **Americas Headquarters**

Cisco Systems, Inc.  
170 West Tasman Drive  
San Jose, CA 95134-1706  
USA  
<http://www.cisco.com>  
Tel: 408 526-4000  
800 553-NETS (6387)  
Fax: 408 527-0883

THE SPECIFICATIONS AND INFORMATION REGARDING THE PRODUCTS IN THIS MANUAL ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL STATEMENTS, INFORMATION, AND RECOMMENDATIONS IN THIS MANUAL ARE BELIEVED TO BE ACCURATE BUT ARE PRESENTED WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED. USERS MUST TAKE FULL RESPONSIBILITY FOR THEIR APPLICATION OF ANY PRODUCTS.

THE SOFTWARE LICENSE AND LIMITED WARRANTY FOR THE ACCOMPANYING PRODUCT ARE SET FORTH IN THE INFORMATION PACKET THAT SHIPPED WITH THE PRODUCT AND ARE INCORPORATED HEREIN BY THIS REFERENCE. IF YOU ARE UNABLE TO LOCATE THE SOFTWARE LICENSE OR LIMITED WARRANTY, CONTACT YOUR CISCO REPRESENTATIVE FOR A COPY.

The Cisco implementation of TCP header compression is an adaptation of a program developed by the University of California, Berkeley (UCB) as part of UCB's public domain version of the UNIX operating system. All rights reserved. Copyright © 1981, Regents of the University of California.

NOTWITHSTANDING ANY OTHER WARRANTY HEREIN, ALL DOCUMENT FILES AND SOFTWARE OF THESE SUPPLIERS ARE PROVIDED "AS IS" WITH ALL FAULTS. CISCO AND THE ABOVE-NAMED SUPPLIERS DISCLAIM ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, THOSE OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE.

IN NO EVENT SHALL CISCO OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THIS MANUAL, EVEN IF CISCO OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.

All printed copies and duplicate soft copies of this document are considered uncontrolled. See the current online version for the latest version.

Cisco has more than 200 offices worldwide. Addresses and phone numbers are listed on the Cisco website at [www.cisco.com/go/offices](http://www.cisco.com/go/offices).

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: <https://www.cisco.com/c/en/us/about/legal/trademarks.html>. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1721R)

© 2019 Cisco Systems, Inc. All rights reserved.



## CONTENTS

---

### CHAPTER 1

---

#### Feature History 1

---

### CHAPTER 2

#### Marking Network Traffic 3

- Prerequisites for Marking Network Traffic 3
- Restrictions for Marking Network Traffic 3
- Information About Marking Network Traffic 4
  - Purpose of Marking Network Traffic 4
  - Benefits of Marking Network Traffic 4
  - How to Mark Traffic Attributes 5
    - Method One Using a set Command 5
    - Traffic Marking Procedure Flowchart 6
  - Method for Marking Traffic Attributes 7
    - Using a set Command 7
  - MQC and Network Traffic Marking 8
  - Traffic Classification Compared with Traffic Marking 8
- How to Mark Network Traffic 9
  - Creating a Class Map for Marking Network Traffic 9
  - Creating a Policy Map for Applying a QoS Feature to Network Traffic 10
    - What to Do Next 12
  - Attaching the Policy Map to an Interface, EFP or Xconnect 12
- Configuration Examples for Marking Network Traffic 14
  - Example: Creating a Class Map for Marking Network Traffic 14
  - Example Creating a Policy Map for Applying a QoS Feature to Network Traffic 14
  - Example: Attaching a Traffic Policy to an Interface 15
- Additional References for Marking Network Traffic 15

---

<b>CHAPTER 3</b>	<b>Classifying and Marking MPLS EXP</b>	<b>17</b>
	Prerequisites for Classifying and Marking MPLS EXP	17
	Restrictions for Classifying and Marking MPLS EXP	17
	Information About Classifying and Marking MPLS EXP	18
	Classifying and Marking MPLS EXP Overview	18
	MPLS Experimental Field	18
	Benefits of MPLS EXP Classification and Marking	19
	How to Classify and Mark MPLS EXP	19
	Classifying MPLS Encapsulated Packets	19
	Marking MPLS EXP on All Imposed Labels	20
	Marking MPLS EXP on Label Switched Packets	21
	Configuring Conditional Marking	22
	Configuration Examples for Classifying and Marking MPLS EXP	24
	Example: Classifying MPLS Encapsulated Packets	24
	Example: Marking MPLS EXP on All Imposed Labels	25
	Example: Marking MPLS EXP on Label Switched Packets	26
	Example: Configuring Conditional Marking	26
	Additional References	27

---

<b>CHAPTER 4</b>	<b>Priority Shaper</b>	<b>29</b>
	Restrictions for Priority Shaper	29
	Configuring Priority Shaper	29
	Configuration Examples for Priority Shaper	31
	Example: Configuring Priority Shaper	31
	Verifying Priority Shaper	31



# CHAPTER 1

## Feature History

---

The following table lists the new and modified features that are supported in the QoS: Classification Configuration Guide in Cisco IOS XE 17 releases, on Cisco NCS 4206 and Cisco NCS 4216 routers.

Feature Name	Cisco IOS XE Release
DSCP Preservation of MLDP Traffic	17.1.1





## CHAPTER 2

# Marking Network Traffic

---

Marking network traffic allows you to set or modify the attributes for traffic (that is, packets) belonging to a specific class or category. When used in conjunction with network traffic classification, marking network traffic is the foundation for enabling many quality of service (QoS) features on your network. This module contains conceptual information and the configuration tasks for marking network traffic.

- [Prerequisites for Marking Network Traffic, on page 3](#)
- [Restrictions for Marking Network Traffic, on page 3](#)
- [Information About Marking Network Traffic, on page 4](#)
- [How to Mark Network Traffic, on page 9](#)
- [Configuration Examples for Marking Network Traffic, on page 14](#)
- [Additional References for Marking Network Traffic, on page 15](#)

## Prerequisites for Marking Network Traffic

In order to mark network traffic, Cisco Express Forwarding must be configured on both the interface receiving the traffic and the interface sending the traffic.

## Restrictions for Marking Network Traffic

- Cos Marking is *not* supported for pop 0.
- IPv6 classification and marking are *not* supported on the Cisco RSP3 Module.
- You cannot configure QoS with empty class map and cannot attach a policy without any class map match condition.

For information, see *Quality of Service Configuration Guidelines for Cisco NCS 4200 Series*.

# Information About Marking Network Traffic

## Purpose of Marking Network Traffic

Traffic marking is a method used to identify certain traffic types for unique handling, effectively partitioning network traffic into different categories.

After the network traffic is organized into classes by traffic classification, traffic marking allows you to mark (that is, set or change) a value (attribute) for the traffic belonging to a specific class. For instance, you may want to change the class of service (CoS) value from 2 to 1 in one class, or you may want to change the differentiated services code point (DSCP) value from 3 to 2 in another class. In this module, these values are referred to as attributes.

Attributes that can be set and modified include the following:

- Discard-class value
- DSCP value in the type of service (ToS) byte
- MPLS EXP field value in the topmost label on an input interface
- Multiprotocol Label Switching (MPLS) experimental (EXP) field on all imposed label entries
- Precedence value in the packet header
- QoS group identifier (ID)
- ToS bits in the header of an IP packet



**Note** Effective with Release 16.5.1, if the same table-mapping is applied on multiple interfaces, the MDT index is shared across these interfaces. Thus increased scaling of table-map is possible if table-mapping is reused.

For information on attributes that marking supports see, *Quality of Service Configuration Guidelines for Cisco NCS 4200 Series*.

## Benefits of Marking Network Traffic

*Table 1: Feature History*

Feature Name	Release	Description
DSCP Preservation of MLDP Traffic	Cisco IOS XE Amsterdam 17.1.1	The Differentiated Services Code Point (DSCP) value does not change on both the uniform and pipe modes.

### Improved Network Performance

Traffic marking allows you to fine-tune the attributes for traffic on your network. This increased granularity helps single out traffic that requires special handling and, thus, helps to achieve optimal application performance.

Traffic marking allows you to determine how traffic will be treated, based on how the attributes for the network traffic are set. It allows you to segment network traffic into multiple priority levels or classes of service based on those attributes, as follows:

- The DSCP field (TAG to IP) value does not change in both the uniform mode and in pipe mode. This is applicable to both the Unicast and Multicast traffic scenario.
- Traffic marking is often used to set the IP precedence or IP DSCP values for traffic entering a network. Networking devices within your network can then use the newly marked IP precedence values to determine how traffic should be treated. For example, voice traffic can be marked with a particular IP precedence or DSCP, and a queueing mechanism can then be configured to put all packets of that mark into a priority queue.
- Traffic marking can be used to identify traffic for any class-based QoS feature (any feature available in policy-map class configuration mode, although some restrictions exist).
- Traffic marking can be used to assign traffic to a QoS group within a device. The device can use the QoS groups to determine how to prioritize traffic for transmission. The QoS group value is used for one of the two following reasons:
  - To leverage a large range of traffic classes. The QoS group value has 100 different individual markings, as opposed to DSCP and IP precedence, which have 64 and 8, respectively.
  - If changing the IP precedence or DSCP value is undesirable.
- If a packet (for instance, in a traffic flow) that needs to be marked to differentiate user-defined QoS services is leaving a device and entering a switch, the device can set the CoS value of the traffic, because the switch can process the Layer 2 CoS header marking. Alternatively, the Layer 2 CoS value of the traffic leaving a switch can be mapped to the Layer 3 IP or MPLS value.
- Weighted random early detection (WRED) uses precedence values or DSCP values to determine the probability that the traffic will be dropped. Therefore, the Precedence and DSCP can be used along with WRED.

## How to Mark Traffic Attributes

You can specify and mark the traffic attribute by using a **set** command.

With this method, you configure individual **set** commands for the traffic attribute that you want to mark.

This method is further described in the section that follows.

### Method One Using a set Command

You specify the traffic attribute that you want to change with a **set** command configured in a policy map. The table below lists the available **set** commands and the corresponding attribute. The table also includes the network layer and the network protocol typically associated with the traffic attribute.

*Table 2: set Commands and Corresponding Traffic Attribute, Network Layer, and Protocol*

set Commands <sup>1</sup>	Traffic Attribute	Network Layer	Protocol
set cos	Layer 2 CoS value of the outgoing traffic	Layer 2	

set Commands <sup>1</sup>	Traffic Attribute	Network Layer	Protocol
<b>set discard-class</b>	discard-class value	Layer 2 <b>Note</b> <b>set discard-class</b> supports Layer 2 and Layer 3 on the Cisco RSP3 Module.	
<b>set dscp</b>	DSCP value in the ToS byte	Layer 3	IP
<b>set mpls experimental imposition</b>	MPLS EXP field on all imposed label entries	Layer 3	MPLS
<b>set mpls experimental topmost</b>	MPLS EXP field value in the topmost label on either an input or an output interface	Layer 3	MPLS
<b>set precedence</b>	Precedence value in the packet header	Layer 3	IP
<b>set qos-group</b>	QoS group ID	Layer 3	IP, MPLS

<sup>1</sup> Cisco set commands can vary by release. For more information, see the command documentation for the Cisco release that you are using



**Note** The **set qos-group** can be used for L2 traffic on the Cisco RSP3 Module.

If you are using individual **set** commands, those **set** commands are specified in a policy map. The following is a sample policy map configured with one of the **set** commands listed in the table above. In this sample configuration, the **set dscp** command has been configured in the policy map (policy1).

```
policy-map policy1
  class class1
    set dscp 1
  end
```




**Note** **set dscp** command is *not* supported on the Cisco RSP3 Module for L2 EFP configuration.

## Traffic Marking Procedure Flowchart

The figure below illustrates the order of the procedures for configuring traffic marking.

Figure 1: Traffic Marking Procedure Flowchart

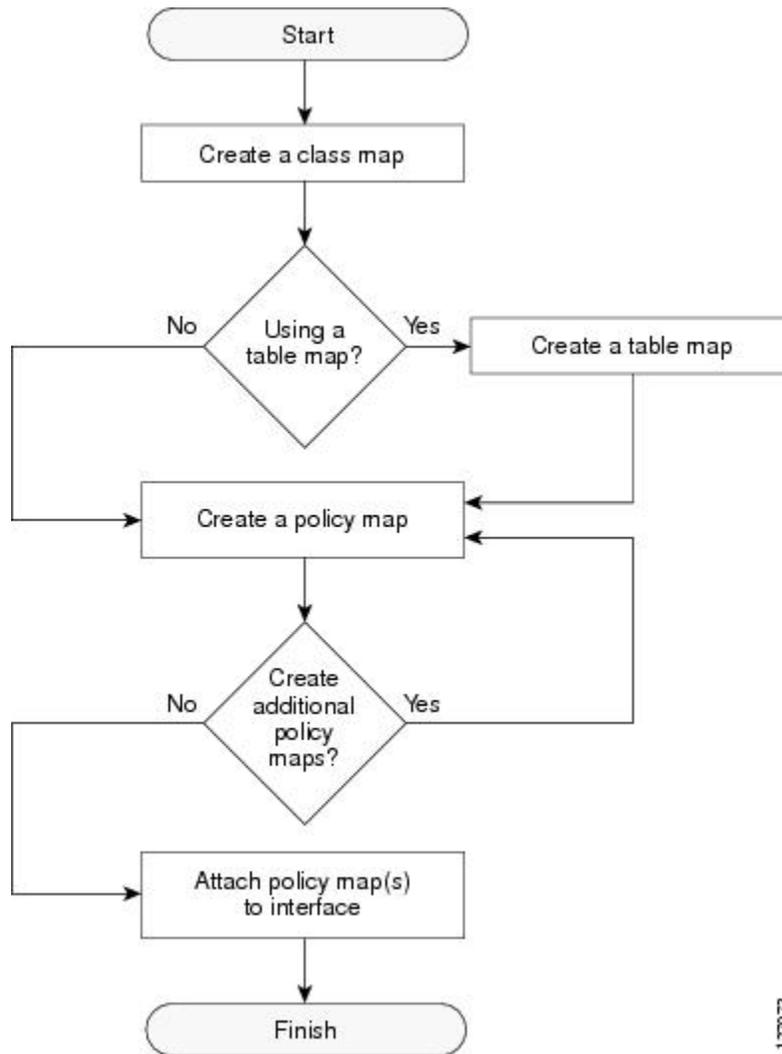

127073

## Method for Marking Traffic Attributes

You specify and mark the traffic attribute that you want to change by using a **set** command configured in a policy map.

With this method, you configure individual **set** commands for the traffic attribute that you want to mark.

### Using a set Command

The table below lists the available **set** commands and the corresponding attribute. The table below also includes the network layer and the network protocol typically associated with the traffic attribute.

Table 3: set Commands and Corresponding Traffic Attribute, Network Layer, and Protocol

set Commands <sup>2</sup>	Traffic Attribute	Network Layer	Protocol
set cos	Layer 2 CoS value of the outgoing traffic	Layer 2	
set discard-class	discard-class value	Layer 2	
set dscp	DSCP value in the ToS byte	Layer 3	IP
set mpls experimental imposition	MPLS EXP field on all imposed label entries	Layer 3	MPLS
set mpls experimental topmost	MPLS EXP field value in the topmost label on an input or output interface	Layer 3	MPLS
set precedence	Precedence value in the packet header	Layer 3	IP
set qos-group	QoS group ID	Layer 3	IP, MPLS

<sup>2</sup> Cisco set commands can vary by release. For more information, see the command documentation.

If you are using individual **set** commands, those **set** commands are specified in a policy map. The following is a sample policy map configured with one of the **set** commands listed in the table above. In this sample configuration, the **set cos** command has been configured in the policy map (policy1) to mark the CoS value.

```
policy-map policy1
class class1
  set cos 1
end
```

For information on configuring a policy map, see the “Creating a Policy Map for Applying a QoS Feature to Network Traffic” section.

The final task is to attach the policy map to the interface. For information on attaching the policy map to the interface, see the “Attaching the Policy Map to an Interface” section.

## MQC and Network Traffic Marking

To configure network traffic marking, you use the Modular QoS CLI (MQC).

The MQC is a CLI structure that allows you to complete the following tasks:

- Specify the matching criteria used to define a traffic class.
- Create a traffic policy (policy map). The traffic policy defines the QoS policy actions to be taken for each traffic class.
- Apply the policy actions specified in the policy map to an interface, EFP, Trunk EFP, or Xconnect by using the **service-policy** command.

## Traffic Classification Compared with Traffic Marking

Traffic classification and traffic marking are closely related and can be used together. Traffic marking can be viewed as an additional action, specified in a policy map, to be taken on a traffic class.

Traffic classification allows you to organize into traffic classes on the basis of whether the traffic matches specific criteria. For example, all traffic with a CoS value of 2 is grouped into one class, and traffic with a DSCP value of 3 is grouped into another class. The match criteria are user-defined.

After the traffic is organized into traffic classes, traffic marking allows you to mark (that is, set or change) an attribute for the traffic belonging to that specific class. For instance, you may want to change the CoS value from 2 to 1, or you may want to change the DSCP value from 3 to 2.

The match criteria used by traffic classification are specified by configuring a **match** command in a class map. The marking action taken by traffic marking is specified by configuring a **set** command in a policy map. These class maps and policy maps are configured using the MQC.

The table below compares the features of traffic classification and traffic marking.

**Table 4: Traffic Classification Compared with Traffic Marking**

Feature	Traffic Classification	Traffic Marking
Goal	Groups network traffic into specific traffic classes on the basis of whether the traffic matches the user-defined criterion.	After the network traffic is grouped into traffic classes, modifies the attributes for the traffic in a particular traffic class.
Configuration Mechanism	Uses class maps and policy maps in the MQC.	Uses class maps and policy maps in the MQC.
CLI	In a class map, uses <b>match</b> commands (for example, <b>match cos</b> ) to define the traffic matching criteria.	Uses the traffic classes and matching criteria specified by traffic classification.  In addition, uses <b>set</b> commands (for example, <b>set cos</b> ) in a policy map to modify the attributes for the network traffic.

# How to Mark Network Traffic

## Creating a Class Map for Marking Network Traffic

### Procedure

#### Step 1

**enable**

#### Example:

```
Router> enable
```

Enables privileged EXEC mode.

- Enter your password if prompted.

#### Step 2

**configure terminal**

#### Example:

```
Router# configure terminal
```

Enters global configuration mode.

**Step 3** **class-map** *class-map-name* [**match-all**| **match-any**]

**Example:**

```
Router(config)# class-map class1
```

Creates a class map to be used for matching traffic to a specified class, and enters class-map configuration mode.

- Enter the class map name.

**Step 4** **match cos** *cos-value*

**Example:**

```
Router (config)# match cos 1
```

Matches with Cos value.

*cos-value*: Sets the Cos Value. The valid values are 1 and 2.

**Step 5** **end**

**Example:**

```
Router(config-cmap)# end
```

(Optional) Returns to privileged EXEC mode.

## Creating a Policy Map for Applying a QoS Feature to Network Traffic

### Before you begin

The following restrictions apply to creating a QoS policy map:

- A policy map containing the **set qos-group** command can only be attached as an input traffic policy. QoS group values are not usable for traffic leaving a device.
- A policy map containing the **set cos** command can only be attached as an output traffic policy.



**Note** Cos Marking is not supported for pop 0. Cos marking is supported for pop1 and pop2.



**Note** For Cisco RSP3 Module, Cos Marking is supported only for pop 0 and push cases. Cos Marking is *not* supported for pop1 and pop2.

## Procedure

---

**Step 1****enable****Example:**

```
Device> enable
```

Enables privileged EXEC mode.

- Enter your password if prompted.

**Step 2****configure terminal****Example:**

```
Device# configure terminal
```

Enters global configuration mode.

**Step 3****policy-map *policy-map-name*****Example:**

```
Device(config)# policy-map policy1
```

Specifies the name of the policy map and enters policy-map configuration mode.

**Step 4****class {*class-name* | **class-default**}****Example:**

```
Device(config-pmap)# class class1
```

Specifies the name of the class whose policy you want to create and enters policy-map class configuration mode. This class is associated with the class map created earlier.

**Step 5****set cos *cos-value*****Example:**

```
Device(config-pmap-c)# set cos 2
```

(Optional) Sets the CoS value in the type of service (ToS) byte.

**Note** The **set cos** command is an example of one of the **set** commands that can be used when marking traffic. Other **set** commands can be used. For a list of other **set** commands, see “Information About Marking Network Traffic”.

**Step 6****set dscp *value*****Example:**

```
Device(config-pmap-c)# set dscp 2
```

**Step 7****end****Example:**

```
Device(config-pmap-c)# end
```

Returns to privileged EXEC mode.

**Step 8** **show policy-map**

**Example:**

```
Device# show policy-map
```

(Optional) Displays all configured policy maps.

**Step 9** **show policy-map** *policy-map* **class** *class-name*

**Example:**

```
Device# show policy-map policy1 class class1
```

(Optional) Displays the configuration for the specified class of the specified policy map.

## What to Do Next

Create and configure as many policy maps as you need for your network. To create and configure additional policy maps, repeat the steps in the “Creating a Policy Map for Applying a QoS Feature to Network Traffic” section. Then attach the policy maps to the appropriate interface, following the instructions in the “Attaching the Policy Map to an Interface” section.

## Attaching the Policy Map to an Interface, EFP or Xconnect

### Before you begin



**Note**

Depending on the needs of your network, policy maps can be attached to targets that are supported. For information, see *Quality of Service Configuration Guidelines for Cisco NCS 4200 Series*.

### Procedure

**Step 1** **configure terminal**

Enter global configuration mode.

**Example:**

```
Router# configure terminal
```

**Step 2** **interface** *interface-id*

Specify the port to attach to the policy map, and enter interface configuration mode. Valid interfaces are physical ports.

**Example:**

```
Router(config)# interface gigabitethernet 0/3/6
```

**Step 3** `service instance number ethernet [name]`

Configure an EFP (service instance) and enter service instance configuration) mode.

- The number is the EFP identifier, an integer from 1 to 4000.
- (Optional) **ethernet** name is the name of a previously configured EVC. You do not need to use an EVC name in a service instance.

**Example:**

```
Rotuer(config)# service instance 1 ethernet
```

**Step 4** `service-policy {input | output} policy-map-name`

Attaches the specified policy map to the input or output interfaces .

- *policy-map-name*  
: Specifies the policy map.

**Example:**

```
Router(config-if-srv)# service-policy input col
```

**Step 5** `encapsulation {default | dot1q | priority-tagged | untagged}`

Configure encapsulation type for the service instance.

- **default**—Configure to match all unmatched packets.
- **dot1q**—Configure 802.1Q encapsulation.
- **priority-tagged**—Specify priority-tagged frames, VLAN-ID 0 and CoS value of 0 to 7.
- **untagged**—Map to untagged VLANs. Only one EFP per port can have untagged encapsulation.

**Example:**

```
Router(config-if-srv)# encapsulation dot1q 1
```

**Step 6** `bridge-domain bridge-id [split-horizon group group-id]`

Configure the bridge domain ID. The range is from 1 to 4000.

You can use the **split-horizon** keyword to configure the port as a member of a split horizon group. The *group-id* range is from 0 to 2.

**Example:**

```
Router(config-if-srv)# bridge-domain 1
```

**Step 7** `end`

Return to privileged EXEC mode.

**Example:**

```
Router(config-if-srv)# end
```

### Configuration Example

```
Router(config)# interface gigabitethernet 0/3/6
Router(config-if)# service instance 1 ethernet
Router(config-if-srv)# service-policy input co1
Router(config-if-srv)# encapsulation dot1q 1
Router(config-if-srv)# bridge-domain 1
Router(config-if-srv)# end
```

## Configuration Examples for Marking Network Traffic

### Example: Creating a Class Map for Marking Network Traffic

- The following is an example of configuring a class map with using match-any .

```
Router> enable
Router# configure terminal
Router(config)# interface gigabitethernet0/3/6
Router(config-if)# service instance 1 ethernet
Router(config-if-srv)# encapsulation dot1q 1
Router(config-if-srv)# bridge-domain 1
Device(config)# class-map match-any class1
Device(config-cmap)# match cos 1
Device(config-cmap)# end
```

- The following is an example of configuring a class map with using match-all .

```
Router> enable
Router# configure terminal
Router(config)# interface gigabitethernet0/3/6
Router(config-if)# service instance 1 ethernet
Router(config-if-srv)# encapsulation dot1q 1
Router(config-if-srv)# bridge-domain 1
Device(config)# class-map match-all class1
Device(config-cmap)# match cos 1
Device(config-cmap)# end
```

### Example Creating a Policy Map for Applying a QoS Feature to Network Traffic

The following is an example of creating a policy map to be used for traffic classification.

```
Router> enable
Router# configure terminal
Router(config)# policy-map policy1
Router(config-pmap)# class class1
Router(config-pmap-c)# set cos 2
Router(config-pmap-c)# end
Router# exit
```

## Example: Attaching a Traffic Policy to an Interface

The following example shows how to attach an existing traffic policy to an interface. After you define a traffic policy with the **policy-map** command, you can attach it to one or more interfaces by using the **service-policy** command in interface configuration mode. Although you can assign the same traffic policy to multiple interfaces, each interface can have only one traffic policy attached in the input direction and only one traffic policy attached in the output direction.

```
Router(config)# interface gigabitethernet0/3/6
Router(config-if)# service instance 1 ethernet
Router(config-if-srv)# service-policy input col
Router(config-if-srv)# encapsulation dot1q 1
Router(config-if-srv)# bridge-domain 1
Router(config-if)# service-policy input policy1
Router(config-if)# end
```

## Additional References for Marking Network Traffic

### Related Documents

Related Topic	Document Title
Cisco commands	<a href="#">Cisco IOS Master Commands List, All Releases</a>
QoS commands: complete command syntax, command modes, command history, defaults, usage guidelines, and examples	<i>Cisco IOS Quality of Service Solutions Command Reference</i>
MQC	“Applying QoS Features Using the MQC” module
Classifying network traffic	“Classifying Network Traffic” module

### Technical Assistance

Description	Link
The Cisco Support and Documentation website provides online resources to download documentation, software, and tools. Use these resources to install and configure the software and to troubleshoot and resolve technical issues with Cisco products and technologies. Access to most tools on the Cisco Support and Documentation website requires a Cisco.com user ID and password.	<a href="http://www.cisco.com/cisco/web/support/index.html">http://www.cisco.com/cisco/web/support/index.html</a>





## CHAPTER 3

# Classifying and Marking MPLS EXP

---

The QoS EXP Matching feature allows you to classify and mark network traffic by modifying the Multiprotocol Label Switching (MPLS) experimental bits (EXP) field in IP packets. This module contains conceptual information and the configuration tasks for classifying and marking network traffic using the MPLS EXP field.

- [Prerequisites for Classifying and Marking MPLS EXP, on page 17](#)
- [Restrictions for Classifying and Marking MPLS EXP, on page 17](#)
- [Information About Classifying and Marking MPLS EXP, on page 18](#)
- [How to Classify and Mark MPLS EXP, on page 19](#)
- [Configuration Examples for Classifying and Marking MPLS EXP, on page 24](#)
- [Additional References, on page 27](#)

## Prerequisites for Classifying and Marking MPLS EXP

- The router must be configured as an MPLS provider edge (PE) or provider (P) router, which can include the configuration of a valid label protocol and underlying IP routing protocols.

## Restrictions for Classifying and Marking MPLS EXP

- MPLS classification and marking can only occur in an operational MPLS Network.
- MPLS EXP classification and marking is supported on the main router interfaces for MPLS packet switching and imposition (simple IP imposition and Ethernet over MPLS (EoMPLS) imposition) and on Ethernet virtual circuits (EVCs) or Ethernet flow points (EFPs) for EoMPLS imposition.
- MPLS EXP classification or marking for bridged MPLS packets on EVCs or EFPs is not supported.
- MPLS EXP marking is supported only in the ingress direction.



---

**Note** MPLS EXP marking is supported on both ingress and egress directions on the Cisco RSP3 Module.

---

- If a packet is classified by IP type of service (ToS) or class of service (CoS) at ingress, it cannot be reclassified by MPLS EXP at egress (imposition case). However, if a packet is classified by MPLS at ingress it can be reclassified by IP ToS, CoS, or Quality of Service (QoS) group at egress (disposition case).




---

**Note** Quality of Service (QoS) group is the only egress classification supported on the Cisco RSP3 Module.

---

- If a packet is encapsulated in MPLS, the MPLS payload cannot be checked for other protocols such as IP for classification or marking. Only MPLS EXP marking affects packets encapsulated by MPLS.

## Information About Classifying and Marking MPLS EXP

### Classifying and Marking MPLS EXP Overview

The QoS EXP Matching feature allows you to organize network traffic by setting values for the MPLS EXP field in MPLS packets. By choosing different values for the MPLS EXP field, you can mark packets so that packets have the priority that they require during periods of congestion. Setting the MPLS EXP value allows you to:

- Classify traffic

The classification process selects the traffic to be marked. Classification accomplishes this by partitioning traffic into multiple priority levels, or classes of service. Traffic classification is the primary component of class-based QoS provisioning. For more information, see the “Classifying Network Traffic” module.

- Police and mark traffic

Policing causes traffic that exceeds the configured rate to be discarded or marked to a different drop level. Marking traffic is a way to identify packet flows to differentiate them. Packet marking allows you to partition your network into multiple priority levels or classes of service. For more information, see the “Marking Network Traffic” module.

### MPLS Experimental Field

The MPLS experimental bits (EXP) field is a 3-bit field in the MPLS header that you can use to define the QoS treatment (per-hop behavior) that a node should give to a packet. In an IP network, the DiffServ Code Point (DSCP) (a 6-bit field) defines a class and drop precedence. The EXP bits can be used to carry some of the information encoded in the IP DSCP and can also be used to encode the dropping precedence.

By default, Cisco IOS Software copies the three most significant bits of the DSCP or the IP precedence of the IP packet to the EXP field in the MPLS header. This action happens when the MPLS header is initially imposed on the IP packet. However, you can also set the EXP field by defining a mapping between the DSCP or IP precedence and the EXP bits. This mapping is configured using the **set mpls experimental** or **police** commands. For more information, see the “How to Classify and Mark MPLS EXP” section.

## Benefits of MPLS EXP Classification and Marking

If a service provider does not want to modify the value of the IP precedence field in packets transported through the network, they can use the MPLS EXP field value to classify and mark IP packets.



**Note** The MPLS EXP field value cannot be used to mark IP packets at disposition on the Cisco RSP3 Module.

By choosing different values for the MPLS EXP field, you can mark critical packets so that those packets have priority if network congestion occurs.

## How to Classify and Mark MPLS EXP

### Classifying MPLS Encapsulated Packets



**Note** MPLS EXP topmost classification is not supported for bridged MPLS packets on Ethernet virtual circuits (EVC) or Ethernet flow points (EFP).

#### Procedure

	Command or Action	Purpose
<b>Step 1</b>	<b>enable</b> <b>Example:</b> Router> enable	Enables privileged EXEC mode. <ul style="list-style-type: none"> <li>• Enter your password if prompted.</li> </ul>
<b>Step 2</b>	<b>configure terminal</b> <b>Example:</b> Router# configure terminal	Enters global configuration mode.
<b>Step 3</b>	<b>class-map [match-all   match-any]</b> <i>class-map-name</i> <b>Example:</b> Router(config)# class-map exp3	Creates a class map to be used for matching traffic to a specified class, and enters class-map configuration mode. <ul style="list-style-type: none"> <li>• Enter the class map name.</li> </ul>
<b>Step 4</b>	<b>match mpls experimental topmost</b> <i>mpls-exp-value</i> <b>Example:</b> Router(config-cmap)# match mpls experimental topmost 3	Specifies the match criteria.  <b>Note</b> The <b>match mpls experimental topmost</b> command classifies traffic on the basis of the EXP value in the topmost label header.

	Command or Action	Purpose
<b>Step 5</b>	<b>end</b>  <b>Example:</b>  <pre>Router(config-cmap)# end</pre>	(Optional) Returns to privileged EXEC mode.

## Marking MPLS EXP on All Imposed Labels

Perform this task to set the value of the MPLS EXP field on all imposed label entries.

### Before you begin

The router supports MPLS EXP marking only in the ingress direction.

In typical configurations, marking MPLS packets at imposition is used with ingress classification on IP ToS or CoS fields. However, generic matching with the class default value is supported with other ingress attributes such as **vlan**.



**Note** For IP imposition marking, the IP precedence value is copied to the MPLS EXP value by default.



**Note** For EVC configuration, a policy map that performs matching based on the CoS and that sets the EXP imposition value should be used to copy CoS values to the EXP value.



**Note** The **set mpls experimental imposition** command works only on packets that have new or additional MPLS labels added to them.



**Note** Configure **set qos-group** command to mark MPLS EXP label. The **set mpls experimental imposition** command is *not* supported for xconnect/L2VPN on the Cisco RSP3 Module.

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	<b>enable</b>  <b>Example:</b>  <pre>Router&gt; enable</pre>	Enables privileged EXEC mode. <ul style="list-style-type: none"> <li>• Enter your password if prompted.</li> </ul>
<b>Step 2</b>	<b>configure terminal</b>  <b>Example:</b>	Enters global configuration mode.

	Command or Action	Purpose
	<code>Router# configure terminal</code>	
<b>Step 3</b>	<b>policy-map</b> <i>policy-map-name</i> <b>Example:</b> <code>Router(config)# policy-map mark-up-exp-2</code>	Specifies the name of the policy map to be created and enters policy-map configuration mode. <ul style="list-style-type: none"> <li>• Enter the policy map name.</li> </ul>
<b>Step 4</b>	<b>class</b> <i>class-map-name</i> <b>Example:</b> <code>Router(config-pmap)# class prec012</code>	Creates a class map to be used for matching traffic to a specified class, and enters class-map configuration mode. <ul style="list-style-type: none"> <li>• Enter the class map name.</li> </ul>
<b>Step 5</b>	<b>set mpls experimental imposition</b> <i>mpls-exp-value</i> <b>Example:</b> <code>Router(config-pmap-c)# set mpls experimental imposition 2</code>	Sets the value of the MPLS EXP field on all imposed label entries.
<b>Step 6</b>	<b>end</b> <b>Example:</b> <code>Router(config-pmap-c)# end</code>	(Optional) Returns to privileged EXEC mode.

## Marking MPLS EXP on Label Switched Packets

Perform this task to set the MPLS EXP field on label switched packets.

### Before you begin



**Note** The **set mpls experimental topmost** command works only on packets that are already MPLS encapsulated.



**Note** The router supports MPLS EXP marking in the ingress direction only, and does not support MPLS EXP classification or marking for bridged MPLS packets on EVCs or EFPs.

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	<b>enable</b> <b>Example:</b>	Enables privileged EXEC mode. <ul style="list-style-type: none"> <li>• Enter your password if prompted.</li> </ul>

	Command or Action	Purpose
	<code>Router&gt; enable</code>	
<b>Step 2</b>	<b>configure terminal</b> <b>Example:</b> <code>Router# configure terminal</code>	Enters global configuration mode.
<b>Step 3</b>	<b>policy-map <i>policy-map-name</i></b> <b>Example:</b> <code>Router(config)# policy-map mark-up-exp-2</code>	Specifies the name of the policy map to be created and enters policy-map configuration mode. <ul style="list-style-type: none"><li>• Enter the policy map name.</li></ul>
<b>Step 4</b>	<b>class <i>class-map-name</i></b> <b>Example:</b> <code>Router(config-pmap)# class-map exp012</code>	Creates a class map to be used for matching traffic to a specified class, and enters class-map configuration mode. <ul style="list-style-type: none"><li>• Enter the class map name.</li></ul>
<b>Step 5</b>	<b>set mpls experimental topmost</b> <i>mpls-exp-value</i> <b>Example:</b> <code>Router(config-pmap-c)# set mpls experimental topmost 2</code>	Sets the MPLS EXP field value in the topmost label on the output interface.
<b>Step 6</b>	<b>end</b> <b>Example:</b> <code>Router(config-pmap-c)# end</code>	(Optional) Returns to privileged EXEC mode.

## Configuring Conditional Marking

To conditionally set the value of the MPLS EXP field on all imposed label, perform the following task:

### Before you begin



**Note** The **set-mpls-exp-topmost-transmit** action affects MPLS encapsulated packets only. The **set-mpls-exp-imposition-transmit** action affects any new labels that are added to the packet.



**Note** The conditional marking is supported on the router in the ingress direction only.



**Note** The following are *not* supported on the Cisco RSP3 Module:

- IPv6 ACL
- Conditional Marking

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	<b>enable</b> <b>Example:</b> <pre>Router&gt; enable</pre>	Enables privileged EXEC mode. <ul style="list-style-type: none"> <li>• Enter your password if prompted.</li> </ul>
<b>Step 2</b>	<b>configure terminal</b> <b>Example:</b> <pre>Router# configure terminal</pre>	Enters global configuration mode.
<b>Step 3</b>	<b>policy-map <i>policy-map-name</i></b> <b>Example:</b> <pre>Router(config)# policy-map ip2tag</pre>	Specifies the name of the policy map to be created and enters policy-map configuration mode. <ul style="list-style-type: none"> <li>• Enter the policy map name.</li> </ul>
<b>Step 4</b>	<b>class <i>class-map-name</i></b> <b>Example:</b> <pre>Router(config-pmap)# class iptcp</pre>	Creates a class map to be used for matching traffic to a specified class, and enters policy-map class configuration mode. <ul style="list-style-type: none"> <li>• Enter the class map name.</li> </ul>
<b>Step 5</b>	<b>police cir <i>bps</i> bc pir <i>bps</i> be</b> <b>Example:</b> <pre>Router(config-pmap-c)# police cir 1000000 pir 2000000</pre>	Defines a policer for classified traffic and enters policy-map class police configuration mode.
<b>Step 6</b>	<b>conform-action</b> <b>[set-mpls-exp-imposition-transmit</b> <i>mpls-exp-value</i>   <b>set-mpls-exp-topmost-transmit</b> <i>mpls-exp-value</i> ] <b>Example:</b> <pre>Router(config-pmap-c-police)# conform-action set-mpls-exp-imposition-transmit 3</pre>	Defines the action to take on packets that conform to the values specified by the policer. <ul style="list-style-type: none"> <li>• In this example, if the packet conforms to the committed information rate (cir) or is within the conform burst (bc) size, the MPLS EXP field is set to 3.</li> </ul>

	Command or Action	Purpose
<b>Step 7</b>	<b>exceed-action</b> <code>[set-mpls-exp-imposition-transmit  mpls-exp-value    set-mpls-exp-topmost-transmit  mpls-exp-value]</code> <b>Example:</b> <pre>Router(config-pmap-c-police) # exceed-action set-mpls-exp-imposition-transmit 2</pre>	Defines the action to take on packets that exceed the values specified by the policer. <ul style="list-style-type: none"> <li>In this example, if the packet exceeds the cir rate and the bc size, but is within the peak burst (be) size, the MPLS EXP field is set to 2.</li> </ul>
<b>Step 8</b>	<b>violate-action drop</b> <b>Example:</b> <pre>Router(config-pmap-c-police) # violate-action drop</pre>	Defines the action to take on packets whose rate exceeds the peak information rate (pir) and is outside the bc and be ranges. <ul style="list-style-type: none"> <li>You must specify the exceed action before you specify the violate action.</li> <li>In this example, if the packet rate exceeds the pir rate and is outside the bc and be ranges, the packet is dropped.</li> </ul>
<b>Step 9</b>	<b>end</b> <b>Example:</b> <pre>Router(config-pmap-c-police) # end</pre>	(Optional) Returns to privileged EXEC mode.

## Configuration Examples for Classifying and Marking MPLS EXP

### Example: Classifying MPLS Encapsulated Packets

#### Defining an MPLS EXP Class Map

The following example defines a class map named exp3 that matches packets that contains MPLS experimental value 3:

```
Router(config) # class-map exp3
Router(config-cmap) # match mpls experimental topmost 3
Router(config-cmap) # exit
```

#### Defining a Policy Map and Applying the Policy Map to an Ingress Interface

The following example uses the class map created in the example above to define a policy map. This example also applies the policy map to a physical interface for ingress traffic.

```
Router(config) # policy-map change-exp-3-to-2
Router(config-pmap) # class exp3
```

```

Router(config-pmap-c)# set mpls experimental topmost 2
Router(config-pmap)# exit
Router(config)# interface GigabitEthernet 0/0/0
Router(config-if)# service-policy input change-exp-3-to-2
Router(config-if)# exit

```

### Defining a Policy Map and Applying the Policy Map to an Egress Interface

The following example uses the class map created in the example above to define a policy map. This example also applies the policy map to a physical interface for egress traffic.

```

Router(config)# policy-map WAN-out
Router(config-pmap)# class exp3
Router(config-pmap-c)# shape average 10000000
Router(config-pmap-c)# exit
Router(config-pmap)# exit
Router(config)# interface GigabitEthernet 0/0/0
Router(config-if)# service-policy output WAN-out
Router(config-if)# exit

```

## Example: Marking MPLS EXP on All Imposed Labels

### Defining an MPLS EXP Imposition Policy Map

The following example defines a policy map that sets the MPLS EXP imposition value to 2 based on the IP precedence value of the forwarded packet:

```

Router# configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)# class-map prec012
Router(config-cmap)# match ip prec 0 1 2
Router(config-cmap)# exit
Router(config)# policy-map mark-up-exp-2
Router(config-pmap)# class prec012
Router(config-pmap-c)# set mpls experimental imposition 2
Router(config-pmap-c)# exit
Router(config-pmap)# exit

```

### Applying the MPLS EXP Imposition Policy Map to a Main Interface

The following example applies a policy map to Gigabit Ethernet interface 0/0/0:

```

Router# configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)# interface GigabitEthernet 0/0/0
Router(config-if)# service-policy input mark-up-exp-2
Router(config-if)# exit

```

### Applying the MPLS EXP Imposition Policy Map to an EVC

The following example applies a policy map to the Ethernet Virtual Connection specified by the **service instance** command:

```

Router# configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)# interface GigabitEthernet 0/0/0
Router(config-if)# service instance 100 ethernet
Router(config-if-srv)# xconnect 100.0.0.1 encapsulation mpls 100
Router(config-if-srv)# service-policy input mark-up-exp-2
Router(config-if-srv)# exit
Router(config-if)# exit

```

## Example: Marking MPLS EXP on Label Switched Packets

### Defining an MPLS EXP Label Switched Packets Policy Map

The following example defines a policy map that sets the MPLS EXP topmost value to 2 according to the MPLS EXP value of the forwarded packet:

```

Router# configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)# class-map exp012
Router(config-cmap)# match mpls experimental topmost 0 1 2
Router(config-cmap)# exit
Router(config-cmap)# policy-map mark-up-exp-2
Router(config-pmap)# class exp012
Router(config-pmap-c)# set mpls experimental topmost 2
Router(config-pmap-c)# exit
Router(config-pmap)# exit

```

### Applying the MPLS EXP Label Switched Packets Policy Map to a Main Interface

The following example shows how to apply the policy map to a main interface:

```

Router# configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)# interface GigabitEthernet 0/0/0
Router(config-if)# service-policy input mark-up-exp-2
Router(config-if)# exit

```

## Example: Configuring Conditional Marking

The example in this section creates a policer for the **iptcp** class, which is part of the **ip2tag** policy map, and attaches the policy map to the Gigabit Ethernet interface.

```

Router(config)# policy-map ip2tag
Router(config-pmap)# class iptcp
Router(config-pmap-c)# police cir 1000000 pir 2000000
Router(config-pmap-c-police)# conform-action set-mpls-exp-imposition-transmit 3
Router(config-pmap-c-police)# exceed-action set-mpls-exp-imposition-transmit 2
Router(config-pmap-c-police)# violate-action drop
Router(config-pmap-c-police)# exit
Router(config-pmap-c)# exit
Router(config-pmap)# exit
Router(config)# interface GigabitEthernet 0/0/1
Router(config-if)# service-policy input ip2tag

```

## Additional References

### Related Documents

Related Topic	Document Title
Cisco IOS commands	<a href="#">Cisco IOS Master Commands List, All Releases</a>
QoS commands	<i>Cisco IOS Quality of Service Solutions Command Reference</i>
Classifying network traffic	“Classifying Network Traffic” module
Marking network traffic	“Marking Network Traffic” module

### Standards and RFCs

Standard/RFC	Title
No new or modified standards are supported, and support for existing standards has not been modified.	

### MIBs

MIB	MIBs Link
No new or modified MIBs are supported, and support for existing MIBs has not been modified.	To locate and download MIBs for selected platforms, Cisco software releases, and feature sets, use Cisco MIB Locator found at the following URL: <a href="http://www.cisco.com/go/mibs">http://www.cisco.com/go/mibs</a>

### Technical Assistance

Description	Link
The Cisco Support and Documentation website provides online resources to download documentation, software, and tools. Use these resources to install and configure the software and to troubleshoot and resolve technical issues with Cisco products and technologies. Access to most tools on the Cisco Support and Documentation website requires a Cisco.com user ID and password.	<a href="http://www.cisco.com/cisco/web/support/index.html">http://www.cisco.com/cisco/web/support/index.html</a>





## CHAPTER 4

# Priority Shaper

---

Earlier, when the priority of a queue at Per-Hop Behavior (PHB) was propagated all the way up the hierarchy towards the channel level, the PHB classes that had priority at PHB level would only be prioritized over other classes of subchannels. To avoid this, Priority Shaper feature is implemented.

Priority Shaper feature helps to balance the packet drops between the streams when multiple streams egress out of a priority queue. Egress QoS policy is supported on Priority Shaper.

- [Restrictions for Priority Shaper, on page 29](#)
- [Configuring Priority Shaper, on page 29](#)

## Restrictions for Priority Shaper

- Priority Shaper is supported only for PHB level classes.
- Egress QoS Policy map with Priority Shaper can be applied only on the member interface of port channel and not at the logical level.
- Policer configuration is not supported with the Priority Shaper configuration under same class map.
- Priority Traffic Latency is increased during congestion with Priority Shaper configuration at Q level. Configure the queue limit with a lesser value for the priority queue to reduce the latency of priority traffic.
- If the packet is from a 10G interface to a 1G interface, the burstiness is introduced. Due to this, dequeuing rate of this strict priority queue may be sometimes more than enqueueing. As a result, very few packet counters are seen in other queues.

## Configuring Priority Shaper

Perform the following steps to configure Priority Shaper.

### Procedure

---

**Step 1**      **enable**

**Example:**

```
Device> enable
```

Enables privileged EXEC mode.

- Enter your password if prompted.

**Step 2**     **configure terminal**

**Example:**

```
Device# configure terminal
```

Enters global configuration mode.

**Step 3**     **class-map** *class-map-name*

**Example:**

```
Device(config)#class-map class_priority
```

Configures class map and specifies the name of the class map to be created.

**Step 4**     **policy-map** *policy-map-name*

**Example:**

```
Device(config)#policy-map shape_priority
```

Configures the policy map.

**Step 5**     **class** *class-map-name*

**Example:**

```
Device(config-pmap)#class class_priority
```

Specifies the name of the class whose policy you want to create and enters policy-map class configuration mode. This class is associated with the class map that is created earlier.

**Step 6**     **priority level** *<level 1/2 >* **percent** *<percentage 1-100 >* or **priority level** *<level 1/2>* *<kbps>* *<burst size>*

**Example:**

```
Device(config-pmap-c)# priority <1-10000000> Kilo Bits per second
Device(config-pmap-c)# priority Percent <1-100>
Device(config-pmap-c)# priority level <1-2> <1-10000000> Kilo Bits per second
Device(config-pmap-c)# priority level <1-2> percent <1-100>
```

Assigns priority to a traffic class at the priority level specified.

**Note**     **level** is the level of priority assigned to the priority class. Valid values are 1 (high priority) and 2 (low priority). The default value is 1. Do not specify the same priority level for two different classes in the same policy map.

**Step 7**     **interface** *interface-type interface-number*

**Example:**

```
Device(config)# interface gigabitethernet 0/0/1
```

Specifies the port to attach to the policy map and allows to enter the interface configuration mode. Valid interfaces are physical ports.

**Step 8**     **service-policy output** *policy-map-name*

**Example:**

```
Device(config-if)# service instance 1 ethernet
Device(config-if-srv)# service-policy output shape_priority
```

Applies output policy to the interface.

**Note** You can also attach the service policy over the service instance.

**Step 9** end

**Example:**

```
Device(config)#end
```

Returns to privileged EXEC mode.

---

## Configuration Examples for Priority Shaper

This section shows sample configurations for Priority Shaper.

### Example: Configuring Priority Shaper

### Verifying Priority Shaper

Use the following command to verify that the Priority Shaper feature is configured on your interface.

