



# Cisco Secure Equipment Access integration with Cisco Catalyst SD-WAN

- [Cisco Secure Equipment Access integration with Cisco Catalyst SD-WAN, on page 1](#)
- [Information about Cisco Secure Equipment Access integration, on page 2](#)
- [Cisco Secure Equipment Access application, on page 3](#)
- [Using the Cisco Secure Equipment Access solution, on page 3](#)
- [Supported platforms for Cisco Secure Equipment Access integration, on page 3](#)
- [Prerequisites for Cisco Secure Equipment Access integration, on page 3](#)
- [Restrictions for Cisco Secure Equipment Access integration, on page 4](#)
- [Configure Cisco Secure Equipment Access integration, high level, on page 5](#)
- [Verify that Cisco SD-WAN Manager has connected to the Cisco Secure Equipment Access cloud portal, on page 14](#)
- [Verify that the Cisco Secure Equipment Access application is operating on a device, using the CLI, on page 14](#)
- [Monitor the Cisco Secure Equipment Access application on devices, on page 15](#)

## Cisco Secure Equipment Access integration with Cisco Catalyst SD-WAN

**Table 1: Feature history**

Feature name	Release information	Feature description
Cisco Secure Equipment Access integration	Cisco IOS XE Catalyst SD-WAN Release 17.16.1a Cisco Catalyst SD-WAN Manager Release 20.16.1	Cisco Secure Equipment Access (SEA) is a solution that provides remote access to network-connected assets. Assets can include anything reachable by IP address, such as servers, industrial internet of things (IIoT) devices, and so on.  Integration with Cisco Catalyst SD-WAN enables you to use Cisco SD-WAN Manager to deploy the Cisco SEA solution within a Cisco Catalyst SD-WAN network.

# Information about Cisco Secure Equipment Access integration

Cisco Secure Equipment Access (SEA) is a solution that provides remote access to network-connected assets. Assets can include anything reachable by IP address, such as servers, industrial internet of things (IIoT) devices, and so on. Integration with Cisco Catalyst SD-WAN enables you to use Cisco SD-WAN Manager to

- install the SEA agent on devices, such as routers, in the Cisco Catalyst SD-WAN overlay network
- configure connectivity between the devices in the overlay network and the Cisco Secure Equipment Access cloud portal, and
- configure how remote assets connect to the devices.

After you install the SEA agent on devices and configure the connectivity described here, other remote access tasks operate as usual for Cisco SEA. See [Secure Equipment Access Overview](#) on the Cisco DevNet site.

## Benefits of Cisco Secure Equipment Access integration

Remote access is important for configuring, managing, and troubleshooting operational technology (OT) assets without time-consuming and costly site visits. Cisco Secure Equipment (SEA) combines all the benefits of a Zero-Trust Network Access (ZTNA) solution with a network architecture that makes it simple to deploy at scale in operational environments. There is no dedicated hardware to install and manage, or complex firewall rules to configure and maintain. It features comprehensive security capabilities, with advanced cybersecurity controls and easy-to-build policies based on identities and contexts.

Cisco SEA provides numerous benefits:

- **Operational efficiency**  
Enables operations teams easy remote access to OT assets, even those behind NAT boundaries.
- **Simple installation and scalability**  
Operates through existing routers and switches, so there is no need for dedicated appliances or complex firewall setups.
- **Strong security controls**  
Authenticates users with MFA and SSO. Cisco SEA verifies each user's security posture, providing access only to relevant assets.
- **Least-privilege access**  
Allows select users to access only specific devices, using only certain protocols, and only at defined times.
- **Audit trail**  
Records sessions and builds audit trails for investigation and compliance.

# Cisco Secure Equipment Access application

## Installing the SEA agent

A Cisco IOx application called the Cisco Secure Equipment Access (SEA) agent provides Cisco SEA functionality to a device (a router in the network). When you enable Cisco SEA on a device through Cisco SD-WAN Manager, the device downloads and installs the Cisco SEA application.

## Cisco SEA cloud portal

After a successful installation of the Cisco SEA agent, the device communicates with the Cisco SEA cloud portal. It appears in the device list in the Cisco SEA cloud portal.

# Using the Cisco Secure Equipment Access solution

The procedures described here enable devices to operate as part of the Cisco Secure Equipment Access solution. After you've set this up, use Cisco SEA to manage access to remote assets. For information, see the [Cisco Secure Equipment Access documentation](#) on the Cisco DevNet site.

# Supported platforms for Cisco Secure Equipment Access integration

*Table 2: Supported platforms*

Platform series	Models
Cisco Catalyst IR1100 Rugged Series Routers	Cisco Catalyst IR1101
Cisco Catalyst IR1800 Rugged Series Routers	Cisco Catalyst IR1821 Cisco Catalyst IR1831 Cisco Catalyst IR1833 Cisco Catalyst IR1835

# Prerequisites for Cisco Secure Equipment Access integration

## Network reachability to the Cisco Secure Equipment Access portal

Before deploying a configuration group that includes the Cisco SEA feature, ensure that the routers in the network that will run the Cisco SEA agent application have network reachability to the Cisco SEA cloud portal.

Because of this requirement, configuring devices to work with Cisco SEA is a two-step process:

1. Deploying a configuration group to a set of devices to establish reachability to a Cisco SEA cloud portal.
2. Deploying a configuration group to a set of devices to enable Cisco SEA on the devices.

After you confirm reachability in the previous step, you can modify the same configuration group that you used in that step, adding the Cisco SEA feature, and deploy the configuration group to the devices.

This same requirement applies when you add devices to a configuration group that has the Cisco SEA feature and that you have deployed to devices already. If you want to deploy the configuration group to additional devices, make note of the above and first establish reachability to a Cisco SEA cloud portal for the additional devices.

### Virtual port group interfaces

The Cisco SEA application requires virtual port group (VPG) interfaces 7 to 10 to be available. Ensure that these VPG interfaces are not configured for use with a different application.

The Cisco SEA application uses VPG interface 7 to connect to the Cisco SEA cloud portal, and reserves VPG interfaces 8 to 10 to connect to remote assets. For restrictions that apply to virtual port groups, see [Restrictions for Cisco Secure Equipment Access integration, on page 4](#).

### IP address for virtual port group interface 7

For each router, configure an IP address for VPG interface 7 connectivity to the Cisco SEA cloud portal.

## Restrictions for Cisco Secure Equipment Access integration

### Single Cisco SEA cloud portal

Cisco SD-WAN Manager can connect to only a single Cisco SEA cloud portal.

### Single Cisco SD-WAN Manager

A single organization, as defined in the Cisco SEA cloud portal, can connect to only one Cisco SD-WAN Manager. This has consequences for a Cisco SEA cloud portal that is operating in a multitenant environment, because a Cisco SD-WAN Manager instance represents a single organization.

### Virtual port groups (VPG) and remote asset connectivity

The Cisco SEA application uses VPG interface 7 to connect to the Cisco SEA cloud portal, and reserves VPG interfaces 8 to 10 to connect to assets. A single VPG interface (8, 9, or 10) can provide connectivity for a single remote asset network. The remote asset network can include more than one asset.

### Editing Secure Equipment Access Cloud fields

On the **Configuration > Network Hierarchy > External Services** page, in the **Secure Equipment Access Cloud** section, if you update the **VPN** or **Proxy** fields, Cisco SD-WAN Manager resets the IP address of the remote server called SEA-RemoteServer.

If you edit these fields, restore the IP address of the remote server:

1. From the Cisco SD-WAN Manager menu, choose **Maintenance > Software Repository > Remote server**.

2. Edit the remote server for SEA to use the locally hosted remote server that you have configured.
  - a. Edit the automatically created server, called: SEA-RemoteServer
  - b. Change the IP address to use the locally hosted remote server that hosts the SEA Agent image.

### API key

The API key used for establishing a secure link with the Cisco SEA cloud portal has an expiration period of one year.

### Remote server

In Cisco Catalyst SD-WAN Manager Release 20.16.x, the Cisco SEA Agent image is locally hosted on a remote server using HTTP protocol only. SCP and FTP protocols are not supported.

### Multitenancy

- In Cisco Catalyst SD-WAN Manager Release 20.16.x, multitenant environments do not support integration with Cisco Secure Equipment Access.
- From Cisco Catalyst SD-WAN Manager Release 20.18.1, multitenant environments support integration with Cisco Secure Equipment Access only at the tenant level, not at the provider level.

# Configure Cisco Secure Equipment Access integration, high level

## Procedure

---

- Step 1** [Configure a connection to a Cisco Secure Equipment Access portal in the Network Hierarchy, on page 6](#)
  - Step 2** [Upload the Cisco SEA application to Cisco SD-WAN Manager, on page 8](#)
  - Step 3** [Create a Configuration Group Profile with an SEA Feature, on page 9](#)
  - Step 4** [Add a Cisco SEA Feature to a Configuration Group, on page 12](#)
  - Step 5** [Deploy a Configuration Group with a Cisco SEA Feature, on page 13](#)
- 

### What to do next

After the configuration steps, you can monitor the activity of the Cisco SEA application operating on a device. See [Monitor the Cisco Secure Equipment Access application on devices, on page 15](#).

## Configure a connection to a Cisco Secure Equipment Access portal in the Network Hierarchy

Configure a secure connection between your network devices and the Cisco Secure Equipment Access (SEA) cloud portal within the Network Hierarchy using Cisco SD-WAN Manager.

### Before you begin

#### API key

1. In the Cisco SEA cloud portal, create an API key to enable devices to establish a secure link with the Cisco SEA cloud portal.

For information about creating an API key, see the [Cisco Secure Equipment Access documentation](#) on the Cisco DevNet site. When you generate the API key, if there is an option to enable the key for external controller integration, choose that option.

2. Copy the API key and have it ready for the procedure.

#### Connectivity

The devices in your network that operate with Cisco SEA require network reachability to the Cisco SEA cloud portal. Ensure that your network topology provides this reachability.

#### Remote server

In Cisco Catalyst SD-WAN Manager Release 20.16.x, set up a remote server. This is a locally hosted file server, required to host the Cisco SEA Agent image. Refer to the Register Remote Server section of the *Cisco Catalyst SD-WAN Monitor and Maintain Configuration Guide* for setup instructions.

### Procedure

- 
- Step 1** From the Cisco SD-WAN Manager menu, choose **Configuration > Network Hierarchy**.
- Step 2** Click **External Services**.
- Step 3** In the **Secure Equipment Access Cloud** pane, enter these:

*Table 3: Secure Equipment Access Cloud Pane*

Field	Description
Cluster access type	Choose an API key option: <ul style="list-style-type: none"> <li>• <b>Manual:</b> Enter the API key manually by copying it from the Cisco SEA cloud portal.</li> <li>• <b>Auto:</b> Retrieve the API key automatically from the Cisco SEA cloud portal.</li> </ul>

Field	Description
API Key	(This field appears if you choose <b>Manual</b> in <b>Cluster access type</b> .) Enter the API key that you generated in the Cisco SEA cloud portal. <b>Note</b> Starting from SD-WAN Manager 26.1.1, you can edit the Secure Equipment Access (SEA) API key in the Secure Equipment Access Cloud window for external services. Updating the API key does not require stopping any running configurations. You must re-deploy the configuration groups after updating the SEA API key.
Select Secure Equipment Access Cluster	(This field appears if you choose <b>Auto</b> in <b>Cluster access type</b> .) Choose the cluster name associated with your Cisco SEA cloud portal account. Click <b>Connect</b> and log in with your Cisco SEA cloud portal credentials.
VPN	VPN providing reachability between devices and the Cisco SEA cloud portal. <b>Note</b> If you later edit this field, see the restriction regarding editing Secure Equipment Access Cloud fields, in <a href="#">Restrictions for Cisco Secure Equipment Access integration, on page 4</a> .
Proxy	If devices in your network require a proxy for connectivity between devices and the Cisco SEA cloud portal, enter the IP address of the proxy. <b>Note</b> If you later edit this field, see the restriction regarding editing Secure Equipment Access Cloud fields, in <a href="#">Restrictions for Cisco Secure Equipment Access integration, on page 4</a> .

**Step 4** Click **Save**.

**Step 5** If you are using Cisco Catalyst SD-WAN Manager Release 20.16.x, do this:

- Open **Maintenance > Software Repository > Remote server**.
- Edit the automatically created remote server called: SEA-RemoteServer to use the locally hosted remote server that you have configured.
- Change the IP address to use the locally hosted remote server that hosts the SEA Agent image.

**Note**

From Cisco Catalyst SD-WAN Manager Release 20.18.1 or later, SD-WAN Manager does not automatically create a remote server entry.

---

**What to do next**

From Cisco Catalyst SD-WAN Manager Release 20.18.1 or later, upload the Cisco SEA application to SD-WAN Manager to connect to the Cisco SEA cloud.

## Upload the Cisco SEA application to Cisco SD-WAN Manager

You can host a Cisco SEA application in one of the two ways:

- Upload the Cisco SEA application to the SD-WAN Manager local repository, or
- Upload the Cisco SEA application to a remote repository.

### Before you begin

Minimum supported release: Cisco Catalyst SD-WAN Manager Release 20.18.1 and later

Download the Cisco SEA application image.

Download the [ARM image file for the Cisco SEA application](#). Note that the **App type** should be **seaAgent**.

### Procedure

**Step 1** **Method 1:** If you choose to host the SEA Agent image in the SD-WAN Manager local repository, follow these steps.

This option is available in a single-tenant environment, or for a service provider operating a multitenant environment.

- From the Cisco SD-WAN Manager menu, choose **Maintenance > Software Repository**.
- Click **Virtual Images**.
- Click **Add New Virtual Image** and select **Manager**.
- Choose the SEA image that you have downloaded and click **Upload**.

SD-WAN Manager creates an entry in **Virtual Images** for the locally hosted SEA image.

**Step 2** **Method 2:** If you choose to host the SEA Agent image on a remote repository server, follow these steps.

This option is available in a single-tenant environment, or for tenants in a multitenant environment. Tenants in a multitenant environment can use this option if the SEA Agent image is not available in the local SD-WAN Manager repository.

- Set up a file server and register it in SD-WAN Manager. Refer to the Register Remote Server section of the *Cisco Catalyst SD-WAN Monitor and Maintain Configuration Guide* for setup instructions.
- From the Cisco SD-WAN Manager menu, choose **Maintenance > Software Repository > Virtual Images**.
- Click **Add New Virtual Image** and select **Remote Server**.
- Enter the SEA image file name.
- For **Select service type**, choose **App-Hosting**.
- For **Select app type**, choose **SEA-Enterprise-Agent**.
- Enter the version of the downloaded app.

You can see the software version on the software download page and in the package.yaml that is extracted from the SEA Agent image file (a tar file).

- For **Select architecture**, choose **aarch64**.
- In the **Remote Server** section, select the name of the remote server that you have registered.

The **Remote Server Details** shows the details of the locally hosted server.

- Click **Save**.

SD-WAN Manager creates an entry in **Virtual Images** for the remotely hosted SEA Agent image.

---

## Create a Configuration Group Profile with an SEA Feature

### Before you begin

On the **Configuration > Configuration Groups** page, choose either

- **SD-WAN**, or
- **SD-Routing**

as the solution type.

### Procedure

---

**Step 1** From the Cisco SD-WAN Manager menu, choose **Configuration > Configuration Groups**.

**Step 2** Create and configure an [SEA](#) feature in an Other profile.

- a. Enter a name and description for the feature.

*Table 4: Name and Description*

Field	Description
Name	Name for the feature.
Description	Optionally, add a description.

- b. Configure the connection between the Cisco SEA agent and the physical interface of the host device, using virtual port group (VPG) 7. This is necessary to enable the Cisco SEA agent to reach the Cisco SEA cloud portal.

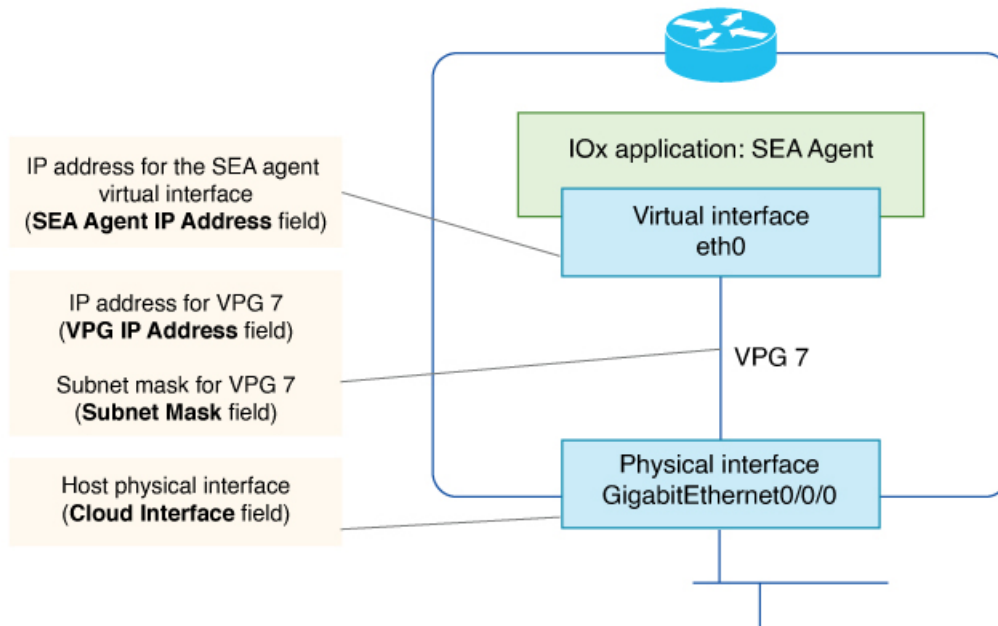


Table 5: Base Configuration

Field	Description
<b>VPG IP Address</b>	IP address to assign to virtual port group (VPG) 7. This VPG is a virtual link between the Cisco SEA agent and a physical interface of the host device. Example: 10.100.1.1
<b>Subnet Mask</b>	Subnet mask for VPG interface 7, which connects to the Cisco SEA cloud portal. Together with <b>VPG IP Address</b> , this defines the address space for the VPG 7 network. Example: 255.255.252.0
<b>SEA Agent IP Address</b>	IP address to assign to the Cisco SEA cloud agent to map it to VPG 7. Enter an address within the address space defined by <b>VPG IP Address</b> and <b>Subnet Mask</b> . Example: 10.100.1.2

Field	Description
<b>Cloud Interface</b>	<p>This field appears when configuring an SEA feature for use with the SD-Routing solution.</p> <p>Enter the physical interface that the device uses to connect to the Cisco SEA cloud portal. The interface type can include cellular.</p> <p>Example: GigabitEthernet0/0/0</p> <p>Example: Cellular0/1/0</p> <p><b>Note</b> For a device that you are configuring for the SD-WAN solution (not the SD-Routing solution), the VPG automatically connects to the host interface used for the control connection between the host device and Cisco SD-WAN Manager.</p>

- c. Optionally, configure one or more asset networks for connectivity to assets.

*Table 6: Asset Access Networks (optional)*

Field	Description
<b>Add Access Network</b>	Configure connectivity for up to three asset networks, each of which can include more than one asset.
<b>Service VPN</b>	<p>(This field appears when configuring an SEA feature for use with the SD-WAN solution.)</p> <p>If your assets are distributed across multiple different service VPNs, you may need to add each of the service VPNs here.</p> <p><b>Note</b> Configure route leaking to provide connectivity between (a) the service VPN used for connectivity with the Cisco SEA cloud portal, and (b) each service VPN that you configure here.</p>
<b>Asset Interface</b>	<p>(This field appears when configuring an SEA feature for use with the SD-Routing solution.)</p> <p>Physical interface that the device is using to connect to the asset network.</p>
<b>VPG IP Address</b>	IP address to assign to the VPG interface on the router.
<b>SEA Agent IP Address</b>	IP address to assign to the SEA asset agent for mapping to the respective VPG interface on the router. The address must be within the same network as the asset VPG interface.
<b>Subnet Mask</b>	VPG subnet mask.
<b>Action</b>	A delete option removes a row of the table, removing an asset network configuration.

- d. Configure a DNS server within your network, capable of resolving Cisco SEA portal domain names.

Table 7: Name Servers

Field	Description
<b>Add Name Server</b>	Configure a DNS server within your network, capable of resolving Cisco SEA portal domain names. Click <b>Add Name Server</b> to add a name server.  For information about the Cisco SEA portal domain names, see <a href="#">Network ports and protocols</a> .  This is a mandatory field. If you do not configure a name server, you cannot save the configuration.  Maximum number of name servers: 5
<b>Name Server</b>	IP address of a domain name server.
<b>Action</b>	A delete option removes a row of the table, removing a name server.

**What to do next**

Also see [Deploy a configuration group](#).

## Add a Cisco SEA Feature to a Configuration Group

### Procedure

- 
- Step 1** From the Cisco SD-WAN Manager menu, choose **Configuration > Configuration Groups**.
- Step 2** In the solution drop-down list, choose either
- **SD-WAN**, or
  - **SD-Routing**
- as the solution type to display configuration groups only for this solution.
- Step 3** Click the **Configuration Groups** tab.
- Step 4** If you need to create a configuration group, follow the steps described in the Using Configuration Groups section of the *Cisco Catalyst SD-WAN Configuration Groups Reference Guide*.
- Step 5** For an existing configuration group, click **Add Profile** and add an **Other Profile** to the configuration group.
- Step 6** In the configuration group, locate the **Other Profile** drop-down list and choose a Cisco SEA profile.
-

# Deploy a Configuration Group with a Cisco SEA Feature

## Before you begin

- See [Supported platforms for Cisco Secure Equipment Access integration, on page 3](#) before deploying a configuration group with the Cisco SEA feature.
- For each device that will be running the Cisco SEA agent, ensure that device has network reachability to the Cisco SEA cloud portal before deploying a configuration group that includes the Cisco SEA feature. This requires two steps:
  1. Deploy a configuration group to establish reachability to a Cisco SEA cloud portal.
  2. Deploy a configuration group to enable Cisco SEA on the devices.

After you confirm reachability in the previous step, you can modify the same configuration group that you used in that step, adding the Cisco SEA feature, and deploy the configuration group to the devices.

See [Prerequisites for Cisco Secure Equipment Access integration, on page 3](#).



---

**Note** This same requirement applies when you add devices to a configuration group that has the Cisco SEA feature and that you have deployed to devices already. If you want to deploy the configuration group to additional devices, make note of the above and first establish reachability to the Cisco SEA cloud portal for the additional devices.

---

## Procedure

- 
- Step 1** Use the [configuration group deployment procedure](#) in the *Cisco Catalyst SD-WAN Configuration Groups Reference Guide* to deploy a configuration group to devices in the network.
- Step 2** If you are deploying to devices of the SD-WAN solution type, during deployment, enter any device-specific variables, as required, for each router.
- If you are deploying to devices of the SD-Routing solution type, skip this step.
- Step 3** If you want to monitor the progress of installing the Cisco SEA application on a device, view the log messages for the installation.
- a. Click the task list button near the top right.
  - b. Click the **Deploy configuration group** task.

This opens a page showing the deployment progress for each device.
  - c. Adjacent to a device, click the log icon in the **Action** column.

The **View Logs** pane opens, showing the deployment progress for the device. When the deployment is complete, and when the devices have established a connection to the Cisco SEA cloud portal, a success message, such as "Config Group successfully deployed to device," appears in the log.

When you first deploy a configuration group with the Cisco SEA feature to a device, it triggers the device to install the Cisco SEA application. It takes several minutes for a device to install the Cisco SEA application. After a successful installation, the device operates as part of the Cisco SEA solution.

---

## Verify that Cisco SD-WAN Manager has connected to the Cisco Secure Equipment Access cloud portal

When you create a configuration group with a Cisco SEA feature, deploying the configuration group to devices triggers the devices to install the Cisco SEA application. It takes several minutes for a device to install the Cisco SEA application. After a successful installation, the device operates as part of the Cisco SEA solution.

### Before you begin

Deploy a configuration group with a Cisco SEA feature to one or more devices. See [Deploy a Configuration Group with a Cisco SEA Feature, on page 13](#).

### Procedure

---

- Step 1** Log in to the Cisco SEA cloud portal.
- Step 2** View the device list. For details, see the [Cisco Secure Equipment Access documentation](#) on the Cisco DevNet site.
- 

## Verify that the Cisco Secure Equipment Access application is operating on a device, using the CLI

This verification method is applicable to devices in the SD-WAN or SD-Routing solutions.

### Before you begin

Deploy a configuration group with a Cisco Secure Equipment Access feature to one or more devices. See [Deploy a Configuration Group with a Cisco SEA Feature, on page 13](#).

### Procedure

---

- Step 1** On a device running the Cisco Secure Equipment Access application, run this command.
- ```
Device# show iox-service
```
- Step 2** Based on the output of the command in the previous step, do one of these:
- If the command output shows that the IOxman service is running, then proceed to the next step.

- If the command output shows that the IOxman service is not running, this indicates that the Cisco Secure Equipment Access application is not operating correctly. Reinstall the application. See [Deploy a Configuration Group with a Cisco SEA Feature, on page 13](#).

**Step 3** On the same device, run this command. If the output shows that state as running, this indicates that the Cisco Secure Equipment Access application is operating correctly.

```
Device# show app-hosting detail appid sea
```

---

### Example

In this example, the Cisco Secure Equipment Access application is installed and operating. Note that the command output is abbreviated here.

```
Device# show iox-service
IOx Infrastructure Summary:
IOx service (CAF)           : Running
IOx service (HA)           : Not Supported
IOx service (IOxman)       : Running
IOx service (Sec storage)  : Running
Libvirt 5.5.0              : Running
Docker v19.03.13-ce       : Running

Device# show app-hosting detail appid sea
App id      : sea
Owner      : iox
State      : RUNNING
...
```

## Monitor the Cisco Secure Equipment Access application on devices

### Before you begin

Deploy a configuration group with a Cisco Secure Equipment Access feature to one or more devices. See [Deploy a Configuration Group with a Cisco SEA Feature, on page 13](#).

### Procedure

---

**Step 1** From the Cisco SD-WAN Manager menu, choose **Monitor > Devices**.

**Step 2** Click a device name for a device in the SD-WAN solution.

#### Note

This monitoring method is applicable to devices in the SD-WAN solution, but not to devices in the SD-Routing solution.

**Step 3** Click the **Real Time** tab.

**Step 4** Enter any of these App Hosting commands in the **Device Options** field to view the resource usage or other details of the Cisco Secure Equipment Access application operating on the device:

- App Hosting Details
  - App Hosting Utilization
  - App Hosting Network Utilization
  - App Hosting Storage Utilization
  - App Hosting Processes
  - App Hosting Attached Devices
  - App Hosting Network Interfaces
  - App Hosting Guest routes
-