



Manage onboarded device settings

This chapter provides guidance on managing the device settings of the onboarded device.

- [Changing a device's IP address in Security Cloud Control Firewall Management, on page 1](#)
- [Changing a device's name in Security Cloud Control Firewall Management, on page 2](#)
- [Export a list of devices and services, on page 3](#)
- [Export device configuration, on page 3](#)
- [External links for devices, on page 4](#)
- [Bulk reconnect devices to Security Cloud Control Firewall Management, on page 7](#)
- [Moving devices between organizations, on page 8](#)
- [Device certificate expiry detection, on page 8](#)
- [Write a device note, on page 9](#)
- [Delete a device from Security Cloud Control Firewall Management, on page 9](#)
- [Manage security devices, on page 9](#)
- [Back up Firewall Threat Defense devices, on page 10](#)
- [Manage Firewall Threat Defense devices through Security Cloud Control Firewall Management, on page 11](#)
- [Security devices overview, on page 12](#)
- [Security Cloud Control Firewall Management labels and filtering, on page 13](#)
- [Use Security Cloud Control Firewall Management search functionality, on page 14](#)

Changing a device's IP address in Security Cloud Control Firewall Management

When you onboard an device to Security Cloud Control Firewall Management using an IP address, Security Cloud Control Firewall Management stores that IP address in its database and communicates with the device using that IP address. If the IP address of the device changes, you can update the IP address stored in Security Cloud Control Firewall Management to match the new address. Changing the device's IP address on Security Cloud Control Firewall Management does not change device's configuration.

To change the IP address, Security Cloud Control uses to communicate with a device, follow this procedure:

Procedure

-
- Step 1** Choose **Security Devices**
- Step 2** Click the **Devices** tab to locate the device.
- Step 3** Click the appropriate device type tab.
- You can use the [filter](#) and [search](#) functionalities to find the required device.
- Step 4** Select the device whose IP address it is you want to change.
- Step 5** Above the **Device Details** pane, click the edit button next to the device's IP address.

Nashua Building 1 

ASA 10.86.118.4:443 

- Step 6** Enter the new IP address in the field and click the blue check button.
- No change is made to the device itself, so the device's Configuration Status will continue to show that it is Synced.

Related Information:

- [Moving devices between organizations, on page 8](#)
- [Bulk reconnect devices to Security Cloud Control Firewall Management, on page 7](#)

Changing a device's name in Security Cloud Control Firewall Management

All devices, models, templates, and services are given a name when they are onboarded or created in Security Cloud Control Firewall Management. You can change that name without changing the configuration of the device itself.

Procedure

-
- Step 1** Choose **Security Devices**.
- Step 2** Click the **Device** tab to locate the device.
- Step 3** Select the device whose name it is you want to change.
- Step 4** Above the **Device Details** pane, click the edit button next to the device's name.

Nashua Building 1 

- Step 5** Enter the new name in the field and click the blue check button.

No change is made to the device itself, so the device's Configuration Status will continue to show that it is Synced.

Export a list of devices and services

This article explains how to export your list of devices and services to a comma-separated value (.csv) file. Once in that format, you can open the file in a spreadsheet application such as Microsoft Excel to sort and filter the items in your list.

The export button is available in both the Devices and Templates tab. You can also export details from devices under the selected device type tab.

Before you export your list of devices and services, look at the filter pane and determine if the **Security Devices** page is displaying the information you want to export. Clear all filters to view all managed devices and services, or apply filters to display a subset of your devices and services. The export function includes only the information currently displayed in the **Security Devices** page.

Procedure


Step 1 Choose **Security Devices**.

Step 2 Click the **Devices** tab to locate the device or the **Templates** tab to locate the model device.

Step 3 Click the appropriate device type tab to export details from devices under that tab or click **All** to export details from all devices.

You can use the [filter](#) and [search](#) functionalities to find the required device.

Step 4 Click **Export list to CSV**.



Step 5 If prompted, save the .csv file.

Step 6 Open the .csv file in a spreadsheet application to sort and filter the results.

Export device configuration


You can only export one device configuration at a time. Use the following procedure to export a device's configuration to a JSON file:

Procedure

-
- Step 1** Choose **Security Devices**.
- Step 2** Click the **Devices** tab to locate the device or the **Templates** tab to locate the model device.
- Step 3** Click the appropriate device type tab.
- You can use the [filter](#) and [search](#) functionalities to find the required device.
- Step 4** Select the device you want so it is highlighted.
- Step 5** In the **Actions** pane, select **Export Configuration**.
- Step 6** Select **Confirm** to save the configuration as a JSON file.
-

External links for devices

You can create a hyperlink to an external resource and associate it with a device you manage with Security Cloud Control. You could use this feature to create a convenient link to the local manager of one of your devices (). You could also use it to link to a search engine, documentation resource, a corporate wiki, or any other URL that you choose. You can associate as many external links with a device as you want. You can also associate the same link with multiple devices at the same time.

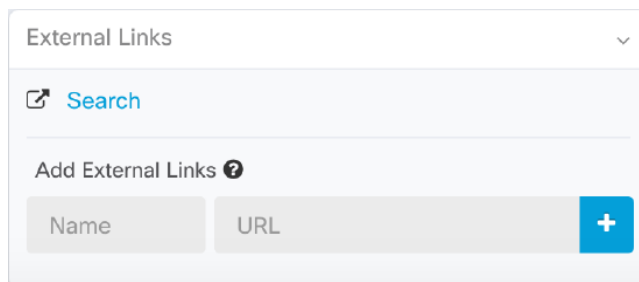

The links you create can reach anywhere, but your company's security requirements do not change. For example, if you ordinarily need to be connected to your corporate network, by being on-premises or through a VPN connection to reach a particular URL, those requirements remain. If your company blocks specific URLs, those URLs continue to be blocked. URLs that are not restricted continue to not be restricted.

Location Variable

We have created the {location} variable that you can incorporate in your URLs. This variable will be populated with the IP address of your device. For example,

```
https://{location}
```

.

Related Information:

- [Write a device note, on page 9](#)
- [Export a list of devices and services, on page 3](#)

Create an External Link from your Device

Procedure

-
- Step 1** Choose **Security Devices**.
- Step 2** Click the **Devices** tab to locate the device or the **Templates** tab to locate the model device.
- Step 3** Click the appropriate device type tab.
- Step 4** Select a device or model.
- You can use the [filter](#) and [search](#) functionalities to find the required device.
- Step 5** Enter a name for the link in the details pane under the **External Links** section.
- Step 6** Enter the URL for the link in the URL field. You need to specify the full URL. For example, for Cisco, enter <http://www.cisco.com>.
- Step 7** Click + to associate the link with the device.
-

Create an External Link to

Here is a convenient way to open , directly from Security Cloud Control.

Procedure

-
- Step 1** In the left pane, click **Security Devices**.
- Step 2** Click the **Devices** tab to locate the device or the **Templates** tab to locate the model device.
- Step 3** Click the appropriate device type tab.
- You can use the [filter](#) and [search](#) functionalities to find the required device.
- Step 4** Select a device or model.
- Step 5** In the details pane, on the right, go to the **External Links** section.
- Step 6** Enter a name for the link such as .
- Step 7** Enter `https://{location}` in the URL field. The `{location}` variable will be populated with the IP address of your device.
- Step 8** Click the + box.
-

Create an External Link for Multiple Devices

Procedure

- Step 1** Choose **Security Devices**.
- Step 2** Click the **Devices** tab to locate the device or the **Templates** tab to locate the model device.
- Step 3** Click the appropriate device type tab.
- You can use the [filter](#) and [search](#) functionalities to find the required devices.
- Step 4** Select multiple devices or models.
- Step 5** In the details pane, on the right, go to the **External Links** section.
- Step 6** Enter a name for the link.
- Step 7** Enter the URL you want to reach using one of these methods:
- Enter
`https://{location}`
in the URL field. The {location} variable will be populated with the IP address of your device. This creates an automatic link to the ASDM for your device.
 - Enter the URL for the link in the URL field. You need to specify the full URL, for example, for Cisco enter <http://www.cisco.com>.
- Step 8** Click + to associate the link with the device.
-

Edit or Delete External Links

Procedure

- Step 1** Choose **Security Devices**.
- Step 2** Click the **Devices** tab to locate the device or the **Templates** tab to locate the model device.
- Step 3** Click the appropriate device type tab.
- You can use the [filter](#) and [search](#) functionalities to find the required device.
- Step 4** Select a device or model.
- Step 5** In the details pane, go to the **External Links** section.
- Step 6** Mouse-over the name of the link to reveal the edit and delete icons.
- Step 7** Click the appropriate icon to edit or delete the external link and confirm your action.
-

Edit or Delete External Links for Multiple Devices

Procedure

-
- Step 1** In the left pane, click **Security Devices**.
- Step 2** Click the **Devices** tab to locate the device or the **Templates** tab to locate the model device.
- Step 3** Click the appropriate device type tab.
- You can use the [filter](#) and [search](#) functionalities to find the required devices.
- Step 4** Select multiple devices or models.
- Step 5** In the details pane, on the right, go to the **External Links** section.
- Step 6** Mouse-over the name of the link to reveal the edit and delete icons.
- Step 7** Click the appropriate icon to edit or delete the external link and confirm your action.
-

Bulk reconnect devices to Security Cloud Control Firewall Management

Security Cloud Control Firewall Management allows an administrator to attempt to reconnect more than one managed device to Security Cloud Control Firewall Management at the same time. When a device Security Cloud Control Firewall Management manages is marked "unreachable," Security Cloud Control Firewall Management can no longer detect out of band configuration changes or manage the device. There could be many different reasons for the disconnect. Attempting to reconnect the devices is a simple first step in restoring Security Cloud Control Firewall Management's management of the device.



- Note** If you are reconnecting devices having new certificates, Security Cloud Control Firewall Management automatically reviews and accepts the new certificates on the devices and continues to reconnect with them. However, if you are reconnecting with only one device, Security Cloud Control Firewall Management prompts you to review and accept the certificate manually to continue to reconnect with it.
-

Procedure

-
- Step 1** In the left pane, click **Security Devices**.
- Step 2** Click the **Devices** tab to locate devices.
- Step 3** Click the appropriate device type tab.
- Use the [filter](#) to look for devices whose connectivity status is "unreachable."
- Step 4** From the filtered results, select the devices you want to attempt to reconnect.

Step 5 Click **Reconnect** . Notice that Security Cloud Control only provides command buttons for actions that can be applied to all the selected devices.

Step 6 Look at the **notifications** tab for the progress of the bulk device reconnect action. If you want more information about how the actions in the bulk device reconnect job succeeded or failed, click the blue Review link and you will be directed to the [Monitor jobs in Security Cloud Control](#).

Tip

If a reconnect failure was caused because the device's certificate or credentials have changed, you will have to reconnect to those devices individually to add the new credentials and accept the new certificate.

Moving devices between organizations

After onboarding devices to a Security Cloud Control Firewall Management organization, you cannot migrate the devices from one Security Cloud Control Firewall Management organization to another. If you want to move your devices to a new organization, you need to remove the devices from the old tenant and re-onboard them to the new organization.

Device certificate expiry detection

The management certificate is used for accessing FDM-managed and ASA devices from Security Cloud Control Firewall Management, while the Cisco Secure Client (formerly AnyConnect) is necessary for using virtual private network features on ASA, FDM-managed, and FTD devices from Security Cloud Control Firewall Management.

Security Cloud Control Firewall Management actively monitors the expiration status of these certificates and notifies the user when these certificates are nearing their expiration date or have expired. This prevents any disruptions in device operations due to certificate expiry. You should renew the corresponding certificate to address this issue.

The management certificate expiry check applies to ASA and FDM-managed devices, while the Secure Client certificate expiry check applies to ASA, FDM-managed, and FTD devices.

View Certificate Expiry Notification

In the top right corner, click the **Notifications** () icon to view the most recent alerts that have occurred or affected the devices you have onboarded to your tenant. The **High Priority** section displays the certificate expiration notifications.

These notifications are sent 30, 14, and 7 days before the certificate expiration date and then every day thereafter until the certificate either expires or is renewed with a valid certificate. You can also subscribe to receive these notifications by email on the **Notification Settings** section of the user preferences page. For more information, see [User Notification Preferences](#).

Write a device note

Use this procedure to create a single, plain-text, note file for a device.

Procedure

-
- Step 1** In the left pane, click **Security Devices**.
 - Step 2** Click the **Devices** tab to locate the device or the **Templates** tab to locate the model device.
 - Step 3** Click the appropriate device type tab.
 - Step 4** Select the device or model you want to create a note for.
 - Step 5** In the **Management** pane on the right, click **Notes**.  [Notes](#).
 - Step 6** Click the editor button on the right and select the Default text editor, Vim, or Emacs text editors.
 - Step 7** Edit the Notes page.
 - Step 8** Click **Save**.
The note is saved in the tab.
-

Delete a device from Security Cloud Control Firewall Management

Follow these steps to delete a device from Security Cloud Control Firewall Management:

Procedure

-
- Step 1** Choose **Security Devices**.
 - Step 2** Select the device you want to delete.
 - Step 3** Click **Remove** in the **Device Actions** pane.
 - Step 4** To confirm device removal, click **OK**.
To keep the device onboarded, click **Cancel**.
-

Manage security devices

Security Cloud Control Firewall Management provides the ability to view, manage, filter, and evaluate your onboarded devices on the **Security Devices** page. From the **Security Devices** page you can:

- [Onboard devices and services for Security Cloud Control management.](#)

- View the configuration state and connectivity state of managed devices and services.
- View onboarded devices and templates categorized in separate tabs. See [Security devices overview, on page 12](#).
- Evaluate and take action on individual devices and services.
- View device and service specific information and resolve issues.
- View device health status for threat defense devices managed by:
 - [Cloud-Delivered Firewall Management Center](#)
 - [on-premises Firewall Management Center](#)

For threat defense devices managed by the Cloud-Delivered Firewall Management Center, you can also see the node status for devices in a cluster.

- Search for a device or template by name, type, IP address, model name, serial number, or labels. Search is not case-sensitive. Providing multiple search terms brings up devices and services that match at least one of the terms. See [Page Level Search, on page 14](#).
- Filter for a device or template filter by device type, hardware and software versions, snort version, configuration status, connection states, conflict detection, and secure device connectors, and labels. See [Filters](#).
- Delete a device

Back up Firewall Threat Defense devices

To know how to back up Security Cloud Control-managed Firewall Threat Defense device types, use the following references:

Back Up Firewall Threat Defense devices managed by Cloud-Delivered Firewall Management Center

- In the Security Cloud Control left pane, choose **Administration > Firewall Management Center**.
- Choose **Cloud-delivered FMC** under the **FMC** tab.
- Click **Devices** on the right pane to navigate to the Cloud-Delivered Firewall Management Center.
- Continue to follow the steps in [Back Up a Threat Defense Device from Cloud-delivered Firewall Management Center](#).

Back Up Firewall Threat Defense devices managed by On-Premises Firewall Management Center onboarded to Security Cloud Control Firewall Management

- In the Security Cloud Control left pane, choose **Administration > Firewall Management Center**.
- Choose the On-Premises Firewall Management Center whose Firewall Threat Defense devices you want to back up.
- Click **FMC Cross Launch URL** on the right pane to navigate to the on-premises Firewall Management Center or manually log in to the on-premises Firewall Management Center.

- Continue to follow the steps in *Back up a Device from the Management Center* in the [Cisco Secure Firewall Management Center Administration Guide](#).

Back up Firewall Threat Defense devices managed by Firewall Device Managers onboarded to Security Cloud Control Firewall Management

Follow the steps in [Back up an FDM-managed Device](#).

Manage Firewall Threat Defense devices through Security Cloud Control Firewall Management

Before you begin

Security Cloud Control Firewall Management provides a unified interface to manage Firewall Threat Defense devices, both in hardware and virtual formats.

Firewall Threat Defense devices associated with these three management applications can be managed on the Security Cloud Control platform:

- Secure Firewall Device Manager
- Secure Firewall Management Center
- Secure Cloud-Delivered Firewall Management Center

Procedure

-
- | | |
|---------------|---|
| Step 1 | Log in to the Security Cloud Control platform. |
| Step 2 | In the left pane, click Security Devices . |
| Step 3 | Click the FTD tab. |
| Step 4 | Click  at the top-left corner.

Under Devices/Services , the filter pane provides filters that display Firewall Threat Defense devices based on the management application through which they are accessed from Security Cloud Control. <ul style="list-style-type: none">• FDM: Firewall Threat Defense device managed by Firewall Device Manager• FMC-FTD: Firewall Threat Defense devices managed by Firewall Management Center• FTD: Firewall Threat Defense devices managed by Cloud-Delivered Firewall Management Center |
| Step 5 | To view the Firewall Threat Defense devices under a management application, check the corresponding check box. |
-

Security devices overview

The **Security Devices** page displays all the physical and virtual onboarded devices and the templates created from the onboarded devices. The page classifies devices and templates based on their type and displays them in the corresponding tabs dedicated to each device type.

You can view the following details on the **Security Devices** page:

- The **Devices** tab displays all the live devices that are onboarded to Security Cloud Control.
- The **Templates** tab displays all the template devices created from live devices or configuration files imported to Security Cloud Control.

Filters in security devices

The **Filter** panel on the **Security Devices** page provides multiple options to narrow down results and find devices based on specific attributes, including **Devices/Services**, **Hardware Versions**, **Device End-of-Life**, **Software Versions**, **Snort Version**, **Configuration Status**, **Connectivity States**, **Conflict Detection**, **Health Status**, **Secure Device Connectors**, and **Labels**.

The Hardware End-of-Life (EoL) Filter

The **Hardware End-of-Life (EoL) filter** allows you to identify devices that are nearing or have reached their last day of hardware support. Running unsupported hardware may pose operational and security risks because Cisco no longer provides software updates, security patches, or technical support after the EoL date.



Note The Hardware EoL filter currently supports Firewall Threat Defense devices managed by on-premises Firewall Management Center and Cloud-Delivered Firewall Management Center, and ASA devices.

Procedure

1. In the **Devices** tab, click the filter icon.
2. From the list of available filters, under **Device End-of-Life**, select **Hardware End-of-Life**.
The list now displays all devices that are approaching or have reached their hardware end-of-life.
3. Select a device to view more information on the right pane.
4. Scroll down to the **Device End of Life** section to view the following details:
 - The exact end-of-life date.
 - Remaining time until the last day of support.
5. Click **Know more**.

You can view a detailed page that provides the following information:

- Cisco's recommended replacement devices with product specifications, along with links to view the official data sheets.
- Guidance on submitting a request through the [Contact Cisco page](#) and options to connect directly with Cisco experts.

- Information on Cisco's [product recycling program](#).

6. Click **Export** to download the device report in CSV format for offline analysis.

Security Cloud Control Firewall Management labels and filtering

Labels are used for grouping devices or objects. You can apply labels to one or more devices during onboarding or any time after onboarding. You can apply labels to objects after creating them. Once you apply labels to devices and objects, you can filter the contents of the device table or objects table using the corresponding label.



Note A label that is applied to a device is not extended to its associated objects, and a label applied to a shared object is not extended to its associated objects.

You can create a label group by using the syntax group name:label, for example, Region:East or Region:West. If you create these two labels, the group label would be Region and you could choose from East or West in that group.

Apply Labels to Devices and Objects

To apply a label to devices, perform these steps:

Procedure

- Step 1** In the left pane, click **Security Devices**.
- Step 2** In the left pane, click **Objects**.
- Step 3** Click the **Devices** tab to locate a device or the **Templates** tab to locate the model device.
- Step 4** Click the appropriate device type tab.
- Step 5** Select one or more devices.
- Step 6** In the **Add Groups and Labels** field on the right, specify a label for the devices.
- Step 7** Click the  icon.

Filters on security devices, policies, and objects page

Use filters on the **Security Devices**, **Policies**, and **Objects** pages to find devices and objects. To filter, select the filter icon in the left pane.

On the **Security Devices** page, the filter panel lets you filter devices by criteria such as device type, hardware version, software version, Snort version, configuration status, connection state, conflict detection, Secure Device Connector, and labels. You can apply filters within the selected device type tab.

When the **FTD** tab is open, the filter panel also lets you filter FTD devices by the management application that Security Cloud Control uses to access them.

To filter, click  in the left-hand pane of the Security Devices, Policies, and Objects tabs.



Note When the **FTD** tab is opened, the filter pane provides filters to show FDM-managed devices based on the management application through which the devices are accessed from Security Cloud Control.

- FDM: Devices managed using FTD API or Firewall Device Manager.
- FMC-FTD: Devices managed using Firepower Management Center.
- FTD: Devices managed using FTD Management.

Use Security Cloud Control Firewall Management search functionality

The Security Cloud Control Firewall Management platform has a highly efficient search function that makes it easy to find anything you need. The search bar on each page is tailored to the content of that page, while the global search allows for a comprehensive search across the entire tenant. This saves time and effort, as you can quickly locate the necessary information.

Page Level Search

The page-level search enables you to search specific items on the Security Devices, Policies, Objects, VPN, Change Log, and Jobs pages.

- In the **Security Devices** space, you can simply start typing in the search bar, and devices that fit the search criteria will be displayed. You can type any partial part name of the device, IP address, or the serial number of the physical device to find the device.
- In the **Policies** space, you can search policies by their name, components or objects used in them.
- In the **Objects** space, you can search for an object by typing any partial part of the name of the object, or partial IP Address, port, or protocols.
- In the **VPN** space, you can search by tunnel name, device name, and IP address used in the VPN policies.
- In the **Change log** space, you can search logs based on events, device names, or actions.

Procedure

- Step 1** Navigate to the search bar near the top of the interface.
- Step 2** Type the search criteria into the Search Bar and the corresponding results will be displayed.