



## Integrate with Cisco Cyber Vision

---

- [pxGrid, on page 1](#)
- [XDR, on page 1](#)
- [Secure Equipment Access, on page 5](#)
- [Cisco In Product Support, on page 8](#)

### pxGrid

From **Platform Exchange Grid** page, you can configure ISE pxGrid Cisco Cyber Vision integration.

Cisco Platform Exchange Grid (pxGrid) is an open, scalable data-sharing and threat control platform that allows seamless integration between multivendor identity, network, security and asset management systems.

To access the **Platform Exchange Grid** page, choose **Admin > Integrations > pxGrid** from the main menu.

For more information about how to perform this integration, refer to the manual "Integrating Cisco Cyber Vision with Cisco Identity Services Engine (ISE) via pxGrid".

### XDR

Cisco Cyber Vision can be integrated with XDR, a cloud-native, built-in platform that connects the Cisco Secure portfolio with your infrastructure. This integration allows you to significantly reduce dwell time and human-powered tasks.



---

**Note** SecureX reached its end of life on July 31, 2024.

---

Cisco XDR is an online platform that centralizes security events from various Cisco software equipments through an API. For instance, events such as those from Cisco Cyber Vision or firewall activities can be transmitted to Cisco XDR and correlated, then presented across diverse dashboards.

XDR integration enables three features in Cisco Cyber Vision:

- Without XDR SSO login, the **Investigate in XDR Threat Response** button will appear on components' technical sheets.

- With XDR SSO login, the **Report to XDR** button will appear on certain events of the event calendar page. This button is utilized to push the events to XDR.
- With XDR SSO login, an XDR ribbon featuring several functionalities can be activated within Cisco Cyber Vision.

This section details the configuration of XDR in Cisco Cyber Vision and different authorized features.

## XDR Configuration

### Before you begin

The Cisco XDR configuration in Cisco Cyber Vision requests:

- An Admin access to Cisco Cyber Vision Center.
- A Cisco Cyber Vision Center with internet access.
- A XDR account with an admin role.

### Procedure

---

**Step 1** From the main menu, choose **Admin > Integrations > XDR**.

**Step 2** Click the dropdown arrow of the **Region** field.

**Step 3** Select the region from dropdown list.

**Step 4** Click **Enable XDR** to enable the link.

Once you enable the link, the button turns red to indicate **Disable XDR**.

By completing the steps above, you are now able to use the button **Investigate in XDR Threat Response** that will appear in the components' technical sheet. To install and use the XDR ribbon and the Report to XDR button, complete the steps herebelow.

**Step 5** Click the user menu located in the top right corner of the GUI.

**Step 6** Click **My Settings**.

A new **XDR** menu appears on the right of the **My settings** page.

**Step 7** Click the **Log in** button.

A **Grant Application Access** popup appears with an authentication code.

**Step 8** Click **Verify and Authorize**.

The browser opens a new page with the **Security Cloud Sign On** window to grant Cisco Cyber Vision access to **XDR**.

**Step 9** Enter **Email** and click **Continue**.

**Step 10** Click **Authorize Cyber Vision**.


A **Client Access Granted** popup appears.

- Step 11** In **Cisco Cyber Vision Center > My Settings**, the XDR menu indicates that Cisco Cyber Vision is connected to XDR.
- Step 12** Use the **Ribbon status** toggle button to enable the XDR ribbon.  
Once you enable the **Ribbon status** toggle button, message appears.
- Step 13** To log out, click **Logout of XDR**.
- Step 14** Click **Save settings**.

## XDR Ribbon

Once configured and activated, the XDR ribbon will appear at the bottom of the Cisco Cyber Vision GUI of the Explore menu.


The XDR ribbon in the Device List view:

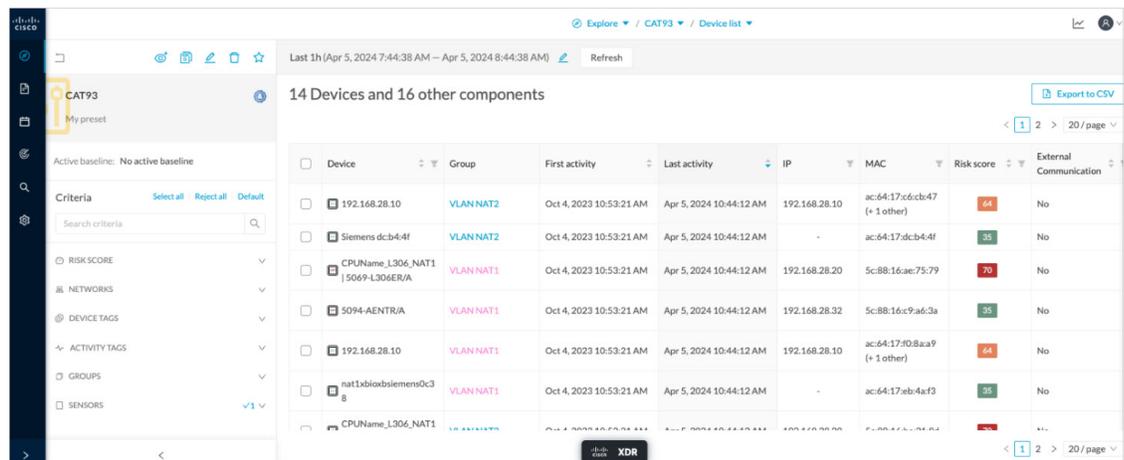

Device	Group	First activity	Last activity	IP	MAC	Risk score	External Communication
192.168.28.10	VLAN NAT2	Oct 4, 2023 10:53:21 AM	Apr 5, 2024 10:44:12 AM	192.168.28.10	ac:64:17:c6:cb:47 (+ 1 other)	64	No
Siemens dc:b4:4f	VLAN NAT2	Oct 4, 2023 10:53:21 AM	Apr 5, 2024 10:44:12 AM	-	ac:64:17:dc:b4:4f	35	No
CPUName_L306_NAT1 15069-L306ER/A	VLAN NAT1	Oct 4, 2023 10:53:21 AM	Apr 5, 2024 10:44:12 AM	192.168.28.20	5c:88:16:ae:75:79	70	No
5094-AENTRA/A	VLAN NAT1	Oct 4, 2023 10:53:21 AM	Apr 5, 2024 10:44:12 AM	192.168.28.32	5c:88:16:c9:a6:3a	35	No
192.168.28.10	VLAN NAT1	Oct 4, 2023 10:53:21 AM	Apr 5, 2024 10:44:12 AM	192.168.28.10	ac:64:17:f0:8aa9 (+ 1 other)	64	No
nat1xblxbsiemens0c3 B	VLAN NAT1	Oct 4, 2023 10:53:21 AM	Apr 5, 2024 10:44:12 AM	-	ac:64:17:eb:4af3	35	No
CPUName_L306_NAT1	VLAN NAT1	Oct 4, 2023 10:53:21 AM	Apr 5, 2024 10:44:12 AM	192.168.28.20	5c:88:16:ae:75:79	70	No

The [Cisco XDR Getting Started Guide](#) explains how to use the XDR ribbon.

For example, to find observables and investigate them in XDR Threat Response, click the **Find Observables** icon like below:

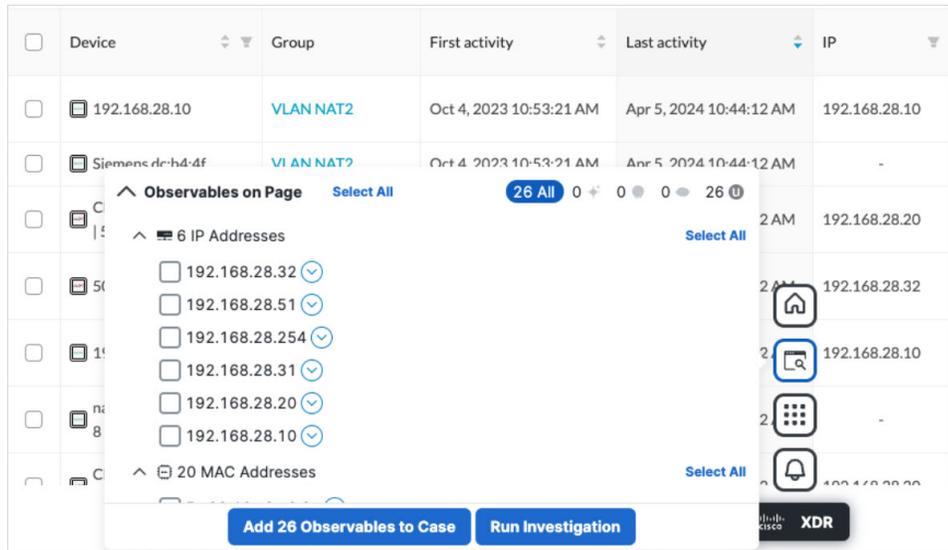


## XDR Event Integration

Once XDR has been configured in Cisco Cyber Vision, a **Report to XDR** button appears on some events of the event calendar page. Using this button will push the event to XDR and create an incident.

The XDR button appears on three categories of event:


- Anomaly Detection
- Control Systems Events
- Signature Based Detection

The Report to XDR button on a Control Systems Events:

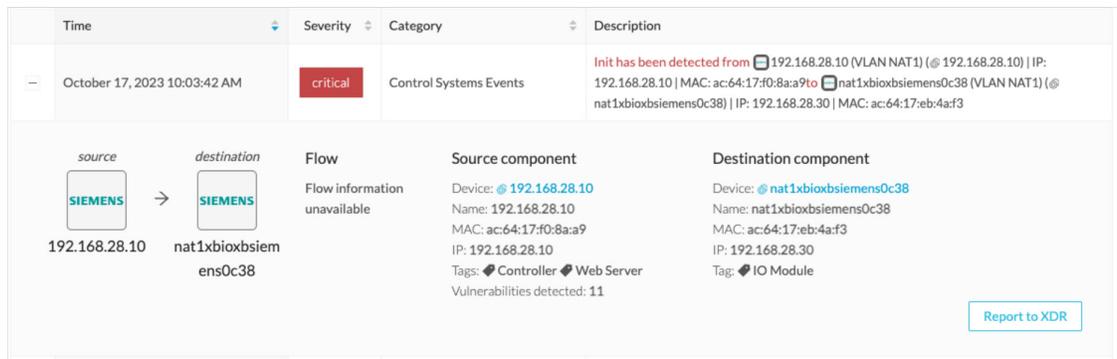

## XDR Component Button

Once XDR has been configured in Cisco Cyber Vision, the button **Investigate in Cisco Threat Response** appears on the components' technical sheet. The component's IP and MAC addresses will be investigated in XDR Threat Response if you use this button.

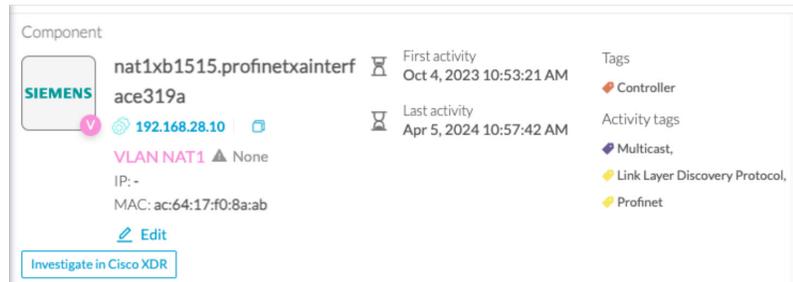

## External Resources for XDR Integration

Herebelow is the list of all URLs called by the Cisco Cyber Vision Center in case you need to authorize them, for example in a firewall.

### Center:

#### North America

- Cisco XDR Platform: <https://visibility.amp.cisco.com/iroh/>
- Cisco XDR Private Intelligence: <https://private.intel.amp.cisco.com/ctia/>
- Cisco XDR Automation: <https://automate.us.security.cisco.com/api/>

#### Europe

- Cisco XDR Platform: <https://visibility.eu.amp.cisco.com/iroh/>
- Cisco XDR Private Intelligence: <https://private.intel.eu.amp.cisco.com/ctia/>
- Cisco XDR Automation: <https://automate.eu.security.cisco.com/api/>

#### Asia Pacific, Japan, and China

- Cisco XDR Platform: <https://visibility.apjc.amp.cisco.com/iroh/>
- Cisco XDR Private Intelligence: <https://private.intel.apjc.amp.cisco.com/ctia/>
- Cisco XDR Automation: <https://automate.apjc.security.cisco.com/api/>

### Web client:

- [conure.apjc.security.cisco.com](https://conure.apjc.security.cisco.com)
- [conure.us.security.cisco.com](https://conure.us.security.cisco.com)
- [conure.eu.security.cisco.com](https://conure.eu.security.cisco.com)

## Secure Equipment Access

Secure Equipment Access (SEA) is a Cisco offering that

- provides secure remote access for operations teams to manage and troubleshoot operational technology (OT) assets,

- eliminates the need for costly on-site service visits
- enables Zero Trust Network Access (ZTNA) gateway functionality.


For more details, see the [SEA documentation](#) on Cisco DevNet.

You can integrate Secure Equipment Access (SEA) with Cisco Cyber Vision for unified management via the CV Center.

This integration requires the SEA agent, an IOx app, to be running on your network device. You can install the SEA agent while installing the CV sensor app using the same workflow. Both the SEA agent and CV sensor runtimes are packaged as a single IOx application.

This diagram illustrates how Cyber Vision integrates with Secure Equipment Access for industrial network management:

Figure 1: Integrate CV with SEA

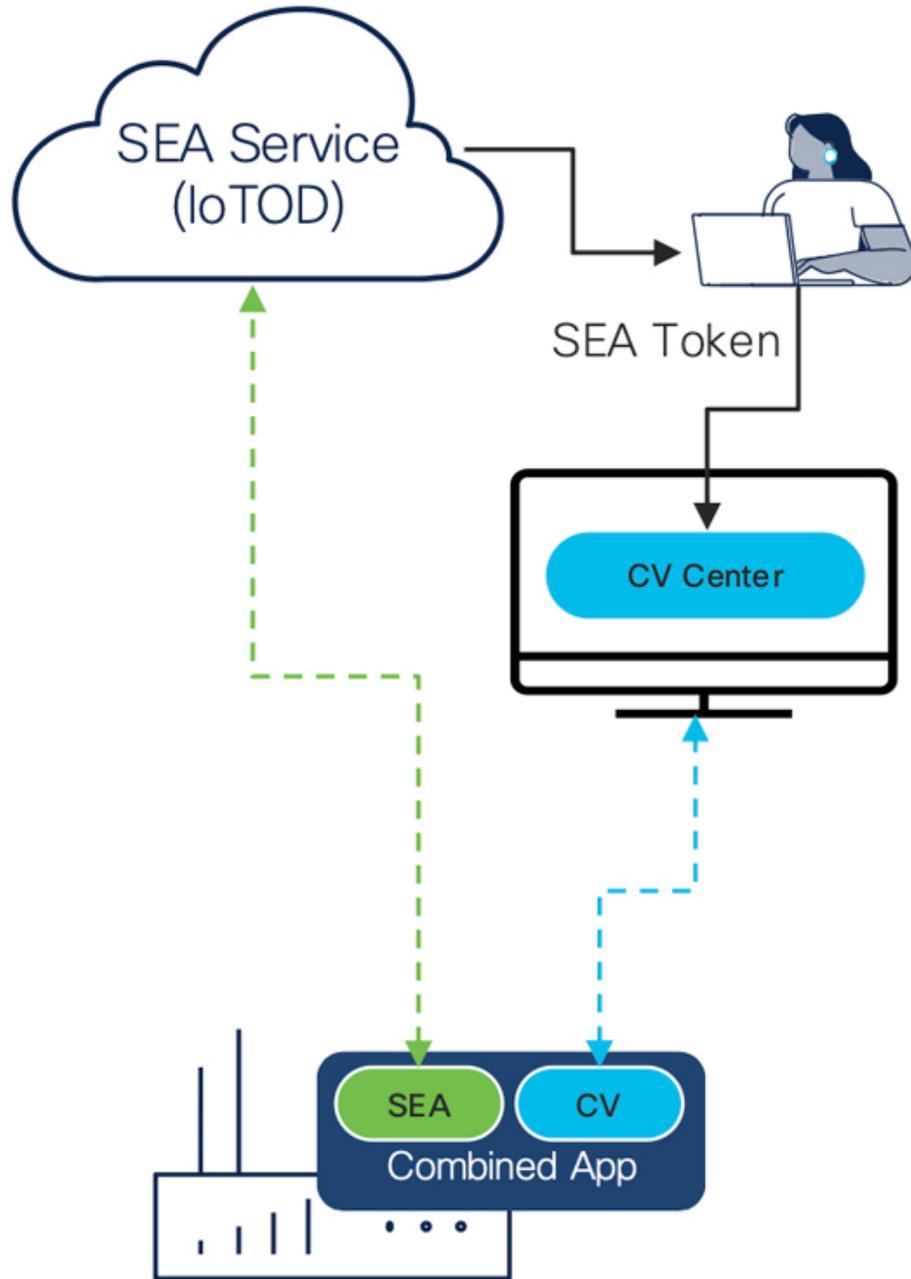

525801

## Integrate Cisco Cyber Vision Center with SEA

The purpose of this integration is to enable seamless and unified management of both Secure Equipment Access (SEA) and Cisco Cyber Vision through the CV Center. This combined approach simplifies deployment and ongoing management of both components on the same device, while ensuring separation of their operations.

**Before you begin**

Ensure the following:

- Administrative access to Cisco Cyber Vision Center
- Tenant admin access to the SEA organization where you intend to connect with CV.

**Procedure**

- 
- Step 1** Log in to Cisco Cyber Vision Center, and from the main menu, choose **Admin > Integrations > SEA**.
- Step 2** On the **SEA** page, in the **Configuration** section, select a region from the drop-down list and click **Connect**.
- Step 3** Log in to the **IoT Operations Dashboard** with your IoT OD credentials.
- Step 4** On the **IoT Operations Dashboard**, click **Connect**.
- Step 5** On the **SEA** page, verify your details listed in the **Configuration** section.
- Step 6** Click **Enable SEA**.
- Step 7** (Optional) To validate the configuration, click **Validate configuration**.
- 

A success message appears on the SEA page, indicating that SEA is configured.

**What to do next**

Install the compatible sensors. For more information, see the "Install sensors with the sensor management extension" topic in the *Cisco Cyber Vision Sensor Application for Cisco Switches Installation Guide*.

## Cisco In Product Support

A **Cisco In Product Support** is a virtual assistant that:

- provides customers and partners with a unified self-service experience across multiple support domains,
- offers tools for managing cases, checking bug applicability, troubleshooting hardware, and managing licensing, and
- enables users to connect directly with case owners, managers, or Technical Assistance Center (TAC) duty managers for escalations or assistance.

**Table 1: Feature History Table**

Feature	Release Information	Feature Description
Cisco In Product Support	Release 5.3.x	Use Cisco In Product Support to manage your Cisco support cases and related tasks directly from the Center.

### Functionality

**Cisco In Product Support** is designed to simplify and speed up support activities for Cisco customers and partners.

You can address technical challenges and manage support team interactions efficiently by using a single interface that consolidates multiple support services.

The tool integrates with Cisco's back-end systems to provide up-to-date case tracking, bug search, and device troubleshooting resources.

### Examples

- A partner uses **Cisco In Product Support** to submit and track a hardware replacement (RMA) request.
- A customer uses the assistant to check whether a reported bug affects their installed software version.
- A network engineer leverages the self-service troubleshooting function to diagnose hardware issues without opening a formal support ticket.

## Access Cisco In Product Support

Open **Cisco In Product Support** to interact with Cisco TAC support within your product.

**Cisco In Product Support** provides integrated access to Cisco TAC services. You can use **Cisco In Product Support** to open TAC cases, record screens, or upload files directly from your product interface.

### Before you begin

- Ensure you have a Cisco account with TAC access.


### Procedure

---

**Step 1** From the main menu, choose **Admin > Integrations > Cisco In Product Support**.

#### Note

**Cisco In Product Support** integration is enabled by default. Its icon is available on the page.

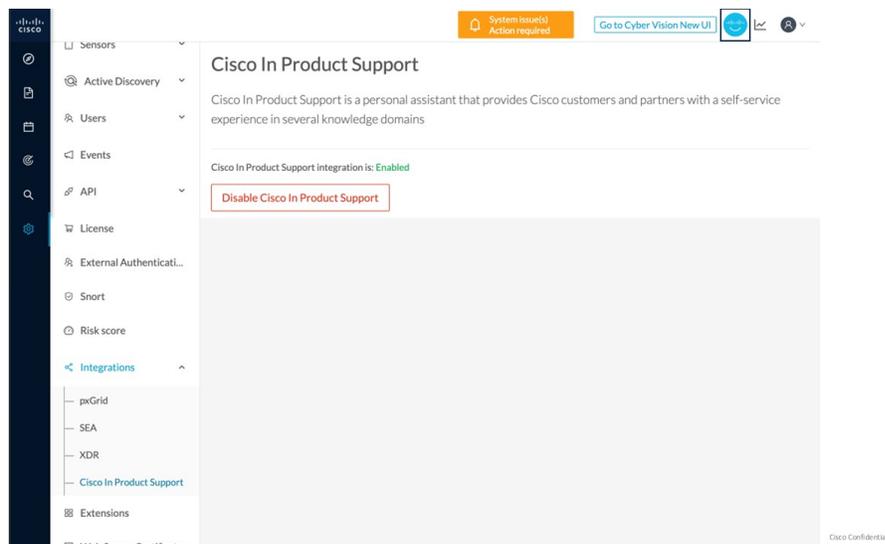

**Step 2** Click the **Cisco In Product Support** icon.

**Step 3** Click **Sign In** to enable TAC's virtual assistance.

---

After you enable Cisco In Product Support, you can:

- **Open Cisco Support Case**
- **Record Screen**
- **Upload Local File**

### What to do next

To generate and upload diagnostics, click the **System Statistics** icon.