



Cisco SD-WAN: Enabling Direct Internet Access

Solutions Adoption Prescriptive Reference: Design & Deployment Guide

August, 2020

Table of contents

Introduction.....	5
About the Solution.....	5
About this Guide.....	5
Define – SD-WAN Direct Internet Access introduction	6
Audience.....	6
Purpose of this Document.....	6
Overview.....	6
Benefits of using DIA include.....	6
Prerequisites to Deploying Direct Access to the Internet	6
Design – Cisco SD-WAN Direct Internet Access Use Cases	8
Use Cases	8
Use case #1 – DIA for remote-site internal employees	8
Use case #2 - DIA for guest user access.....	8
Design – Cisco SD-WAN Direct Internet Access Design Components and Considerations	10
Direct Internet Access Design.....	10
SD-WAN DIA Design Components	10
Segmentation.....	11
Network Address Translation	12
Centralized Data Policy	13
NAT DIA Route	15
How NAT DIA Routes Work	15
Leverage centralized data policy and NAT DIA route to deploy DIA	15
NAT Tracker	17
SD-WAN DIA Failover Scenarios	18
SD-WAN L3 Distribution Switch	19
SD-WAN Remote-Site Design Details	19
SD-WAN Single-Router Hybrid Remote-Site Design.....	19
SD-WAN Dual-Router Hybrid Remote-Site Design	21
SD-WAN Single-Router Dual Internet Remote-Site Design	24
SD-WAN Dual-Router Dual Internet Remote-Site Design	26
Deploy - Cisco SD-WAN Direct Internet Access Prerequisites.....	30
Prerequisites	30
Process: Verify WAN Edge router prerequisites.....	30
Step 1: Verify Cisco Edge devices in vManage.....	30
Step 2: Configure Device Template for the Cisco WAN Edge Devices to Participate in SD-WAN Overlay	31
Step 3: Deploy the Device Template to the Cisco WAN Edge devices that will be used	32

Procedure 3: Verify NAT Feature Configuration.....	38
Deploy - Cisco SD-WAN Direct Internet Access Configuration.....	42
Deploying Cisco SD-WAN DIA Configuration	42
Procedure 1: Use Case #1 - Create Centralized Data Policy to Redirect Employee Traffic	42
Alternate Method to Deploy Traffic Data Policy	62
Procedure 2: Use Case #2 - Create NAT DIA Route to Redirect Guest Internet.....	66
Configuration of System Tracker	74
Operate - Cisco SD-WAN Direct Internet Access Monitoring.....	78
Monitor, Troubleshoot and Manage Cisco SD-WAN Direct Internet Access	78
Step 1: Monitor DIA sessions based on the NAT Translations	78
Step 2: Monitor the configured data policy for traffic flow	79
Step 3: Understand the overall routing table for Service Side VPN for NAT DIA route	80
Appendix A: New in this guide	81
Appendix B: Hardware and software used for validation.....	82
Appendix C: DIA Deployment Example	83
Appendix D: Cisco WAN Edge configuration summary (Templates).....	85
System feature template	85
Logging feature template	85
NTP feature template	86
OMP feature template.....	86
VPN 1 interface Ethernet Loopback0	86
BFD feature template	87
Security feature template.....	87
VPN 512 feature template	87
VPN 512 interface feature template	88
VPN 0 feature template	88
VPN 0 BGP feature template	89
VPN 0 Interface feature template	89
VPN 1 feature template	96
VPN 1 Interface feature template	96
VPN 1 OSPF feature template.....	97
VPN 2 feature template	98
VPN 2 Interface feature template	98
VPN 2 OSPF feature template.....	99
VPN 0 Datacenter feature template.....	100
VPN 0 Datacenter Interface feature template	101
VPN 1 Datacenter feature template.....	102
VPN 1 Datacenter BGP feature template	103

VPN 1 Datacenter Interface feature template	104
Datacenter device template	105
Remote-site (branch) device template.....	105
Appendix E: Cisco WAN Edge CLI-equivalent configuration	111
Appendix F—Glossary.....	145
About this guide	146
Feedback & discussion.....	146

Introduction

About the Solution

This solution focuses on deploying Cisco SD-WAN Direct Internet Access within remote sites to allow certain Internet-bound traffic or public cloud traffic from the branch to be routed directly to the Internet instead of tunneling the Internet traffic to a central site or datacenter for Internet access.

About this Guide

This guide is intended to provide technical guidance to design, deploy, and operate the Cisco SD-WAN Direct Internet Access solution using a mix of both Cisco IOS XE SD-WAN and vEdge devices.

Figure 1 **Implementation flow**



This document contains four major sections:

- The **Define** section discusses shortcomings of traditional central Internet model and introduces Cisco SD-WAN Direct Internet Access.
- The **Design** section shows the Direct Internet Access design models used, along with an in-depth explanation of individual components to support Direct Internet Access. This section also covers two major use cases.
- The **Deploy** section is divided into two parts. The first part provides information about the prerequisites necessary for deploying Direct Internet Access. The second part discusses the automated deployment of Direct Internet Access to support the two use cases presented within the **Design** section.
- The **Operate** section shows some of the monitoring and troubleshooting tools for the SD-WAN Direct Internet Access features through the vManage web-based GUI.

Define – SD-WAN Direct Internet Access introduction

Audience

This document is intended for network design engineers, network operations personnel, and security operations personnel who wish to implement Direct Internet Access within each remote-site to allow local breakout of Internet-bound traffic directly from the branch.

Purpose of this Document

This guide will help you deploy Direct Internet Access within the Cisco SD-WAN solution and secure your branch, preparing your organization for future growth. In this guide, the deployment models discussed include a mix of both Cisco IOS XE SD-WAN and vEdge devices, collectively referred to as *WAN Edge routers*. The guide focuses on methods to reduce the consumption WAN bandwidth, providing a better user experience by enabling secure direct access to the Internet at each remote site, without routing traffic to central network locations. This is not an exhaustive guide and does not cover all the options. It does, however, highlight the best practices and assists with a successful configuration and deployment of Direct Internet Access for local Internet breakout. This guide assumes that a fully functional SD-WAN overlay is in place.

The implementation includes one data center with two Cisco vEdge 5000 routers and four remote sites with a mix of Cisco ISR4331, ISR4351, and vEdge1000 routers. Refer to the [Cisco SD-WAN deployment guide](#) for configuration, deployment guidance, and background information on the SD-WAN solution.

Overview

Digital innovation is overwhelming the branch and WAN. A majority of employees and customers work in branch offices, leading to a significant increase in devices accessing Internet-based applications. However, the digital transformation of many enterprises is hindered owing to the adoption of legacy network architectures. The traditional WAN topology backhauls all Internet traffic to the datacenters resulting in packet latency, drops, and jitter. In addition, the network is being constantly challenged with high costs associated with deployment and complex management.

One of the many ways to overcome these challenges within an organization is to use Direct Internet Access (DIA) with Cisco Software Defined WAN (SD-WAN). DIA is a component of the Cisco SD-WAN architecture in which certain Internet-bound traffic or public cloud traffic from the branch can be routed directly to the Internet, thereby bypassing the latency of tunneling Internet-bound traffic to a central site.

Benefits of using DIA include

- Reduced bandwidth consumption, latency and cost savings on WAN links by offloading Internet traffic from the private WAN circuit.
- Improved branch office user experience by providing Direct Internet Access (DIA) for employees at remote site locations

Prerequisites to Deploying Direct Access to the Internet

Ensure the following is in place before deploying Direct Internet Access:

- The SD-WAN controllers are set up and deployed.

- The Cisco IOS XE SD-WAN and vEdge routers are configured using device templates in order to establish a functional and secure overlay fabric to pass data traffic across the organization's distributed sites. An example of template configuration is explained in the Deploy: SD-WAN Direct Internet Access Prerequisites section of this guide.
- The network devices adjacent to the Cisco IOS SD-WAN and vEdge routers are configured.

Refer to Appendix B for the hardware models and software versions used in this guide. Refer to Appendix C for the network topology and site ID/ IP address details ,and Appendix D for portions of the supporting network device configuration templates. Appendix E details the CLI configurations of the WAN Edge devices deployed in this guide.

Design – Cisco SD-WAN Direct Internet Access Use Cases


Use Cases

Two main use cases discussed in this guide are DIA for remote-site internal employees and DIA for guest users.

Use case #1 – DIA for remote-site internal employees

As shown in the figure, branch (remote-site) employees are allowed direct access to the Internet for cloud-based applications and user web access. This is achieved by configuring the WAN edge routers as an Internet exit point. Designated employee Internet traffic uses the directly connected Internet transport for direct Internet access, while the rest of the Internal traffic exits via the MPLS or INET tunnel to the destination.


Figure 2 Internet traffic flow from employee network

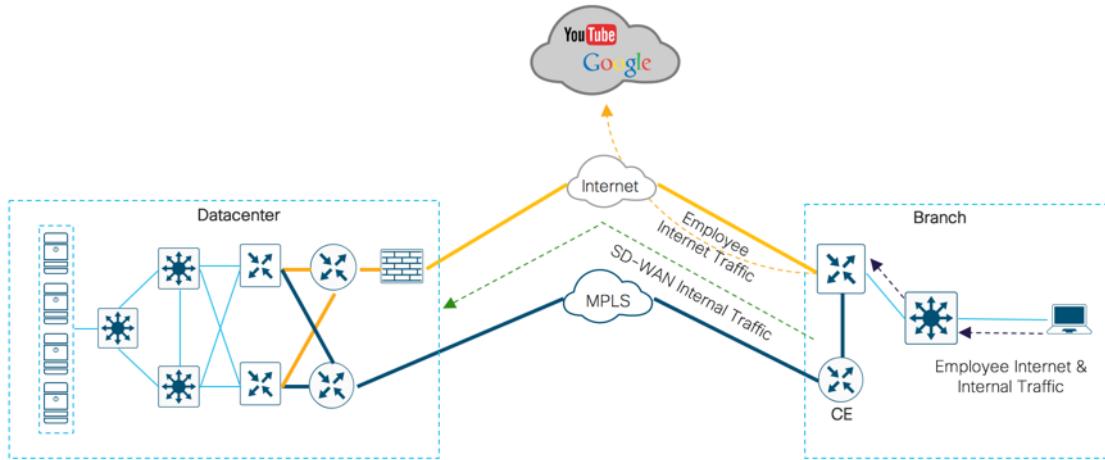

Use case #2 - DIA for guest user access

Remote-site guest users access the Internet directly for user web access and cloud-based applications, without routing their traffic via the internal network and through the central site.

Figure 3 Internet traffic flow from guest network

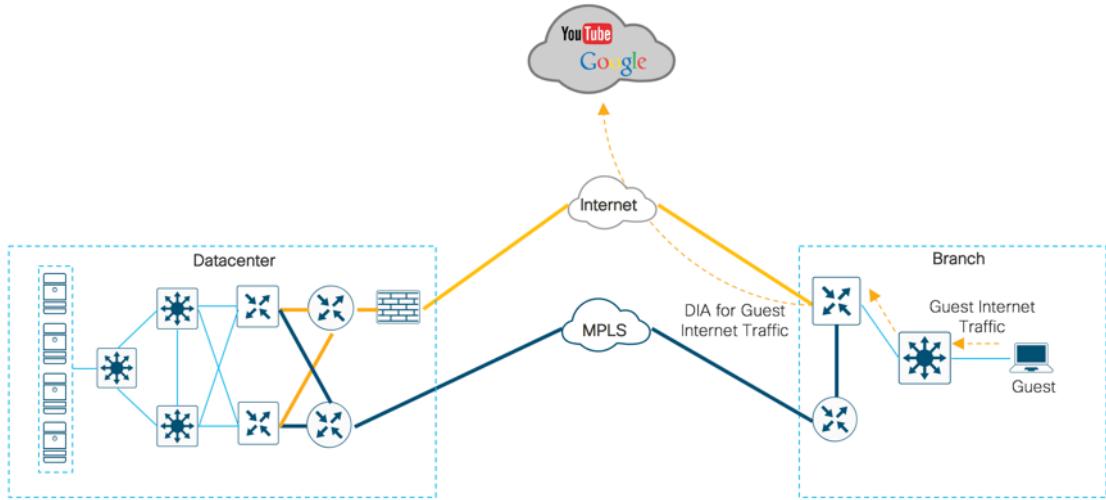


Design – Cisco SD-WAN Direct Internet Access Design Components and Considerations

Direct Internet Access Design

This guide focuses on four remote-site designs with DIA:

- Single-router remote site with MPLS WAN services and Internet connectivity, known as the single-router hybrid design model.
- Dual-router remote site with MPLS WAN services and Internet connectivity using TLOC extension, known as the dual-router hybrid design model.
- Single-router remote site with dual-Internet connections to different Internet Service Providers (ISPs), known as the single-router dual-Internet design model.
- Dual-router remote site with dual-Internet connections to different ISPs using TLOC extension, known as the dual-router dual-Internet design model.

Figure 4 Internet access design models

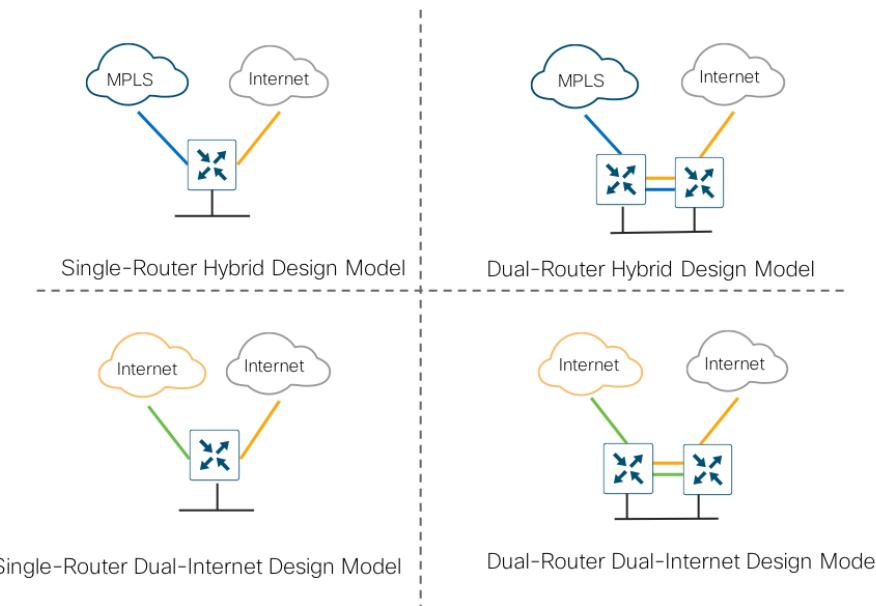

These designs provide configuration and guidance for enabling localized Internet access in remote office locations.

SD-WAN DIA Design Components

The design components required to establish local Internet exit at each branch are explained in the following sections.


Segmentation

In DIA, segmentation is useful in keeping authenticated employee or users separate from the guest users. All SD-WAN designs are based on the use of VPN to segment the routing table, thus allowing multiple default routes to exist on the same WAN edge.

In SD-WAN, VPN 0, the transport VPN, is similar to a Front-Door VRF (FVRF) used in IWAN. In WAN Edge devices, each VPN is a VRF and completely isolated from one another. All VPNs other than VPN 0 and VPN 512 are used to carry data traffic across the overlay network. These VPNs, 1-511 and 513-65530, are referred to as service-side VPNs. For these VPNs to operate, each one must have an operational interface (or sub-interface). The remainder of what is configured in these VPNs depends on the network needs. You can configure features specific for the user segment, such as BGP and OSPF routing, VRRP, QoS, traffic shaping, and policing.


As shown in figure, if the interface in VPN 0 is assigned a static IP address, a default static route can be configured in VPN 0 pointing to the ISP device as its next hop router. Alternatively, an IP address and default route could be obtained dynamically with DHCP. After authenticating with the vBond orchestrator, the WAN edge device uses this route to authenticate itself with vSmart controller and then establish an OMP session over the DTLS tunnel.

Figure 5 Authentication via DTLS

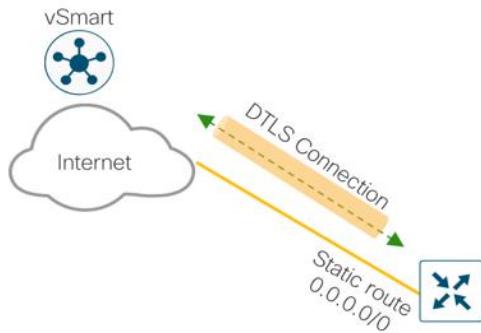


Once the IPsec tunnel is established between the WAN Edges, all Internet traffic from the site will use the OMP default route learnt over the DTLS tunnels in the service side VPN to reach the Internet via datacenter, in the absence of local branch DIA.

Figure 6 Internet exit via tunnel

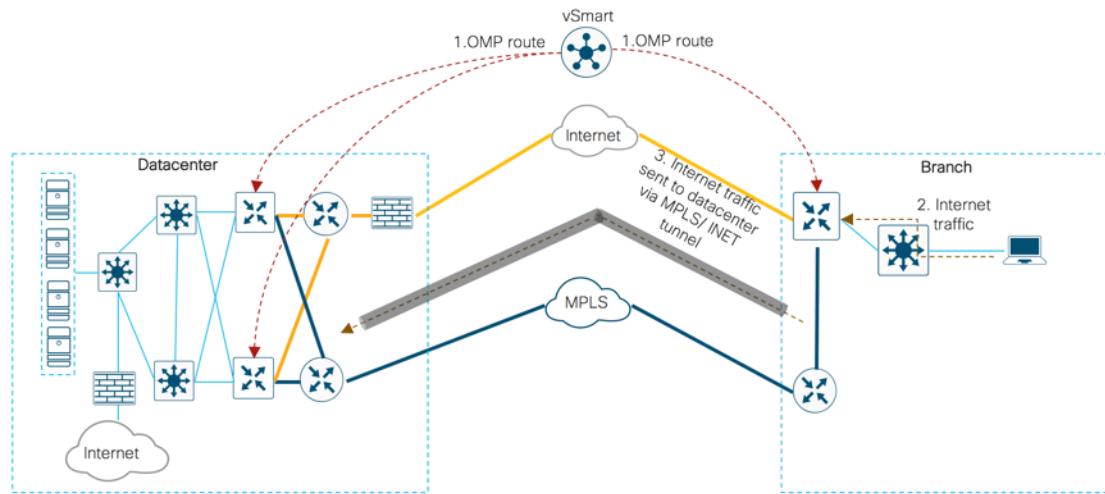

As explained in figure 7, within the direct Internet model, segmentation is leveraged by deploying centralized data policies or a NAT DIA route to leak Internet traffic from the service-side VPN (VPNs 0 - 511,513 - 65530) into the Internet transport VPN (VPN 0), which allows traffic to exit directly to the Internet through the NAT- enabled interface in VPN 0.

Figure 7 Local Internet breakout

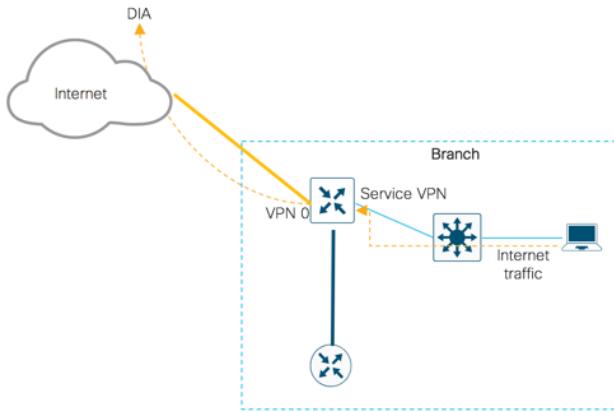


Network Address Translation

Network Address Translation (NAT) is designed for IP address conservation. It enables private IP networks that uses unregistered IP addresses to connect to the Internet. NAT usually connects two networks together by translating the private addresses in the internal network into legal addresses, before forwarding traffic to another network.


For DIA, NAT translation for packets exiting into the internet within the branch is enabled on the WAN edge devices via NAT overload. NAT overload is the mapping of multiple unregistered IP addresses to a single registered IP address by using different ports. To achieve this functionality on WAN edge devices, configure NAT on all WAN transport interfaces that face the Internet. The NAT operation on outgoing traffic is performed in VPN 0, which is always only a transport VPN. The router's connection to the Internet is in VPN 0.

Figure 8 NAT configuration on transport VPN Interface

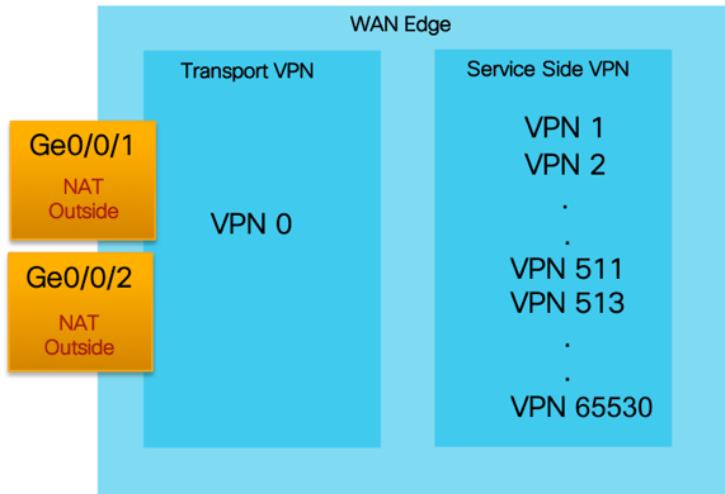

For DIA, as shown in the figure, NAT overload can be configured on the physical Internet transport interfaces connecting to the Internet Service Provider's network. The source IP address of internal traffic destined for the Internet is translated to the interface IP address and exits directly to the Internet. The rest of the traffic remains within the overlay network and travels between two routers on the secure IPsec tunnels.

Figure 9 WAN edge acting as a NAT device

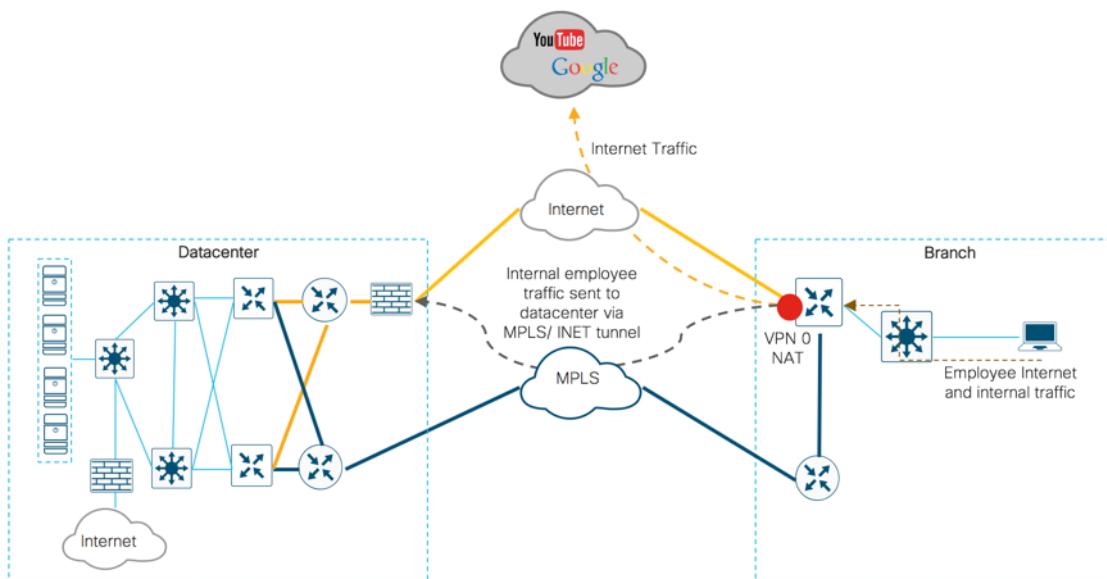

Centralized Data Policy

Data policies influence the flow of data traffic through the network based on fields in the IP packet headers and VPN membership. Centralized policies can be used in configuring application firewalls, service chaining, traffic engineering, Quality of Service (QoS), and Cflowd. Localized data policies allow you to configure data traffic at a specific site, such as ACLs, QoS, mirroring, and policing. Some centralized data policies may affect handling on the WAN edge itself, as in the case of app-route policies or a QOS classification policy.


Centralized policies are built using vManage, and then stored in its database. They are then sent via NETCONF to the vSmart controller to become a part of vSmart configurations. The vSmart controller then uses OMP to send the policy parameters as updates in the routing protocol to all of the WAN edge devices. WAN edge devices learn the policy and then execute them in memory. As a result, all configurations are backed up in vManage configuration database.

In a centralized data policy, when a packet matches one of the match conditions, the associated action is taken and policy evaluation on that packet stops. Bear this in mind as you design your policies to ensure that the desired actions are taken on the items subject to policy, because if a packet matches no parameters in any of the sequences in the policy, it is dropped and discarded by default.

Working of Centralized Data Policy

In WAN edge devices, new flows hash based on ECMP. However, it is possible to route data traffic to a specific DIA interface by setting a path preference by using a traffic data policy within the centralized policy. Such centralized policies are configured on the vSmart controller and set two actions—VPN NAT and local-TLOC color. In this case, the flow is based on the preference set within the traffic data policy (preferred and backup path). In the figure, Internet 2 (bronze) is set as backup preferred path, on failure of preferred path which is Internet 1 (biz-internet), the web traffic rerouted based on the policy.

Figure 10 Centralized data policy with set path preference

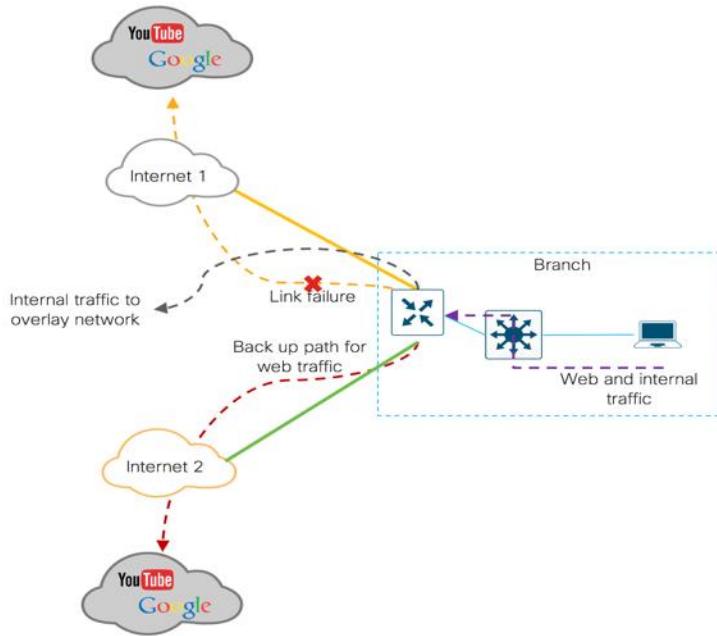

Technical Tip: In IOS XE SD-WAN routers with two transports, the new flows hash according to ECMP and no path preference can be set.

Design Considerations for using Centralized Data Policy

- When applying policy definitions to a site-list, you can apply only one of each type of policy in a particular direction.
- Because a site-list is a grouping of many sites, you should be careful about not including a site in more than one site-list while designing a data policy. Ensure that the site IDs across all the site lists are unique.

Techical Tip: Data policies that come from the vSmart controller are always implicitly applied in the inbound direction.


NAT DIA Route

One of the three types of NAT routes include NAT DIA route. In the DIA use case, a service side VPN is statically defined as a nat-route prefix, pointing the nexthop towards VPN 0.

How NAT DIA Routes Work

While configuring a NAT DIA route, you can direct local Internet traffic to exit directly to the Internet cloud from the service-side VPN, through the next hop transport VPN, VPN 0. Refer to the figure, to see the flow of Internet traffic from service-side VPN (VPN 2) on the WAN edge device to the Internet.

Figure 11 NAT DIA route for guest traffic

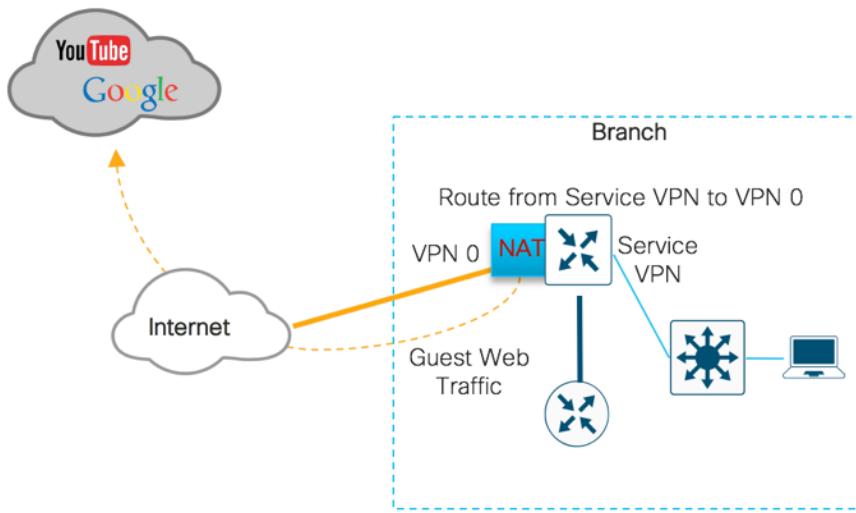

Design Considerations on using NAT DIA

- Along with the configuration of a NAT DIA route within the service side VPN, ensure that you enable NAT on the Internet facing interface within VPN 0, as Internet traffic is redirected based on the NAT DIA route from the service-side to the NAT-enabled transport side interface.
- If you are using one of routing protocols on the service-side VPN, ensure that you redistribute the NAT DIA route into it. Refer to the deployment section for specific configuration.
- In NAT DIA, it is assumed that NAT/PAT is configured on one or more interfaces in VPN 0.
- By default, an IP static route has an administrative distance of 1, a NAT DIA route has a distance of 6, and OMP has a distance of 251. Therefore, the NAT DIA route overwrites the OMP advertised default to prefer the local Internet exit, instead of taking the remote data center Internet exit within a VPN.


Leverage centralized data policy and NAT DIA route to deploy DIA

This section explains the adoption of centralized data policies and NAT DIA routes to allow Internet traffic to have a local Internet-exit within the branch for specific use cases. As both of the options explained below will help configure DIA , choose the one that best fits the network. For instance, to filter out traffic based on the IP prefixes and IP packet headers, you can deploy centralized data policy (option 2), if not to allow flow of all the traffic from LAN side to exit directly to the Internet from the branch, configure NAT DIA (option 1).

Option 1: DIA using NAT DIA Route

As shown in the figure, traffic is routed to a NAT-enabled WAN transport VPN (VPN 0) from the service-side VPN (VPN 2) based on the destination prefix in the NAT DIA route. Then, the source IP address of the packet is translated to the interface IP address using NAT and forwarded to the destination prefix. In this scenario, traffic flowing from the LAN side is not filtered, but sent directly to the interface IP address that has been translated using NAT.


Figure 12 Traffic flow with NAT DIA route

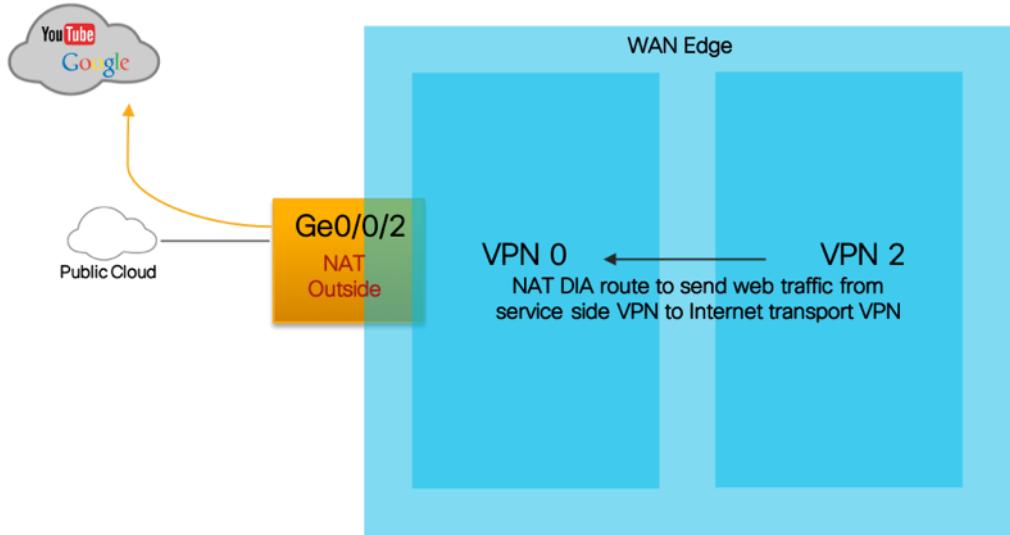

Option 2: DIA using Centralized Policy

To enable DIA from the branch, enable NAT within the Internet transport interface on the WAN Edge router, and a centralized data policy is created using vManage, which is then applied to the vSmart controller to establish DIA within the remote-site. The LAN traffic here is filtered within the policy based on IP prefixes and IP headers and the result of the policy is pushed to the WAN edge devices. Based on the policy configuration used in this deployment scenario, the Internet traffic is redirected from the service VPN to the transport VPN (VPN 0). All other traffic remains in VPN 1 and travels directly through the IPsec data plane tunnel to the destination WAN edge router. This traffic never passes through VPN 0, therefore, it is never touched by NAT. Only the traffic destined for the public network passes from the service-side VPN to VPN 0, where its source IP address is translated using NAT.

Figure 13 Traffic flow using centralized data policy

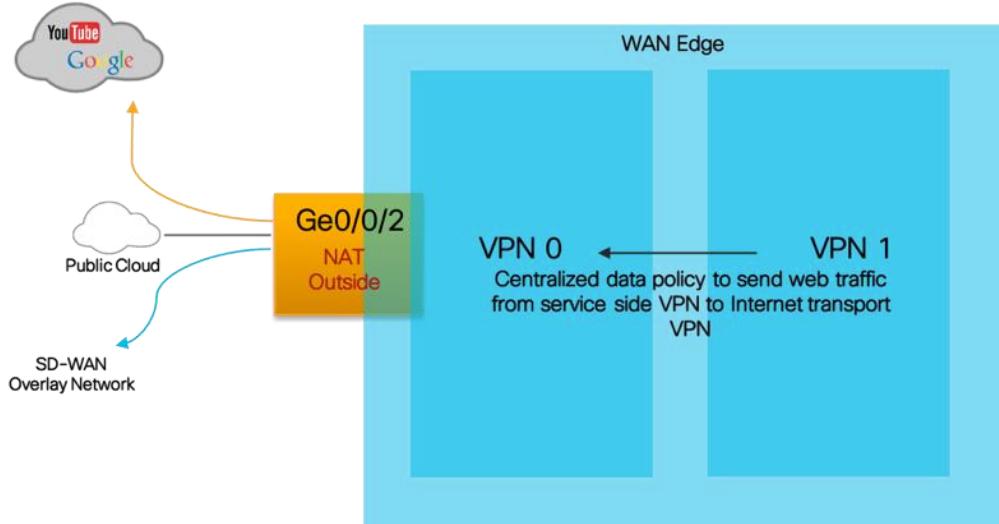

Technical Tip: The other option to enable DIA on vEdge router platforms is by using Cloud onRamp for SaaS, for more information refer to [SD-WAN: Cloud onRamp for SaaS Deployment Guide](#). Note that this feature is not yet supported on IOS XE SD-WAN platforms.

NAT Tracker

If the Internet or external network becomes unavailable, for example, due to a brownout, the router has no way to learn of this disruption, and it continues to forward traffic based on the policy rules. The result is that traffic that is being forwarded to the Internet is silently dropped. To prevent the Internet bound traffic from being dropped, configure the WAN edge device to track the status of the transport interface, using System Tracker. If local Internet is unavailable, redirect the traffic to the IPsec tunnel that hasn't had its address translated using NAT.

The SD-WAN System Tracker can be configured to track the status of the transport interfaces that connect to the Internet. The tracking feature is useful when NAT is enabled on a transport interface in VPN 0 to allow data traffic from the router to exit directly to the Internet.

With tracking enabled, the router periodically probes the path to the Internet to determine whether it is up. When it detects that the path is down, the router withdraws the NAT route to the Internet destination, and reroutes the traffic to the IPsec tunnel, that doesn't have NAT enabled. The local router continues to periodically check the status of the path to the interface. When it detects that the path is functioning again, the router reinstalls the NAT route to the Internet.

Minimum Requirements for NAT Tracker

- At a minimum, you must specify the IP address or DNS name of a destination on the Internet. This is the destination to which the router sends probes to determine the status of the transport interface. You can configure either one IP address or one DNS name. Ensure that you use an endpoint IP address that responds to HTTP/HTTPS requests.
- By default, a status probe is sent every minute (60 seconds) and only after sending three probes and receiving no responses does the router declare that the transport interface is down. To modify this value, change the time in the interval command to a value from 10 through 600 seconds and the number of retries to a value from 1 through 10.
- Also note that, by default, the router waits 300 milliseconds to receive a response from the Internet destination. To modify the time to wait for a response, change the time in the threshold command to a value from 100 through 1000 milliseconds.


Techical Tip: You can configure up to eight interface trackers and each transport interface must have a different tracker name associated with it. The same tracker name cannot be used on all NAT interfaces.

SD-WAN DIA Failover Scenarios

Based on the type of remote-site, the WAN edge design varies. While most remote sites are designed with a single-router WAN edge, there are certain dual-router, remote-site branches that run business critical applications that justify the need for redundancy to remove a single point of failure.

In the figure below, the remote sites are classified as single and dual SD-WAN edge devices with Internet failover to central Internet model in the event of local Internet link failure.


Figure 14 Single-router and dual-router hybrid design models

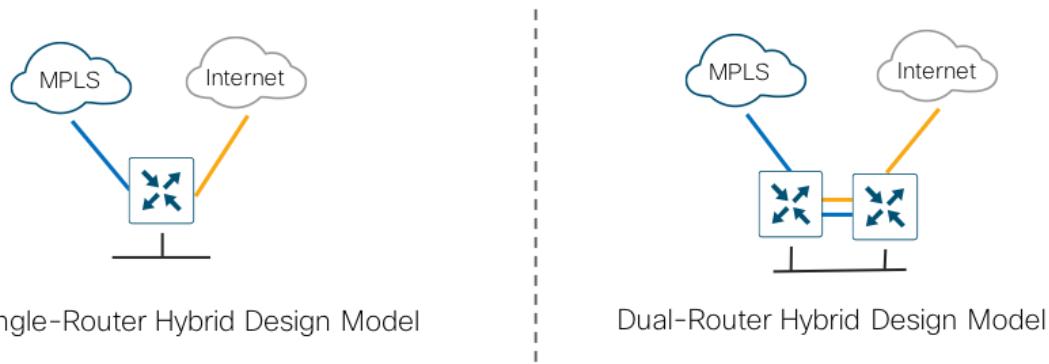

In the SD-WAN single-router, hybrid design model and SD-WAN dual-router hybrid design model, a failure of the local Internet link causes failover of Internet traffic to the central Internet model. Therefore, the Internet traffic exits via the central site or datacenter to the internet.

In the figure below, the remote sites are classified as single and dual SD-WAN edge devices with Internet failover to secondary Internet link in the event of primary Internet link failure.

Figure 15 Single router and dual router dual-internet design models

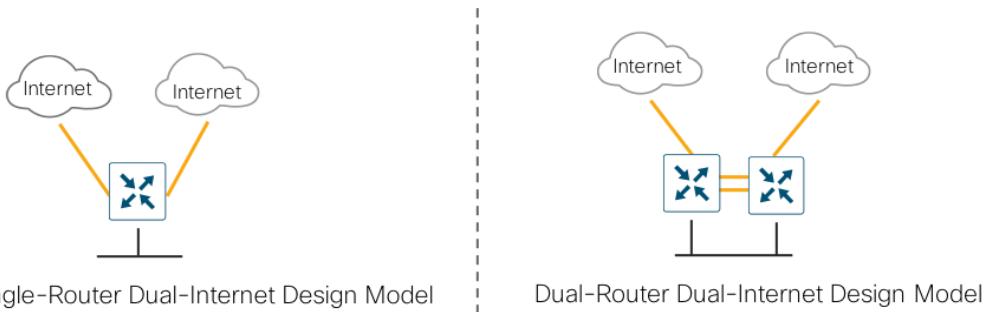

In the SD-WAN single-router, dual-Internet design model and dual-router, dual-Internet design model, redundancy allows for local Internet connectivity to failover to the secondary local Internet connection on WAN edge device.

SD-WAN L3 Distribution Switch

The switch connected to the WAN edge device must be configured with either a default/static route to direct traffic to the Internet-connected WAN Edge device or through redistribution into a dynamic protocol that runs between them. In this deployment scenario, the traffic is segmented. Guest traffic traverses through GUEST VRF, while the rest of the traffic follows the global routing table.

SD-WAN Remote-Site Design Details

In the following section, each of the components explained earlier are tied together and the design details per remote-site are explained in depth.


Note that the common technical details are repeated in each section.

SD-WAN Single-Router Hybrid Remote-Site Design

The remote-site is configured with a single WAN edge router with MPLS tunnel and Internet transport tunnel. In this hybrid design with DIA configured, the Internet traffic is routed outside the tunnel to exit via the local Internet interface. The configuration is based on maintaining the Internet path as the primary one with failover to the central site Internet connectivity using the MPLS based tunnel.


On the Internet facing interface, DHCP can be used to obtain an IP address from the Internet Service Provider with the WAN edge device installing a default route into transport VPN from the ISP. Alternatively, a static IP address and static route can be configured on the WAN edge device as done in this deployment. As shown in the figure below, the local Internet traffic exits directly to the Internet from the branch using this route.

Figure 16 Remote site DIA exit

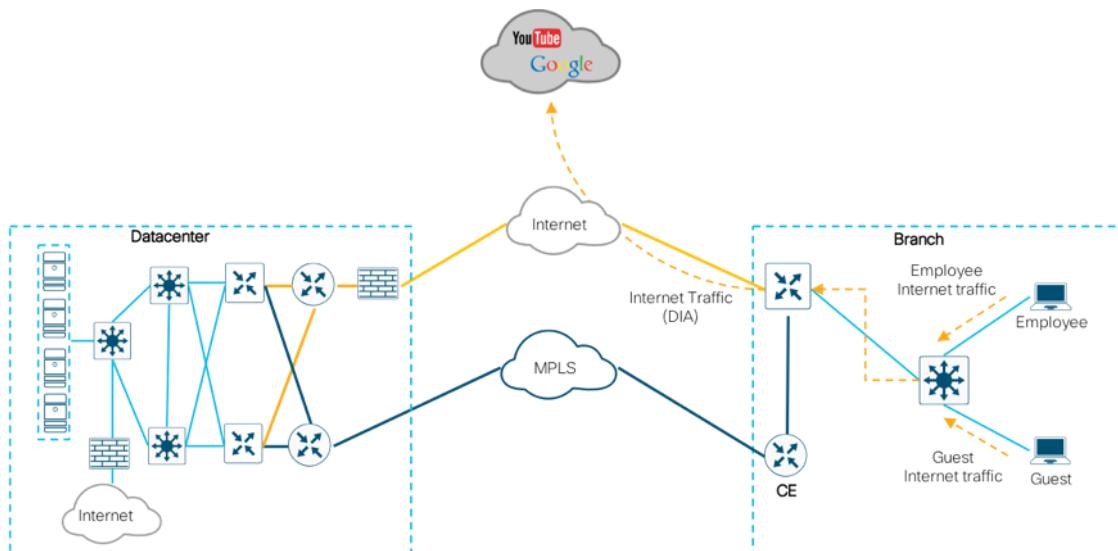


NAT is enabled on the Internet transport interface.

Figure 17 NAT Enabled Interfaces

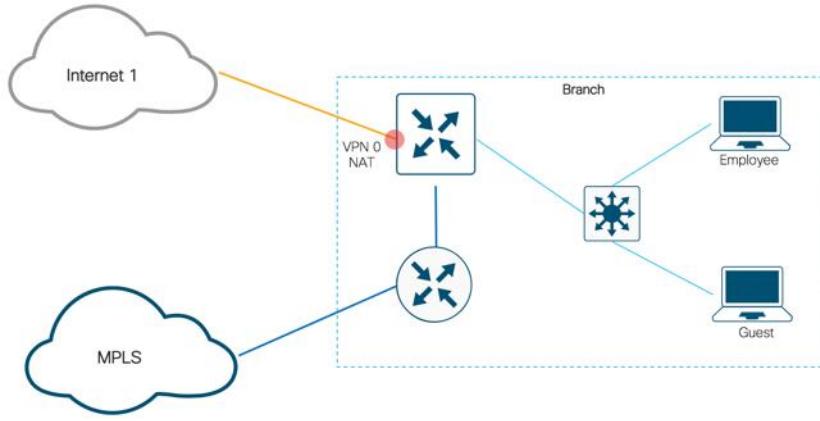


As discussed within the components section, to enable DIA, a centralized data policy can be configured to filter the incoming traffic based on match/action and route the traffic from service side VPN to transport side VPN. Another solution for DIA is to configure IP NAT route using device templates to route traffic from service side to the transport side VPN 0 NAT enabled interface.

Figure 18 Internet traffic flow using DIA route or data policy

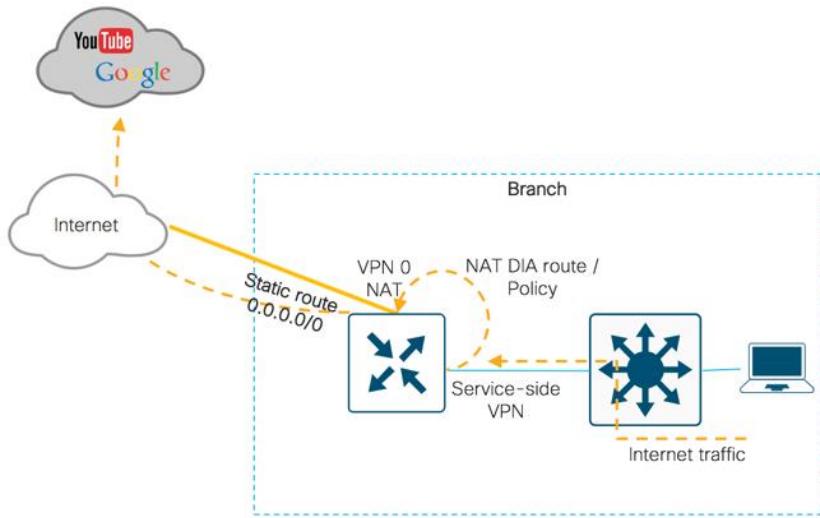

In figure 19, MPLS based transport tunnel is used as a backup path for all Internet traffic on failure of the local Internet connection. A default route is advertised from the central site to roll back to the central Internet model.

Figure 19 Internet traffic flow via datacenter

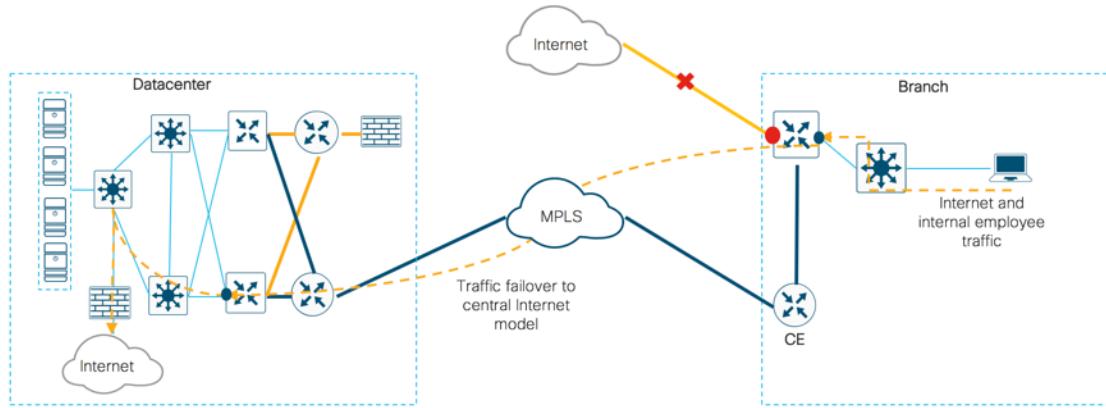

On WAN edge routers, tracking the interface status is useful when NAT on the transport interface in VPN 0 allows data traffic to flow directly to the Internet. On enabling transport tunnel tracking, the software periodically probes the path to the Internet to determine whether it is up, based DNS or endpoint IP address. If the software detects that this path is down, the NAT feature on the interface is disabled and all Internet traffic exits via the central Internet model. Ensure that you use an endpoint IP address that responds to HTTP/HTTPS requests. For instance, Google DNS server 8.8.8.8 cannot be used as an endpoint IP address.


Technical Tip: NAT tracker is currently unavailable on devices running IOS XE SD-WAN software.

SD-WAN Dual-Router Hybrid Remote-Site Design

In this design, the remote-site is configured with a single WAN edge router with the MPLS tunnel and Internet transport tunnel. In this hybrid design with DIA configured, the Internet traffic is routed outside the tunnel to exit via the local Internet interface. The configuration is based on maintaining the Internet path as the primary one with failover to the central site Internet connectivity using the MPLS based tunnel via TLOC interface.


On the Internet facing interface, DHCP can be used to obtain an IP address from the Internet Service Provider with the WAN Edge device installing a default route into transport VPN from the ISP. Alternatively, a static IP address and static route can be configured on the WAN Edge device as done in this deployment. As shown in the figure below, the local Internet traffic exits directly to the Internet from the branch using this route.

Figure 20 **Remote-site DIA exit**

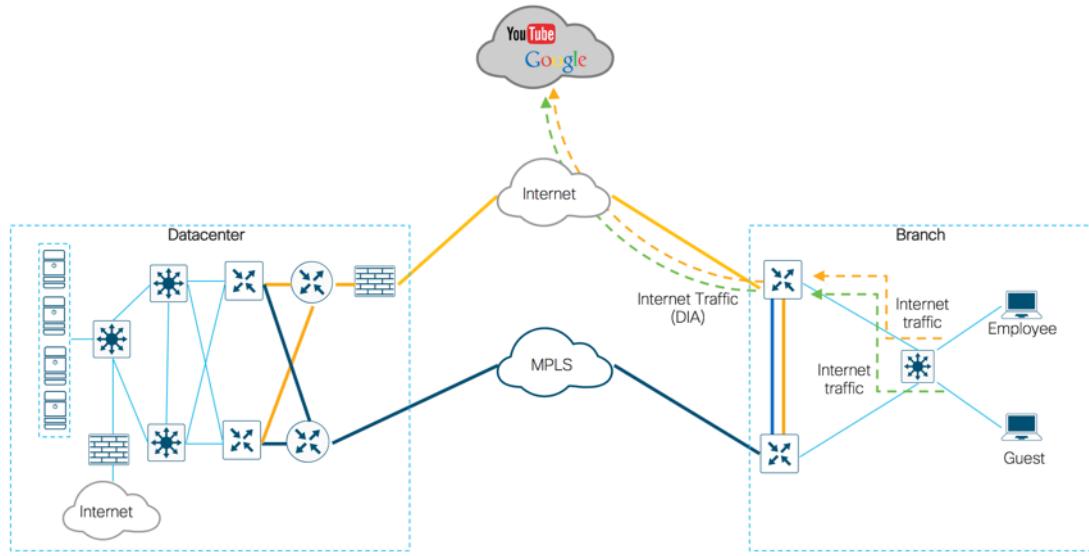


In the figure below, NAT is enabled on the Internet transport interfaces in both the WAN edge devices. Note that here NAT is also enabled on the TLOC interface to allow the internet traffic that hits the WAN Edge device (device with a direct MPLS transport) to flow via the TLOC port towards the device that has the Internet transport interface. The internet traffic then exits from the second WAN edge device (device connected to the Internet transport) directly to the Internet without being routed to the datacenter.

Figure 21 NAT enabled Interfaces

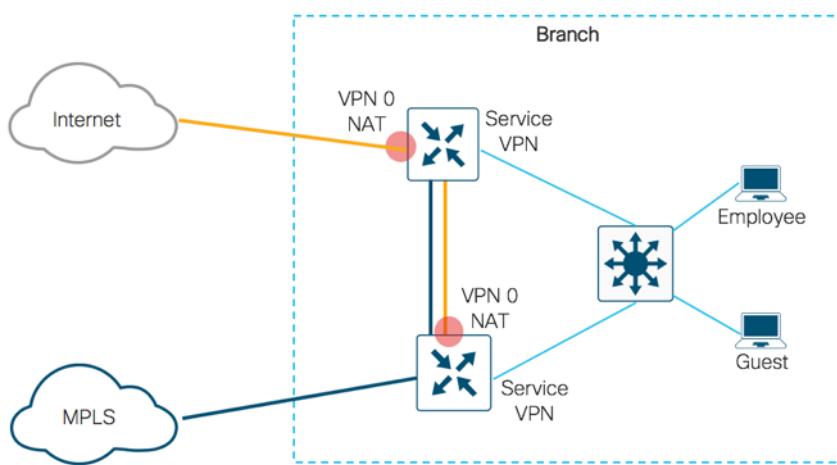


As discussed in the components section, to enable DIA, a centralized data policy can be configured to filter the incoming traffic based on match/action and route the traffic from service side VPN to transport side VPN. Another solution for DIA is to configure IP NAT route using device templates to route traffic from service side to the transport side VPN 0, NAT-enabled interface.

Figure 22 Internet traffic flow using DIA route or data policy

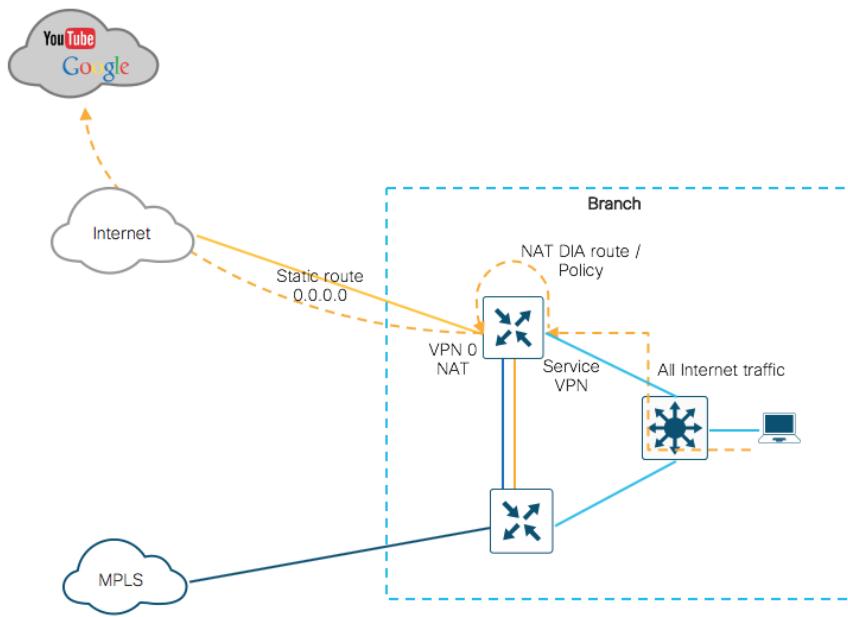

In figure 23, MPLS-based transport tunnel is used as a backup path for all Internet traffic when the local Internet connection fails. A default route is advertised from the central site over the MPLS tunnel to roll back to the central Internet model.

Figure 23 Internet traffic failover

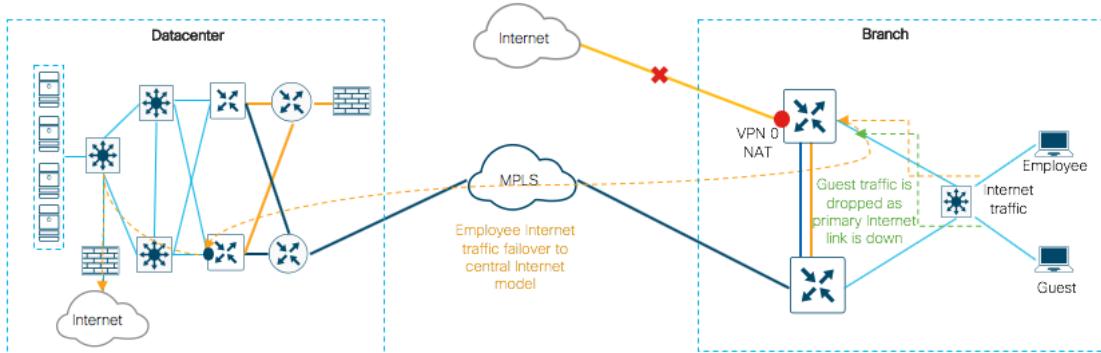

On WAN edge routers, tracking the interface status is useful when NAT on the transport interface in VPN 0 allows data traffic to flow directly to the Internet. At a minimum, the tracker name along with endpoint IP address is specified. On enabling transport tunnel tracking, the software periodically probes the path to the Internet to determine whether it is up based endpoint-dns-name or endpoint-IP address. If the software detects that this path is down, NAT is disabled on the interface and all Internet traffic exits via the central Internet model. Ensure that you use an endpoint IP address that responds to HTTP/HTTPS requests and apply only one tracker to an interface. For instance, Google DNS server 8.8.8.8 cannot be used as an endpoint IP address.


Technical Tip: NAT tracker is currently unavailable on devices running IOS XE SD-WAN software.

SD-WAN Single-Router Dual Internet Remote-Site Design

The remote-site is configured with a single WAN Edge router with two Internet tunnels. In this dual-internet design with DIA configured, the Internet traffic is routed outside the tunnel to exit via the local Internet interface. The configuration is based on maintaining dual Internet path with traffic load-balancing for SD-WAN XE devices and vEdge router platforms.


On the Internet facing interface, DHCP can be used to obtain an IP address from the Internet Service Provider with the WAN edge device installing a default route into transport VPN from the ISP. Alternatively, a static IP address and static route can be configured on the WAN Edge device as done in this deployment. As shown in the figure below, the local Internet traffic exits directly to the Internet from the branch using this route.

Figure 24 Remote-Site DIA exit

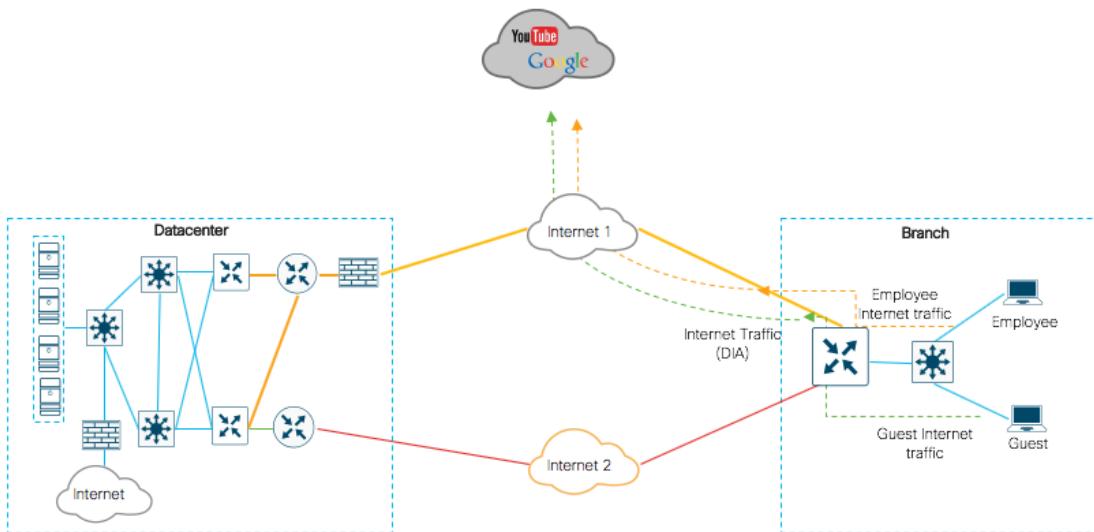


In the figure below, NAT is enabled on the Internet transport interface in both WAN Edge devices.

Figure 25 NAT enabled Interfaces

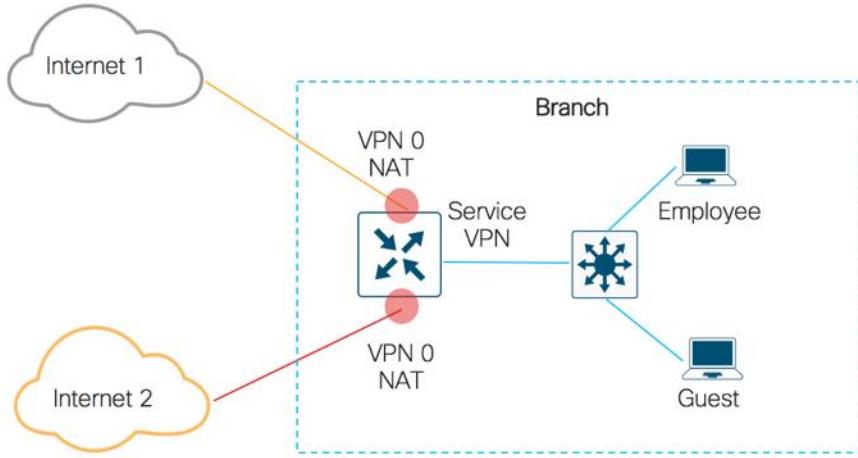

As discussed in the components section, to enable DIA, a centralized data policy can be configured to filter the incoming traffic based on match/action and route the traffic from service side VPN to transport side VPN. Another solution for DIA is to configure an IP NAT route using device templates to route traffic from service side to the transport side VPN 0, NAT-enabled interface.


Figure 26 Internet traffic flow using DIA route or data policy

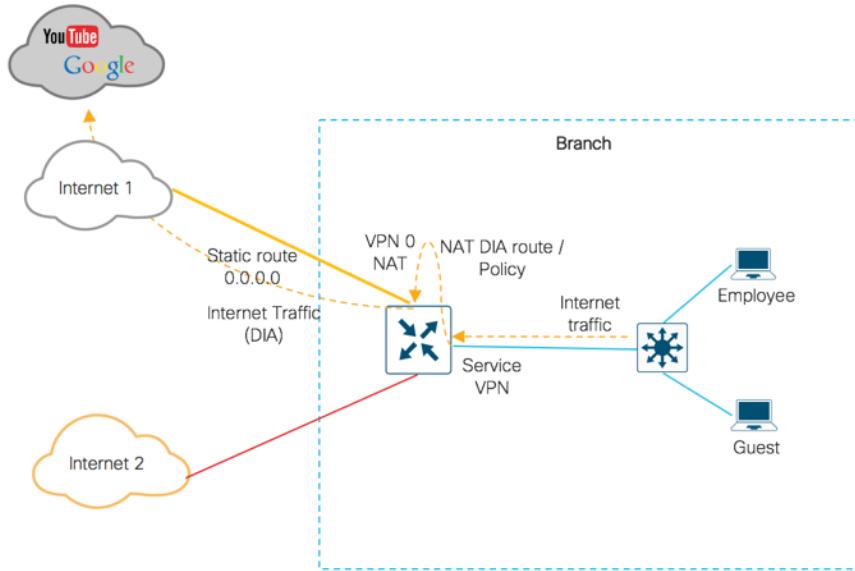

When a WAN edge router has two or more NAT interfaces, and hence two or more DIA connections to the Internet, data traffic is forwarded on the NAT interfaces using ECMP by default. To direct data traffic to a specific DIA interface, a

centralized data policy can be configured on the vSmart controller that sets two actions—NAT and local-TLOC color. In the local-TLOC color action, the preferred color of the TLOC that connects to the desired DIA connection is chosen. In this design example, Internet 1 is labelled color biz-internet and Internet 2 is labelled color bronze. The local-TLOC color is set as biz-internet with failover to bronze. When Internet 1 is down, web traffic fails over to Internet 2.

Figure 27 Path preference for Internet traffic

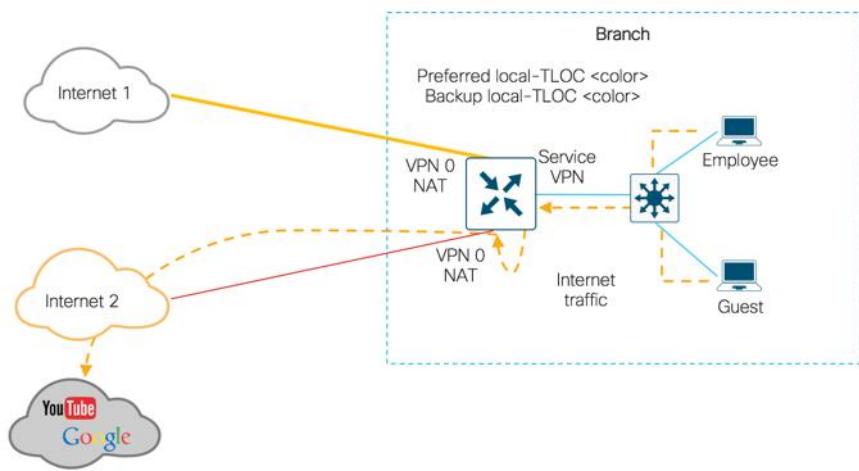

Techical Tip: On IOS XE SD-WAN routers, the traffic can be forwarded to the NAT interfaces based on ECMP, as path preference is not yet supported on these router platforms.

On WAN edge routers, tracking the interface status is useful when NAT on the transport interface in VPN 0 allows data traffic to flow directly to the Internet. At a minimum, the tracker name along with the endpoint IP address is specified. On enabling transport tunnel tracking, the software periodically probes the path to the Internet to determine whether it is up based on endpoint-dns-name or endpoint-IP address. If the software detects that this path is down, NAT is disabled on the interface and all Internet traffic exits via the central Internet model. Ensure that you use an endpoint IP address that responds to HTTP/HTTPS requests and apply only one tracker to an interface. For instance, Google DNS server 8.8.8.8 cannot be used as an endpoint IP address.

Techical Tip: In this design, two different NAT tracker names must be configured and enabled under each NAT interface. NAT must be enabled before the trackers are configured.


SD-WAN Dual-Router Dual Internet Remote-Site Design

The remote-site is configured with dual WAN edge routers and two Internet transport links. In this dual-internet design with DIA configured, the Internet traffic is routed outside the tunnel to exit via the local Internet interface. The transport links are labelled with a specific TLOC color, for instance biz-Internet, bronze etc. In this design, the primary local Internet is Internet transport biz-internet and on link failure, a fail-over is initiated to the bronze Internet transport.

On the Internet facing interface, DHCP can be used to obtain an IP address from the Internet Service Provider with the WAN edge device installing a default route into transport VPN from the ISP. Alternatively, a static IP address and static route can


be configured on the WAN edge device as done in this deployment. As shown in the figure below, the local Internet traffic exits directly to the Internet from the branch using this route.

Figure 28 Remote-Site DIA exit

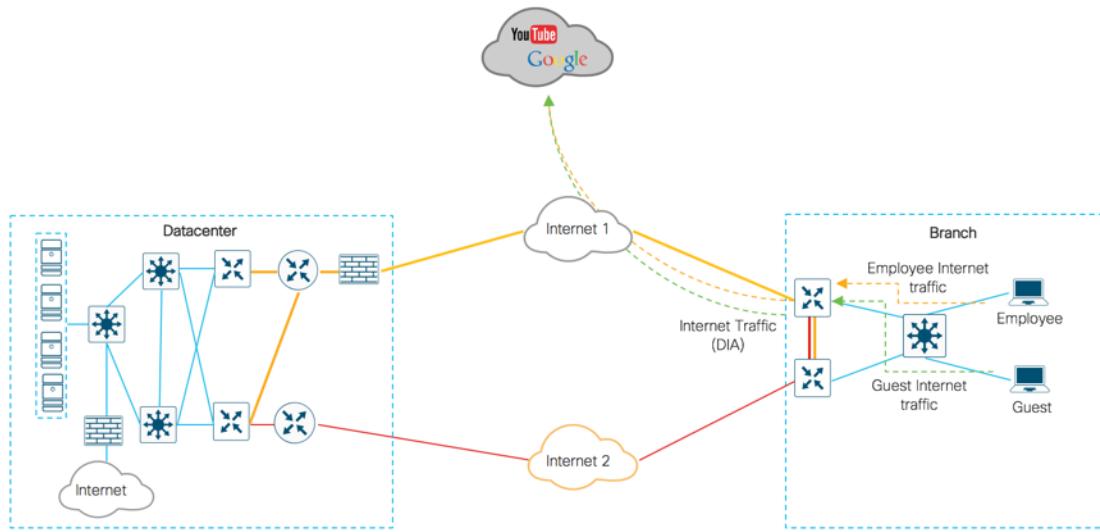


In the figure below, NAT is enabled on the Internet transport interface in both WAN Edge devices. Note that, NAT here is enabled on the TLOC Interfaces to allow flow of Internet traffic via the TLOC interface to then exit directly via the Internet transport interface of the second WAN edge device. This configuration is particularly useful in a situation where one of the two Internet transports has failed.

Figure 29 NAT enabled Interfaces

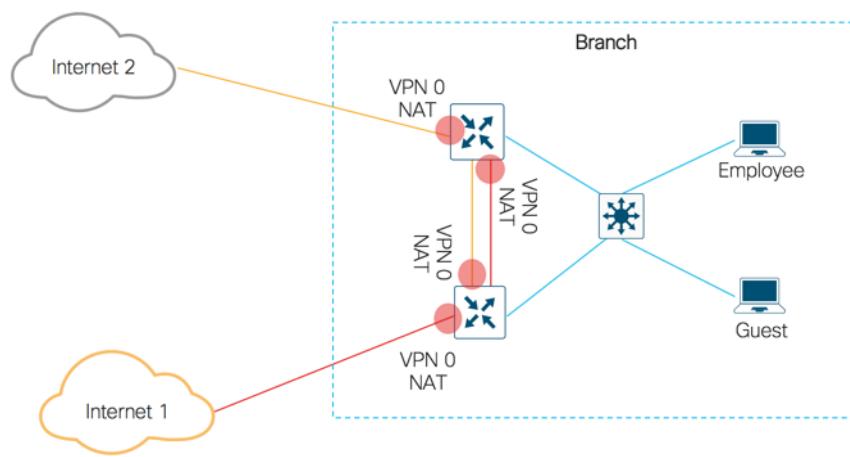


As discussed in the components section, to enable DIA, a centralized data policy can be configured to filter the incoming traffic based on match/action and route the traffic from service side VPN to transport side VPN. Another solution for DIA is to configure IP NAT route using device templates to route traffic from service side to the transport side (VPN 0) NAT enabled interface.

Figure 30 Internet traffic flow using DIA route or data policy

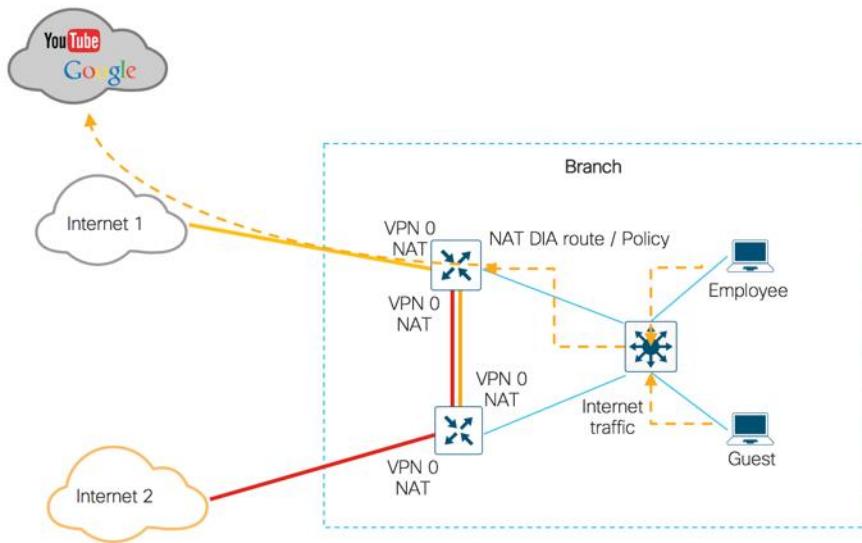

When a WAN edge router has two or more NAT interfaces, and hence two or more DIA connections to the Internet, by default, data traffic is forwarded on the NAT interfaces using ECMP. To direct data traffic to a specific DIA interface, a centralized data policy can be configured on the vSmart controller that sets two actions—NAT and local-TLOC color. In the local-TLOC color action, the preferred color of the TLOC that connects to the desired DIA connection is chosen. In this design example, Internet 1 is labelled color biz-internet and Internet 2 is labelled color bronze. The local-TLOC color is set as biz-internet with failover to bronze. When Internet 1 is down, web traffic fails over to Internet 2.

Figure 31 Path preference for Internet traffic

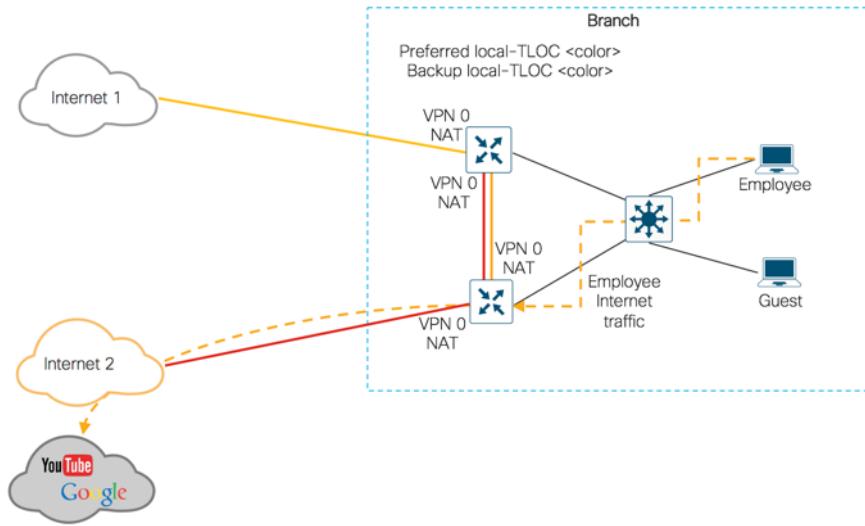

Note that path preference is set for the vEdge platform to biz-internet in this design. If the interface configured with color biz-internet goes to down state, the Internet traffic automatically chooses the second Internet link (Bronze) as the DIA path. With centralized policy configured, if the Internet link on WAN edge device wherein Biz-Internet color is configured on the main physical interface goes down, and Internet traffic is being routed towards this router from the TLOC interface of the neighbouring WAN edge device, the traffic will be blackholed. To prevent this, a possible solution is to configure NAT DIA route to enable DIA with system tracker.

Techical Tip: On IOS XE SD-WAN routers, traffic forwarding to the NAT interfaces using path preference is not yet supported on IOS XE SD-WAN platforms.

On WAN edge routers, tracking the interface status is useful when NAT on the transport interface in VPN 0 allows data traffic to flow directly to the Internet. At a minimum, the tracker name along with endpoint IP address is specified. On enabling transport tunnel tracking, the software periodically probes the path to the Internet to determine whether it is up based on endpoint-dns-name or endpoint-IP address. If the software detects that this path is down, NAT is disabled on the interface and all Internet traffic exits via the central Internet model. Ensure that you use an endpoint IP address that responds to HTTP/HTTPS requests and apply only one tracker to an interface. For instance, Google DNS server 8.8.8.8 cannot be used as an endpoint IP address.

Techical Tip: In this design, two different NAT tracker names must be configured and enabled under each NAT interface. NAT must be enabled before the trackers are configured.

Deploy - Cisco SD-WAN Direct Internet Access Prerequisites

Prerequisites

This section of the guide focuses on the prerequisites for each remote site design which involves onboarding devices into the vManage NMS, building and deploying templates, followed by validating NAT configuration.

Process: Verify WAN Edge router prerequisites

For the procedures below, you will need to login to the vManage web console using the IP address or fully qualified domain name of your vManage instance. For example:

https://<vManage_ipaddr_or_FQDN>:8443/

Step 1: Verify Cisco Edge devices in vManage

1. In order to add WAN edge devices to the list of available devices, navigate to **Plug and Play Connect** on Cisco Software Central and provision the devices based on a serial and chassis numbers. An authorized serial file of .viptela format is generated and uploaded to the vManage dashboard.

Profile Name	Controller Type	Default	Description	Used By	Download
ENB-SOLUTIONS-VBOND	VBOND	✓	vBond for ENB SOLUTIONS	3	Provisioning File

The serial file list contains both vEdge and SD-WAN XE routers. Legacy serial files for vEdge routers are available on the Cisco SD-WAN support website. However, most of these serial files are also available within Plug and Play (PnP) Connect Portal now.

Technical Tip: The Sync Smart Account option introduced in version 18.3 and above allows vManage to automatically connect to the PnP Connect portal and pull up the authorized serial file. For more details, refer to the latest [SD-WAN Deployment Guide](#).

2. In the navigation panel on the left of the screen, select **Configuration > Devices**.

This will bring up the **Devices** screen. An example is shown in the figure below.

The screenshot shows the Cisco vManage interface with the title bar "Cisco vManage". The left sidebar has icons for Home, Configuration, Devices, Network, Security, and Analytics. The main header says "CONFIGURATION | DEVICES" with tabs for "WAN Edge List" (selected) and "Controllers". Below the header are buttons for "Change Mode", "Upload WAN Edge List", "Export Bootstrap Configuration", and "Sync Smart Account". A search bar and "Search Options" dropdown are also present. The main area displays a table titled "WAN Edge List" with the following columns: State, Device Model, Chassis Number, Serial No./Token, Enterprise Cert Serial No., Enterprise Cert Expiration Date, Hostname, and three ellipsis buttons. The table contains 18 rows of device information, with the last two rows showing "DC1-WAN-Edge1" and "DC1-WAN-Edge2" respectively. The total number of rows is 76.

State	Device Model	Chassis Number	Serial No./Token	Enterprise Cert Serial No.	Enterprise Cert Expiration Date	Hostname	
Green	vEdge Cloud	34f4a954-307e-4f67-840b-98801236f749	Token - ef33d3e591d04...	NA	NA	--	...
Green	vEdge 5000	193A1104180047	082C1032	NA	NA	--	...
Green	vEdge Cloud	1a5add78-b19a-43db-aa6e-76a6b2361...	Token - e9f3c45ba393a...	NA	NA	--	...
Green	vEdge Cloud	d160d6ce-8d25-4084-a43a-ea4c2bb7e...	Token - d0f16498200d...	NA	NA	--	...
Green	vEdge Cloud	471d427d-4383-4b85-b8d5-463694790...	Token - 07ef04568037f...	NA	NA	--	...
Green	vEdge 1000	110G403180462	100070F6	NA	NA	--	...
Green	vEdge Cloud	0d777876-18a4-4e1f-ba0d-2297ba6d5...	Token - 13d75d2c4b13...	NA	NA	--	...
Green	vEdge Cloud	4d67b056-0e1c-4acc-840e-d1a9a2fb7...	Token - ac7cc124d3ca...	NA	NA	--	...
Green	vEdge Cloud	682af1c6-cd58-42fa-b1fa-a20e0941196f	Token - 38049872d93f...	NA	NA	--	...
Green	vEdge 5000	193A1104180040	1AFAA920	NA	NA	DC1-WAN-Edge2	...
Green	vEdge Cloud	46bc4c1a-8f21-4478-8b8d-771752777...	Token - 05abfa9fb62ee...	NA	NA	--	...
Green	vEdge Cloud	847a408c-ffde-4920-a6ec-b0fac65dfccb	Token - 090a1c43a67c...	NA	NA	--	...
Green	vEdge 1000	110G408180011	10006E32	NA	NA	--	...
Green	vEdge 100 B	1920B448161432	10004C17	NA	NA	--	...
Green	vEdge Cloud	2923298d-5e05-4efe-bc99-cf95f9db0ef5	Token - 4dccfcdb4787f...	NA	NA	--	...
Green	vEdge 5000	193A1104180039	0D611768	NA	NA	DC1-WAN-Edge1	...

Step 2: Configure Device Template for the Cisco WAN Edge Devices to Participate in SD-WAN Overlay

The templates used in this deployment guide are similar to those used in Cisco SD-WAN Deployment Guide. In this guide we have one datacenter and four branches. The templates used are:

Model	Template
Datacenter	DC_Hybrid_Type_A_BGP
Dual-route dual-internet remote-site model	Branch_A_Bronze_BGP_TLOC_SubInt OSPF Branch_A_INET_TLOC_SubInt OSPF
Dual-router hybrid remote-site model	Branch_B MPLS_BGP_TLOC_VRRP Branch_B_INET_TLOC_VRRP
Single-router hybrid remote-site model	Branch_C MPLS_CE_LAN OSPF
Single-router dual-internet remote-site model	Branch_D_Bronze_BizInternet_LAN OSPF

The device template, as well as the various feature templates which make up the device template, are discussed in **Appendix D**. Also, to further understand the topology of each branch and datacenter design, refer to **Appendix C**.

However, for detailed step-by-step instructions on creating individual feature templates and device templates, refer to the [Cisco SD-WAN Deployment Guide](#).

Step 3: Deploy the Device Template to the Cisco WAN Edge devices that will be used

On attaching the device template to a WAN edge router, vManage attaches the configurations based on the feature templates and pushes the configuration to the devices. There are two ways to build your feature templates: either by entering values within the variables configured or by uploading a .csv file with a list of the variables and their values. Note that within a feature template, the radio buttons against certain features can be configured as globally on/off or as variables through either of the methods explained earlier.

In this deployment guide, we will only discuss the values that are being entered manually in the device temaplate.

1. Go to **Configuration > Templates** and select the **Device** tab.
2. Find the desired device template.
3. Select the three dots to the right of the template, and from the drop-down menu, select **Attach Devices**.


An example is shown in the following figure.

Name	Description	Type	Device Model	Feature Templates	Devices Attached
Branch_C_MPLS_CE_LAN OSPF	Branch with Dual WAN with Hybrid transport and DIA exit	Feature	ISR4331	19	0 2 ...
Branch_B_INET_TLOC_VRRP	Branch Dual vEdge Hybrid TLOC with INET and LAN-side Acces...	Feature	ISR4331	14	
vSmart	vSmart	Feature	vSmart	9	
Branch_A_INET_TLOC_SubInt OSPF	Branch Dual vEdge Hybrid TLOC SubInts with INET and LAN-sid...	Feature	vEdge 1000	16	
Branch_D_Bronze_BizInternet_LAN OSPF	Branch Dual WAN Edge router with Dual Internet transport with ...	Feature	ISR4351	18	
DC_Hybrid_Type_A_BGP	DC MPLS and INET - Static to CE and BGP to LAN	Feature	vEdge 5000	16	
Branch_B_MPLS_BGP_TLOC_VRRP	Branch Dual vEdge Hybrid TLOC with MPLS BGP and LAN-side ...	Feature	ISR4331	15	
Branch_A_BRONZE_BGP_TLOC_SubInt OSPF	Branch Dual vEdge Hybrid TLOC SubInts with MPLS BGP and L...	Feature	vEdge 1000	16	1 ...

A pop-up window lists the available devices to be attached to this configuration.

4. Select the devices to which the template should be applied and click the arrow to move the device from the **Available Devices** box to the **Selected Devices** box.


You can select multiple devices at one time by simply clicking each desired device.

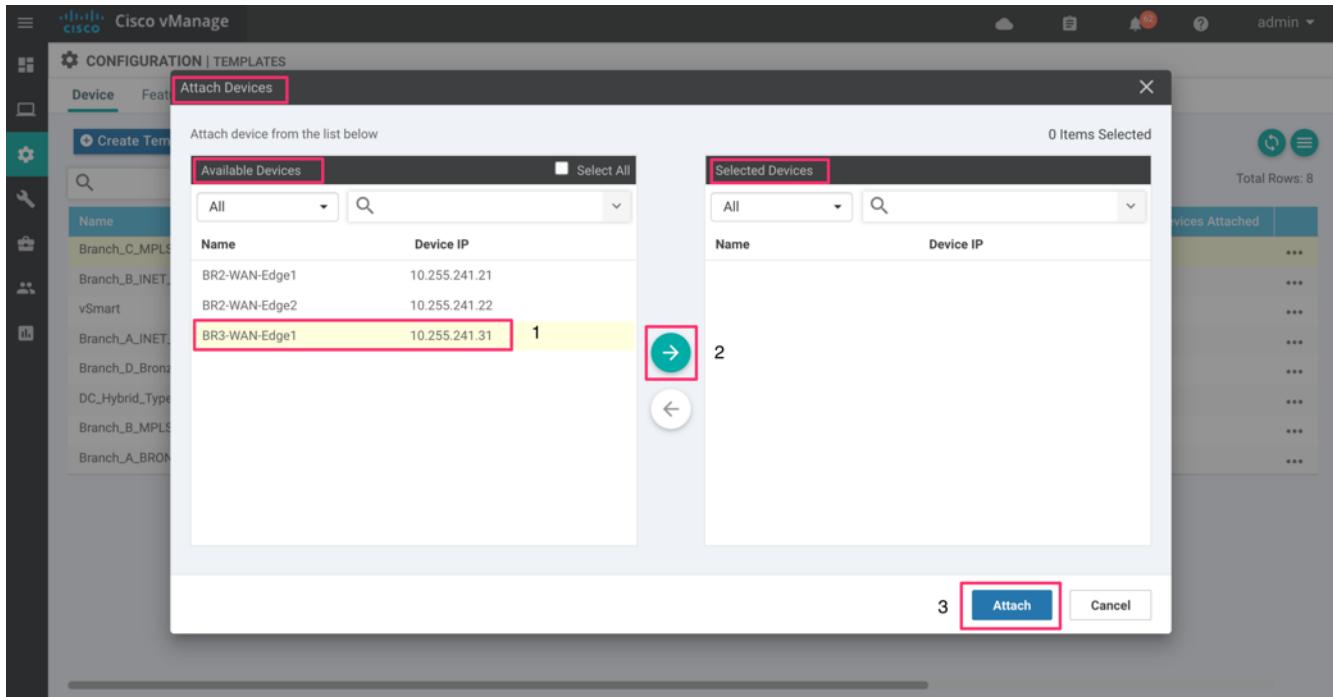

Click the **Attach** button.

5. A new screen appear, click the **three dots . . .** at the right and then select **Edit Device Template**.

An example is shown in the following figure.

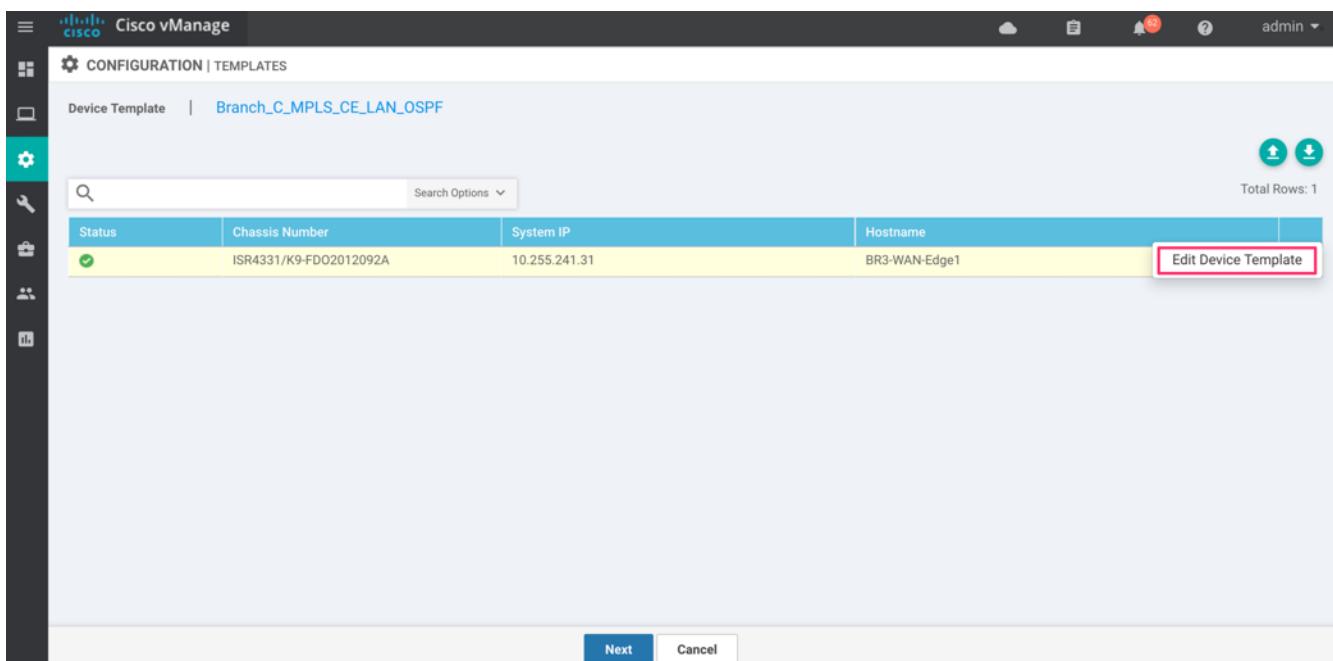

In this deployment, the feature templates are configured using variables. Therefore, when you click Edit, a list of variables and empty boxes appear. There may also be variables with check boxes to check/uncheck for on/off values.

6. Fill in the values of the variables in the text boxes.

All text boxes must be filled in. Check boxes can be left unmarked. For check boxes, checked means “Yes” and unchecked means “No”. If you leave a text field empty, the text box will be highlighted red when you try to move to the next page. Fill in the variables using information from the table below.

Because you will be configuring DIA later, ensure that NAT is enabled on all interfaces that face Internet transport.


Table 1 Single-Router Hybrid Design Model - Branch_C_MPLS_CE_LAN OSPF

Variable	Value
Interface Name(vpn1_lan_int1_gex x_or_gex x.VLAN)	GigabitEthernet0/0/1.10
Description(VPN1_lan_int1_description)	Service side Interface
IPv4 Address(vpn1_lan_int1_ip_addr maskbits)	10.30.13.2/30
Shutdown(vpn1_lan_int1_shutdown)	<input type="checkbox"/>
Router ID(vpn1_ospf_router_id)	10.30.31.31
Interface Name(vpn1_ospf_interface_gex x)	GigabitEthernet0/0/1.10
Interface Cost(vpn1_ospf_interface_cost)	1
Message Digest Key(vpn1_ospf_message_digest_key)	*****
Address(vpn1_ospf_area_range_address_0)	10.30.13.0/30
Interface Name(vpn512_mgmt_int_mgmt0_or gex)	GigabitEthernet0
IPv4 Address(vpn512_mgmt_int_ip_addr maskbits)	100.119.118.6/24
Address(vpn0_inet_next_hop_ip_addr)	30.30.1.2
Address(vpn0_mpls_next_hop_ip_addr)	10.30.23.1
Interface Name(vpn0_mpls_int_gex)	GigabitEthernet0/0/0
IPv4 Address(vpn0_mpls_int_ip_addr maskbits)	10.30.23.2/30
Preference(vpn_if_tunnel_ipsec_preference)	100
IP MTU(vpn0_mpls_mtu)	1500
Shutdown(vpn0_mpls_int_shutdown)	<input type="checkbox"/>
Bandwidth Upstream(vpn0_mpls_int_bandwidth_up)	1000000
Bandwidth Upstream(vpn0_mpls_int_bandwidth_down)	1000000
Interface Name(vpn0_inet_int_gex)	GigabitEthernet0/0/2
IPv4 Address(vpn0_inet_int_ip_addr maskbits)	30.30.1.1/30
Preference(vpn_if_tunnel_ipsec_preference)	100
IP MTU(vpn0_inet_mtu)	1500

Variable	Value
Shutdown(vpn0_mpls_int_shutdown)	<input type="checkbox"/>
Bandwidth Upstream(vpn0_mpls_int_bandwidth_up)	1000000
Bandwidth Upstream(vpn0_mpls_int_bandwidth_down)	1000000
Hostname(system_host_name)	BR3-WAN-Edge1
Latitude(system_latitude)	37.3541
Longitude(system_longitude)	-97.335
Device Groups(system_device_groups)	BR,ISR4331,US,West
System IP(system_system_ip)	10.255.241.31
Site ID(system_site_id)	112004
Port Offset(system_port_offset)	0
Port Hopping(system_port_hop)	<input checked="" type="checkbox"/>
NAT	<input checked="" type="checkbox"/>
Interface Name(vpn_lan_parent_int_gex x)	GigabitEthernet0/0/1
Shutdown(vpn_lan_parent_int_shutdown)	<input type="checkbox"/>
Interface Name(vpn2_lan_int2_gex x_or_gex)	GigabitEthernet0/0/1.20
IPv4 Address(vpn2_lan_int2_ip_addr maskbits)	10.30.12.2/30
Shutdown(vpn2_lan_int2_shutdown)	<input type="checkbox"/>
Router ID(vpn1_ospf_router_id)	10.30.31.31
Interface Name(vpn1_ospf_interface_gex x)	GigabitEthernet0/0/1.20
Interface Cost(vpn1_ospf_interface_cost)	1
Message Digest Key(vpn1_ospf_message_digest_key)	*****
Address(vpn1_ospf_area_range_address_0)	10.30.12.0/30

Technical Tip: In dual-transport scenarios with TLOC extension, enable NAT on both, the TLOC interface and the physical Internet facing Interface. For more information, refer to the Design section of this document.

7. Select **Update** to add values within the device template.

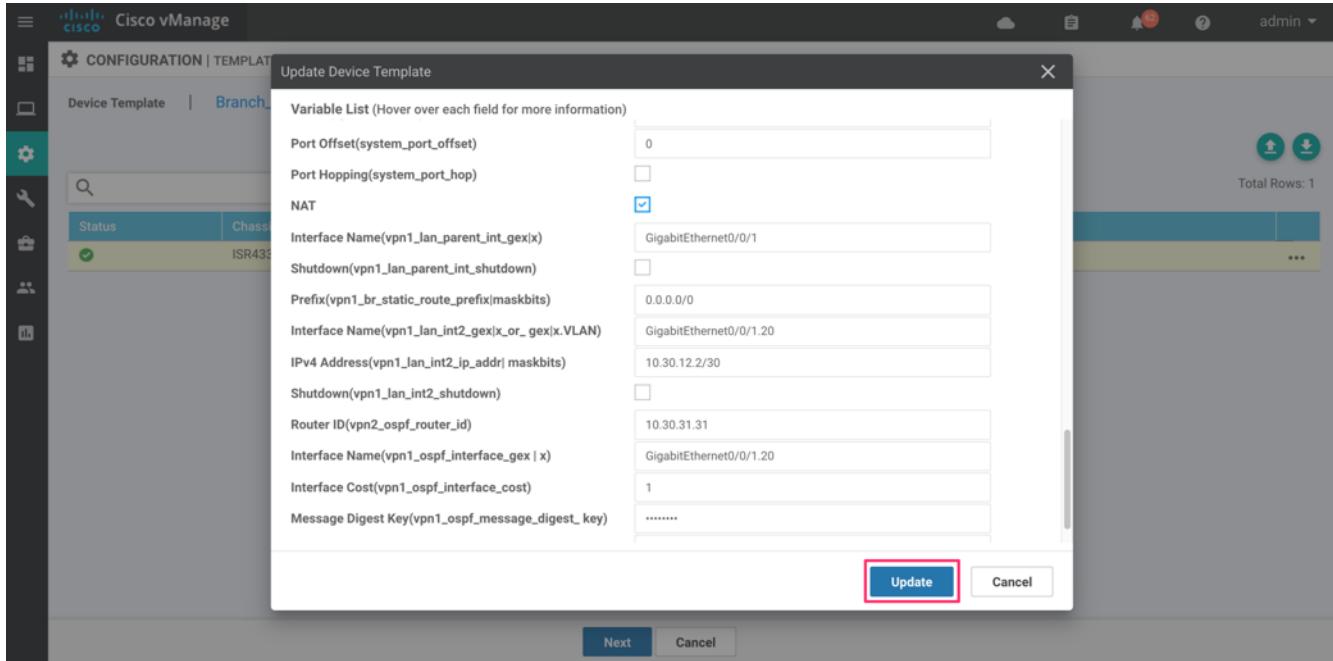

8. Repeat **Steps 6 – 8** for the other WAN edge devices. You can find the templates for the rest of the branches in **Appendix D**.
9. Before proceeding, ensure that you download the .csv file by clicking the down arrow on the upper right corner of the screen. The .csv file should be populated with the values you have filled in so far. If you deploy the configuration, and if for any reason there is an error in one of the input variables, the configuration may fail to deploy. When you come back to this page, all the values will be gone, and you will need to enter them again.

If you downloaded the populated .csv file, upload it by selecting the up arrow. Then you can select ... to the right of the desired device and select **Edit Device Template**. Your latest values will be populated in the text boxes. You can then modify any input values and try to deploy the configuration again.

The screenshot shows the Cisco vManage interface under the 'CONFIGURATION | TEMPLATES' section. A device template named 'Branch_C_MPLS_CE_LAN OSPF' is selected. A table displays one device entry:

Status	Chassis Number	System IP	Hostname
✓	ISR4331/K9-FDO2012092A	10.255.241.31	BR3-WAN-Edge1

At the bottom right of the table area, there are two download icons (one blue, one red) and the text 'Total Rows: 1'. Below the table, there are 'Next' and 'Cancel' buttons, with 'Next' being highlighted by a red box.

10. When you are ready to deploy, click **Next**.

The next screen will indicate that the **Configure** action will be applied to device attached to the template. An example is shown in the figure below.

The screenshot shows the Cisco vManage interface under the 'CONFIGURATION | TEMPLATES' section. A device template named 'Branch_C_MPLS_CE_LAN OSPF' is selected. A yellow banner at the top right states: "'Configure' action will be applied to 1 device(s) attached to 1 device template(s.)".

The main area shows a 'Config Preview' tab with the following configuration commands:

```

!
!
bfd color mpls
hello-interval 1000
no pmtu-discovery
multiplier 7
!
bfd color biz-internet
hello-interval 1000
no pmtu-discovery
multiplier 7
!
bfd app-route multiplier 6
bfd app-route poll-interval 120000
omp
no shutdown
graceful-restart
!
security
ipsec
rekey 86400
replay-window 4096
authentication-type sha1-hmac ah-sha1-hmac
!
!
banner login c
banner motd c

```

At the bottom right of the configuration preview area, there are 'Back', 'Configure Devices' (highlighted with a red box), and 'Cancel' buttons.

If you forget to add values for a device, you will get an error and won't be able to proceed until that is corrected.

Select the device in the left-hand panel to view the configuration associated with them, which will be pushed to the WAN Edge router (Config Preview tab). Click **Configure Devices** and confirm configuration changes on the device and then click **OK**.

The configuration pushed to all WAN edge devices in this deployment guide from the configuration template is shown in **Appendix E**.

11. In the **Task View** screen verify if the templates were successfully pushed to the device based on the status. Click the arrow next to a device to view the deployment logs. If you encounter errors while applying a device template, you'll see the error logs here.

The screenshot shows the Cisco vManage interface with the title bar "Cisco vManage". The main area is titled "TASK VIEW" and displays a table of deployment logs. The table has columns: Status, Message, Chassis Number, Device Model, Hostname, System IP, Site ID, and vManage IP. One row is shown, indicating a success status for a task involving ISR4331/K9-FDO2012... device model, with details like "Done - Push Feature T..." and log entries for configuration steps. The status bar at the bottom right shows "Total Rows: 1".

Status	Message	Chassis Number	Device Model	Hostname	System IP	Site ID	vManage IP
Success	Done - Push Feature T...	ISR4331/K9-FDO2012...	ISR4331	BR3-WAN-Edge1	10.255.241.31	112004	172.27.0.14

```

[23-Apr-2019 22:25:34 PDT] Configuring device with feature template: Branch_C_MPLS_CE_LAN OSPF
[23-Apr-2019 22:25:34 PDT] Generating configuration from template
[23-Apr-2019 22:25:43 PDT] Checking and creating device in vManage
[23-Apr-2019 22:25:43 PDT] Device is online
[23-Apr-2019 22:25:43 PDT] Updating device configuration in vManage
[23-Apr-2019 22:25:51 PDT] Pushing configuration to device
[23-Apr-2019 22:26:02 PDT] Template successfully attached to device
  
```

Procedure 3: Verify NAT Feature Configuration

Lastly, verify that NAT has been enabled in the internet-facing interfaces of all WAN edge devices. This step is crucial to enable DIA. If you find out that a device does not have NAT enabled, you can enable it later by editing the device or the feature template, without losing the previous configuration.

12. Navigate to **Configuration > Templates** and click on the three dots to the right of the device template you wish to enable NAT for. Click **Change Device Values**.

The screenshot shows the Cisco vManage interface under the 'Configuration | Templates' section. The 'Device' tab is selected. A list of templates is displayed, including:

- Branch_B_MPILS_BGP_TLOC_VRRP
- Branch_A_BRONZE_BGP_TLOC_SubInt OSPF
- Branch_B_INET_TLOC_VRRP
- vSmart
- Branch_C_MPLS_CE_LAN OSPF** (highlighted in yellow)
- DC_Hybrid_Type_A_BGP
- Branch_D_Bronze_BizInternet_LAN OSPF
- Branch_A_INET_TLOC_SubInt OSPF

A context menu is open over the 'Branch_C_MPLS_CE_LAN OSPF' template, with the following options:

- Edit
- View
- Delete
- Copy
- Attach Devices
- Detach Devices
- Export CSV
- Change Device Values** (highlighted with a red box)

13. Enable NAT within the Update Device Template tab. Here we have enabled NAT under the Internet transport interface, Ge0/0/2.

The screenshot shows the 'Update Device Template' dialog box for the 'Branch...' template. The 'NAT' checkbox is checked and highlighted with a red box. The 'Update' button at the bottom right is also highlighted with a red box.

Variable List (Hover over each field for more information)	
Interface Name(vpn0_inet_int_gex)	GigabitEthernet0/0/2
IPv4 Address(vpn0_inet_int_ip_addr_maskbits)	30.30.1.30
Preference(vpn_if_tunnel_ipsec_preference)	100
IP MTU(vpn0_inet_mtu)	1500
Shutdown(vpn0_inet_int_shutdown)	<input type="checkbox"/>
Bandwidth Upstream(vpn0_inet_int_bandwidth_up)	1000000
Bandwidth Downstream(vpn0_inet_int_bandwidth_down)	1000000
Hostname(system_host_name)	BR3-WAN-Edge1
Latitude(system_latitude)	37.409284
Longitude(system_longitude)	-97.335
Device Groups(system_device_groups)	DC,v5000,US,West,UG3,Primary
System IP(system_system_ip)	10.255.241.31
Site ID(system_site_id)	112004
Port Offset(system_port_offset)	0
Port Hopping(system_port_hop)	<input checked="" type="checkbox"/>
NAT	<input checked="" type="checkbox"/> 1

14. Validate the configuration.

Cisco vManage

CONFIGURATION | TEMPLATES

Device Template Total 1
Branch_C_MPLS_CE_LAN...

Device list (Total: 1 devices)
ISR4331/K9-FDO2012092A
BR3-WAN-Edge1|10.255.241.31

```

79   /8      address-family ipv6
80   79      exit-address-family
81   80      !
82   81      !
83   82      no ip finger
84   83      no ip rcmd rcp-enable
85   84      no ip rcmd rsh-enable
86   85      no ip dhcp use class
87   86      ip route 0.0.0.0 0.0.0.0 10.30.23.1 1
88   87      ip route 0.0.0.0 0.0.0.0 30.30.1.2 1
89   88      no ip igmp ssm-map query dns
90   89      ip nat inside source list nat-dia-vpn-hop-access-list interface GigabitEthernet0/0/2 overload
91   90      ip nat translation tcp-timeout 60
92   91      ip nat translation udp-timeout 1
93   92      ip nat route vrf 2 0.0.0.0 0.0.0.0 global
94   93      no ip rsvp signalling rate-limit
95   94      no ipv6 mld ssm-map query dns
96   95      interface GigabitEthernet0
97   96      description Management Interface
98   97      no shutdown
99   98      arp timeout 1200
100  99      vrf forwarding Mgmt-intf
101  100     ip address 100.119.118.6 255.255.255.0
102  101     ip redirects
          in.mtu 1500

```

Configure Device Rollback Timer

Back Configure Devices Cancel

Cisco vManage

CONFIGURATION | TEMPLATES

Device Template Total 1
Branch_C_MPLS_CE_LAN...

Device list (Total: 1 devices)
ISR4331/K9-FDO2012092A
BR3-WAN-Edge1|10.255.241.31

```

146  149      interface GigabitEthernet0/0/2
147  150      description INET Interface
148  151      no shutdown
149  152      arp timeout 1200
150  153      ip address 30.30.1.1 255.255.255.252
151  154      ip redirects
152  155      ip tcp adjust-mss 1350
153  156      ip mtu 1500
154  157      ip nat outside
155  158      mtu 1500
156  159      negotiation auto
157  160      exit
158  161      interface Tunnel0
159  162      no shutdown
160  163      ip unnumbered GigabitEthernet0/0/0
161  164      no ip redirects
162  165      ipv6 unnumbered GigabitEthernet0/0/0
163  166      no ipv6 redirects
164  167      tunnel source GigabitEthernet0/0/0
165  168      tunnel mode sdwan
166  169      exit
167  170      interface Tunnel2
168  171      no shutdown
          ip unnumbered GigabitEthernet0/0/2

```

Configure Device Rollback Timer

Back Configure Devices Cancel

Alternatively, you can also edit an existing feature template to enable/disable NAT globally. In this deployment, one of the feature templates used to configure features within VPN 0 Internet facing Interface is BR_INET_INT.

15. To edit the feature template, click **Edit** within the configured feature template and configure NAT globally.

Name	Description	Type	Device Model	Device Templates	Devices Attached	Updated By	Updated On
BR_INET_INT_NAT	Branch Internet Interface w...	WAN Edge Interface	ISR4331 ISR4321 IS...	0	0	admin	14 Jan 2019 9:16:3...
BR_INET_INT_TLOC	Branch Internet Interface w...	WAN Edge Interface	ISR4331 ISR4321 IS...	1	1	admin	21 Nov 2018 6:54:3...
BR_INET_INT	Branch Internet Interface w...	WAN Edge Interface	ISR4331 ISR4321 IS...	3	2	admin	22 Jan 2019 9:26:1...
BR_INET_INT2	Branch Internet Interface 2 ...	WAN Edge Interface	ISR4331 ISR4321 IS...	0	0	admin	
BR_INET_INT_DIA	Branch Internet Interface w...	WAN Edge Interface	ISR4331 ISR4321 IS...	0	0	admin	
BR_INET_INT_1	Branch Internet Interface w...	WAN Edge Interface	ISR4331 ISR4321 IS...	0	0	admin	

Figure 32 Edit using feature templates

Technical Tip: On SD-WAN XE devices, enabling NAT creates an additional line of NAT overload command within the configuration. The NAT overload feature works the same way on both vEdge and SD-WAN XE devices.

Deploy - Cisco SD-WAN Direct Internet Access Configuration

You must complete the following tasks for successful deployment of DIA with SD-WAN.

- Configure NAT DIA route or configure a centralized data policy to accomplish DIA.
- Optionally configure a system tracker.

Configure NAT DIA routing: Configure an IP NAT route to perform route lookup to redirect traffic from the service-side VPN to the transport-side VPN.

Configure centralized data policy: Configure centralized data policies within vManage. These policies are provisioned on a vSmart controller and are applied only to the vSmart controller. The effects of the policy reflect on the WAN edge routers.

[Optional] Configure a (System tracker) transport interface tracker: Configure a global interface tracker (system tracker) within system template and apply it to the transport NAT-enabled interface. This configuration helps redirect traffic to the tunnel on the transport interface, that is not NAT-enabled, if the Internet or external network becomes unavailable. Also, in a design scenario that has dual-internet exits, if the internet link that is not enabled with NAT is down, the Internet traffic can still traverse via the second Internet NAT-enabled interface.

Deploying Cisco SD-WAN DIA Configuration

This section of the guide focuses on the configuration and activation of DIA within remote sites via policies or a NAT DIA route through the vManage dashboard.

This section addresses both the use cases. The network is deployed such that in each design scenario, VRF 1 or VPN 1 are dedicated for employee traffic and VRF 2 or VPN 2 for guest traffic. In this deployment network, a centralized data policy is used to allow DIA for all employee traffic and the NAT DIA route type is configured to allow Internet access for guest traffic. However, either of these DIA configurations can be configured irrespective of the type of traffic based on the requirement. The guide also covers the configuration of a system tracker to enable fallback on vEdge router platforms, on configuring NAT DIA route.

Procedure 1: Use Case #1 - Create Centralized Data Policy to Redirect Employee Traffic


To route the specific employee web traffic from service-side VPN to transport-side VPN, a centralized data policy is built. This policy is configured on the vSmart controller and the result of the policy is pushed into the affected WAN Edge routers based on the site list.

1. Login to the vManage web console using the IP address or fully qualified domain name of your vManage instance. For example:


https://vManage_ip_addr_or_FQDN:8443/

2. This brings up the vManage dashboard.

Navigate to **Configuration > Policies** from the vManage GUI.

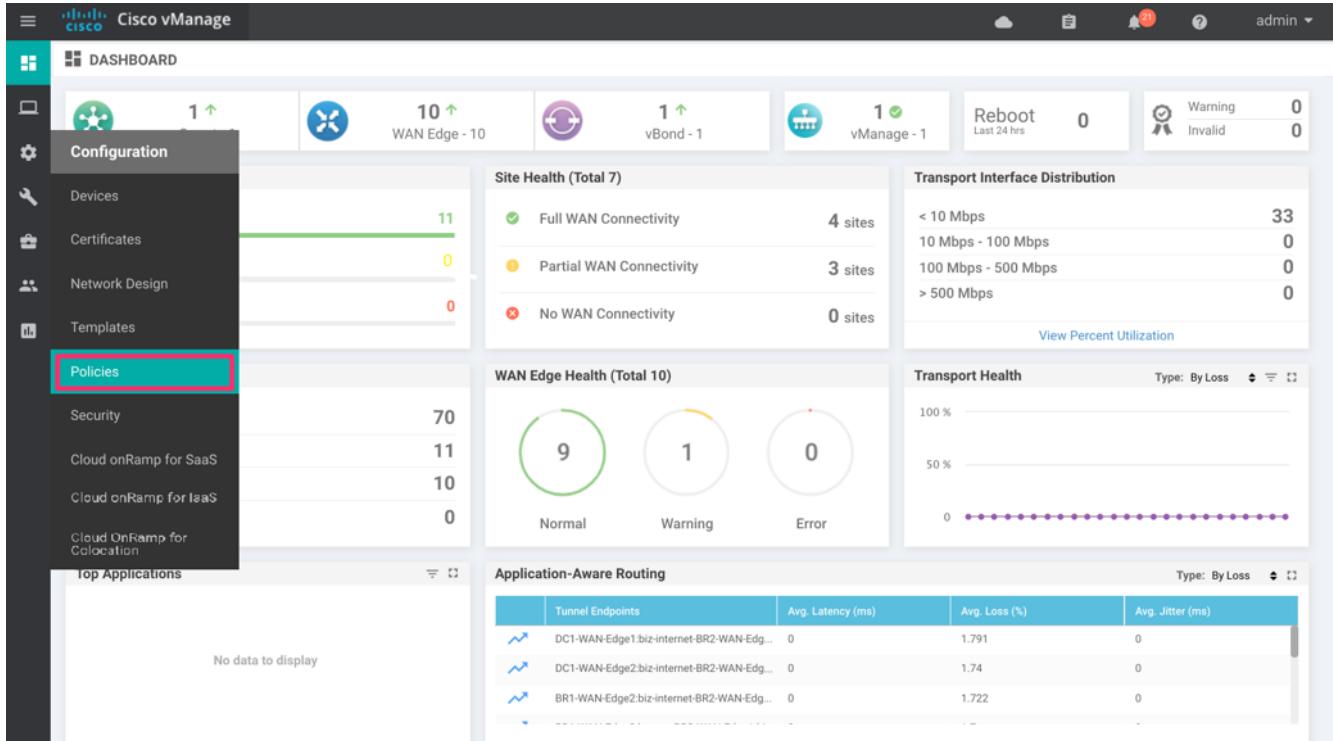

- Click the **Add Policy** tab within the centralized policy to navigate to groups of interest.

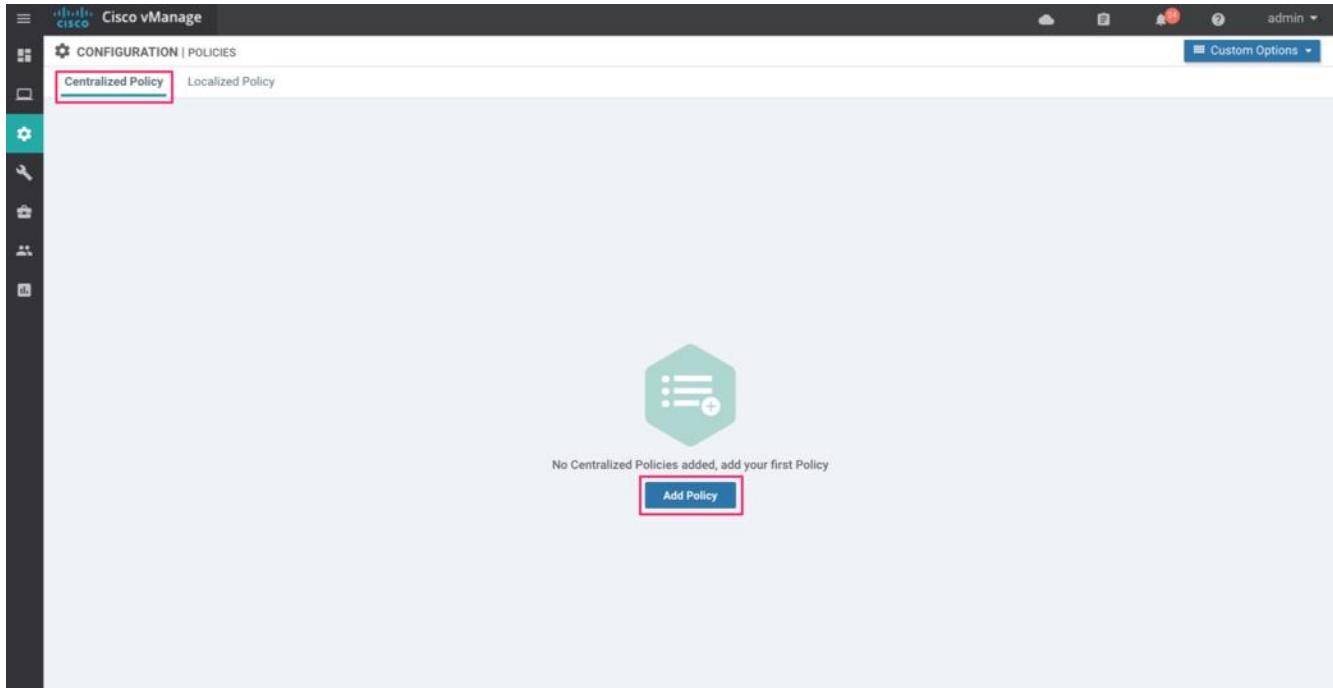

Step 1: Create Groups of Interest

Select the type of list from left pane and create lists based on the network requirements.

The groups of Interest configured here will help you create specific lists such as Prefix list, VPN list, list of Site IDs and more. Use these lists later within the centralized data policy to filter the incoming traffic and to reflect the result of the policy on specific VPNs and site IDs.

In this DIA deployment, centralized data policy is built to filter traffic based on the prefix list configured (i.e. source data prefix) and this policy is then applied to the vSmart controller. The result of the policy is pushed from vSmart controller to the WAN edge devices based on the list of site IDs configured within the centralized data policy. Within the affected WAN edge devices, all traffic entering specific VPNs that are a part of the VPN list, is filtered based on its source data prefix configured within the policy match statement, and routed to the transport-side interface, VPN 0.

Groups of Interest configured in this guide include the following:

- Data prefix list
- Site ID list
- VPN list

Data Prefix List

1. Select Data Prefix from the panel on the left.

The screenshot shows the Cisco vManage web interface. The top navigation bar includes the Cisco logo, user 'admin', and various icons. Below it, the main header reads 'CONFIGURATION | POLICIES Centralized Policy > Add Policy'. A sub-header says 'Select a list type on the left and start creating your groups of interest'. On the left, a sidebar lists categories: Application, Color (highlighted with a red box), Data Prefix, Policer, Prefix, Site, SLA Class, TLOC, and VPN. A button 'New Color List' is visible. The main content area displays a table with columns: Name, Entries, Reference Count, Updated By, Last Updated, and Action. The message 'No data available' is centered. At the bottom are 'Next' and 'CANCEL' buttons.

2. On the resulting screen

1. Click **New Data Prefix List**. Enter a name for the Data Prefix List (Data_Prefix_BR_112002).
2. Enter the Data Prefix (10.10.0.0/16).
3. Click the **Add** button.

Repeat steps 1-3 to add a second Data Prefix List.

The screenshot shows the Cisco vManage interface under the 'CONFIGURATION | POLICIES' section, specifically the 'Centralized Policy > Add Policy' page. On the left sidebar, the 'Data Prefix' option is selected and highlighted with a red box, labeled '1'. In the main panel, a 'New Data Prefix List' button is highlighted with a red box and labeled '2'. Below it, a text input field for 'Data Prefix List Name' contains the value 'Data_Prefix_BR_112002'. To the right of the name input, there is a note: 'Enter a name for the data prefix list'. Further down, an 'Internet Protocol' section shows 'IPv4' selected. An 'Add Data Prefix' input field contains the value '10.10.0.0/16', with a note: 'Enter the data prefix'. At the bottom right of the main panel, there is a 'Cancel' button and an 'Add' button highlighted with a red box and labeled '3'. A note above the 'Add' button says 'Add the data prefix list'. Below the main panel, there is a table showing existing data prefix lists:

Name	Entries	Internet Protocol	Reference Count	Updated By
default-route	0.0.0.0/0	IPv4	2	admin
DC-1	10.0.0.0/8	IPv4	1	admin

At the bottom of the interface, there are 'Next' and 'CANCEL' buttons.

This screenshot shows the continuation of the configuration process. The left sidebar still has 'Data Prefix' selected (labeled '1'). The 'New Data Prefix List' button is again highlighted with a red box and labeled '2'. The 'Data Prefix List Name' input field now contains 'Data_Prefix_BR_112003_112005'. To the right of the name input, there is a note: 'Enter a name for the second data prefix list'. Below this, an 'Internet Protocol' section shows 'IPv4' selected. An 'Add Data Prefix' input field contains the value '10.20.0.0/16, 10.30.0.0/16, 10.40.0.0/16', with a note: 'Enter multiple data prefix lists separated by commas'. At the bottom right of the main panel, there is a 'Cancel' button and an 'Add' button highlighted with a red box and labeled '3'. A note above the 'Add' button says 'Add the data prefix list'. Below the main panel, there is a table showing the newly added data prefix lists:

Entries	Internet Protocol	Reference Count	Updated By	Last Updated	Action
0.0.0.0/0	IPv4	2	admin	20 Nov 2018 1:04:07 PM PST	
10.0.0.0/8	IPv4	1	admin	31 Jan 2019 12:13:03 PM PST	

At the bottom of the interface, there are 'Next' and 'CANCEL' buttons.

Note that prefix lists configured can be used to match source or destination data prefixes. These lists in this guide are configured to match source data prefixes. All the employee traffic from the IOS XE SD-WAN devices is added under a single data prefix and a separate data prefix is created for vEdge devices.

Note that a separate data prefix list of 10.10.0.0/16 is created in this deployment for the purpose of building a separate data policy to show how path preference is set in vEdge router platforms. Also, a separate data prefix list Overlay_Traffic is created. This is to be used later in the policy within a sequence rule to allow flow of Internal traffic across SD-WAN overlay network.

An example of data prefix list build for each of the branches is provided below.

Table 2 The data prefix lists built are summarized in the following tableList of data prefixes

Data Prefix List Name	Add Data Prefix
Data_Prefix_BR_112002	10.10.0.0/16
Data_Prefix_BR_112003_112005	10.20.0.0/16, 10.30.0.0/16, 10.40.0.0/16
Overlay_Traffic	10.0.0.0/8

The data prefixes are deployed based on the policy deployed in this document.

Site ID List

Within list type site, create a new site list. If you already have a site list defined that you will apply the DIA policy to, skip this section. Here's an example of creating site lists for each of the branches.

An example of the list of Site ID's for each of the branches, along with the necessary steps are mentioned below.

1. Select Site from the panel on the left.

Select a list type on the left and start creating your groups of interest

Application

Color

Data Prefix

Policer

Prefix

Site

SLA Class

TLOC


VPN

+ New Color List

Name	Entries	Reference Count	Updated By	Last Updated	Action
No data available					

Next CANCEL

2. On the resulting screen,
 1. Click **New Site List**.
 2. Enter a name for the Site List (Site_ID_BR_112002).
 3. Enter the Site ID (112002). Click the **Add** button.

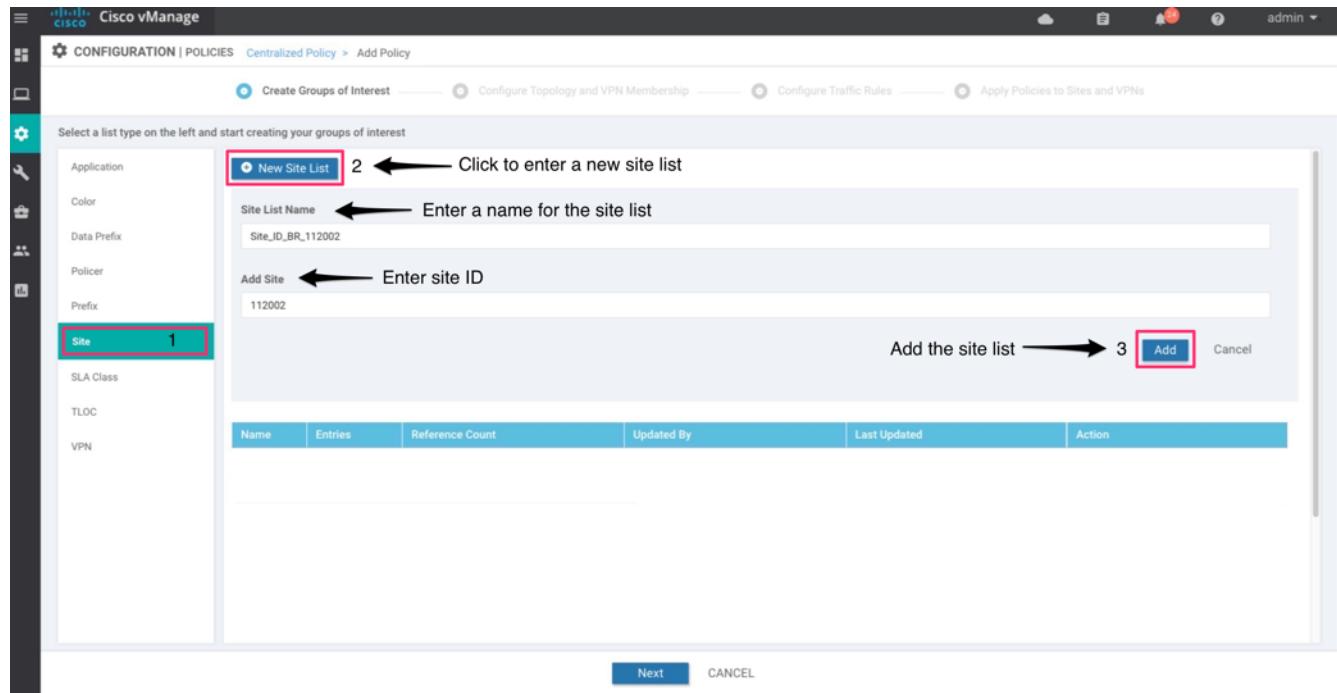


Repeat steps 1-3 to configure the remaining site ID lists.

The Site ID lists that are built are summarized in the following table:

Table 3 List of Sites

Site List Name	Add Site
Site_ID_BR_112002	112002
Site_ID_BR_112003	112003
Site_ID_BR_112004	112004
Site_ID_BR_112005	112005

Alternatively, the Site IDs can be added under a single Site List separated by commas as shown below.

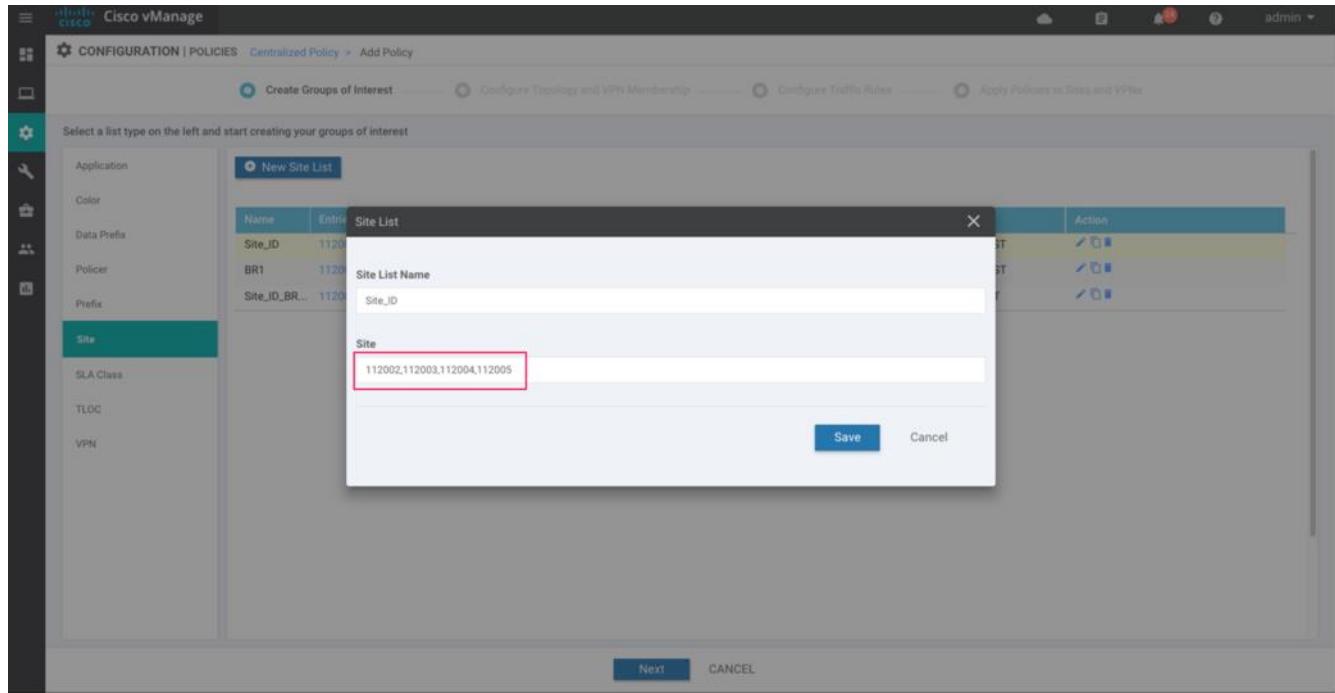

VPN List

Within list type VPN, create a new VPN list. This VPN list includes the service VPN IDs you will apply the policy to. If you already have a VPN list defined that you will apply the DIA policy to, skip this section. Here's an example of creating VPN lists.

1. Select VPN from the panel on the left.


The screenshot shows the Cisco vManage web interface. At the top, there's a navigation bar with icons for cloud, self-service, notifications, and user admin. Below it, the main header reads "CONFIGURATION | POLICIES" and "Centralized Policy > Add Policy". A sub-header "Create Groups of Interest" is visible above a toolbar with five buttons: "Create Groups of Interest", "Configure Topology and VPN Membership", "Configure Traffic Rules", "Apply Policies to Sites and VPNs", and a question mark icon.

The main content area has a heading "Select a list type on the left and start creating your groups of interest". On the left, a sidebar lists various options: Application, Color (which is selected and highlighted with a red border), Data Prefix, Policer, Prefix, Site, SLA Class, TLOC, and VPN. To the right of the sidebar is a table with the following columns: Name, Entries, Reference Count, Updated By, Last Updated, and Action. A button "New Color List" is located at the top of this table. The table displays the message "No data available".

At the bottom of the screen, there are two buttons: "Next" and "CANCEL".

2. On the resulting screen, click **New VPN List**.

1. Enter a name for the VPN List (VPN_1).
2. Enter the VPN ID (1).
3. Click the **Add** button

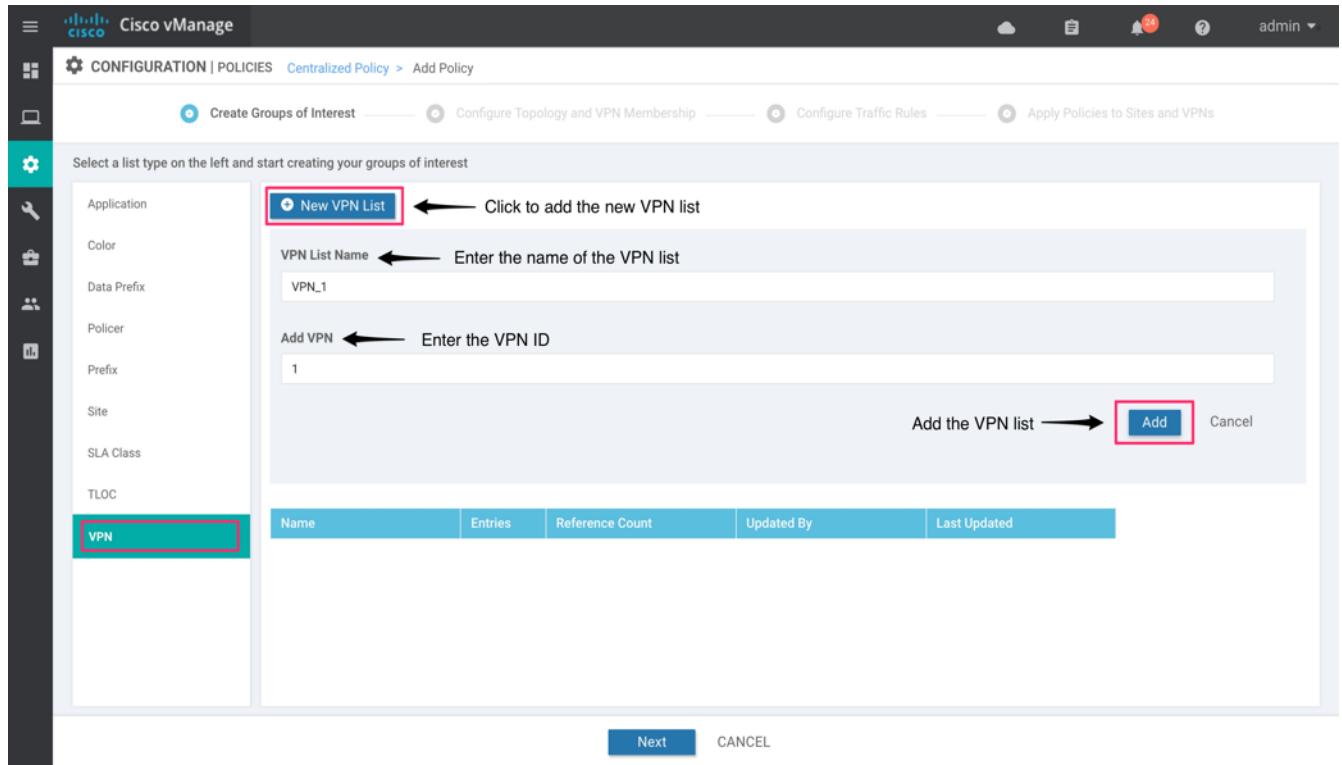

The following table summarizes the Site VPN list built.

Table 4 List of VPNs

VPN List Name	VPN
VPN_1	1

Once the lists are created, proceed to the next page and configure the traffic rules for the policy.

3. Click the **Next** button twice at the bottom of the page to arrive at the **Configure Traffic Rules** page.

The screenshot shows the Cisco vManage web interface. At the top, there's a navigation bar with icons for cloud, file, notifications, help, and user 'admin'. Below that is a secondary header with tabs: 'CONFIGURATION | POLICIES', 'Centralized Policy >', and 'Add Policy'. There are four status indicators: 'Create Groups of Interest' (green checkmark), 'Configure Topology and VPN Membership' (blue gear), 'Configure Traffic Rules' (grey gear), and 'Apply Policies to Sites and VPNs' (grey gear). On the left, a vertical sidebar has icons for Home, Devices, Policies, Groups, and Scripts. The main content area is titled 'Specify your network topology' with a 'Topology' tab selected over 'VPN Membership'. A sub-header 'Add Topology' with a dropdown arrow is visible. Below is a search bar with a magnifying glass icon and a dropdown 'Search Options'. A table header row includes columns for Name, Type, Description, Reference Count, Updated By, and Last Updated. To the right of the table, it says 'Total Rows: 0'. At the bottom, there are buttons for 'BACK', 'Next' (which is highlighted with a red box), and 'CANCEL'.

Step 2: Configure Traffic Rules

In this example, three separate sequence rules are added. The first rule is to maintain the overlay or internal traffic flow, second sequence rule is to enable DIA for the SD-WAN XE devices without path preference and the third sequence rule is to again enable DIA for the vEdge router platform with path preference set.

4. To create a new data policy, click **Add Policy**. Next, select **Create New** from the drop-down list.

The screenshot shows the Cisco vManage interface with the title 'Cisco vManage'. In the top navigation bar, there are several icons and the text 'CONFIGURATION | POLICIES Centralized Policy > Add Policy'. Below this, there are four green checkmark buttons: 'Create Groups of Interest', 'Configure Topology and VPN Membership', 'Configure Traffic Rules', and 'Apply Policies to Sites and VPNs'. On the left, a sidebar has a gear icon labeled 'CONFIGURATION'. The main content area has a heading 'Choose a tab and add Traffic rules under the selected type' with three tabs: 'Application Aware Routing' (selected), 'Traffic Data' (highlighted with a red box and number 1), and 'Cflowd'. Under 'Traffic Data', there is a 'Add Policy' button with a dropdown menu. The menu items are 'Create New' (highlighted with a red box and number 3) and 'Import Existing'. A callout arrow points from the 'Create New' item to the text 'To create a new traffic policy'. Below the menu is a search bar labeled 'Search Options'. At the bottom of the table are columns for 'Name', 'Type', 'Description', 'Reference Count', 'Updated By', and 'Last Updated'. The message 'No data available' is displayed. At the bottom of the page are buttons for 'BACK', 'Next', and 'CANCEL'.


Technical Tip: Alternatively, the entire traffic data policy can be configured using the custom option found on the top right of the main policy page and then later imported into the centralized policy. Within the **Traffic Data** tab, there is an Import option under **Configure Traffic Rules**, to import an existing traffic policy. For more information, refer to the section **Alternate method to deploy traffic data policy**.

5. Create the new traffic policy and enter the traffic data policy name and policy description. The details are summarized in the following table:


Table 5 Traffic Data Policy Description

Policy Name	Policy Description
TRAFFIC_DATA_POLICY	Data policy to match employee traffic and route the traffic from service VPN 1 to VPN 0

6. From the right pane, click **Sequence Type** and choose **Custom** from the list of available types of data policy.

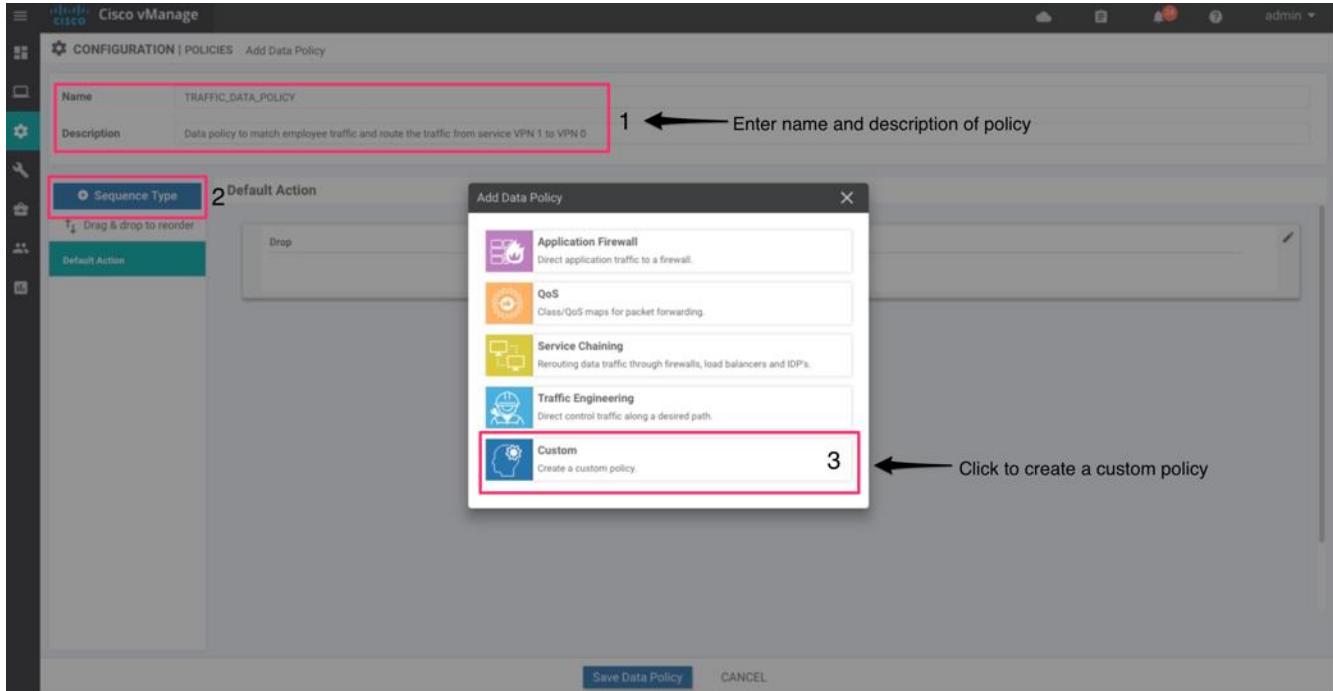

7. Under **Custom**, click on **Sequence Rule** and add the created groups of interests under **Match** condition. The lists are added as part of the match condition within the data policy. Within the **Action** tab, click **Accept** and add NAT VPN 0. Click **Save Match and Actions**.

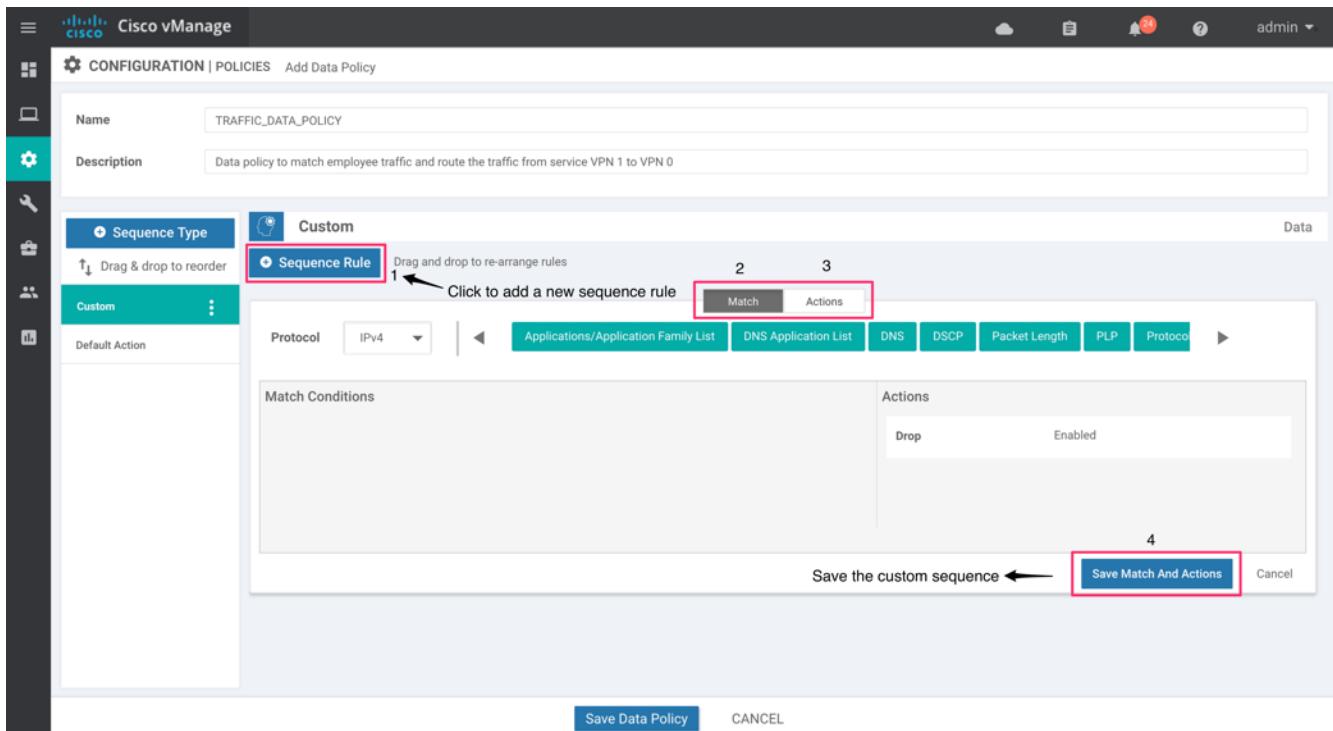

Here's an example of how the traffic data policy can be created. Two separate sequence rules are added to allow DIA, and a separate sequence rule is configured before the DIA sequence rule to maintain the flow of internal branch to branch or branch to datacenter traffic across SD-WAN overlay network.

In the following screenshot, the first sequence rule accepts the flow of internal traffic based on the destination prefix, and the second sequence rule is configured to enable DIA for SD-WAN XE platforms based on source data prefix.

The screenshot shows the Cisco vManage interface for configuring a Traffic Data Policy. The policy is named "TRAFFIC_DATA_POLICY" and has a description: "Data policy to match employee traffic and route the traffic from service VPN 1 to VPN 0". The sequence type is set to "Custom". There are three sequence rules:

- Rule 1:** Match Conditions: Destination Data Prefix List: Overlay_Traffic; Destination: IP. Action: Accept.
- Rule 2:** Match Conditions: Source Data Prefix List: Data_Prefix_BR_112003_112005; Source: IP. Action: NAT VPN: 0.
- Rule 3:** Match Conditions: Source Data Prefix List: Data_Prefix_BR_112002. Action: Accept.

The third sequence rule (Rule 3) is highlighted with a red box, indicating it is the configuration point of interest for enabling DIA for vEdge router platforms based on the source data prefix.

The third sequence rule allows DIA for vEdge router platforms based on the source data prefix. Within the tab **Action**, path preference is set using **Local TLOC List**.

The screenshot shows the Cisco vManage interface for configuring policies. A data policy named "TRAFFIC_DATA_POLICY" is being edited. The "Custom" tab is selected for the sequence rule. Two match conditions are defined:

- Condition 1:** Source Data Prefix List: Data_Prefix_BR_112003_112005, Source: IP. Action: Accept.
- Condition 2:** Source Data Prefix List: Data_Prefix_BR_112002, Source: IP. Actions include Accept, Fallback, and Local TLOC List: biz-internet.

At the bottom, there are "Save Data Policy" and "CANCEL" buttons.

- If a packet matches none of the parameters configured in any of the sequences within the policy, it is dropped and discarded by default. To avoid packet drops, within the tab **Custom**, modify the **Default Action** and click **Accept**.

Select **Save Data Policy** to save the parameters.

The screenshot shows the Cisco vManage interface for configuring a traffic data policy. The policy is named 'TRAFFIC_DATA_POLICY' and has a description: 'Data policy to match employee traffic and route the traffic from service VPN 1 to VPN 0'. The 'Default Action' section is selected, showing an 'Accept' button. Step numbers 1 through 4 are overlaid on the interface: 1 points to the 'Default Action' button, 2 points to the 'Accept' button, 3 points to the 'Save Match And Actions' button, and 4 points to the 'Save Data Policy' button.

Technical Tip: If a centralized policy is already configured with a traffic data policy embedded in it, then you can either edit the existing data policy to include additional sequence rules, as listed earlier, to enable DIA or add a new traffic data policy under same centralized data policy to enable DIA. However, preview the policy configuration to ensure that the order of traffic data policy is correct and does not break the flow of overlay traffic.

9. Select **Next** to apply policies to sites and VPNs in the wizard.

The screenshot shows the Cisco vManage interface for adding a centralized policy. The 'Centralized Policy > Add Policy' screen is displayed, with the 'Traffic Data' tab selected. A table lists a single policy named 'TRAFFIC_DATA_POLICY' with details: Type: Data, Description: Policy to route LAN traffic fro..., Reference Count: 0, Updated By: admin, Last Updated: 28 Jan 2019 2:53:56 PM PST. Step number 5 is overlaid on the 'Next' button.

Step 3: Apply Policy to Sites and VPNs

Apply the policy to sites and VPNs configured within the groups of interest.

10. Firstly, provide a **Policy Name** and **Policy Description**.

Policy Name	Policy Description
CENTRALIZED_DATA_POLICY_DIA	Centralized data policy to activate the data policy and apply to the site IDs.

11. Select the **Traffic Data** tab.

1. Click **New Site List and VPN List**
2. By default, the data policy applies to all data traffic passing through the WAN edge router. To have the data policy apply only to the traffic coming from the service side, select the **From Service** option.
3. Choose the sites that you want the data policy to be applied to by selecting one or more site lists.
4. Choose the service VPNs that you want the data policy to be applied to by selecting one or more VPN lists.
5. Click the **Add** button to complete the data policy.

1 ← Name and description of the policy

2 ← Traffic Data

3 ← Click to enter Site List and VPN List


4 → Add

5 → Preview

6

Techical Tip: For all data-policy policies that you apply, the site IDs across all the site lists must be unique. That is, the site lists must not contain overlapping site IDs. An example of overlapping site IDs is when two site lists, site-list 1 containing site-id 1-100, and site-list 2 containing site-id 70-130. Here, sites 70 through 100 are part of both lists. If you were to apply these two site lists to two different data-policy policies, the attempt to commit the configuration on the vSmart controller would fail.


12. Click **Preview** to view the configured policy. The policy is displayed in CLI format.

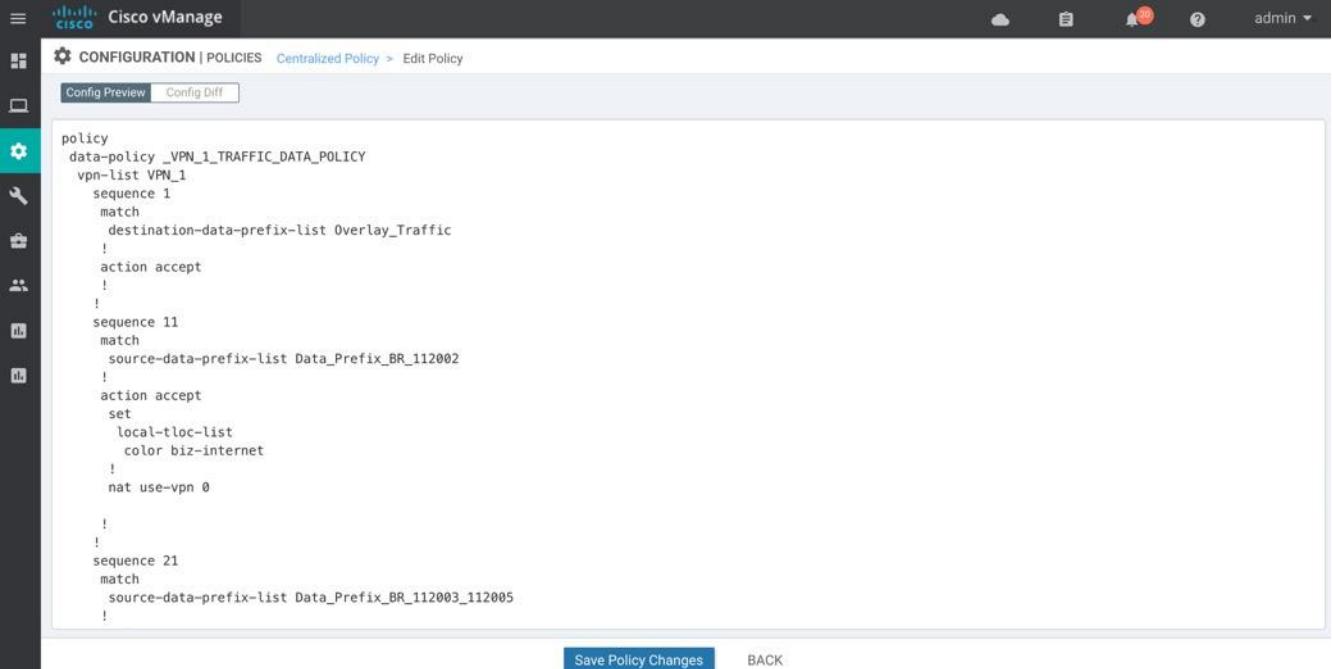

```

policy
data-policy _VPN_1_TRAFFIC_DATA_POLICY
vpn-list VPN_1
sequence 1
match
destination-data-prefix-list Overlay_Traffic
!
action accept
!
sequence 11
match
source-data-prefix-list Data_Prefix_BR_112002
!
action accept
set
local-tloc-list
color biz-internet
!
nat use-vpn 0
!
sequence 21
match
source-data-prefix-list Data_Prefix_BR_112003_112005
!
```


13. Click **Save Policy** to save the new centralized policy.

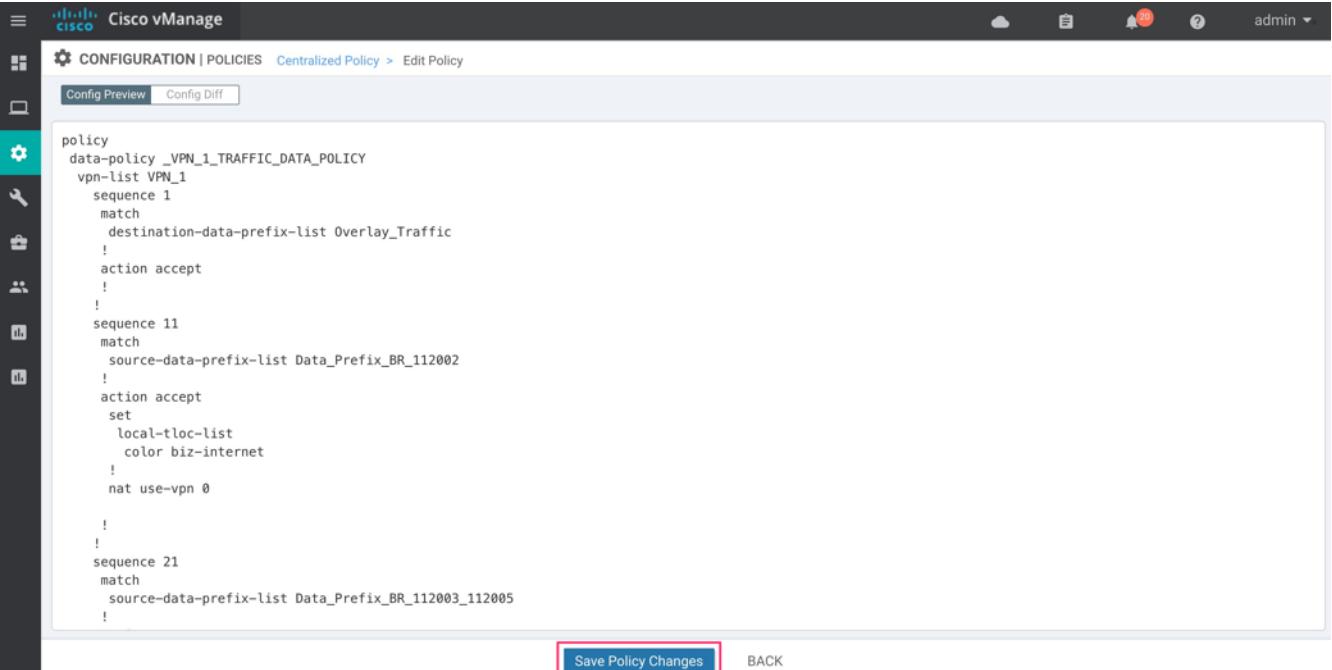

```

policy
data-policy _VPN_1_TRAFFIC_DATA_POLICY
vpn-list VPN_1
sequence 1
match
destination-data-prefix-list Overlay_Traffic
!
action accept
!
sequence 11
match
source-data-prefix-list Data_Prefix_BR_112002
!
action accept
set
local-tloc-list
color biz-internet
!
nat use-vpn 0
!
sequence 21
match
source-data-prefix-list Data_Prefix_BR_112003_112005
!
```

14. Within **CONFIGURATION | POLICIES** tab, the newly created policy is added under the **Centralized Policy** section.

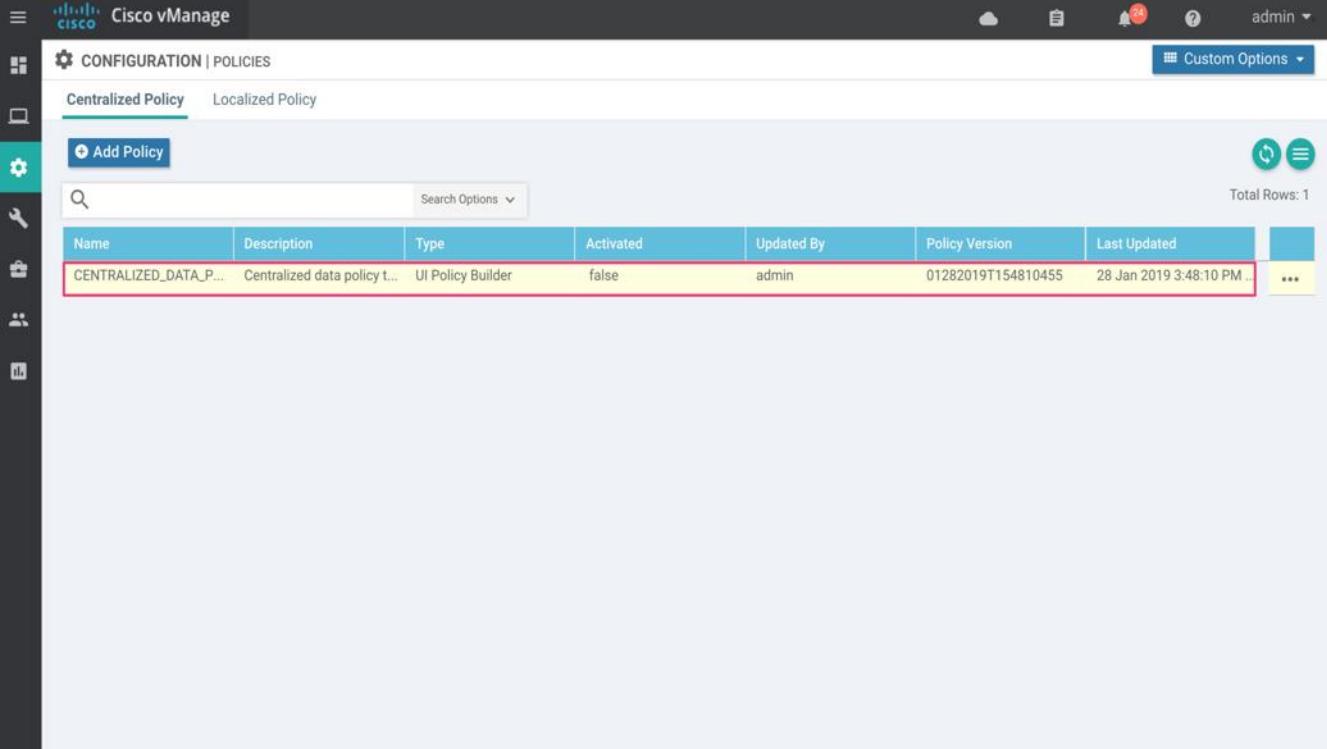

The screenshot shows the Cisco vManage web interface. The top navigation bar includes the Cisco logo, user information (admin), and a 'Custom Options' dropdown. The main menu on the left has 'CONFIGURATION | POLICIES' selected. The 'Centralized Policy' tab is active, while 'Localized Policy' is shown as a link. A search bar and a 'Search Options' dropdown are at the top of the list table. The table displays one row of data:

Name	Description	Type	Activated	Updated By	Policy Version	Last Updated	Actions
CENTRALIZED_DATA_P...	Centralized data policy t...	UI Policy Builder	false	admin	01282019T154810455	28-Jan-2019 3:48:10 PM

Total Rows: 1

15. To activate the centralized policy, click the three dots at the right of the policy screen and select **Activate**.

The screenshot shows the Cisco vManage web interface. The top navigation bar includes the Cisco logo, 'Cisco vManage', user status ('admin'), and a 'Custom Options' dropdown. The main menu on the left has 'CONFIGURATION' selected, with 'POLICIES' under it. The 'Centralized Policy' tab is active, showing a table with one row. The table columns are: Name, Description, Type, Activated, Updated By, Policy Version, and Last Updated. The single row contains: CENTRALIZED_DATA_P..., 'Centralized data policy t...', 'UI Policy Builder', 'false', 'admin', '01282019T154810455', and '28 Jan 2019 3:48:10 PM ...'. To the right of the table is a context menu with options: View, Preview, Copy, Edit, Delete, and Activate. The 'Activate' button is highlighted with a red box and an arrow points to it from the text below.


Name	Description	Type	Activated	Updated By	Policy Version	Last Updated
CENTRALIZED_DATA_P...	Centralized data policy t...	UI Policy Builder	false	admin	01282019T154810455	28 Jan 2019 3:48:10 PM ...

Once activated, the policy is pushed into the vSmart controller. Next, based on the site ID list, the results of the data policy are pushed to the designated WAN Edge devices via OMP.


Alternate Method to Deploy Traffic Data Policy

This section explains an alternate method to build traffic data policy and import an existing traffic data policy into the centralized policy. Skip this section if the traffic policy was built based on the steps above and is already attached to the centralized policy.


1. Go to **Configuration > Policies**.

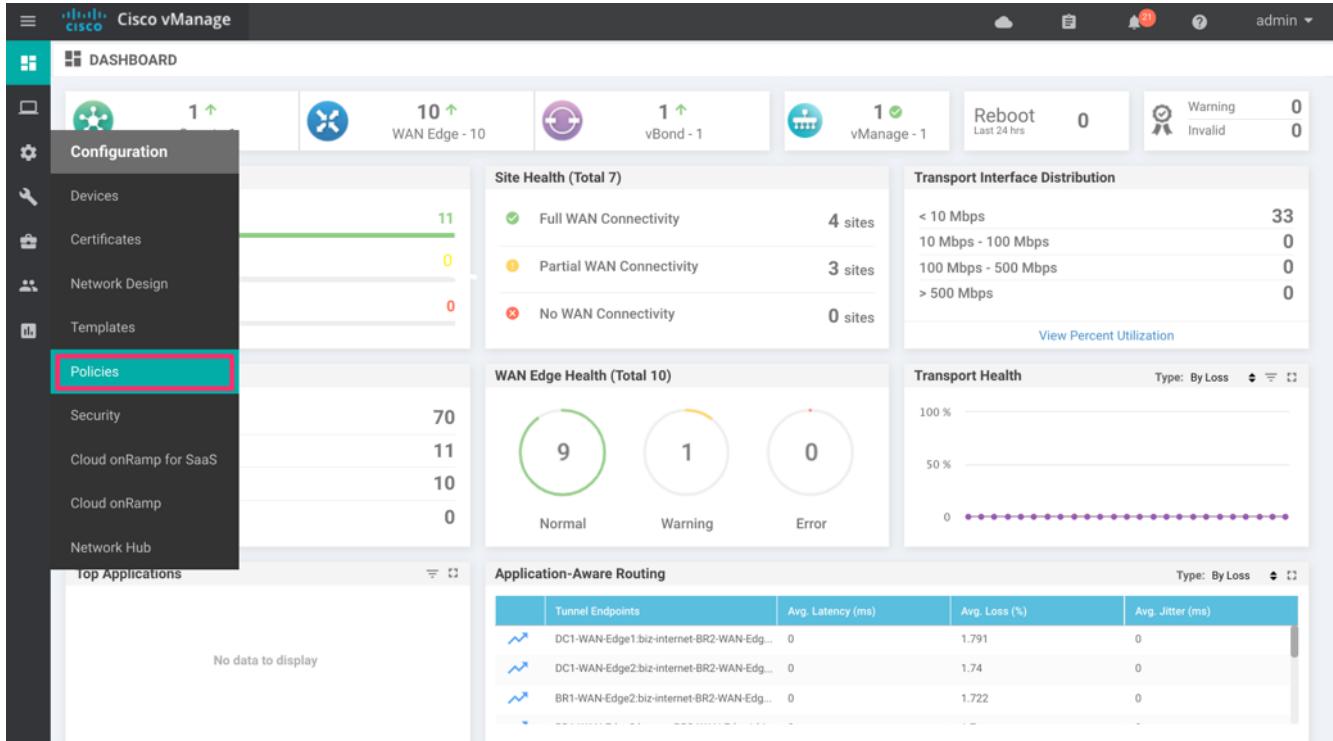


2. Click **Custom Options** on the top right and navigate to **Traffic Policy** under Centralized Policy.

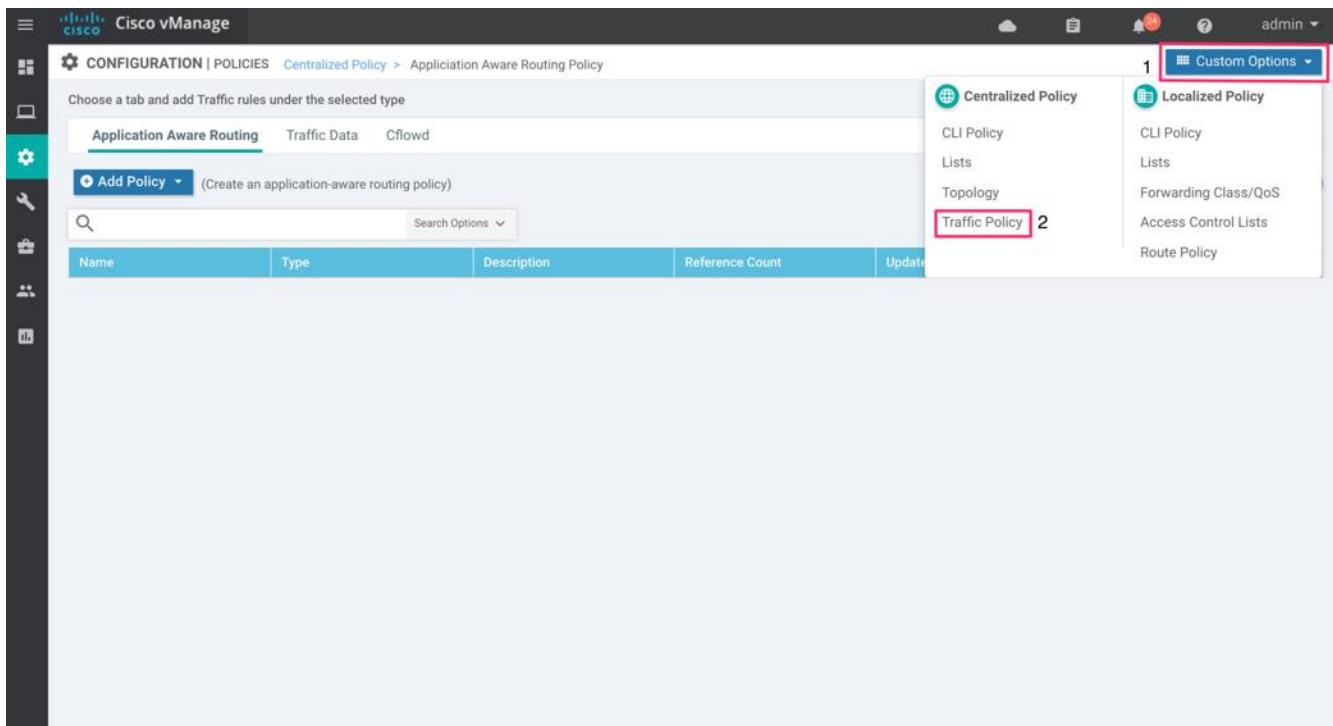

3. The configured lists are added under the **Match/Action** condition within the traffic data policy.

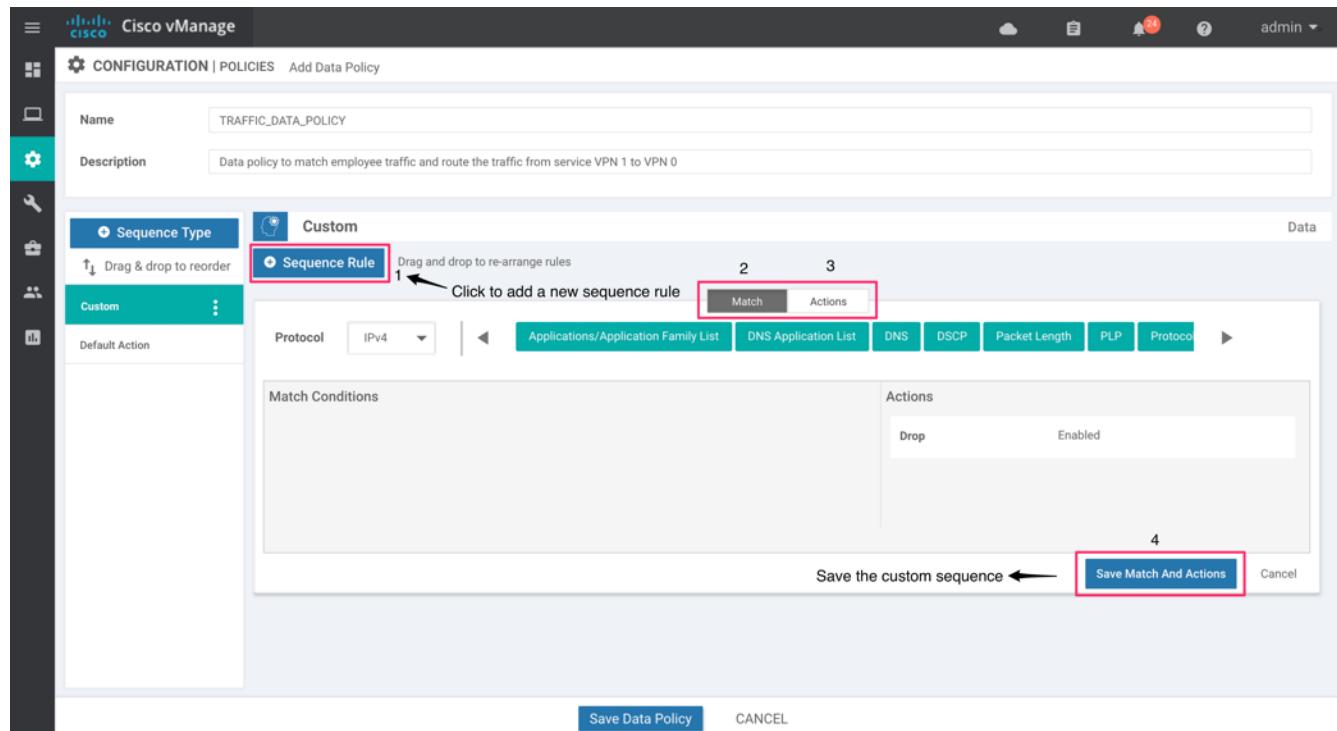

- Next, import the configured traffic data policy to centralized data policy. Navigate back to Centralized Policy and click **Policies**.

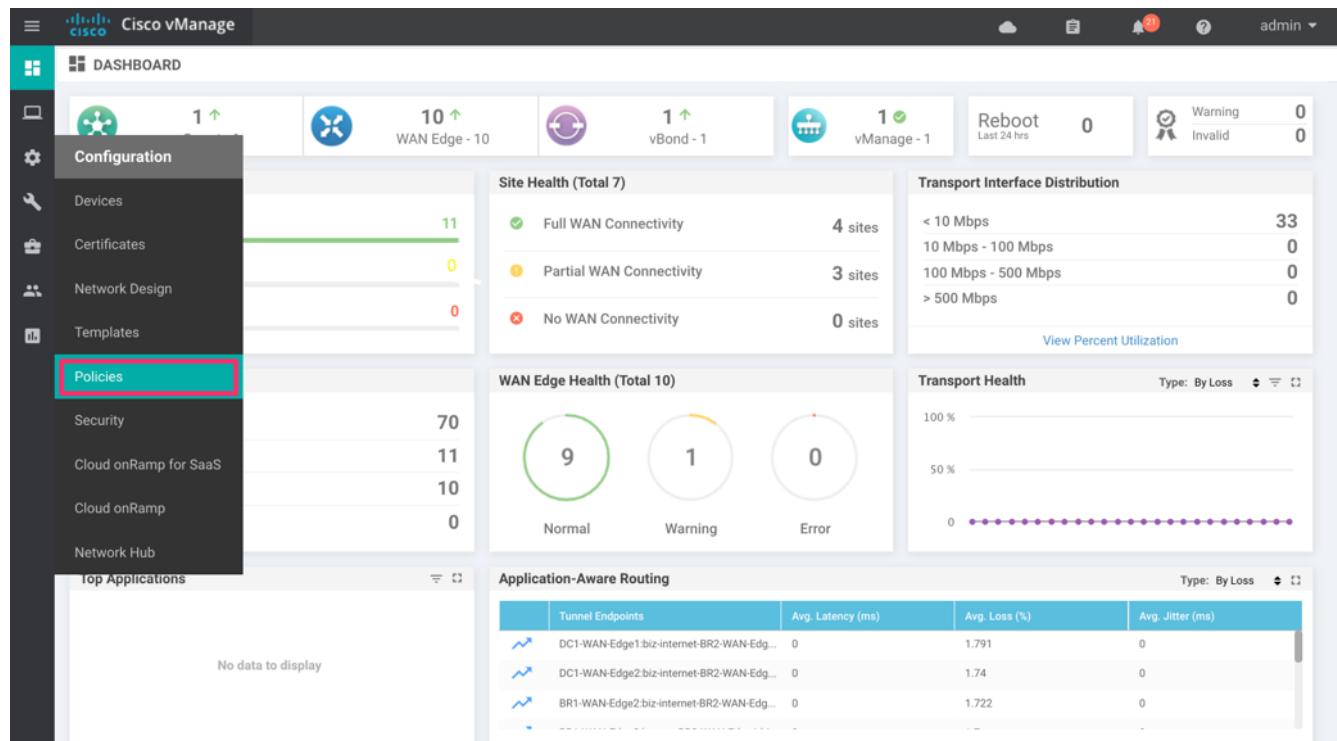

- On the **CONFIGURATION | POLICIES** page, navigate to **Configure Traffic Rules**, and click **Import Existing** to import an existing traffic data policy.

The screenshot shows the Cisco vManage web interface. The top navigation bar includes icons for cloud, file, notifications, help, and user admin. Below the bar, the title is "CONFIGURATION | POLICIES Centralized Policy > Add Policy". A horizontal toolbar has four items: "Create Groups of Interest" (green checkmark), "Configure Topology and VPN Membership" (green checkmark), "Configure Traffic Rules" (blue circle), and "Apply Policies to Sites and VPNs". On the left, a sidebar lists icons for Home, Network, Devices, Security, and Applications. The main content area is titled "Choose a tab and add Traffic rules under the selected type" and shows three tabs: "Application Aware Routing" (2), "Traffic Data" (highlighted with a red box and labeled 1), and "Cflowd". Below the tabs is a button "Add Policy" with a dropdown arrow (highlighted with a red box and labeled 2). A search bar and a "Create New" link are also present. A table header row includes columns for Name, Type, Description, Reference Count, Updated By, and Last Updated. A callout with arrow 3 points to the "Import Existing" link in the table header. The message "No data available" is displayed below the table. At the bottom are "BACK", "Next" (highlighted with a blue box), and "CANCEL" buttons.

6. Select the policy from the list and click **Import**.

The screenshot shows the Cisco vManage interface with the "Import Existing Data Policy" dialog box open. The dialog has a search bar and a list of policies. One policy, "TRAFFIC_DATA_POLICY", is highlighted with a red box. The background shows the same "Add Policy" screen as the previous image, with the "Traffic Data" tab selected and the "Import Existing" link visible in the table header. The bottom of the screen shows "BACK", "Next" (highlighted with a blue box), and "CANCEL" buttons.

7. The traffic policy is attached to the centralized data policy. Click **Next** to provide a name to the new centralized data policy and attach VPN/Sites.

The screenshot shows the Cisco vManage web interface. The top navigation bar includes the Cisco logo, 'Cisco vManage', and user information ('admin'). Below the header, a sub-navigation bar shows 'CONFIGURATION | POLICIES' with 'Centralized Policy > Add Policy'. A horizontal menu bar below the sub-navigation includes 'Create Groups of Interest', 'Configure Topology and VPN Membership', 'Configure Traffic Rules', and 'Apply Policies to Sites and VPNs'. The main content area is titled 'Choose a tab and add Traffic rules under the selected type' and shows tabs for 'Application Aware Routing', 'Traffic Data' (which is selected), and 'Cflowd'. A sub-menu for 'Add Policy' is open, showing '(Create a data policy)'. Below this is a search bar and a table with one row. The table columns are 'Name', 'Type', 'Description', 'Reference Count', 'Updated By', and 'Last Updated'. The single row contains 'TRAFFIC_DATA_POLICY', 'Data', 'Policy to route LAN traffic fro...', '0', 'admin', and '28 Jan 2019 2:53:56 PM PST'. At the bottom of the table are refresh and export icons. The footer of the page includes 'BACK', 'Next' (which is highlighted with a red box), and 'CANCEL'.

Name	Type	Description	Reference Count	Updated By	Last Updated
TRAFFIC_DATA_POLICY	Data	Policy to route LAN traffic fro...	0	admin	28 Jan 2019 2:53:56 PM PST

Procedure 2: Use Case #2 - Create NAT DIA Route to Redirect Guest Internet

In this procedure, a NAT DIA route is configured to route all remote-site guest Internet traffic from service side VPN 2 to VPN 0, which will allow the traffic to exit directly to the local Internet.

Step 1: Create Feature Template with NAT DIA Route

Configure a NAT DIA route within VPN 2 by creating a new template from one of the existing branch templates. Use a VPN template corresponding to a service VPN. In this guide, we have generated a copy of an existing service VPN branch template **BR_VPN1_Static_Routing** (Refer to [SDWAN deployment guide](#) to build new templates).

1. Go to **Configuration > Templates**.

The screenshot shows the Cisco vManage dashboard. On the left, a sidebar menu is open with several options: Configuration, Devices, Certificates, Network Design, and Templates. The 'Templates' option is highlighted with a red box. Below the sidebar, there are four main cards:

- Site Health (Total 7)**: Shows Full WAN Connectivity (4 sites), Partial WAN Connectivity (3 sites), and No WAN Connectivity (0 sites).
- WAN Edge Health (Total 10)**: Shows 9 Normal, 1 Warning, and 0 Error.
- Transport Interface Distribution**: A chart showing the distribution of transport interface bandwidth: < 10 Mbps (33), 10 Mbps - 100 Mbps (0), 100 Mbps - 500 Mbps (0), and > 500 Mbps (0).
- Application-Aware Routing**: A table showing tunnel endpoints and their metrics. The table has columns: Tunnel Endpoints, Avg. Latency (ms), Avg. Loss (%), and Avg. Jitter (ms). Three entries are listed:

Tunnel Endpoints	Avg. Latency (ms)	Avg. Loss (%)	Avg. Jitter (ms)
DC1-WAN-Edge1.biz-internet-BR2-WAN-Edg...	0	1.791	0
DC1-WAN-Edge2.biz-internet-BR2-WAN-Edg...	0	1.74	0
BR1-WAN-Edge2.biz-internet-BR2-WAN-Edg...	0	1.722	0

2. Click the **Feature** tab. Find the desired feature template (**BR_VPN1_Static_Routing**).

The screenshot shows the 'CONFIGURATION | TEMPLATES' screen in Cisco vManage. The 'Feature' tab is selected, indicated by a red box. In the search bar, the text 'BR_VPN1_Static_Routing' is entered, also highlighted with a red box. The search results table shows one entry:

Name	Description	Type	Device Model	Device Templates	Devices Attached	Updated By	Last Updated
BR_VPN1_Static_Routing	Branch VPN1 Static routing...	WAN Ed...	ISR4331 ISR4321 IS...	2	2	admin	10 Jan 2019 11:4...

To the right of the table, a context menu is open for the selected row, listing options: View, Edit, Change Device Models, Delete, and Copy. The 'Copy' option is highlighted with a red box.

3. Click three dots (...) to the right of the feature template and select **Copy** from the drop-down list.

The screenshot shows the Cisco vManage interface under the Configuration | Templates section. A specific template, 'BR_VPN1_Static_Routing', is selected and highlighted with a red box. A context menu is open over this template, with the 'Copy' option highlighted (also boxed in red). Other options in the menu include View, Edit, Change Device Models, and Delete.

- In the pop-up window, enter a Template Name (**BR_VPN2_NAT_DIA_Route**) and Description (**Branch VPN2 NAT route configuration**)

The dialog box is titled 'Template Copy'. It has two main input fields: 'Template Name' containing 'BR_VPN2_NAT_DIA_Route' and 'Description' containing 'Branch VPN2 NAT DIA route configuration'. At the bottom, there are two buttons: 'Copy' (highlighted with a red box) and 'Cancel'.

- Click **Copy**.


Once a copy of the template is generated, find the newly-created template (**BR_VPN2_NAT_DIA_Route**). To do so, click the three dots (...) next to the desired template and select **Edit**.

Ensure that the following parameters are set within the template:

Table 6 Template BR_VPN2_NAT_DIA_Route

Section	Parameter	Type	Variable/Value
Basic configuration	VPN	Global	2
	Name	Global	Service Guest VPN
IPv4 Route	Prefix	Global	0.0.0.0/0

Section	Parameter	Type	Variable/Value
	Gateway	Radio button	VPN
	Enable VPN	Global	On

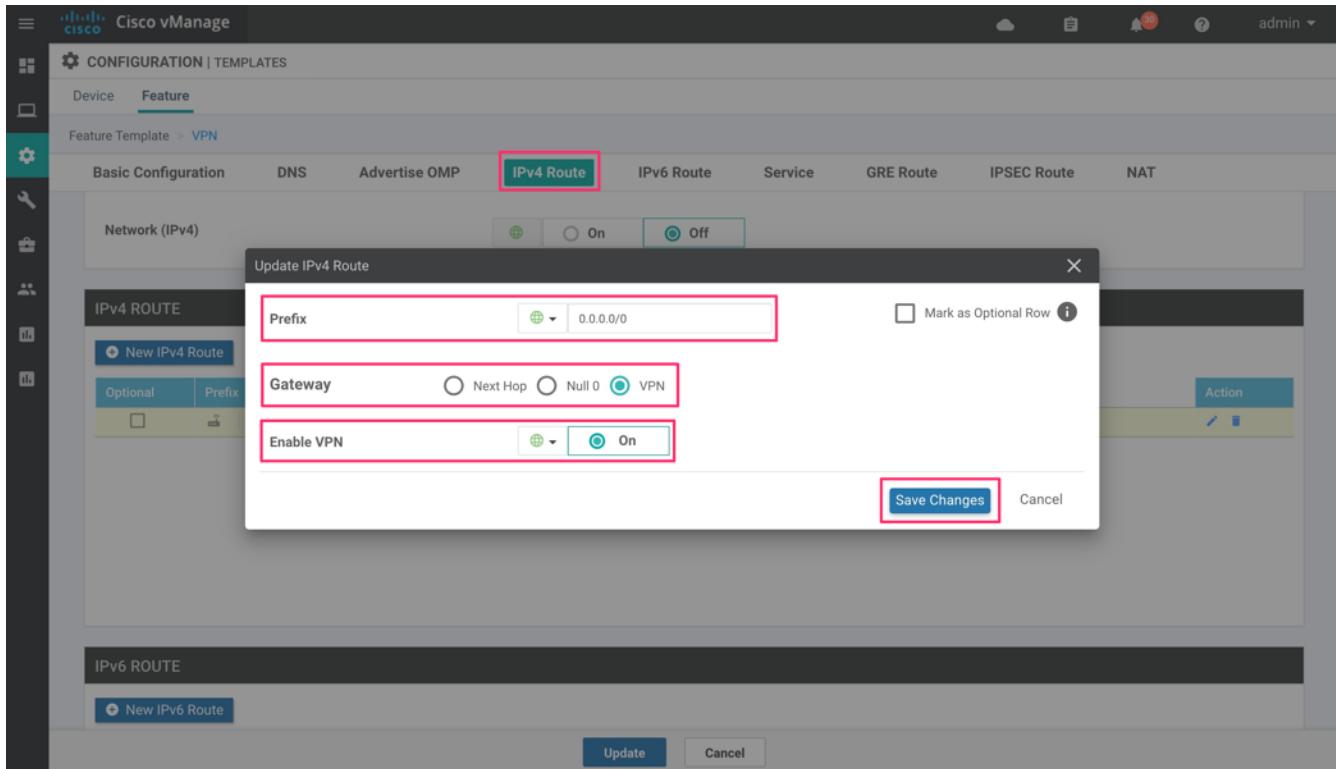

6. Update or save the modified template.

Based on the configuration above, when a packet hits an interface within Service VPN or VPN 2, the packet is forwarded to the NAT-enabled transport VPN (VPN 0) interface. The packet then exists directly to the Internet. To understand how NAT DIA configuration works in detail, refer to the Design Section of this guide. See Appendix D for all the templates used within this guide.

Step 2: Redistribute the NAT DIA Route into the Routing Protocol

In this guide OSPF is running between the LAN or service side of each WAN edge device and L3 distribution switch. Therefore, proceed to redistribute the NAT DIA route into the routing protocol.

- To redistribute the NAT DIA route into OSPF, copy the existing OSPF feature template, **BR_VPN1_OSPF** as done earlier in step 3.

The screenshot shows the Cisco vManage interface under the 'CONFIGURATION | TEMPLATES' section. The 'Feature' tab is selected. A search bar at the top contains 'BR_VPN1 OSPF'. A context menu is open over the first row of the table, with the 'Copy' option highlighted.

Name	Description	Type	Device Model	Device Templates	Devices Attached	Updated By	Updated On
BR_VPN1 OSPF	Branch LAN VPN 1 OSPF	OSPF	ISR4331 ISR4321 IS...	2	2	admin	19 Nov 2018 10:43:2...
BR_VPN1 OSPF_NA...	Branch LAN VPN 1 OSPF w...	OSPF	ISR4331 ISR4321 IS...	2	1	admin	

- Enter a new name for the template (**BR_VPN2 OSPF NAT REDISTRIBUTE**) along with a description (**Branch LAN VPN 2 OSPF with NAT redistribute**) and click **Copy**.

The screenshot shows the 'Template Copy' dialog box. It has two input fields: 'Template Name' containing 'BR_VPN2 OSPF_NAT_REDISTRIBUTE' and 'Description' containing 'Branch LAN VPN 2 OSPF with NAT redistribute'. At the bottom right of the dialog is a 'Copy' button, which is highlighted with a red box.

Figure 33 Name and description of the new feature template

- Edit the **BR_VPN2 OSPF NAT REDISTRIBUTE** template and add the following:

Table 7 Template BR_VPN2 OSPF NAT REDISTRIBUTE

Section	Parameter	Type	Variable/Value
Basic Configuration	Router ID	Device Specific	vpn2_ospf_router_id
Redistribute	Protocol	Global	nat

Cisco vManage Configuration | Templates

Feature Template: OSPF

Device Type: vEdge 1000, vEdge 100, vEdge 100 B, vEdge 100 WM, vEdge 100 M, ISR4331, ISR4321, ISR4351

Template Name: BR_VPN2 OSPF NAT REDISTRIBUTE

Description: Branch LAN VPN 2 OSPF with NAT redistribute

Basic Configuration (selected)

BASIC CONFIGURATION

- Router ID: [vpn2_ospf_router_id]
- Distance for External Routes: 110
- Distance for Inter-Area Routes: 110
- Distance for Intra-Area Routes: 110

Update Cancel

Cisco vManage Configuration | Templates

Feature Template: OSPF

Device Type: vEdge 1000, vEdge 100, vEdge 100 B, vEdge 100 WM, vEdge 100 M, ISR4331, ISR4321, ISR4351

Template Name: BR_VPN2 OSPF NAT REDISTRIBUTE

Description: Branch LAN VPN 2 OSPF with NAT redistribute

Basic Configuration

Update Redistribute

Protocol: nat

Route Policy:

Router ID

Distance for External Routes: 110


Distance for Inter-Area Routes: 110

Distance for Intra-Area Routes: 110

2 Save Changes Cancel

Click **Save Changes** to add the redistribute NAT statement into the template.

10. Finally, click **Update** or save the **BR_VPN2 OSPF NAT REDISTRIBUTE** template.

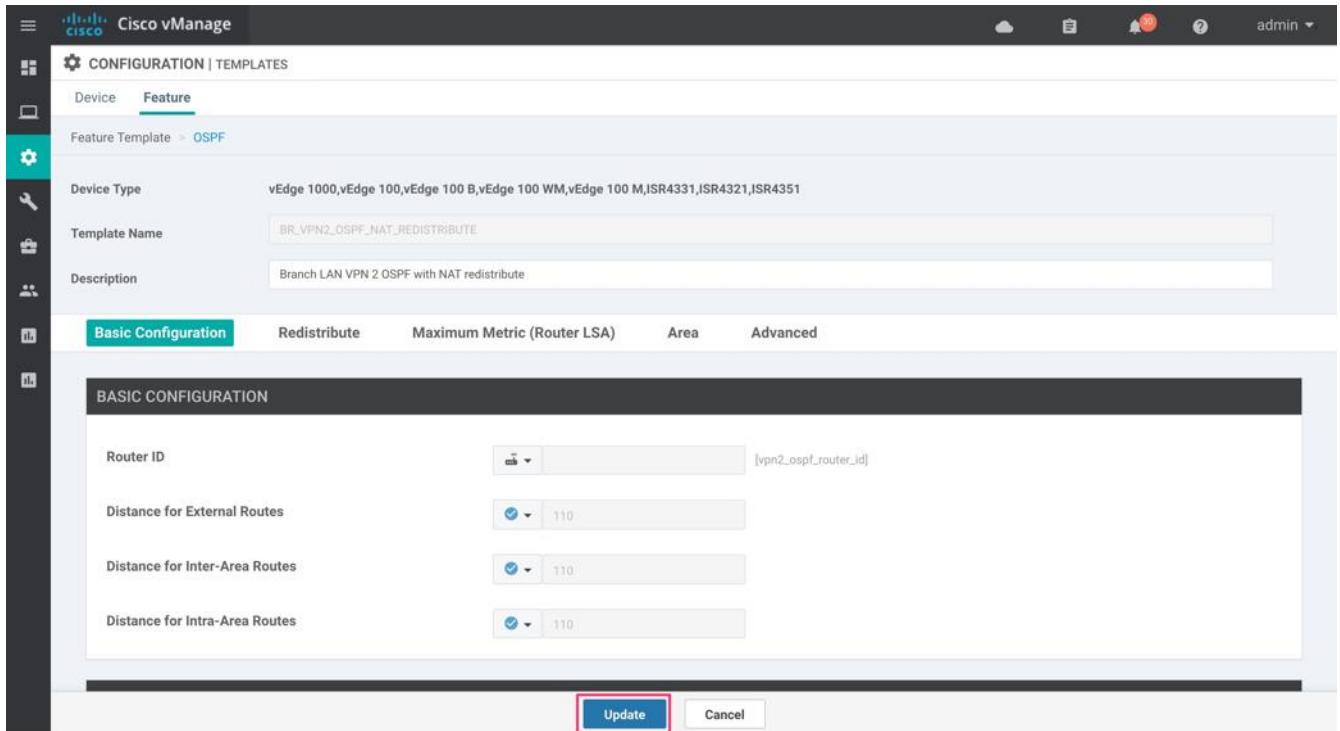

Process 3: Add the Configured Feature Templates to Device Template

11. Go to **Configuration > Templates** to see the list of device templates.

12. Edit the desired WAN Edge device template.

1. Under **Service VPN** next to **VPN**, select the feature template modified to include the NAT DIA route (**BR_VPN2_NAT_DIA_Route**)
2. Under **Service VPN** next to **OSPF**, select the feature template modified to redistribute the NAT route into OSPF (**BR_VPN2 OSPF NAT REDISTRIBUTE**).

Here's an example of the device template with the new feature templates attached to it.

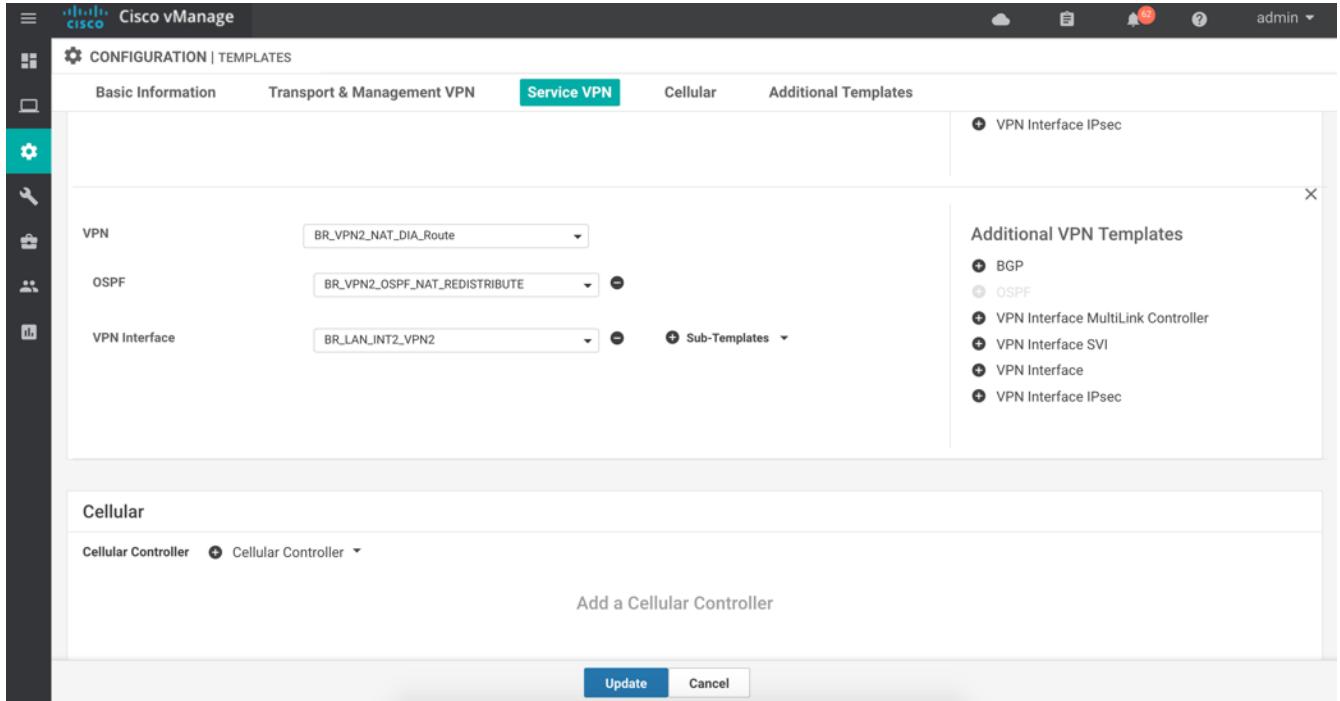


Figure 34 Device Template with NAT DIA configured

Based on the configuration added, 0.0.0.0/0 route is installed into the IOS-XE Routing Information base as a 'hat-dia' type. This route is then redistributed into OSPF protocol on the LAN side.

Once the templates are pushed through the configuration, this is how they would appear.

On IOS XE SD-WAN Router Platforms

```

ip nat inside source list nat-dia-vpn-hop-access-list interface GigabitEthernet0/0/2
overload

ip nat translation tcp-timeout 60

ip nat translation udp-timeout 1

ip nat route vrf 2 0.0.0.0 0.0.0.0 global

router ospf 2 vrf 2

auto-cost reference-bandwidth 100000

timers throttle spf 200 1000 10000

router-id 10.30.31.31

default-information originate

distance ospf external 110

distance ospf inter-area 110

distance ospf intra-area 110

redistribute omp subnets

```

```

 redistribute nat-route dia
 !

```

On vEdge Router Platform

```

vpn 2
  name "Service VPN"
  ecmp-hash-key layer4
  router
    ospf
      router-id 10.10.12.12
      auto-cost reference-bandwidth 100000
      default-information originate
      timers spf 200 1000 10000
      redistribute omp
      redistribute nat

!
ip route 0.0.0.0/0 vpn 0

```

Technical tip: To track the status of the Internet transport link when a NAT DIA route is used for local Internet exit, a system tracker can be configured on vEdge router platforms. This eliminates the issue of internet traffic blackholing when an internet link is down.

Configuration of System Tracker

This section explains how to configure a system tracker to track the status of the Internet transport link when a NAT DIA route is configured.

Step 1: Build the System Tracker Template

To track the status of transport interfaces that are connected to the Internet, system tracker configuration is added to the existing feature template **System_Template**. Note that this feature template would be initially used within the section **System** in your device template to add configurations such as system IP, hostname and so on.

13. Go to **Configuration > Templates** and click the **Feature** tab.

14. Find the WAN Edge System template (**System_Template**), click ... on the far right of the screen and select the **Copy** option.

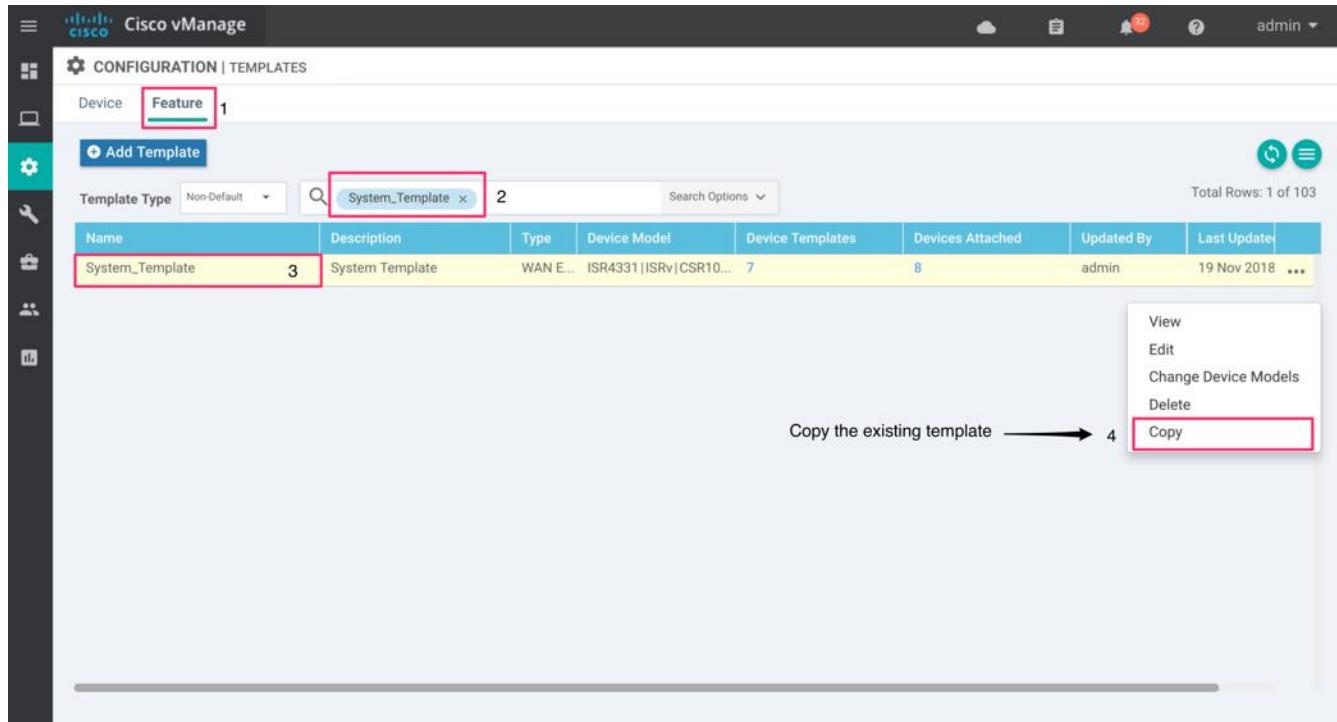


Figure 35 Copy the old template System_Template

15. Enter a new name for the template (**System_Template_Interface_Tracker**) and description (**System Template to track the Internet Interfaces**)

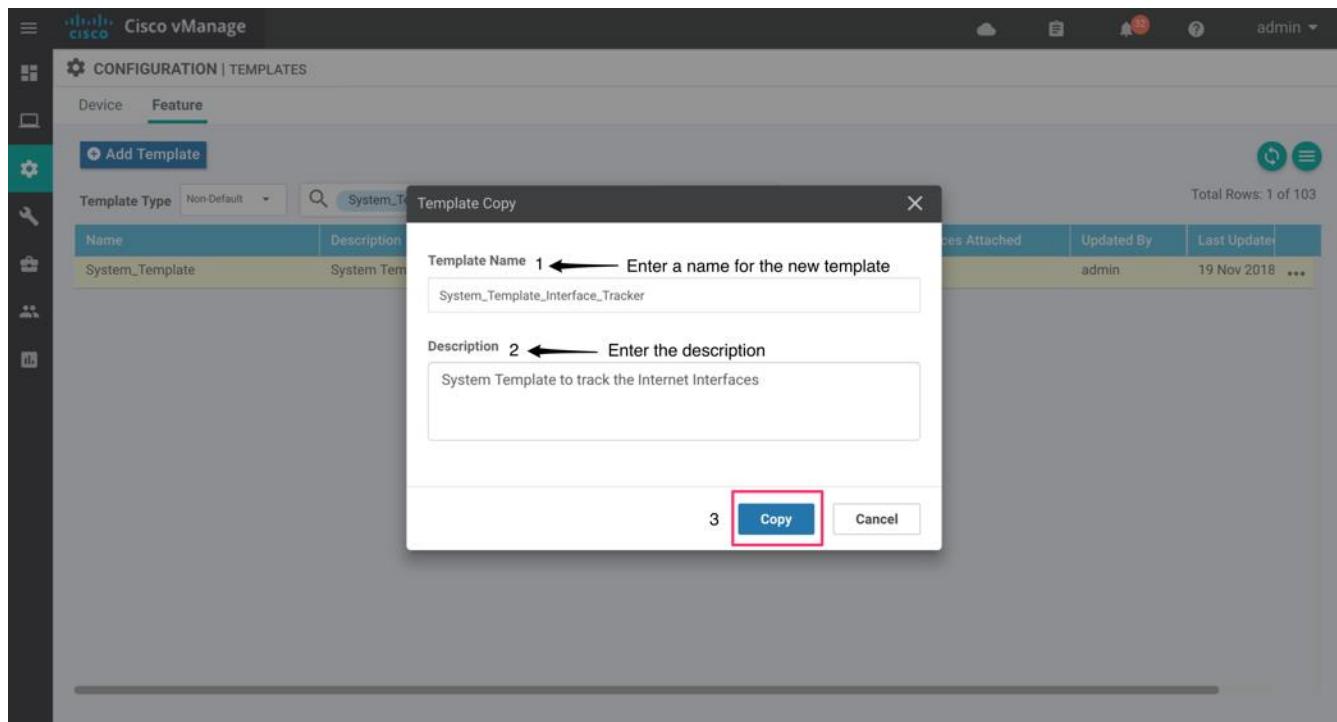


Figure 36 Name and description of template - System_Template_Interface_Tracker.

16. Edit the System_Template_Interface_Tracker template to add the following:

Table 8 Template System_Template_Interface_Tracker

Section	Parameter	Type	Variable/Value
Tracker	Name	Global	nat_tracker
	Endpoint Type	Radio button	IP Address
	Endpoint IP Address	Global	208.67.222.222
	Name	Global	nat_tloc_tracker
	Endpoint Type	Radio button	IP Adress
	Endpoint IP Address	Global	216.58.194.174

Step 2 : Add Tracker Name to Internet Interface

Add the tracker name (nat_tracker / nat_tloc_tracker) to the Interface feature template used to deploy the Internet facing interface of each WAN edge device.

17. Generate a copy of the previously used interface feature templates by clicking the **copy** option as explained earlier. Next, enter the **name/description** for the generated template and attach the tracker to each of these generated feature templates.

The screenshot shows the Cisco vManage interface under the 'CONFIGURATION | TEMPLATES' section. The 'Feature' tab is selected. A search bar at the top contains the text 'BR_INET_INT'. The main area displays a table of templates with the following data:

Name	Description	Type	Device Model	Device Templates	Devices Attached	Updated By	Date
BR_INET_INT_TLOC	Branch Internet Interface w...	WAN Edge Interface	ISR4331 ISR4321 IS...	1	1	admin	21 Nov 2018 6:54:39 ...
BR_INET_INT	Branch Internet Interface w...	WAN Edge Interface	ISR4331 ISR4321 IS...	2	1	admin	22 Jan 2019 9:26:19 ...
BR_INET_INT_DIA	Branch Internet Interface w...	WAN Edge Interface	ISR4331 ISR4321 IS...	1	1	admin	

A context menu is open over the second row (BR_INET_INT), with the 'Copy' option highlighted. The menu also includes options for View, Edit, Change Device Models, Delete, and View.

In this guide, the following templates were used in remote-sites. These templates were copied to create a new template.

Table 9 Internet facing VPN 0 Templates

Existing Template	New Template
BR_INET_INT	BR_INET_INT_DIA
BR_INET_SUBINT	BR_INET_SUBINT_DIA
BR_BRONZE_INT	BR_BRONZE_INT_DIA
BR_BRONZE_SUBINT	BR_BRONZE_SUBINT_DIA

The new template is edited such that the tracker is enabled on each Internet facing interface.

18. Changes made to BR1-WAN-Edge1 (vEdge Site 112002)

Table 10 Template BR_BRONZE_INT

Section	Parameter	Type	Variable/Value
Advanced	Tracker	Global	nat_tracker

Table 11 Template BR_INET_SUBINT

Section	Parameter	Type	Variable/Value
Advanced	Tracker	Global	nat_tloc_tracker

Changes made to device BR1-WAN-Edge2 (vEdge Site 112002)

Table 12 Template BR_INET_INT

Section	Parameter	Type	Variable/Value
Advanced	Tracker	Global	nat_tracker

Table 13 Template BR_BRONZE_SUBINT

Section	Parameter	Type	Variable/Value
Advanced	Tracker	Global	nat_tloc_tracker

Note, to associate each of the trackers to only one NAT-enabled Internet-facing interface. The same tracker cannot be used on two NAT-enabled Internet facing interfaces within the same device.

Technical Tip: System Tracker and path preference using local-TLOC color is not yet supported on IOS XE SD-WAN release. These features are currently supported only on vEdge router platforms.

Operate - Cisco SD-WAN Direct Internet Access Monitoring

Monitor, Troubleshoot and Manage Cisco SD-WAN Direct Internet Access

Using the vManage NMS Dashboard, you can monitor, troubleshoot and manage your SD-WAN overlay network, including the features being deployed. Within DIA,

- Monitor DIA sessions based on the NAT translations
- Monitor the configured data policy for traffic flow
- Understand the interface status and routing table for service-side VPN for NAT DIA route

Step 1: Monitor DIA sessions based on the NAT Translations

Using the vManage NMS dashboard, you can view the NAT translations for traffic exiting the NAT-enabled interface on VPN 0.

1. Navigate to **Monitor > Network** on the left pane and click the WAN edge device you wish to monitor.
2. In the panel on the left, select **Real Time** and a screen appear with **Device Options**. Click the box next to the device options. This populates a list of options that can be chosen to monitor, troubleshoot, and manage your device and the features deployed on it.

The figure below shows an example of NAT translations being monitored on the WAN Edge device using the IP NAT Translation option.

The screenshot displays the Cisco vManage Network Monitor Real Time interface. The top navigation bar shows 'Cisco vManage' with a user icon and 'admin'. The left sidebar has a 'MONITOR' section with various options like 'Select Device', 'Top Talkers', 'WAN', 'TLOC', 'Tunnel', 'Security Monitoring', 'Firewall', 'Intrusion Prevention', 'URL Filtering', 'Umbrella DNS Redirect', 'Control Connections', 'System Status', 'Events', 'ACL Logs', and 'Troubleshooting'. The 'Real Time' option is highlighted with a red box. The main content area shows 'BR3-WAN-Edge1 | 10.255.241.31 Site ID: 112004 Device Model: ISR4331'. Below this, a 'Device Options' section has a search bar with 'IP NAT Translation' and a red box around it. A table titled 'Total Rows: 10' lists NAT translations with columns: Last Updated, Inside Local Address, Inside Local Port, Outside Local Address, Outside Local Port, and Inside Global Address. The data is as follows:

Last Updated	Inside Local Address	Inside Local Port	Outside Local Address	Outside Local Port	Inside Global Address
24 Apr 2019 10:29:24 PM PDT	10.30.14.1	50539	8.8.8.8	53	30.30.1.1
24 Apr 2019 10:29:24 PM PDT	10.30.14.1	49342	184.29.104.234	443	30.30.1.1
24 Apr 2019 10:29:24 PM PDT	10.30.14.1	49344	184.29.104.234	443	30.30.1.1
24 Apr 2019 10:29:24 PM PDT	10.30.14.1	49346	184.29.104.234	443	30.30.1.1
24 Apr 2019 10:29:24 PM PDT	10.30.14.1	49348	184.29.104.234	443	30.30.1.1
24 Apr 2019 10:29:24 PM PDT	10.30.14.1	49350	184.29.104.234	443	30.30.1.1
24 Apr 2019 10:29:24 PM PDT	10.30.14.1	49352	184.29.104.234	443	30.30.1.1
24 Apr 2019 10:29:24 PM PDT	10.30.14.1	49354	184.29.104.234	443	30.30.1.1
24 Apr 2019 10:29:24 PM PDT	10.30.14.1	49356	184.29.104.234	443	30.30.1.1
24 Apr 2019 10:29:24 PM PDT	10.30.14.1	49358	184.29.104.234	443	30.30.1.1

Technical Tip: The device options populated to monitor NAT translations are different for vEdge router platforms. In the vEdge platform, use the **IP NAT Filters** option to verify the NAT translation filters.

Note, you can also view NAT translations from the CLI mode on the routers. To do so, navigate to **Tools > SSH** and click the desired WAN edge device.

The basic show commands to view NAT translations include – **show ip nat translations** and **show ip nat statistics** on SD-WAN XE platforms, and **show ip nat filter | tab** on vEdge router platforms.

Step 2: Monitor the configured data policy for traffic flow

Using vManage NMS dashboard, you can monitor the traffic flow through the policy based on the overall packets/bytes.

1. Navigate to **Monitor > Network** on the left pane and click the WAN edge device you wish to monitor.
2. In the panel on the left, select **Real Time** and a screen will appear with Device Options. Click the box next to the device options. This shows a list of options that can be chosen to monitor, troubleshoot, and manage your device and the features deployed on it.

In the example figure below, packets/bytes of traffic hitting the data policy embedded within the centralized policy are monitored on the WAN Edge device.

Last Updated	Policy Name	VPN	Counter Name	Packets	Bytes
24 Apr 2019 10:30:18 PM PDT	_VPN_1_TRAFFIC_DATA_POLICY...	VPN_1	Count_691307099	643	50390
24 Apr 2019 10:30:18 PM PDT	_VPN_1_TRAFFIC_DATA_POLICY...	VPN_1	default_action_count	0	0
24 Apr 2019 10:30:18 PM PDT	_VPN_1_TRAFFIC_DATA_POLICY...	VPN_1	count_vEdge_6913070...	0	0

Use CLI commands, such as **show (sdwan) policy** from vSmart controllers to view the policy and to monitor the flow of traffic, **show (sdwan) policy data-policy-filter**.

Technical Tip: To determine whether the data policy is sending packets via DIA path or SD-WAN overlay, you can use the CLI command - **show sdwan app-fwd dpi flows** on SD-WAN XE devices or **show app dpi flows** on vEdge platform. This command output, will display the type of application and whether that packet was IPsec encapsulated or not.

Step 3: Understand the overall routing table for Service Side VPN for NAT DIA route

Using vManage NMS dashboard, you can monitor for traffic flow through the policy based on the overall packets/bytes.

1. Navigate to **Monitor > Network** available on the left pane and click on the WAN edge device you wish to monitor.
2. Select Real time and pop-up screen will appear with device options. Click the tab next to the device options. A You will then see a list of options that can be chosen to monitor, troubleshoot, and manage your device and the features deployed on it.

The example below shows the monitoring of IP routes for the WAN Edge device.

Next Hop If Name	VPN ID	AF Type	Prefix	Protocol	Next Hop Address	Next Hop VPN	TLOC IP	TLO
--	1	ipv4	10.2.34.0/30	omp	--	--	10.255.241.102	biz
--	1	ipv4	10.2.35.0/30	omp	--	--	10.255.241.101	biz
geo/0	1	ipv4	10.10.13.0/30	ospf	--	--	--	--
geo/0	1	ipv4	10.10.13.0/30	connected	--	--	--	--
--	1	ipv4	10.30.13.0/30	omp	--	--	10.255.241.31	biz
--	1	ipv4	10.40.4.0/30	omp	--	--	100.255.241.41	biz
--	1	ipv4	10.40.4.0/30	omp	--	--	100.255.241.41	biz
geo/1	2	ipv4	0.0.0.0/0	nat	--	0	--	--
geo/2.102	2	ipv4	0.0.0.0/0	nat	--	0	--	--
--	2	ipv4	10.30.12.0/30	omp	--	--	10.255.241.31	biz
--	2	ipv4	10.40.5.0/30	omp	--	--	100.255.241.41	biz
--	2	ipv4	10.40.5.0/30	omp	--	--	100.255.241.41	biz
loop0.2	512	ipv6	fcff::120	connected	--	--	--	--

Note, you can also filter the view populated on the vManage dashboard.

Technical Tip: The option to view routes on SD-WAN XE devices via vManage NMS is yet to be added. You can view the routes, by navigating to **Tools > SSH Terminal**. Next, click the WAN Edge device and enter CLI command **show ip route**.

Appendix A: New in this guide

This guide is new and is not updated from a previous version.

Appendix B: Hardware and software used for validation


This guide was validated using the following hardware and software.

Table 14 System feature template settings

Functional Area	Product	Software Version
Cloud	Cisco vManage NMS	19.1.0
Cloud	Cisco vBond Controller	19.1.0
Cloud	Cisco vSmart Controller	19.1.0
Data center	Cisco vEdge 5000 Series Routers	18.4.0
Branch office	Cisco vEdge 1000 Series Routers	18.4.0
Branch office	Cisco ISR 4331 Series Routers	16.10.2
Branch office	Cisco ISR 4351 Series Routers	16.10.2

Appendix C: DIA Deployment Example

The following figure is a high-level overview of the example network in this deployment guide.

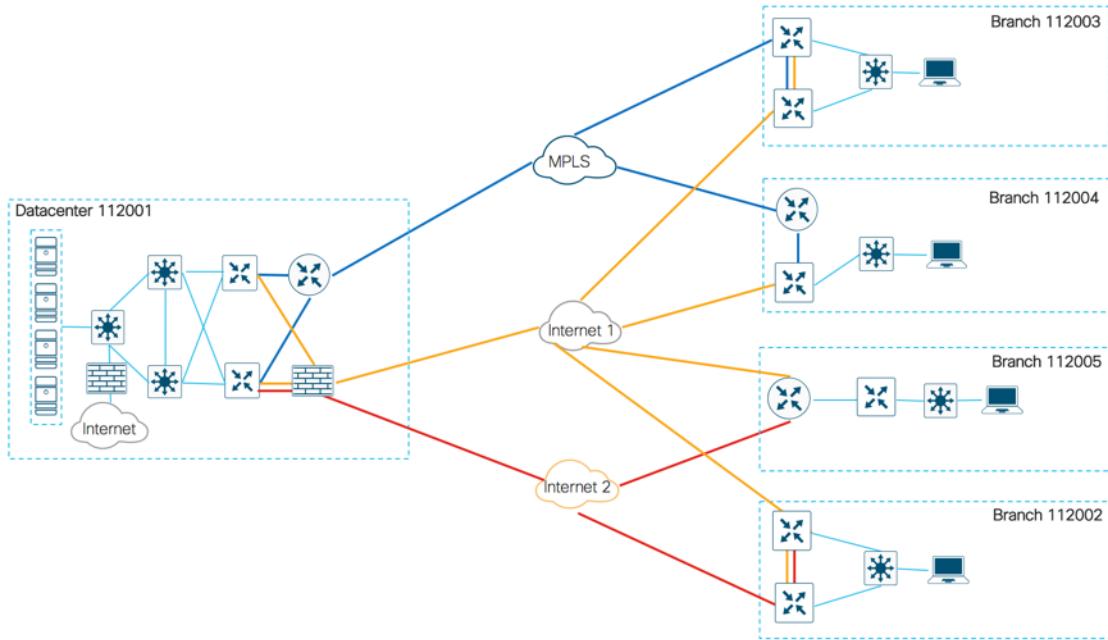

In this topology, there is one data center and 4 remote sites. The transports shown are one MPLS and two Internet Service Providers. The SD-WAN controllers are deployed using Cisco's cloud-managed service and reachable via Internet transport. On the U.S. West Coast there is one vManage, one vSmart controller and one vBond orchestrator.

Each of the WAN edge devices are running SD-WAN code, configured using the templates similar to those used in the SD-WAN deployment guide and the devices are a part of the SD-WAN overlay network.

System IP address and site ID

The following table explains the system IP addresses and site ID's chosen for this deployment guide.

Table 15 Example network site IDs and system IP addresses

Hostname	Location	Site ID	System IP
DC1-WAN-Edge1	Datacenter 1/ West	112001	10.255.241.101
DC1-WAN-Edge2			10.255.241.102
BR1-WAN-Edge1	Branch 1/ West	112002	10.255.241.11
BR1-WAN-Edge2			10.255.241.12
BR2-WAN-Edge1	Branch 2/ West	112003	10.255.241.21
BR2-WAN-Edge2			10.255.241.22

Hostname	Location	Site ID	System IP
BR3-WAN-Edge1	Branch 3/ West	112004	10.255.241.31
BR4-WAN-Edge1			10.255.241.41
BR4-WAN-Edge2	Branch 4/ West	112005	10.255.241.42

The following table explains the color used for each transport in this deployment guide.

Table 16 Color and transport details

Color	Transport
MPLS	MPLS Transport
Biz-Internet	Internet Provider 1
Bronze	Internet Provider 2

The LAN side of each branch contains devices configured within the private IP address range of 10.0.0.0/8 subnet.

Appendix D: Cisco WAN Edge configuration summary (Templates)

This section summarizes the feature templates and device template for the Cisco WAN Edge routers deployed within this deployment guide.

System feature template

Devices: All devices except vManage and vSmart

Template: System

Template Name: System_Template

Description: System Template

Table 17 System feature template settings

Section	Parameter	Type	Variable/Value
Basic Configuration	Site ID	Device Specific	system_site_id
	System IP	Device Specific	system_system_ip
	Hostname	Device Specific	system_host_name
	Device Groups	Device Specific	system_device_groups
GPS	Latitude	Device Specific	system_latitude
	Longitude	Device Specific	system_longitude
Advanced	Port Hopping	Device Specific	system_port_hop
	Port Offset	Device Specific	system_port_offset

Logging feature template

Devices: All devices

Template: Other Templates/Logging

Template Name: Logging_Template

Description: Logging Template

Table 18 Logging feature template settings

Section	Parameter	Type	Variable/Value
Server (Optional)	Hostname/IP Address	Device Specific	logging_server_name
	VPN ID	Device Specific	logging_server_vpn
	Source Interface	Global	loopback0

This feature template is optional, deploy it based on your individual use cases. It will help monitor the network.

NTP feature template

Devices: All devices

Template: Basic Information/NTP

Template Name: NTP_Template

Description: NTP Template

Table 19 NTP feature template settings

Section	Parameter	Type	Variable/Value
Server	Hostname/IP Address	Global	time.nist.gov

The Cisco WAN Edge router syncs the time to an NTP server. For this deployment guide the NTP server **time.nist.gov** was used.

You should be careful to use only known and trusted NTP servers.

OMP feature template

Devices: All devices except vManage and vSmart

Template: Basic Information/OMP

Template Name: OMP_Template

Description: OMP Template

Table 20 OMP feature template settings

Section	Parameter	Type	Variable/Value
Basic configuration	Number of Paths Advertised per Prefix	Global	16
	ECMP Limit	Global	16
Advertise	Connected	Global	Off
	Static	Global	Off

The rest of the options are in type default.

VPN 1 interface Ethernet Loopback0

Devices: WAN Edge device (ISR4331, ISR4351, vEdge1k, vEdge5k)

Template: VPN/VPN Interface Ethernet

Template Name: VPN1_Lo0

Description: Service VPN 1 Interface Loopback 0

Table 21 OMP feature template settings

Section	Parameter	Type	Variable/Value
Basic Configuration	Shutdown	Global	No

Section	Parameter	Type	Variable/Value
	Interface Name	Global	loopback0
IPv4 Configuration	IPv4 Address	Radio Button	Static
	IPv4 Address	Device Specific	vpn1_lo0_int_ip_addr maskbits

The rest of the options are in type default.

BFD feature template

Devices: WAN Edge device (ISR4331, ISR4351, vEdge1k, vEdge5k)

Template: Basic Information/BFD_Template

Template Name: BFD_Template

Description: BFD Template for WAN Edge devices

Table 22 BFD feature template settings

Section	Parameter	Type	Variable/Value
Basic configuration	Poll Interval	Global	120000
Color (Biz Internet)	Color	Drop-down	Biz Internet
	Path MTU	Global	Off
Color (MPLS)	Color	Drop-down	MPLS
	Path MTU	Global	Off

The rest of the options are in type default.

The default BFD hello interval is 1,000 milliseconds. The BFD hello interval controls how fast the network converges in the case of an IPsec tunnel failure. The shorter the BFD hello interval, generally the faster the network recognizes a failure of one of the Cisco vEdge Cloud routers within the transit VPC and selects an alternate path.

Security feature template

Devices: All devices except vManage and vSmart

Template: Basic Information/Security

Template Name: Security_Template

Description: Security Template

Table 23 NTP feature template settings

Section	Parameter	Type	Variable/Value
Basic configuration	Replay window	Global / drop-down	4096

VPN 512 feature template

Devices: WAN Edge device (ISR4331, ISR4351, vEdge1k, vEdge5k)

Template: VPN/VPN

Template Name: VPN512_Template**Description: VPN 512 Out-of-Band Management for WAN Edge devices****Table 24 VPN512 feature template settings**

Section	Parameter	Type	Variable/Value
Basic configuration	VPN	Global	512
	Name	Global	Management VPN

The rest of the options are not altered.

VPN 512 interface feature template**Devices: WAN Edge device (ISR4331, ISR4351, vEdge1k, vEdge5k)****Template: VPN/VPN Interface Ethernet****Template Name: VPN512_Interface****Description: VPN 512 Management Interface for WAN Edge devices****Table 25 VPN512 interface feature template settings**

Section	Parameter	Type	Variable/Value
Basic Configuration	Shutdown	Global	No
	Interface Name	Device Specific	vpn512_int_mgmt0_or_gex
	Description	Global	Management Interface
IPv4 Configuration	IPv4 Address	Radio Button	Static
		IPv4 Address	vpn512_int_mgmt_ip_addr maskbits

VPN 0 feature template**Devices: WAN Edge device (ISR4331, ISR4351, vEdge1k)****Template: WAN Edge VPN****Template Name: BR_VPN0_Dual_Transport****Description: VPNO Dual Transport Template****Table 26 VPNO dual transport feature template settings**

Section	Parameter	Type	Variable/Value
Basic configuration	VPN	Global	0
	Name	Global	Transport VPN
	Enhanced ECMP Keying	Global (Radio)	On
DNS	Primary DNS Address (IPv4)	Global	208.67.220.220

Section	Parameter	Type	Variable/Value
	Secondary DNS Address (IPv4)	Global	208.67.222.222
IPv4 Route	Address (Next Hop)	device specific	vpn0_inet_next_hop_ip_addr
			vpn0_mpls_next_hop_ip_addr
	Prefix	Global	0.0.0.0/0

VPN 0 BGP feature template

Devices: WAN Edge device (ISR4331)

Template: BGP

Template Name: BR_VPN0_BGP

Description: VPN0 Template for BGP configuration for WAN Edge devices

Table 27 VPN0 feature template for BGP settings

Section	Parameter	Type	Variable/Value
Basic configuration	Shutdown	device specific	bgp_shutdown
	AS Number	device specific	bgp_as_num
	Propagate AS Path	Global (Radio)	On
Unicast Address Family	IPv4 Maximum Paths	Global	2
	Redistribute	Global	OMP
Neighbor	Address	device specific	bgp_neighbor1_address
	Description	device specific	bgp_neighbor1_description
	Remote AS	device specific	bgp_neighbor1_remote_as
	Address Family	device specific	On
	Address Family	device specific	IPv4-Unicast
	Shutdown	device specific	bgp_neighbor1_shutdown
	Advanced (source Interface)	Radio	Address
	Advanced (Password)	device specific	bgp_neighbor1_password
	Keepalive Time (seconds)	Global	3
	Hold Time (seconds)	Global	9

VPN 0 Interface feature template

Devices: WAN Edge device (ISR4331, ISR4351, Edge1000)

Template: WAN Edge Interface**Template Name: BR_WAN_PARENT_INT****Description: VPN0 INET Transport Template for WAN Edge devices****Table 28 VPN0 WAN parent feature template settings**

Section	Parameter	Type	Variable/Value
Basic configuration	Shutdown	device specific	vpn0_wan_parent_int_shutdown
	Interface Name	device specific	vpn0_wan_parent_int_gex x
	Description	Global (Radio)	WAN Parent Interface
Advanced	IP MTU	Global	IP_MTU

Devices: WAN Edge device (ISR4331, ISR4351, Edge1000)**Template: WAN Edge Interface****Template Name: BR_LAN_PARENT_INT****Description: VPN1 LAN Parent Service Side Interface Template for WAN Edge devices****Table 29 VPN0 LAN parent feature template settings**

Section	Parameter	Type	Variable/Value
Basic configuration	Shutdown	device specific	vpn_lan_parent_int_shutdown
	Interface Name	device specific	vpn_lan_parent_int_gex x
	Description	Global (Radio)	LAN Parent Interface
Advanced	IP MTU	Global	IP_MTU

Devices: WAN Edge device (ISR4331)**Template: WAN Edge Interface****Template Name: BR_MPLS_INT****Description: VPN0 MPLS Transport Template for WAN Edge devices****Table 30 VPN0 MPLS transport template settings**

Section	Parameter	Type	Variable/Value
Basic configuration	Shutdown	device specific	vpn0_mpls_int_shutdown
	Interface Name	device specific	vpn0_mpls_int_gex x
	Description	Global (Radio)	MPLS Interface
	IPv4	Radio	Static
	IPv4 Address	device specific	vpn0_mpls_int_ip_addr maskbits
	Bandwidth Upstream	device specific	vpn0_mpls_int_bandwidth_up

Section	Parameter	Type	Variable/Value
	Bandwidth Downstream	device specific	vpn0_mpls_int_bandwidth_down
Tunnel	Tunnel Interface	Global (Radio)	On
	Color	Global	mpls
	Restrict	Global	On
Tunnel - Allow Service	All	Global	On
	BGP	Global	On
	DHCP	Global	Off
	NTP	Global	On
Tunnel - Advanced Options	IPsec	Global	On
	Preference	Global	vpn_mpls_tunnel_ipsec_preference
NAT	NAT	device specific	Nat_enable
Advanced	IP MTU	device specific	vpn0_mpls_mtua
	TCP MSS	Global	1350
	Clear-Don't-Fragment	Global	On

Devices: WAN Edge device (ISR4331)

Template: WAN Edge Interface

Template Name: BR_MPLS_SUBINT

Description: VPNO MPLS Transport Template for WAN Edge devices

Table 31 VPNO MPLS transport sub-interface template settings

Section	Parameter	Type	Variable/Value
Basic configuration	Shutdown	Device Specific	vpn0_mpls_int_shutdown
	Interface Name	Device Specific	vpn0_mpls_int_gex x.VLAN
	Description	Global (Radio)	MPLS Interface
	IPv4	Radio	Static
	IPv4 Address	Device Specific	vpn0_mpls_int_ip_addr maskbits
	Bandwidth Upstream	Device Specific	vpn0_mpls_int_bandwidth_up
	Bandwidth Downstream	Device Specific	vpn0_mpls_int_bandwidth_down
Tunnel	Tunnel Interface	Global (Radio)	On

Section	Parameter	Type	Variable/Value
	Color	Global	mpls
	Restrict	Global	On
Tunnel - Allow Service	All	Global	On
	BGP	Global	On
	DHCP	Global	Off
	NTP	Global	On
Tunnel - Advanced Options	IPsec	Global	On
	Preference	Global	vpn_mpls_tunnel_ipsec_preference
NAT	NAT	Device Specific	nat_enable
Advanced	IP MTU	Device Specific	IP MTU
	TCP MSS	Global	1350
	Clear-Don't-Fragment	Global	On

Devices: WAN Edge device (ISR4331, ISR4351, Edge1000)

Template: WAN Edge Interface

Template Name: BR_INET_INT

Description: VPNO INET Transport Template for WAN Edge devices

Table 32 VPNO INET transport template settings

Section	Parameter	Type	Variable/Value
Basic configuration	Shutdown	Device Specific	vpn0_inet_int_shutdown
	Interface Name	Device Specific	vpn0_inet_int_gex x
	Description	Global (Radio)	INET Interface
	IPv4	Radio	Static
	IPv4 Address	Device Specific	vpn0_inet_int_ip_addr maskbits
	Bandwidth Upstream	Device Specific	vpn0_inet_int_bandwidth_up
	Bandwidth Downstream	Device Specific	vpn0_inet_int_bandwidth_down
Tunnel	Tunnel Interface	Global (Radio)	On
	Color	Global	Biz-internet
Tunnel - Allow Service	All	Global	On
	BGP	Global	On

Section	Parameter	Type	Variable/Value
	DHCP	Global	Off
	NTP	Global	On
Tunnel - Advanced Options	IPsec	Global	On
	Preference	Global	vpn_inet_tunnel_ipsec_preference
NAT	NAT	Device Specific	Nat_enable
Advanced	IP MTU	Device Specific	vpn0_inet_mtu
	TCP MSS	Global	1350
	Clear-Don't-Fragment	Global	On

Devices: WAN Edge device (ISR4331, ISR4351, Edge1000)

Template: WAN Edge Interface

Template Name: BR_INET_SUBINT

Description: VPNO INET Transport Sub Interface Template for WAN Edge devices

Table 33 VPNO INET transport subinterface template settings

Section	Parameter	Type	Variable/Value
Basic configuration	Shutdown	Device Specific	vpn0_inet_int_shutdown
	Interface Name	Device Specific	vpn0_inet_int_gex x.VLAN
	Description	Global (Radio)	INET Interface
	IPv4	Radio	Static
	IPv4 Address	Device Specific	vpn0_inet_int_ip_addr maskbits
	Bandwidth Upstream	Device Specific	vpn0_inet_int_bandwidth_up
	Bandwidth Downstream	Device Specific	vpn0_inet_int_bandwidth_down
Tunnel	Tunnel Interface	Global (Radio)	On
	Color	Global	Biz-Internet
Tunnel - Allow Service	All	Global	On
	BGP	Global	On
	DHCP	Global	Off
	NTP	Global	On
Tunnel - Advanced Options	IPsec	Global	On
	Preference	Global	vpn_inet_tunnel_ipsec_preference

Section	Parameter	Type	Variable/Value
NAT	NAT	Device Specific	nat_enable
Advanced	IP MTU	Device Specific	IP MTU
	TCP MSS	Global	1350
	Clear-Don't-Fragment	Global	On

Devices: WAN Edge device (ISR4351)

Template: WAN Edge Interface

Template Name: BR_BRONZE_INT

Description: VPNO Bronze Transport Template for WAN Edge devices

Table 34 VPNO feature template settings

Section	Parameter	Type	Variable/Value
Basic configuration	Shutdown	Device Specific	vpn0_bronze_int_shutdown
	Interface Name	Device Specific	vpn0_bronze_int_gex x
	Description	Global (Radio)	Bronze Interface
	IPv4	Radio	Static
	IPv4 Address	Device Specific	vpn0_bronze_int_ip_addr maskbits
	Bandwidth Upstream	Device Specific	vpn0_bronze_int_bandwidth_up
	Bandwidth Downstream	Device Specific	vpn0_bronze_int_bandwidth_down
Tunnel	Tunnel Interface	Global (Radio)	On
	Color	Global	Bronze
Tunnel - Allow Service	All	Global	On
	BGP	Global	On
	DHCP	Global	Off
	NTP	Global	On
Tunnel - Advanced Options	IPsec	Global	On
	Preference	Global	vpn_bronze_tunnel_ipsec_preference
NAT	NAT	Device Specific	Nat_enable
Advanced	IP MTU	Device Specific	vpn0_bronze_mtu
	TCP MSS	Global	1350
	Clear-Don't-Fragment	Global	On

Devices: WAN Edge device (vEdge1000)**Template: WAN Edge Interface****Template Name: BR_BRONZE_SUBINT****Description: VPNO Bronze Transport Sub-InterfaceTemplate for WAN Edge devices****Table 35 VPNO Bronze transport sub-interface feature template settings**

Section	Parameter	Type	Variable/Value
Basic configuration	Shutdown	Device Specific	vpn0_bronze_int_shutdown
	Interface Name	Device Specific	vpn0_bronze_int_gex x.VLAN
	Description	Global (Radio)	Bronze Interface
	IPv4	Radio	Static
	IPv4 Address	Device Specific	vpn0_bronze_int_ip_addr maskbits
	Bandwidth Upstream	Device Specific	vpn0_bronze_int_bandwidth_up
	Bandwidth Downstream	Device Specific	vpn0_bronze_int_bandwidth_down
Tunnel	Tunnel Interface	Global (Radio)	On
	Color	Global	Bronze
Tunnel - Allow Service	All	Global	On
	BGP	Global	On
	DHCP	Global	Off
	NTP	Global	On
Tunnel - Advanced Options	IPsec	Global	On
	Preference	Global	vpn_bronze_tunnel_ipsec_preference
NAT	NAT	Device Specific	nat_enable
Advanced	IP MTU	Device Specific	IP MTU
	TCP MSS	Global	1350
	Clear-Don't-Fragment	Global	On

Devices: WAN Edge device (ISR4331, ISR4351, vEdge1000)**Template: WAN Edge Interface****Template Name: BR_TLOC_INT****Description: VPNO TLOC Interface Template for WAN Edge devices**

Table 36 VPN0 TLOC Interface feature template settings

Section	Parameter	Type	Variable/Value
Basic configuration	Shutdown	Device Specific	vpn0_yloc_int_shutdown
	Interface Name	Device Specific	vpn0_tloc_int_gex x.VLAN
	Description	Global (Radio)	TLOC Interface
	IPv4	Radio	Static
	IPv4 Address	Device Specific	vpn0_tloc_int_ip_addr maskbits
Advanced	IP MTU	Device Specific	IP MTU

VPN 1 feature template**Devices: WAN Edge device (ISR4331, ISR4351, vEdge1000)****Template: Service Side VPN****Template Name: BR_VPN1_Base****Description: VPN1 Base Template for WAN Edge devices****Table 37 VPN1 base template feature template settings**

Section	Parameter	Type	Variable/Value
Basic configuration	VPN	Global	1
	Name	Global	Service VPN
	Enhanced ECMP Keying	Global	On
Advertise OMP	BGP (IPv4)	Global	Off
	Static (IPv4)	Global	On
	Connected (IPv4)	Global	On
	OSPF External (IPv4)	Global	On
	Network (IPv4)	Global	Off

VPN 1 Interface feature template**Devices: WAN Edge device (ISR4331, ISR4351, vEdge1000)****Template: Service Side Interface****Template Name: BR_LAN_VPN1_INT1****Description: VPN1 LAN Interface Template for WAN Edge devices**

Table 38 VPN1 LAN interface template feature template settings

Section	Parameter	Type	Variable/Value
Basic configuration	Shutdown	Device Specific	vpn1_lan_int1_shutdown
	Interface Name	Device Specific	vpn1_lan_int_gex x.VLAN
	Description	Global (Radio)	vpn1_lan_int1_description
	IPv4	Radio	Static
	IPv4 Address	Device Specific	vpn1_lan_int1_ip_addr maskbits

Devices: WAN Edge device (**ISR4331, ISR4351, vEdge1000**)

Template: Servicee Side Interface

Template Name: **BR_LAN_VPN1_INT_VRRP**

Description: **VPN1 LAN Interface Template with VRRP for WAN Edge devices**

Table 39 VPN1 LAN Interface VRRP feature template settings

Section	Parameter	Type	Variable/Value
Basic configuration	Shutdown	Device Specific	vpn1_lan_int1_shutdown
	Interface Name	Device Specific	vpn1_lan_int_gex x_or_.VLAN
	Description	Global (Radio)	vpn1_lan_int1_description
	IPv4	Radio	Static
	IPv4 Address	Device Specific	vpn1_lan_int1_ip_addr maskbits
VRRP	Group ID	Global	1
	Priority	Device Specific	vpn1_vrrp_priority1
	Track OMP	Radio Button	On
	IP Address	Device Specific	vpn1_vrrp_ip_addr1

VPN 1 OSPF feature template

Devices: WAN Edge device (**ISR4331, ISR4351, Edge1000**)

Template: OSPF

Template Name: **BR_VPN1_OSPF_INT**

Description: **VPN1 OSPF Template for WAN Edge devices**

Table 40 VPN1 OSPF feature template settings

Section	Parameter	Type	Variable/Value
Basic configuration	Router ID	Device Specific	vpn1_ospf_router_id

Section	Parameter	Type	Variable/Value
Redistribute	Protocol	Global	OMP
Area	Area Number	Global	0
Area (Interface)	Interface Name	Device Specific	vpn1_ospf_interface_gex x
	Interface Cost	Device Specific	vpn1_ospf_interface_cost
Area (Interface Advanced Options)	OSPF Network Type	Global	point-to-point
	Authentical Type	Global	message-digest
	Message Digest Key ID	Global	22
Area (Range)	Address	Device Specific	vpn1_ospf_area_range_address_0
Advanced	Reference Bandwidth (Mbps)	Global	100000
	Originate	Radio Button	On

VPN 2 feature template

Devices: WAN Edge device (ISR4331, ISR4351, vEdge1000)

Template: Service side VPN

Template Name: BR_VPN2_NAT_DIA_ROUTE

Description: NAT DIA Route within VPN2

Table 41 VPN2 LAN Interface VRRP feature template settings

Section	Parameter	Type	Variable/Value
Basic configuration	VPN	Global	2
	Name	Global	Service VPN
	Enhanced ECMP Keying	Global (Radio)	On
Advertise OMP	Static (IPv4)	Global	On
	Connected (IPv4)	Global	On
IPv4 Route	Prefix (Next Hop)	Device Specific	vpn1_statuc_route_prefix maskbits
	Gateway	Radio Button	VPN
	Enable VPN	Global	On

VPN 2 Interface feature template

Devices: WAN Edge device (ISR4331, ISR4351, vEdge1000)

Template: WAN Edge Interface

Template Name: BR_LAN_VPN2_INT_VRRP**Description: VPN2 LAN Interface Template with VRRP for WAN Edge devices****Table 42 VPN2 LAN Interface VRRP feature template settings**

Section	Parameter	Type	Variable/Value
Basic configuration	Shutdown	Device Specific	vpn2_lan_int1_shutdown
	Interface Name	Device Specific	vpn2_lan_int_gex x_or_.VLAN
	Description	Global (Radio)	vpn2_lan_int1_description
	IPv4	Radio	Static
	IPv4 Address	Device Specific	vpn2_lan_int1_ip_addr maskbits
VRRP	Group ID	Global	1
	Priority	Device Specific	vpn2_vrrp_priority1
	Track OMP	Radio Button	On
	IP Address	Device Specific	vpn2_vrrp_ip_addr1

Devices: WAN Edge device (ISR4331, ISR4351, vEdge1000)**Template: Service Side Interface****Template Name: BR_LAN_VPN2_INT2****Description: VPN2 LAN Interface Template for WAN Edge devices****Table 43 VPNO feature template settings**

Section	Parameter	Type	Variable/Value
Basic configuration	Shutdown	Device Specific	vpn2_lan_int2_shutdown
	Interface Name	Device Specific	vpn2_lan_int_gex x_or_.VLAN
	Description	Global (Radio)	vpn2_lan_int1_description
	IPv4	Radio	Static
	IPv4 Address	Device Specific	vpn2_lan_int1_ip_addr maskbits

VPN 2 OSPF feature template**Devices: WAN Edge device (ISR4331, ISR4351, Edge1000)****Template: OSPF****Template Name: BR_VPN2_OSPF_NAT_REDISTRIBUTE****Description: VPN2 OSPF Template with NAT Redistribute WAN Edge devices**

Table 44 VPN2 OSPF template with redistribute feature template settings

Section	Parameter	Type	Variable/Value
Basic configuration	Router ID	Device Specific	vpn2_ospf_router_id
Redistribute	Protocol	Global	OMP
	Protocol	Global	NAT
Area	Area Number	Global	0
Area (Interface)	Interface Name	Device Specific	vpn2_ospf_interface_gex x
	Interface Cost	Device Specific	vpn2_ospf_interface_cost
Area (Interface Advanced Options)	OSPF Network Type	Global	point-to-point
	Authentical Type	Global	message-digest
	Message Digest Key ID	Global	22
Area (Range)	Address	Device Specific	vpn2_ospf_area_range_address_0
Advanced	Reference Bandwidth (Mbps)	Global	100000
	Originate	Radio Button	On

VPN 0 Datacenter feature template**Devices: WAN Edge device (vEdge5000)****Template: WAN Edge VPN****Template Name: DC_VPN0****Description: VPNO Transport Template for Datacenter****Table 45 VPNO transport feature template settings for datacenter**

Section	Parameter	Type	Variable/Value
Basic configuration	VPN	Global	0
	Name	Global	Transport VPN
	Enhanced ECMP Keying	Global (Radio)	On
DNS	Primary DNS Address (IPv4)	Global	208.67.222.222
	Secondary DNS Address (IPv4)	Global	208.67.220.220
Advertise OMP	BGP (IPv4)	Global	On
	Static (IPv4)	Global	On
	Connected (IPv4)	Global	On
	OSPF External (IPv4)	Global	Off

Section	Parameter	Type	Variable/Value
	Network (IPv4)	Global	Off
IPv4 Route	Address (Next Hop)	device specific	vpn0_inet_next_hop_ip_addr
			vpn0_mpls_next_hop_ip_addr
	Prefix	Global	0.0.0.0/0

VPN 0 Datacenter Interface feature template

Devices: WAN Edge device (vEdge5000)

Template: WAN Edge Interface

Template Name: DC_MPLS_Interface

Description: VPN0 MPLS Transport Template for Datacenter

Table 46 VPN0 MPLS transport feature template settings for datacenter

Section	Parameter	Type	Variable/Value
Basic configuration	Shutdown	Device Specific	vpn0_mpls_int_shutdown
	Interface Name	Device Specific	vpn0_mpls_int_gex x.VLAN
	Description	Global (Radio)	MPLS Interface
	IPv4	Radio	Static
	IPv4 Address	Device Specific	vpn0_mpls_int_ip_addr maskbits
	Bandwidth Upstream	Device Specific	vpn0_mpls_int_bandwidth_up
	Bandwidth Downstream	Device Specific	vpn0_mpls_int_bandwidth_down
Tunnel	Tunnel Interface	Global (Radio)	On
	Color	Global	MPLS
	Restrict	Global	On
Tunnel - Allow Service	All	Global	On
	BGP	Global	On
	DHCP	Global	Off
	NTP	Global	On
Tunnel - Advanced Options	IPsec	Global	On
	Preference	Global	vpn_mpls_tunnel_ipsec_preference
Advanced	IP MTU	Device Specific	1500
	TCP MSS	Global	1350

Section	Parameter	Type	Variable/Value
	Clear-Don't-Fragment	Global	On

Devices: WAN Edge device (vEdge5000)**Template: WAN Edge Interface****Template Name: DC_INET_Interface****Description: VPN0 Internet Transport Template for Datacenter**

Table 47 VPN0 Internet transport feature template settings for datacenter

Section	Parameter	Type	Variable/Value
Basic configuration	Shutdown	Device Specific	vpn0_inet_int_shutdown
	Interface Name	Device Specific	vpn0_inet_int_gex x.VLAN
	Description	Global (Radio)	INET Interface
	IPv4	Radio	Static
	IPv4 Address	Device Specific	vpn0_inet_int_ip_addr maskbits
	Bandwidth Upstream	Device Specific	vpn0_inet_int_bandwidth_up
	Bandwidth Downstream	Device Specific	vpn0_inet_int_bandwidth_down
Tunnel	Tunnel Interface	Global (Radio)	On
	Color	Global	INET
Tunnel - Allow Service	All	Global	On
	BGP	Global	On
	DHCP	Global	Off
	NTP	Global	On
Tunnel - Advanced Options	IPsec	Global	On
	Preference	Global	vpn_inet_tunnel_ipsec_preference
Advanced	IP MTU	Device Specific	1500
	TCP MSS	Global	1350
	Clear-Don't-Fragment	Global	On

VPN 1 Datacenter feature template**Devices: WAN Edge device (vEdge5000)**

Template: WAN Edge VPN**Template Name: DC_VPN1****Description: VPN1 Service Side Template for Datacenter****Table 48 VPN1 service-side feature template settings for datacenter**

Section	Parameter	Type	Variable/Value
Basic configuration	VPN	Global	1
	Name	Global	Service side VPN 1
	Enhanced ECMP Keying	Global	On
	Enable TCP Optimization	Global	On
Advertise OMP	BGP (IPv4)	Global	On
	Static (IPv4)	Global	On
	Connected (IPv4)	Global	On
	OSPF External (IPv4)	Global	Off
	Network (IPv4)	Global	Off

VPN 1 Datacenter BGP feature template**Devices: WAN Edge device (vEdge5000)****Template: BGP****Template Name: DC_VPN1_BGP****Description: VPN1 Service Side BGP Template for Datacenter****Table 49 VPN1 service-side BGP feature template settings for datacenter**

Section	Parameter	Type	Variable/Value
Basic configuration	Shutdown	device specific	bgp_shutdown
	AS Number	device specific	bgp_as_num
	Router ID	device specific	bgp_router_id
	Propagate AS Path	Global (Radio)	On
Unicast Address Family	IPv4 Maximum Paths	Global	2
	Re-distribute	Global	OMP
Neighbor (Neighbor 1)	Address	device specific	bgp_neighbor1_address
	Description	device specific	bgp_neighbor1_description
	Remote AS	device specific	bgp_neighbor1_remote_as

Section	Parameter	Type	Variable/Value
Neighbor (Neighbor 1)	Address Family	device specific	On
	Address Family	device specific	IPv4-Unicast
	Shutdown	device specific	bgp_neighbor1_shutdown
	Advanced (source Interface)	Radio	Address
	Advanced (Password)	device specific	bgp_neighbor1_password
	Keepalive Time (seconds)	Global	3
	Hold Time (seconds)	Global	9
Neighbor (Neighbor 2)	Address	device specific	bgp_neighbor2_address
	Description	device specific	bgp_neighbor2_description
	Remote AS	device specific	bgp_neighbor2_remote_as
	Address Family	device specific	On
	Address Family	device specific	IPv4-Unicast
	Shutdown	device specific	bgp_neighbor2_shutdown
	Advanced (source Interface)	Radio	Address
	Advanced (Password)	device specific	bgp_neighbor2_password
	Keepalive Time (seconds)	Global	3
	Hold Time (seconds)	Global	9

VPN 1 Datacenter Interface feature template

Devices: WAN Edge device (vEdge5000)

Template: WAN Edge Interface

Template Name: DC_VPN1_INT

Description: VPN1 Service Side Interface Template for Datacenter

Table 50 VPN1 service-side Interface feature template settings

Section	Parameter	Type	Variable/Value
Basic configuration	Shutdown	Device Specific	vpn1_lan_int1_shutdown
	Interface Name	Device Specific	vpn1_lan_int_gex x

Section	Parameter	Type	Variable/Value
	Description	Global (Radio)	vpn1_lan_int1_description
	IPv4	Radio	Static
	IPv4 Address	Device Specific	vpn1_lan_int1_ip_addr maskbits

Datacenter device template

The following table summarizes the device template for the Cisco WAN Edge devices deployed within the datacenter.

Device Model: vEdge5000

Template Name: DC_Hybrid_Type_A_BGP

Description: vEdge Template Branch DC MPLS and INET – Static to CE and BGP to LAN

Table 51 Datacenter 112001 device template: DC_Hybrid_Type_A_BGP

Template Type	Template Sub-Type	Template Name
System		System_Template
	Logging	Logging_Template
	NTP	NTP_Template
BFD		BFD_Template
OMP		OMP_Template
Security		Security_Template
VPN0		DC_VPN0
	VPN Interface	DC_MPLS_Interface
		DC_INET_Interface
VPN512		VPN512_Template
	VPN Interface	VPN512_Interface
Service VPN (1)	VPN	DC_VPN1
	BGP	DC_VPN1_BGP
	VPN Interface	DC_VPN1_Int1
		DC_VPN1_Int2
Banner		Banner_Template

Remote-site (branch) device template

The following tables summarize the device templates used for the Cisco WAN Edge devices deployed within the branch.

Device Model: vEdge1000**Template Name: Branch_A_INET_TLOC_SubInt OSPF****Description: Dual-router Dual-Internet transport design with (TLOC, biz-Internet transport)****Table 52 Branch 112002 device template: Branch_A_INET_TLOC_SubInt OSPF**

Template Type	Template Sub-Type	Template Name
System		System_Template_Interface_Tracker
	Logging	Logging_Template
	NTP	NTP_Template
BFD		BFD_Template
OMP		OMP_Template
Security		Security_Template
VPN0		BR_VPN0_Dual_Transport
	VPN Interface	BR_INET_INT_DIA
		BR_BRONZE_SUBINT_DIA
		BR_WAN_PARENT_INT
		BR_TLOC_INT
		BR_LAN_PARENT_INT
VPN512		VPN512_Template
	VPN Interface	VPN512_Interface
Service VPN (1)	VPN	BR_VPN1_BASE
	OSPF	BR_VPN1 OSPF
	VPN Interface	BR_LAN_VPN1_INT1
Service VPN (2)	VPN	BR_VPN2_NAT_DIA_ROUTE
	OSPF	BR_VPN2 OSPF_NAT_REDISTRIBUTE
	VPN Interface	BR_LAN_VPN2_INT2

Device Model: vEdge1000**Template Name: Branch_A_BRONZE_TLOC_SubInt OSPF****Description: Dual-router Dual-Internet transport design with (TLOC, bronze transport)****Table 53 Branch 112002 device template: Branch_A_INET_TLOC_SubInt OSPF**

Template Type	Template Sub-Type	Template Name
System		System_Template_Interface_Tracker

Template Type	Template Sub-Type	Template Name
	Logging	Logging_Template
	NTP	NTP_Template
BFD		BFD_Template
OMP		OMP_Template
Security		Security_Template
VPN0		BR_VPN0_Dual_Transport
	VPN Interface	BR_INET_SUBINT_DIA
		BR_BRONZE_INT_DIA
		BR_WAN_PARENT_INT
		BR_TLOC_INT
		BR_LAN_PARENT_INT
VPN512		VPN512_Template
	VPN Interface	VPN512_Interface
VPN1		BR_VPN1_BASE
	OSPF	BR_VPN1 OSPF
	VPN Interface	BR_LAN_VPN1_INT1
VPN2		BR_VPN2_NAT_DIA_ROUTE
	OSPF	BR_VPN2 OSPF_NAT_REDISTRIBUTE
	VPN Interface	BR_LAN_VPN2_INT2

Device Model: ISR4331**Template Name: Branch_B_INET_TLOC_VRRP****Description: Dual-router Hybrid transport design with (TLOC, biz-internet transport)****Table 54 Branch 112003 device template: Branch_B_INET_TLOC_VRRP**

Template Type	Template Sub-Type	Template Name
System		System_Template
	Logging	Logging_Template
	NTP	NTP_Template
BFD		BFD_Template
OMP		OMP_Template

Template Type	Template Sub-Type	Template Name
Security		Security_Template
VPNO		BR_VPNO_Dual_Transport
	VPN Interface	BR_INET_INT
		BR MPLS_SUBINT
		BR_TLOC_INT
		BR_LAN_PARENT_INT
VPN512		VPN512_Template
	VPN Interface	VPN512_Interface
Service VPN (1)	VPN	BR_VPN1_BASE
	VPN Interface	BR_LAN_VPN1_INT_VRRP
Service VPN (2)	VPN	BR_VPN2_NAT_DIA_ROUTE
	OSPF	BR_VPN2 OSPF_NAT_REDISTRIBUTE
	VPN Interface	BR_LAN_VPN2_INT_VRRP

Device Model: ISR4331

Template Name: Branch_B_MPLS_TLOC_VRRP

Description: Dual-router Hyrbid transport design with (TLOC, MPLS transport)

Table 55 Branch 112003 device template: Branch_B_MPLS_TLOC_VRRP

Template Type	Template Sub-Type	Template Name
System		System_Template
	Logging	Logging_Template
	NTP	NTP_Template
BFD		BFD_Template
OMP		OMP_Template
Security		Security_Template
VPNO		BR_VPNO_Dual_Transport
	VPN Interface	BR_INET_SUBINT
		BR_MPLS_INT
		BR_TLOC_INT
		BR_LAN_PARENT_INT

Template Type	Template Sub-Type	Template Name
	BGP	BR_VPN0_BGP
VPN512		VPN512_Template
	VPN Interface	VPN512_Interface
Service VPN (1)	VPN	BR_VPN1_BASE
	OSPF	BR_VPN1 OSPF
	VPN Interface	BR_LAN_VPN1_INT_VRRP
Service VPN (2)	VPN	BR_VPN2_NAT_DIA_ROUTE
	OSPF	BR_VPN2 OSPF_NAT_REDISTRIBUTE
	VPN Interface	BR_LAN_VPN2_INT_VRRP

Device Model: ISR4331

Template Name: Branch_C_MPLS_CE_LAN OSPF

Description: Single-router Hyrbid transport

Table 56 Branch 112004 device template: Branch_C_MPLS_CE_LAN OSPF

Template Type	Template Sub-Type	Template Name
System		System_Template
	Logging	Logging_Template
	NTP	NTP_Template
BFD		BFD_Template
OMP		OMP_Template
Security		Security_Template
VPNO		BR_VPN0_Dual_Transport
	VPN Interface	BR_INET_INT
		BR_MPLS_INT
		BR_LAN_PARENT_INT
VPN512		VPN512_Template
	VPN Interface	VPN512_Interface
Service VPN (1)	VPN	BR_VPN1_BASE
	OSPF	BR_VPN1 OSPF
	VPN Interface	BR_LAN_VPN1_INT

Template Type	Template Sub-Type	Template Name
Service VPN (2)	VPN	BR_VPN2_NAT_DIA_ROUTE
	OSPF	BR_VPN2 OSPF NAT REDISTRIBUTE
	VPN Interface	BR_LAN_VPN2_INT2

Device Model: ISR4351**Template Name: Branch_D_Dual_Internet_LAN OSPF****Description: Single-router Dual-Internet transport****Table 57 Branch 112004 device template: Branch_D_Dual_Internet_LAN OSPF**

Template Type	Template Sub-Type	Template Name
System		System_Template
	Logging	Logging_Template
	NTP	NTP_Template
BFD		BFD_Template
OMP		OMP_Template
Security		Security_Template
VPN0		BR_VPN0_Dual_Transport
	VPN Interface	BR_INET_INT
		BR_BRONZE_INT
		BR_LAN_PARENT_INT
VPN512		VPN512_Template
	VPN Interface	VPN512_Interface
VPN1		BR_VPN1_BASE
	OSPF	BR_VPN1 OSPF
	VPN Interface	BR_LAN_VPN1_INT
VPN2		BR_VPN2_NAT_DIA_ROUTE
	OSPF	BR_VPN2 OSPF NAT REDISTRIBUTE
	VPN Interface	BR_LAN_VPN2_INT2

Appendix E: Cisco WAN Edge CLI-equivalent configuration

The following is the configuration generated for the Cisco WAN Edg routers, based upon the templates explained in the previous sections device template.

Dual-Router Dual-Internet Model

Branch 112002: BR1-WAN-Edge1

```

system
  host-name          BR1-WAN-Edge1
  gps-location latitude 33.754
  gps-location longitude -84.386
  device-groups      BRANCH Primary UG5 US West v1000
  system-ip          10.255.241.11
  site-id            112002
  port-offset         1
  admin-tech-on-failure
  no route-consistency-check
  sp-organization-name "ENB-Solutions - 21615"
  organization-name   "ENB-Solutions - 21615"
  no port-hop
  tracker nat_tloc_tracker
    endpoint-ip 172.217.7.142
  !
  tracker nat_tracker
    endpoint-ip 172.217.7.142
  !
  vbond 10.10.60.2
  aaa
    auth-order local radius tacacs
    usergroup basic
      task system read write
      task interface read write
    !
    usergroup netadmin
    !
    usergroup operator
      task system read
      task interface read
      task policy read
      task routing read
      task security read
    !
    user admin
      password
$6$siwKBQ==$wT21Ua9BSreDPI6gB8s14E6PAJovXgMbqv/whJ8F1C6sWdRazdxorYYTLrl6syiG6qnLABTnrE96HJiKF6QRq1
  !
  !
  logging
    disk
      enable
    !
  !
  !
  bfd color mpls
  no pmtu-discovery
  !
  bfd color biz-internet
  no pmtu-discovery
  !
  bfd app-route poll-interval 120000
  omp

```

```

no shutdown
send-path-limit 16
ecmp-limit 16
graceful-restart
!
security
ipsec
replay-window 4096
authentication-type sha1-hmac ah-sha1-hmac
!
!
vpn 0
name "Transport VPN"
dns 208.67.220.220 secondary
dns 208.67.222.222 primary
ecmp-hash-key layer4
interface ge0/0
description "LAN Parent Interface"
mtu 1504
no shutdown
!
interface ge0/1
description "Bronze Interface"
ip address 20.50.1.1/30
nat
!
tracker nat_tloc_tracker
tunnel-interface
encapsulation ipsec preference 0
color bronze
allow-service all
allow-service bgp
no allow-service dhcp
allow-service dns
allow-service icmp
no allow-service sshd
no allow-service netconf
allow-service ntp
no allow-service ospf
no allow-service stun
allow-service https
!
clear-dont-fragment
mtu 1496
tcp-mss-adjust 1350
no shutdown
bandwidth-upstream 1000000
bandwidth-downstream 1000000
!
interface ge0/2
description "WAN Parent Interface"
mtu 1504
no shutdown
!
interface ge0/2.101
description "TLOC Interface"
ip address 10.104.1.1/30
mtu 1446
tloc-extension ge0/1
no shutdown
!
interface ge0/2.102
description "INET Interface"
ip address 10.104.2.1/30
nat

```

```

!
tracker          nat_tracker
tunnel-interface
  encapsulation ipsec preference 0
  color biz-internet
  allow-service bgp
  no allow-service dhcp
  allow-service dns
  allow-service icmp
  no allow-service sshd
  no allow-service netconf
  allow-service ntp
  no allow-service ospf
  no allow-service stun
  allow-service https
!
clear-dont-fragment
mtu              1496
tcp-mss-adjust   1350
no shutdown
bandwidth-upstream 1000000
bandwidth-downstream 1000000
!
ip route 0.0.0.0/0 10.104.2.2
ip route 0.0.0.0/0 20.50.1.2
!
vpn 1
  name "Service VPN"
  ecmp-hash-key layer4
  router
    ospf
      router-id 10.10.11.11
      auto-cost reference-bandwidth 100000
      default-information originate
      timers spf 200 1000 10000
      redistribute omp
      area 0
        interface ge0/0.10
          cost 1
          network point-to-point
          authentication type message-digest
          authentication message-digest message-digest-key 22 md5
$8$yqv1qBnH6ubDEPAb0itVNam9DmlWsmLuMeWt0Re9HxE=
      exit
      range 10.10.13.0/30
      exit
  !
  !
  interface ge0/0.10
    description Employee
    ip address 10.10.13.2/30
    no shutdown
  !
  omp
    advertise ospf external
    advertise connected
    advertise static
  !
  !
vpn 2
  name "Service VPN"
  ecmp-hash-key layer4
  router
    ospf
      router-id 10.10.12.12

```

```

auto-cost reference-bandwidth 100000
default-information originate
timers spf 200 1000 10000
redistribute ospf
redistribute nat
area 0
  interface ge0/0.20
    cost 1
    network point-to-point
    authentication type message-digest
    authentication message-digest message-digest-key 22 md5
$8$yLQTZaDYX6h36HkFiU1Xce2yM8Z7GJUQhNsBwfXQuY=
    exit
  range 10.10.14.0/30
  exit
!
!
interface ge0/0.20
  description vpn1_lan_int2_description
  ip address 10.10.14.2/30
  no shutdown
!
ip route 0.0.0.0/0 vpn 0
omp
  advertise connected
  advertise static
!
!
vpn 512
  name "Management VPN"
  interface mgmt0
    description "Management Interface"
    ip address 100.119.118.14/24
    no shutdown
!
!
```

Branch 112002: BR1-WAN-Edge2

```

system
host-name BR1-WAN-Edge2
gps-location latitude 33.754
gps-location longitude -84.386
device-groups BRANCH Secondary UG4 US West v100
system-ip 10.255.241.12
site-id 112002
port-offset 1
admin-tech-on-failure
no route-consistency-check
sp-organization-name "ENB-Solutions - 21615"
organization-name "ENB-Solutions - 21615"
no port-hop
tracker nat_tloc_tracker
  endpoint-ip 172.217.7.142
!
tracker nat_tracker
  endpoint-ip 172.217.7.142
!
vbond 10.10.60.2
aaa
  auth-order local radius tacacs
  usergroup basic
    task system read write

```

```

task interface read write
!
usergroup netadmin
!
usergroup operator
  task system read
  task interface read
  task policy read
  task routing read
  task security read
!
user admin
  password
$6$siwKBQ==$wT2lUa9BSreDPI6gB8s14E6PAJoVXgMbgv/whJ8F1C6sWdRazdxorYYTLrL6syiG6qnLABTnrE96HJiKF6QRq1
!
!
logging
  disk
    enable
!
!
bfd color mpls
  no pmtu-discovery
!
bfd color biz-internet
  no pmtu-discovery
!
bfd app-route poll-interval 120000
omp
  no shutdown
  send-path-limit 16
  ecmp-limit 16
  graceful-restart
!
security
  ipsec
    replay-window 4096
    authentication-type sha1-hmac ah-sha1-hmac
!
!
vpn 0
  name "Transport VPN"
  dns 208.67.220.220 secondary
  dns 208.67.222.222 primary
  ecmp-hash-key layer4
  interface ge0/0
    description "LAN Parent Interface"
    mtu 1504
    no shutdown
!
  interface ge0/1
    description "INET Interface"
    ip address 30.50.1.1/30
    nat
      no block-icmp-error
      respond-to-ping
!
  tracker nat_tracker
  tunnel-interface
    encapsulation ipsec preference 0
    color biz-internet
    allow-service all
    allow-service bgp
    no allow-service dhcp

```

```

allow-service dns
allow-service icmp
no allow-service sshd
no allow-service netconf
allow-service ntp
no allow-service ospf
no allow-service stun
allow-service https
!
clear-dont-fragment
mtu          1496
tcp-mss-adjust    1350
no shutdown
bandwidth-upstream 1000000
bandwidth-downstream 1000000
!
interface ge0/2
description "WAN Parent Interface"
mtu      1504
no shutdown
!
interface ge0/2.101
description      "Bronze subinterface"
ip address 10.104.1.2/30
nat
!
tracker      nat_tloc_tracker
tunnel-interface
encapsulation ipsec preference 0
color bronze
allow-service bgp
no allow-service dhcp
allow-service dns
allow-service icmp
no allow-service sshd
no allow-service netconf
allow-service ntp
no allow-service ospf
no allow-service stun
allow-service https
!
clear-dont-fragment
mtu          1496
tcp-mss-adjust    1350
no shutdown
bandwidth-upstream 1000000
bandwidth-downstream 1000000
!
interface ge0/2.102
description      "TLOC Interface"
ip address 10.104.2.2/30
mtu      1446
tloc-extension ge0/1
no shutdown
!
ip route 0.0.0.0/0 10.104.1.1
ip route 0.0.0.0/0 30.50.1.2
!
vpn 1
name "Service VPN"
ecmp-hash-key layer4
router
ospf
  router-id 10.10.12.12
  auto-cost reference-bandwidth 100000

```

```

default-information originate
timers spf 200 1000 10000
redistribute ospf
area 0
  interface ge0/0.30
    cost 1
  network point-to-point
  authentication type message-digest
  authentication message-digest message-digest-key 22 md5
$8$sHj+89X3B5p2Vlaj3ELIUD+X/s5KhroSDnk43yzf4hk=
  exit
  range 10.10.0.0/16
exit
!
!
interface ge0/0.30
  description "Employee traffic"
  ip address 10.10.24.2/30
  no shutdown
!
omp
  advertise ospf external
  advertise connected
  advertise static
!
!
vpn 2
  name "Service VPN"
  ecmp-hash-key layer4
  router
    ospf
      router-id 10.10.12.12
      auto-cost reference-bandwidth 100000
      default-information originate
      timers spf 200 1000 10000
      redistribute ospf
      redistribute nat
      area 0
        interface ge0/0.40
          cost 1
        network point-to-point
        authentication type message-digest
        authentication message-digest message-digest-key 22 md5
$8$vbKeCR/oQ+jbLMuFhu0xx1D/yM1dsXanYf094G3l7uw=
        exit
        range 10.10.25.0/30
      exit
    !
  !
  interface ge0/0.40
    description vpn1_lan_int2_description
    ip address 10.10.25.2/30
    no shutdown
  !
  ip route 0.0.0.0/0 vpn 0
  omp
    advertise connected
    advertise static
  !
  !
vpn 512
  name "Management VPN"
  interface mgmt0
    description "Management Interface"
    ip address 100.119.118.13/24

```

```

no shutdown
!
!

Dual-Router Hybrid Transport design

Branch 112003: BR2-WAN-Edge1

system
gps-location latitude 33.4484
gps-location longitude -112.074
device-groups      BRANCH Primary UG5 US West v1000
system-ip          10.255.241.21
overlay-id         1
site-id            112003
port-offset        1
control-session-pps 300
admin-tech-on-failure
sp-organization-name "ENB-Solutions - 21615"
organization-name   "ENB-Solutions - 21615"
port-hop
track-transport
track-default-gateway
console-baud-rate 115200
vbond 10.10.60.2 port 12346
!
no service pad
service password-encryption
service timestamps debug datetime msec
service timestamps log datetime msec
no service tcp-small-servers
no service udp-small-servers
hostname BR2-WAN-Edge1
username admin privilege 15 secret 9 $9$3VEF3VAI31MM3E$awMmxogwHvRdxoHA5u1utUOAmKPBUsUbkD4PnwNwmWk
vrf definition 1
description Service VPN
rd      1:1
address-family ipv4
exit-address-family
!
address-family ipv6
exit-address-family
!
!
vrf definition 2
description Service VPN
rd      1:2
address-family ipv4
exit-address-family
!
address-family ipv6
exit-address-family
!
!
vrf definition Mgmt-intf
description Management VPN
rd      1:512
address-family ipv4
exit-address-family
!
address-family ipv6
exit-address-family
!
```

```

!
no ip dhcp use class
ip name-server 208.67.220.220 208.67.222.222
ip route 0.0.0.0 0.0.0.0 10.101.2.2 1
ip route 0.0.0.0 0.0.0.0 20.20.1.2 1
ip http authentication local
ip http server
ip http secure-server
no ip igmp ssm-map query dns
ip nat inside source list nat-dia-vpn-hop-access-list interface GigabitEthernet0/0/1.102 overload
ip nat translation tcp-timeout 3600
ip nat translation udp-timeout 60
ip nat route vrf 2 0.0.0.0 0.0.0.0 global
no ip rsvp signalling rate-limit
ipv6 unicast-routing
no ipv6 mld ssm-map query dns
cdp run
interface GigabitEthernet0
  description Management Interface
  no shutdown
  arp timeout 1200
  vrf forwarding Mgmt-intf
  ip address 100.119.118.8 255.255.255.0
  ip redirects
  ip mtu    1500
  mtu      1500
  negotiation auto
exit
interface GigabitEthernet0/0/0
  description LAN Parent Interface
  no shutdown
  arp timeout 1200
  no ip address
  ip redirects
  ip mtu    1504
  mtu      1504
  negotiation auto
exit
interface GigabitEthernet0/0/0.10
  no shutdown
  encapsulation dot1Q 10
  vrf forwarding 1
  ip address 10.20.21.2 255.255.255.0
  ip mtu 1500
  vrrp 1 address-family ipv4
    vrrpv2
    address 10.20.21.1
    priority 100
    timers advertise 1000
    track omp shutdown
  exit
exit
interface GigabitEthernet0/0/0.20
  no shutdown
  encapsulation dot1Q 20
  vrf forwarding 2
  ip address 10.20.22.2 255.255.255.0
  ip mtu 1500
  ip ospf 2 area 0
  ip ospf authentication message-digest
  ip ospf network point-to-point
  ip ospf cost      2
  ip ospf dead-interval 40
  ip ospf hello-interval 10
  ip ospf message-digest-key 22 md5 7 013057175804575D72

```

```

ip ospf priority 1
ip ospf retransmit-interval 5
vrrp 2 address-family ipv4
  vrrpv2
    address 10.20.22.1
    priority 100
    timers advertise 1000
    track omp shutdown
  exit
exit
interface GigabitEthernet0/0/1
  no shutdown
  no ip address
exit
interface GigabitEthernet0/0/1.101
  no shutdown
  encapsulation dot1Q 101
  ip address 10.101.1.1 255.255.255.252
  ip mtu 1446
exit
interface GigabitEthernet0/0/1.102
  no shutdown
  encapsulation dot1Q 102
  ip address 10.101.2.1 255.255.255.252
  ip tcp adjust-mss 1350
  ip mtu 1496
  ip nat outside
exit
interface GigabitEthernet0/0/2
  description MPLS Interface
  no shutdown
  arp timeout 1200
  ip address 20.20.1.1 255.255.255.252
  ip redirects
  ip tcp adjust-mss 1350
  ip mtu 1500
  mtu 1500
  negotiation auto
exit
interface Tunnel12
  no shutdown
  ip unnumbered GigabitEthernet0/0/2
  no ip redirects
  ipv6 unnumbered GigabitEthernet0/0/2
  no ipv6 redirects
  tunnel source GigabitEthernet0/0/2
  tunnel mode sdwan
exit
interface Tunnel102001
  no shutdown
  ip unnumbered GigabitEthernet0/0/1.102
  no ip redirects
  ipv6 unnumbered GigabitEthernet0/0/1.102
  no ipv6 redirects
  tunnel source GigabitEthernet0/0/1.102
  tunnel mode sdwan
exit
clock timezone UTC 0 0
logging persistent size 104857600 filesize 10485760
logging buffered 512000
no logging rate-limit
logging persistent
aaa authentication login default local
aaa authorization exec default local
multilink bundle-name authenticated

```

```

spanning-tree extend system-id
spanning-tree mode rapid-pvst
no crypto ikev2 diagnose error
router bgp 65201
  bgp log-neighbor-changes
  distance bgp 20 200 20
  maximum-paths eibgp 2
  neighbor 20.20.1.2 remote-as 70
  neighbor 20.20.1.2 description MPLS Service Provider
  neighbor 20.20.1.2 ebgp-multipath 1
  neighbor 20.20.1.2 maximum-prefix 2147483647 100
  neighbor 20.20.1.2 password 0 cisco123
  neighbor 20.20.1.2 send-community both
  neighbor 20.20.1.2 timers 3 9
  address-family ipv4 unicast
    network 10.101.1.0 mask 255.255.255.252
    exit-address-family
!
timers bgp 60 180
!
router ospf 2 vrf 2
  area 0 range 10.20.22.0 255.255.255.0 advertise
  auto-cost reference-bandwidth 100000
  timers throttle spf 200 1000 10000
  router-id 10.20.20.20
  compatible rfc1583
  default-information originate
  distance ospf external 110
  distance ospf inter-area 110
  distance ospf intra-area 110
  redistribute ospf subnets
  redistribute nat-route dia
!
no router rip
line aux 0
  login authentication default
  stopbits 1
!
line con 0
  login authentication default
  speed 115200
  stopbits 1
!
line vty 0 4
  login authentication default
  transport input ssh
!
line vty 5 80
  login authentication default
  transport input ssh
!
diagnostic bootup level minimal
sdwan
  interface GigabitEthernet0/0/0
  exit
  interface GigabitEthernet0/0/0.10
  exit
  interface GigabitEthernet0/0/0.20
  exit
  interface GigabitEthernet0/0/1.101
    tloc-extension GigabitEthernet0/0/2
  exit
  interface GigabitEthernet0/0/1.102
    tunnel-interface
      encapsulation ipsec preference 0 weight 1

```

```

no border
color bizz-internet
no last-resort-circuit
no low-bandwidth-link
control-connections
no vbond-as-stun-server
vmanage-connection-preference 5
port-hop
carrier default
nat-refresh-interval 5
hello-interval 1000
hello-tolerance 12
no allow-service all
allow-service bgp
no allow-service dhcp
allow-service dns
allow-service icmp
no allow-service sshd
no allow-service netconf
allow-service ntp
no allow-service ospf
no allow-service stun
exit
exit
interface GigabitEthernet0/0/2
tunnel-interface
encapsulation ipsec preference 0 weight 1
no border
color mpls restrict
no last-resort-circuit
no low-bandwidth-link
control-connections
no vbond-as-stun-server
vmanage-connection-preference 5
port-hop
carrier default
nat-refresh-interval 5
hello-interval 1000
hello-tolerance 12
allow-service all
allow-service bgp
no allow-service dhcp
allow-service dns
allow-service icmp
no allow-service sshd
no allow-service netconf
allow-service ntp
no allow-service ospf
no allow-service stun
exit
exit
vmanage-transaction vmanage-transaction-id 2019-05-27T08:30:07.034+00:00
omp
no shutdown
send-path-limit 16
ecmp-limit 16
graceful-restart
timers
holdtime 60
advertisement-interval 1
graceful-restart-timer 43200
eor-timer 300
exit
address-family ipv4 vrf 1
advertise ospf external

```

```

advertise connected
advertise static
!
address-family ipv4 vrf 2
  advertise connected
  advertise static
!
!
licensing config enable false
licensing config privacy hostname false
licensing config privacy version false
licensing config utility utility-enable false
netconf-yang cisco-ia blocking cli-blocking-enabled
bfd color mpls
  hello-interval 1000
  no pmtu-discovery
  multiplier    7
!
bfd color biz-internet
  hello-interval 1000
  no pmtu-discovery
  multiplier    7
!
bfd app-route multiplier 6
bfd app-route poll-interval 120000
security
  ipsec
    rekey          86400
    replay-window   4096
    authentication-type sha1-hmac ah-sha1-hmac
!
!
nacm cmd-read-default deny
nacm cmd-exec-default deny

```

Branch 112003: BR2-WAN-Edge2

```

system
gps-location latitude 33.4484
gps-location longitude -112.074
device-groups      BRANCH Primary UG5 US West v1000
system-ip          10.255.241.22
overlay-id         1
site-id            112003
port-offset        1
control-session-pps 300
admin-tech-on-failure
sp-organization-name "ENB-Solutions - 21615"
organization-name   "ENB-Solutions - 21615"
no port-hop
track-transport
track-default-gateway
console-baud-rate  115200
vbond 10.10.60.2 port 12346
!
no service pad
service password-encryption
service timestamps debug datetime msec
service timestamps log datetime msec
no service tcp-small-servers
no service udp-small-servers
hostname BR2-WAN-Edge2

```

```

username admin privilege 15 secret 9 $9$3VEF3VAI31MM3E$awMmxogwHvRdxoHA5u1utUOAmKPBUvUbkD4PnwNWmWk
vrf definition 1
  description Service VPN
  rd      1:1
  address-family ipv4
    exit-address-family
  !
  address-family ipv6
    exit-address-family
  !
!
vrf definition 2
  description Service VPN
  rd      1:2
  address-family ipv4
    exit-address-family
  !
  address-family ipv6
    exit-address-family
  !
!
vrf definition Mgmt-intf
  description Management VPN
  rd      1:512
  address-family ipv4
    exit-address-family
  !
  address-family ipv6
    exit-address-family
  !
no ip dhcp use class
ip name-server 208.67.220.220 208.67.222.222
ip route 0.0.0.0 0.0.0.0 10.101.1.1 1
ip route 0.0.0.0 0.0.0.0 30.20.1.2 1
ip http authentication local
ip http server
ip http secure-server
no ip igmp ssm-map query dns
ip nat inside source list nat-dia-vpn-hop-access-list interface GigabitEthernet0/0/2 overload
ip nat translation tcp-timeout 3600
ip nat translation udp-timeout 60
ip nat route vrf 2 0.0.0.0 0.0.0.0 global
no ip rsvp signalling rate-limit
ipv6 unicast-routing
no ipv6 mld ssm-map query dns
interface GigabitEthernet0
  description Management Interface
  no shutdown
  arp timeout 1200
  vrf forwarding Mgmt-intf
  ip address 100.119.118.9 255.255.255.0
  ip redirects
  ip mtu      1500
  mtu          1500
  negotiation auto
exit
interface GigabitEthernet0/0/0
  description LAN Parent Interface
  no shutdown
  arp timeout 1200
  no ip address
  ip redirects
  ip mtu      1504
  mtu          1504

```

```

negotiation auto
exit
interface GigabitEthernet0/0/0.10
  no shutdown
  encapsulation dot1Q 10
  vrf forwarding 1
  ip address 10.20.21.3 255.255.255.0
  ip mtu 1500
  vrrp 1 address-family ipv4
    vrrpv2
    address 10.20.21.1
    priority 100
    timers advertise 1000
    track omp shutdown
  exit
exit
interface GigabitEthernet0/0/0.20
  no shutdown
  encapsulation dot1Q 20
  vrf forwarding 2
  ip address 10.20.22.3 255.255.255.0
  ip mtu 1500
  ip ospf 2 area 0
  ip ospf authentication message-digest
  ip ospf network point-to-point
  ip ospf cost 1
  ip ospf dead-interval 40
  ip ospf hello-interval 10
  ip ospf message-digest-key 22 md5 7 141443180F0B7B797769
  ip ospf priority 1
  ip ospf retransmit-interval 5
  vrrp 2 address-family ipv4
    vrrpv2
    address 10.20.22.1
    priority 100
    timers advertise 1000
    track omp shutdown
  exit
exit
interface GigabitEthernet0/0/1
  no shutdown
  no ip address
exit
interface GigabitEthernet0/0/1.101
  no shutdown
  encapsulation dot1Q 101
  ip address 10.101.1.2 255.255.255.252
  ip tcp adjust-mss 1350
  ip mtu 1496
exit
interface GigabitEthernet0/0/1.102
  no shutdown
  encapsulation dot1Q 102
  ip address 10.101.2.2 255.255.255.252
  ip mtu 1446
exit
interface GigabitEthernet0/0/2
  description INET Interface
  no shutdown
  arp timeout 1200
  ip address 30.20.1.1 255.255.255.252
  ip redirects
  ip tcp adjust-mss 1350
  ip mtu 1496
  ip nat outside

```

```

mtu      1500
negotiation auto
exit
interface Tunnel2
  no shutdown
  ip unnumbered GigabitEthernet0/0/2
  no ip redirects
  ipv6 unnumbered GigabitEthernet0/0/2
  no ipv6 redirects
  tunnel source GigabitEthernet0/0/2
  tunnel mode sdwan
exit
interface Tunnel101001
  no shutdown
  ip unnumbered GigabitEthernet0/0/1.101
  no ip redirects
  ipv6 unnumbered GigabitEthernet0/0/1.101
  no ipv6 redirects
  tunnel source GigabitEthernet0/0/1.101
  tunnel mode sdwan
exit
clock timezone UTC 0 0
logging persistent size 104857600 filesize 10485760
logging buffered 512000
no logging rate-limit
logging persistent
aaa authentication login default local
aaa authorization exec default local
multilink bundle-name authenticated
spanning-tree extend system-id
spanning-tree mode rapid-pvst
no crypto ikev2 diagnose error
router ospf 2 vrf 2
  area 0 range 10.20.22.0 255.255.255.0 advertise
  auto-cost reference-bandwidth 100000
  timers throttle spf 200 1000 10000
  router-id 10.21.21.21
  compatible rfc1583
  default-information originate
  distance ospf external 110
  distance ospf inter-area 110
  distance ospf intra-area 110
  redistribute omp subnets
  redistribute nat-route dia
!
no router rip
line aux 0
  login authentication default
  stopbits 1
!
line con 0
  login authentication default
  speed    115200
  stopbits 1
!
line vty 0 4
  login authentication default
  transport input ssh
!
line vty 5 80
  login authentication default
  transport input ssh
!
diagnostic bootup level minimal
sdwan

```

```

interface GigabitEthernet0/0/0
exit
interface GigabitEthernet0/0/0.10
exit
interface GigabitEthernet0/0/0.20
exit
interface GigabitEthernet0/0/1.101
tunnel-interface
  encapsulation ipsec preference 0 weight 1
  no border
  color mpls restrict
  no last-resort-circuit
  no low-bandwidth-link
  control-connections
  no vbond-as-stun-server
  vmanage-connection-preference 5
port-hop
  carrier           default
  nat-refresh-interval 5
  hello-interval    1000
  hello-tolerance   12
  no allow-service all
  allow-service bgp
  no allow-service dhcp
  allow-service dns
  allow-service icmp
  no allow-service sshd
  no allow-service netconf
  allow-service ntp
  no allow-service ospf
  no allow-service stun
exit
exit
interface GigabitEthernet0/0/1.102
  tloc-extension GigabitEthernet0/0/2
exit
interface GigabitEthernet0/0/2
tunnel-interface
  encapsulation ipsec preference 0 weight 1
  no border
  color biz-internet
  no last-resort-circuit
  no low-bandwidth-link
  control-connections
  no vbond-as-stun-server
  vmanage-connection-preference 5
port-hop
  carrier           default
  nat-refresh-interval 5
  hello-interval    1000
  hello-tolerance   12
  allow-service all
  no allow-service bgp
  no allow-service dhcp
  allow-service dns
  allow-service icmp
  no allow-service sshd
  no allow-service netconf
  allow-service ntp
  no allow-service ospf
  no allow-service stun
exit
exit
vmanage-transaction vmanage-transaction-id 2019-05-25T23:22:20.21+00:00
omp

```

```

no shutdown
send-path-limit 16
ecmp-limit 16
graceful-restart
timers
  holdtime 60
  advertisement-interval 1
  graceful-restart-timer 43200
  eor-timer 300
exit
address-family ipv4 vrf 1
  advertise ospf external
  advertise connected
  advertise static
!
address-family ipv4 vrf 2
  advertise connected
  advertise static
!
!
licensing config enable false
licensing config privacy hostname false
licensing config privacy version false
licensing config utility utility-enable false
netconf-yang cisco-ia blocking cli-blocking-enabled
bfd color mpls
  hello-interval 1000
  no pmtu-discovery
  multiplier 7
!
bfd color biz-internet
  hello-interval 1000
  no pmtu-discovery
  multiplier 7
!
bfd app-route multiplier 6
bfd app-route poll-interval 120000
security
  ipsec
    rekey 86400
    replay-window 4096
    authentication-type sha1-hmac ah-sha1-hmac
  !
nacm cmd-read-default deny
nacm cmd-exec-default deny

```

Single-Router Hybrid Transport Design

Branch 112004: BR3-WAN-Edge1

```

system
  gps-location latitude 37.409284
  gps-location longitude -97.335
  device-groups DC Primary UG3 US West v5000
  system-ip 10.255.241.31
  overlay-id 1
  site-id 112004
  port-offset 0
  control-session-pps 300
  admin-tech-on-failure
  sp-organization-name "ENB-Solutions - 21615"

```

```

organization-name      "ENB-Solutions - 21615"
no port-hop
track-transport
track-default-gateway
upgrade-confirm      15
console-baud-rate    115200
vbond 10.10.60.2 port 12346
!
no service pad
service password-encryption
service timestamps debug datetime msec
service timestamps log datetime msec
no service tcp-small-servers
no service udp-small-servers
hostname BR3-WAN-Edge1
username admin privilege 15 secret 9 $9$3VEF3VAI3lMM3E$awMmxogwHvRdxoHA5u1utUOAmKPBUVUbkD4PnwNwmWk
vrf definition 1
  description Service VPN
  rd            1:1
  address-family ipv4
    exit-address-family
  !
  address-family ipv6
    exit-address-family
  !
vrf definition 2
  description Service VPN
  rd            1:2
  address-family ipv4
    exit-address-family
  !
  address-family ipv6
    exit-address-family
  !
vrf definition Mgmt-intf
  description Management VPN
  rd            1:512
  address-family ipv4
    exit-address-family
  !
  address-family ipv6
    exit-address-family
  !
no ip dhcp use class
ip name-server 208.67.220.220 208.67.222.222
ip route 0.0.0.0 0.0.0.0 10.30.23.1 1
ip route 0.0.0.0 0.0.0.0 30.30.1.2 1
no ip igmp ssm-map query dns
ip nat inside source list nat-dia-vpn-hop-access-list interface GigabitEthernet0/0/2 overload
ip nat translation tcp-timeout 3600
ip nat translation udp-timeout 60
ip nat route vrf 1 0.0.0.0 0.0.0.0 global
ip nat route vrf 2 0.0.0.0 0.0.0.0 global
no ip rsvp signalling rate-limit
ipv6 unicast-routing
no ipv6 mld ssm-map query dns
cdp run
interface GigabitEthernet0
  description Management Interface
  no shutdown
  arp timeout 1200
  vrf forwarding Mgmt-intf

```

```

ip address 100.119.118.6 255.255.255.0
ip redirects
ip mtu    1500
mtu        1500
negotiation auto
exit
interface GigabitEthernet0/0/0
description MPLS Interface
no shutdown
arp timeout 1200
ip address 10.30.23.2 255.255.255.252
ip redirects
ip tcp adjust-mss 1350
ip mtu    1500
mtu        1500
negotiation auto
exit
interface GigabitEthernet0/0/1
description LAN Parent Interface
no shutdown
arp timeout 1200
no ip address
ip redirects
ip mtu    1504
mtu        1504
negotiation auto
exit
interface GigabitEthernet0/0/1.10
no shutdown
encapsulation dot1Q 10
vrf forwarding 1
ip address 10.30.13.2 255.255.255.252
ip mtu 1500
ip ospf 1 area 0
ip ospf authentication message-digest
ip ospf network point-to-point
ip ospf cost    1
ip ospf dead-interval 40
ip ospf hello-interval 10
ip ospf message-digest-key 22 md5 7 08221D5D0A16544541
ip ospf priority  1
ip ospf retransmit-interval 5
exit
interface GigabitEthernet0/0/1.20
no shutdown
encapsulation dot1Q 20
vrf forwarding 2
ip address 10.30.12.2 255.255.255.252
ip mtu 1500
ip ospf 2 area 0
ip ospf authentication message-digest
ip ospf network point-to-point
ip ospf cost    1
ip ospf dead-interval 40
ip ospf hello-interval 10
ip ospf message-digest-key 22 md5 7 141443180F0B7B7977
ip ospf priority  1
ip ospf retransmit-interval 5
exit
interface GigabitEthernet0/0/2
description INET Interface
no shutdown
arp timeout 1200
ip address 30.30.1.1 255.255.255.252
ip redirects

```

```

ip tcp adjust-mss 1350
ip mtu    1500
ip nat outside
mtu      1500
negotiation auto
exit
interface Tunnel0
no shutdown
ip unnumbered GigabitEthernet0/0/0
no ip redirects
ipv6 unnumbered GigabitEthernet0/0/0
no ipv6 redirects
tunnel source GigabitEthernet0/0/0
tunnel mode sdwan
exit
interface Tunnel2
no shutdown
ip unnumbered GigabitEthernet0/0/2
no ip redirects
ipv6 unnumbered GigabitEthernet0/0/2
no ipv6 redirects
tunnel source GigabitEthernet0/0/2
tunnel mode sdwan
exit
clock timezone UTC 0 0
logging persistent size 104857600 filesize 10485760
logging buffered 512000
logging console debugging
no logging rate-limit
logging persistent
aaa authentication login default local
aaa authorization exec default local
multilink bundle-name authenticated
spanning-tree extend system-id
spanning-tree mode rapid-pvst
no crypto ikev2 diagnose error
router ospf 1 vrf 1
area 0 range 10.30.13.0 255.255.255.252 advertise
auto-cost reference-bandwidth 100000
timers throttle spf 200 1000 10000
router-id 10.30.31.31
compatible rfc1583
default-information originate
distance ospf external 110
distance ospf inter-area 110
distance ospf intra-area 110
redistribute omp subnets
redistribute nat-route dia
!
router ospf 2 vrf 2
area 0 range 10.30.12.0 255.255.255.252 advertise
auto-cost reference-bandwidth 100000
timers throttle spf 200 1000 10000
router-id 10.30.31.31
compatible rfc1583
default-information originate
distance ospf external 110
distance ospf inter-area 110
distance ospf intra-area 110
redistribute omp subnets
redistribute nat-route dia
!
no router rip
line aux 0
login authentication default

```

```

stopbits 1
!
line con 0
  login authentication default
  speed    115200
  stopbits 1
!
line vty 0 4
  login authentication default
  transport input ssh
!
line vty 5 80
  login authentication default
  transport input ssh
!
sdwan
  interface GigabitEthernet0/0/0
    tunnel-interface
      encapsulation ipsec preference 200 weight 1
      no border
      color mpls restrict
      no last-resort-circuit
      no low-bandwidth-link
      control-connections
      no vbond-as-stun-server
      vmanage-connection-preference 5
      port-hop
        carrier           default
        nat-refresh-interval 5
        hello-interval     1000
        hello-tolerance   12
        allow-service all
        allow-service bgp
        no allow-service dhcp
        allow-service dns
        allow-service icmp
        no allow-service sshd
        no allow-service netconf
        allow-service ntp
        no allow-service ospf
        no allow-service stun
      exit
    exit
  interface GigabitEthernet0/0/1
  exit
  interface GigabitEthernet0/0/1.10
  exit
  interface GigabitEthernet0/0/1.20
  exit
  interface GigabitEthernet0/0/2
    tunnel-interface
      encapsulation ipsec preference 100 weight 1
      no border
      color bizz-internet
      no last-resort-circuit
      no low-bandwidth-link
      control-connections
      no vbond-as-stun-server
      vmanage-connection-preference 5
      port-hop
        carrier           default
        nat-refresh-interval 5
        hello-interval     1000
        hello-tolerance   12
        allow-service all

```

```

allow-service bgp
no allow-service dhcp
allow-service dns
allow-service icmp
no allow-service sshd
no allow-service netconf
allow-service ntp
no allow-service ospf
no allow-service stun
exit
exit
vmanage-transaction vmanage-transaction-id 2019-05-18T19:47:26.607+00:00
omp
no shutdown
send-path-limit 16
ecmp-limit 16
graceful-restart
timers
holdtime 60
advertisement-interval 1
graceful-restart-timer 43200
eor-timer 300
exit
address-family ipv4 vrf 1
advertise connected
advertise static
!
address-family ipv4 vrf 2
advertise connected
advertise static
!
!
licensing config enable false
licensing config privacy hostname false
licensing config privacy version false
licensing config utility utility-enable false
netconf-yang cisco-ia blocking cli-blocking-enabled
bfd color mpls
hello-interval 1000
no pmtu-discovery
multiplier 7
!
bfd color biz-internet
hello-interval 1000
no pmtu-discovery
multiplier 7
!
bfd app-route multiplier 6
bfd app-route poll-interval 120000
security
ipsec
rekey 86400
replay-window 4096
authentication-type sha1-hmac ah-sha1-hmac
!
!
nacm cmd-read-default deny
nacm cmd-exec-default deny

```

Single-Router Dual-Internet Design**Branch 112005: BR4-WAN-EDGE1**

```

viptela-system:system
system
  gps-location latitude 37.409284
  gps-location longitude -121.928528
  device-groups      BRANCH Primary UG5 US West v1000
  system-ip         100.255.241.41
  overlay-id        1
  site-id          112005
  port-offset       1
  control-session-pps 300
  admin-tech-on-failure
    sp-organization-name "ENB-Solutions - 21615"
    organization-name   "ENB-Solutions - 21615"
  no port-hop
  track-transport
  track-default-gateway
    console-baud-rate 115200
    vbond 10.10.60.2 port 12346
!
service internal
no service pad
service password-encryption
service timestamps debug datetime msec
service timestamps log datetime msec
no service tcp-small-servers
no service udp-small-servers
hostname BR4-WAN-Edge1
username admin privilege 15 secret 9 $9$3VEF3VAI3lMM3E$awMmxogwHvRdxoHA5u1utUOAmKPBUvUbkD4PnwNWmWk
vrf definition 1
  description Service VPN
  rd           1:1
  address-family ipv4
    exit-address-family
  !
  address-family ipv6
    exit-address-family
  !
vrf definition 2
  description Service VPN
  rd           1:2
  address-family ipv4
    exit-address-family
  !
  address-family ipv6
    exit-address-family
  !
vrf definition Mgmt-intf
  description Management VPN
  rd           1:512
  address-family ipv4
    exit-address-family
  !
  address-family ipv6
    exit-address-family
  !
no ip dhcp use class
ip route 0.0.0.0 0.0.0.0 10.40.34.2 1
ip route 0.0.0.0 0.0.0.0 10.40.35.2 1
no ip igmp ssm-map query dns
no ip rsvp signalling rate-limit
ipv6 unicast-routing
no ipv6 mld ssm-map query dns

```

```

interface GigabitEthernet0
  description Management Interface
  no shutdown
  arp timeout 1200
  vrf forwarding Mgmt-intf
  ip address 100.119.118.10 255.255.255.0
  ip redirects
  ip mtu    1500
  mtu      1500
  negotiation auto
exit
interface GigabitEthernet0/0/0
  description WAN Parent Interface
  no shutdown
  arp timeout 1200
  no ip address
  ip redirects
  ip mtu    1504
  mtu      1504
  negotiation auto
exit
interface GigabitEthernet0/0/0.10
  no shutdown
  encapsulation dot1Q 10
  vrf forwarding 1
  ip address 10.40.4.2 255.255.255.252
  ip mtu 1500
  ip ospf 1 area 0
  ip ospf authentication message-digest
  ip ospf network point-to-point
  ip ospf cost    1
  ip ospf dead-interval 40
  ip ospf hello-interval 10
  ip ospf message-digest-key 22 md5 7 06055E324F41584B56
  ip ospf priority  1
  ip ospf retransmit-interval 5
exit
interface GigabitEthernet0/0/0.20
  no shutdown
  encapsulation dot1Q 20
  vrf forwarding 2
  ip address 10.40.5.2 255.255.255.252
  ip mtu 1500
  ip ospf 2 area 0
  ip ospf authentication message-digest
  ip ospf network point-to-point
  ip ospf cost    1
  ip ospf dead-interval 40
  ip ospf hello-interval 10
  ip ospf message-digest-key 22 md5 7 03070A180500701E1D
  ip ospf priority  1
  ip ospf retransmit-interval 5
exit
interface GigabitEthernet0/0/1
  description Bronze Interface
  no shutdown
  arp timeout 1200
  ip address 10.40.34.1 255.255.255.252
  ip redirects
  ip tcp adjust-mss 1350
  ip mtu    1500
  mtu      1500
  negotiation auto
exit
interface GigabitEthernet0/0/2

```

```

description INET Interface
no shutdown
arp timeout 1200
ip address 10.40.35.1 255.255.255.252
ip redirects
ip tcp adjust-mss 1350
ip mtu    1500
mtu        1500
negotiation auto
exit
interface Tunnel1
no shutdown
ip unnumbered GigabitEthernet0/0/1
no ip redirects
ipv6 unnumbered GigabitEthernet0/0/1
no ipv6 redirects
tunnel source GigabitEthernet0/0/1
tunnel mode sdwan
exit
interface Tunnel2
no shutdown
ip unnumbered GigabitEthernet0/0/2
no ip redirects
ipv6 unnumbered GigabitEthernet0/0/2
no ipv6 redirects
tunnel source GigabitEthernet0/0/2
tunnel mode sdwan
exit
clock timezone UTC 0 0
logging persistent size 104857600 filesize 10485760
logging buffered 512000
no logging rate-limit
logging persistent
aaa authentication login default local
aaa authorization exec default local
multilink bundle-name authenticated
spanning-tree extend system-id
spanning-tree mode rapid-pvst
no crypto ikev2 diagnose error
router ospf 1 vrf 1
area 0 range 10.40.0.0 255.255.0.0 advertise
auto-cost reference-bandwidth 100000
timers throttle spf 200 1000 10000
router-id 10.40.42.42
compatible rfc1583
default-information originate
distance ospf external 110
distance ospf inter-area 110
distance ospf intra-area 110
redistribute omp subnets
!
router ospf 2 vrf 2
area 0 range 10.40.5.0 255.255.255.252 advertise
auto-cost reference-bandwidth 100000
timers throttle spf 200 1000 10000
router-id 10.40.42.42
compatible rfc1583
default-information originate
distance ospf external 110
distance ospf inter-area 110
distance ospf intra-area 110
redistribute omp subnets
redistribute nat-route dia
!
no router rip

```

```

line aux 0
  login authentication default
  stopbits 1
!
line con 0
  login authentication default
  speed    115200
  stopbits 1
!
line vty 0 4
  login authentication default
  transport input ssh
!
line vty 5 80
  login authentication default
  transport input ssh
!
sdwan
  interface GigabitEthernet0/0/0
  exit
  interface GigabitEthernet0/0/0.10
  exit
  interface GigabitEthernet0/0/0.20
  exit
  interface GigabitEthernet0/0/1
  tunnel-interface
    encapsulation ipsec preference 0 weight 1
    no border
    color bronze
    no last-resort-circuit
    no low-bandwidth-link
    control-connections
    no vbond-as-stun-server
    vmanage-connection-preference 5
    port-hop
      carrier           default
      nat-refresh-interval 5
      hello-interval     1000
      hello-tolerance   12
      allow-service all
      allow-service bgp
      no allow-service dhcp
      allow-service dns
      allow-service icmp
      no allow-service sshd
      no allow-service netconf
      allow-service ntp
      no allow-service ospf
      no allow-service stun
    exit
  exit
  interface GigabitEthernet0/0/2
  tunnel-interface
    encapsulation ipsec preference 0 weight 1
    no border
    color bizz-internet
    no last-resort-circuit
    no low-bandwidth-link
    control-connections
    no vbond-as-stun-server
    vmanage-connection-preference 5
    port-hop
      carrier           default
      nat-refresh-interval 5
      hello-interval     1000

```

```

hello-tolerance          12
allow-service all
allow-service bgp
no allow-service dhcp
allow-service dns
allow-service icmp
no allow-service sshd
no allow-service netconf
allow-service ntp
no allow-service ospf
no allow-service stun
exit
exit
vmanage-transaction vmanage-transaction-id 2019-05-28T00:54:15.496+00:00
omp
no shutdown
send-path-limit 16
ecmp-limit 16
graceful-restart
timers
holdtime           60
advertisement-interval 1
graceful-restart-timer 43200
eor-timer          300
exit
address-family ipv4 vrf 1
advertise ospf external
advertise connected
advertise static
!
address-family ipv4 vrf 2
advertise connected
advertise static
!
!
!
licensing config enable false
licensing config privacy hostname false
licensing config privacy version false
licensing config utility utility-enable false
netconf-yang cisco-ia blocking cli-blocking-enabled
bfd color mpls
hello-interval 1000
no pmtu-discovery
multiplier    7
!
bfd color biz-internet
hello-interval 1000
no pmtu-discovery
multiplier    7
!
bfd app-route multiplier 6
bfd app-route poll-interval 120000
security
ipsec
rekey           86400
replay-window   4096
authentication-type sha1-hmac ah-sha1-hmac
!
!
nacm cmd-read-default deny
nacm cmd-exec-default deny

```

Datacenter 112001: DC1-WAN-Edge1

```
system
host-name DC1-WAN-Edge1
gps-location latitude 37.409284
gps-location longitude -121.928528
device-groups DC Primary UG3 US West v5000
system-ip 10.255.241.102
site-id 112001
admin-tech-on-failure
no route-consistency-check
sp-organization-name "ENB-Solutions - 21615"
organization-name "ENB-Solutions - 21615"
no port-hop
vbond 10.10.60.2
aaa
auth-order local radius tacacs
usergroup basic
task system read write
task interface read write
!
usergroup netadmin
!
usergroup operator
task system read
task interface read
task policy read
task routing read
task security read
!
user admin
password $6$siwKBQ==$wT2lUa9BSreDP16gB8s14E6PAJ0VXgMbqv/whJ8F1C6sWdRazdxorYYTLrL6syiG6qnLABTnrE9
6HjIKF6QRq1
!
!
logging
disk
enable
!
!
bfd color mpls
no pmtu-discovery
!
bfd color biz-internet
no pmtu-discovery
!
bfd app-route poll-interval 120000
omp
no shutdown
send-path-limit 16
ecmp-limit 16
graceful-restart
!
security
ipsec
replay-window 4096
authentication-type sha1-hmac ah-sha1-hmac
!
!
vpn 0
name "Transport VPN"
ecmp-hash-key layer4
interface 10qe0/2
```

```

tunnel-interface
  encapsulation ipsec
  no allow-service bgp
  allow-service dhcp
  allow-service dns
  allow-service icmp
  no allow-service sshd
  no allow-service netconf
  no allow-service ntp
  no allow-service ospf
  no allow-service stun
  allow-service https
!
shutdown
!
interface 10ge0/3
  description          "INET Interface"
  ip address 10.2.57.1/30
  tunnel-interface
    encapsulation ipsec preference 12
    color biz-internet
    allow-service all
    allow-service bgp
    no allow-service dhcp
    allow-service dns
    allow-service icmp
    no allow-service sshd
    no allow-service netconf
    no allow-service ntp
    allow-service ospf
    no allow-service stun
    allow-service https
!
clear-dont-fragment
tcp-mss-adjust      1350
no shutdown
bandwidth-upstream  1000000
bandwidth-downstream 1000000
!
ip route 0.0.0.0/0 10.2.56.2
ip route 0.0.0.0/0 10.2.57.2
!
vpn 1
  name          "Service VPN 1"
  ecmp-hash-key layer4
  router
    bgp 65113
      router-id      10.100.102.102
      propagate-aspath
      address-family ipv4-unicast
      network 10.2.35.0/30
      maximum-paths paths 2
      redistribute omp
    !
    neighbor 10.2.25.1
      description Agg-Switch2
      no shutdown
      remote-as   65112
      timers
        keepalive 3
        holdtime  9
    !
    password      $8$EvJJRIC08Ufsso+3a4HFbKenlrhAToPCBiya2RWRLY4=
    address-family ipv4-unicast
  !

```

```

!
neighbor 10.2.35.1
  description Agg-Switch1
  no shutdown
  remote-as 65112
  timers
    keepalive 3
    holdtime 9
  !
  password $8$y86gFx1TwDb3aczIjc9BLYaCWQvaNi6q4ovLL1DL4fs=
  address-family ipv4-unicast
  !
!
!
interface 10ge0/0
  description "To DC1-SW2 G1/0/6"
  ip address 10.2.35.2/30
  no shutdown
!
interface 10ge0/1
  description "To DC1-SW1 G1/0/5"
  ip address 10.2.25.2/30
  no shutdown
!
omp
  advertise bgp
!
tcp-optimization
!
vpn 512
  name "Management VPN"
  interface mgmt0
    description "Management Interface"
    ip address 100.119.118.12/24
    no shutdown
!
!
```

Datacenter 112001: DC1-WAN-Edge2

```

system
  host-name DC1-WAN-Edge2
  gps-location latitude 37.409284
  gps-location longitude -121.928528
  device-groups DC Primary UG2 US West v5000
  system-ip 10.255.241.101
  site-id 112001
  admin-tech-on-failure
  no route-consistency-check
  sp-organization-name "ENB-Solutions - 21615"
  organization-name "ENB-Solutions - 21615"
  no port-hop
  vbond 10.10.60.2
  aaa
    auth-order local radius tacacs
    usergroup basic
      task system read write
      task interface read write
    !
    usergroup netadmin
    !
    usergroup operator
!
```

```

task system read
task interface read
task policy read
task routing read
task security read
!
user admin
password $6$siwKBQ==$wT21Ua9BSreDPI6gB8s14E6PAJoVXgMbqv/whJ8F1C6sWdRazdxorYYTLrL6syiG6qnLABTnrE9
6HJiKF6QRq1
!
!
logging
disk
enable
!
!
!
bfd color mpls
no pmtu-discovery
!
bfd color biz-internet
no pmtu-discovery
!
bfd app-route poll-interval 120000
omp
no shutdown
send-path-limit 16
ecmp-limit 16
graceful-restart
!
security
ipsec
replay-window 4096
authentication-type sha1-hmac ah-sha1-hmac
!
!
vpn 0
name "Transport VPN"
ecmp-hash-key layer4
interface 10ge0/2
description "INET Interface"
ip address 10.2.47.1/30
tunnel-interface
encapsulation ipsec preference 10
color biz-internet
allow-service all
allow-service bgp
no allow-service dhcp
allow-service dns
allow-service icmp
no allow-service sshd
no allow-service netconf
no allow-service ntp
allow-service ospf
no allow-service stun
allow-service https
!
clear-dont-fragment
tcp-mss-adjust 1350
no shutdown
bandwidth-upstream 1000000
bandwidth-downstream 1000000
!
interface 10ge0/3
description "MPLS Interface"

```

```

ip address 10.2.46.1/30
tunnel-interface
  encapsulation ipsec preference 10
  color mpls restrict
  no control-connections
  allow-service all
  allow-service bgp
  allow-service dhcp
  allow-service dns
  allow-service icmp
  no allow-service sshd
  no allow-service netconf
  no allow-service ntp
  allow-service ospf
  no allow-service stun
  allow-service https
!
clear-dont-fragment
tcp-mss-adjust      1350
no shutdown
bandwidth-upstream 1000000
bandwidth-downstream 1000000
!
ip route 0.0.0.0/0 10.2.46.2
ip route 0.0.0.0/0 10.2.47.2
!
vpn 1
  name          "Service VPN 1"
  ecmp-hash-key layer4
  router
    bgp 65113
      router-id      10.100.101.101
      propagate-aspath
      address-family ipv4-unicast
      network 10.2.24.0/30
      maximum-paths paths 2
      redistribute omp
    !
    neighbor 10.2.24.1
      description Agg-Switch1
      no shutdown
      remote-as   65112
      timers
        keepalive 3
        holdtime  9
      !
      password    $8$VFpKDv+e+ZUW1UZYKifUSJVwaLYhI1QyjWZnqdg8Ak=
      address-family ipv4-unicast
      !
    !
    neighbor 10.2.34.1
      description Agg-Switch2
      no shutdown
      remote-as   65112
      timers
        keepalive 3
        holdtime  9
      !
      password    $8$iRmY15bjPLQyJWVUfdv32zpfTK2i+z7MHMSL2RmWGtI=
      address-family ipv4-unicast
      !
    !
  !
interface 10ge0/0

```

```
description "To DC1-SW1 G1/0/6"
ip address 10.2.24.2/30
no shutdown
!
interface 10ge0/1
description "To DC1-SW2 G1/0/5"
ip address 10.2.34.2/30
no shutdown
!
!
omp
  advertise bgp
!
tcp-optimization
!
vpn 512
  name "Management VPN"
  interface mgmt0
    description "Management Interface"
    ip address 100.119.118.11/24
    no shutdown
!
!
```

Appendix F—Glossary

DIA Direct Internet Access

VPN Virtual Private Network

NAT Network Address Translation

LAN Local Area Network

WAN Wide Area Network

About this guide

ALL DESIGNS, SPECIFICATIONS, STATEMENTS, INFORMATION, AND RECOMMENDATIONS (COLLECTIVELY, "DESIGNS") IN THIS MANUAL ARE PRESENTED "AS IS," WITH ALL FAULTS. CISCO AND ITS SUPPLIERS DISCLAIM ALL WARRANTIES, INCLUDING, WITHOUT LIMITATION, THE WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE. IN NO EVENT SHALL CISCO OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THE DESIGNS, EVEN IF CISCO OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

THE DESIGNS ARE SUBJECT TO CHANGE WITHOUT NOTICE. USERS ARE SOLELY RESPONSIBLE FOR THEIR APPLICATION OF THE DESIGNS. THE DESIGNS DO NOT CONSTITUTE THE TECHNICAL OR OTHER PROFESSIONAL ADVICE OF CISCO, ITS SUPPLIERS OR PARTNERS. USERS SHOULD CONSULT THEIR OWN TECHNICAL ADVISORS BEFORE IMPLEMENTING THE DESIGNS. RESULTS MAY VARY DEPENDING ON FACTORS NOT TESTED BY CISCO.

CCDE, CCENT, Cisco Eos, Cisco Lumin, Cisco Nexus, Cisco StadiumVision, Cisco TelePresence, Cisco WebEx, the Cisco logo, DCE, and Welcome to the Human Network are trademarks; Changing the Way We Work, Live, Play, and Learn and Cisco Store are service marks; and Access Registrar, Aironet, AsyncOS, Bringing the Meeting To You, Catalyst, CCDA, CCDP, CCIE, CCIP, CCNA, CCNP, CCSP, CCVP, Cisco, the Cisco Certified Internetwork Expert logo, Cisco IOS, Cisco Press, Cisco Systems, Cisco Systems Capital, the Cisco Systems logo, Cisco Unified Computing System (Cisco UCS), Cisco UCS B-Series Blade Servers, Cisco UCS C-Series Rack Servers, Cisco UCS S-Series Storage Servers, Cisco UCS Manager, Cisco UCS Management Software, Cisco Unified Fabric, Cisco Application Centric Infrastructure, Cisco Nexus 9000 Series, Cisco Nexus 7000 Series, Cisco Prime Data Center Network Manager, Cisco NX-OS Software, Cisco MDS Series, Cisco Unity, Collaboration Without Limitation, EtherFast, EtherSwitch, Event Center, Fast Step, Follow Me Browsing, FormShare, GigaDrive, HomeLink, Internet Quotient, IOS, iPhone, iQuick Study, LightStream, Linksys, MediaTone, MeetingPlace, MeetingPlace Chime Sound, MGX, Networkers, Networking Academy, Network Registrar, PCNow, PIX, PowerPanels, ProConnect, ScriptShare, SenderBase, SMARTnet, Spectrum Expert, StackWise, The Fastest Way to Increase Your Internet Quotient, TransPath, WebEx, and the WebEx logo are registered trademarks of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries.

All other trademarks mentioned in this document or website are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (0809R)

© 2019 Cisco Systems, Inc. All rights reserved.

Feedback & discussion

For comments and suggestions about our guides, please join the discussion on [Cisco Community](#).