



CHAPTER 4

Configuring RADIUS and TACACS+

The authentication, authorization, and accounting (AAA) feature verifies the identity of, grants access to, and tracks the actions of users managing a switch. All Cisco MDS 9000 Family switches use Remote Access Dial-In User Service (RADIUS) or Terminal Access Controller Access Control device Plus (TACACS+) protocols to provide solutions using remote AAA servers.

Based on the user ID and password combination provided, switches perform local authentication or authorization using the local database or remote authentication or authorization using a AAA server. A preshared secret key provides security for communication between the switch and AAA servers. This secret key can be configured for all AAA servers or for only a specific AAA server. This security feature provides a central management capability for AAA servers.

This chapter includes the following sections:

- [Switch Management Security, page 4-1](#)
- [Switch AAA Functionalities, page 4-2](#)
- [Configuring RADIUS, page 4-10](#)
- [Configuring TACACS+, page 4-19](#)
- [Configuring Server Groups, page 4-29](#)
- [AAA Server Distribution, page 4-32](#)
- [MSCHAP Authentication, page 4-36](#)
- [Local AAA Services, page 4-37](#)
- [Configuring Accounting Services, page 4-38](#)
- [Configuring Cisco Access Control Servers, page 4-40](#)
- [Default Settings, page 4-44](#)

Switch Management Security

Management security in any switch in the Cisco MDS 9000 Family provides security to all management access methods, including the command-line interface (CLI) or Simple Network Management Protocol (SNMP).

This section includes the following topics:

- [CLI Security Options, page 4-2](#)
- [SNMP Security Options, page 4-2](#)

[Send documentation comments to mdsfeedback-doc@cisco.com](mailto:mdsfeedback-doc@cisco.com)

CLI Security Options

You can access the CLI using the console (serial connection), Telnet, or Secure Shell (SSH). For each management path (console, Telnet, and SSH), you can configure one or more of the following security control options: local, remote (RADIUS or TACACS+), or none.

- Remote security control
 - Using RADIUS
See the “Configuring RADIUS” section on page 4-10.
 - Using TACACS+
See the “Configuring TACACS+” section on page 4-19.
- Local security control.
See the “Local AAA Services” section on page 4-37.

These security features can also be configured for the following scenarios:

- iSCSI authentication
See the *Cisco MDS 9000 Family NX-OS IP Services Configuration Guide*.
- Fibre Channel Security Protocol (FC-SP) authentication
See Chapter 8, “Configuring FC-SP and DHCHAP.”

SNMP Security Options

The SNMP agent supports security features for SNMPv1, SNMPv2c, and SNMPv3. Normal SNMP security features apply to all applications that use SNMP (for example, Cisco MDS 9000 Fabric Manager).

SNMP security options also apply to Fabric Manager and Device Manager.

See the *Cisco MDS 9000 NX-OS Family System Management Configuration Guide* for more information on the SNMP security options.

Refer to the *Cisco MDS 9000 Family Fundamentals Configuration Guide* for information on Fabric Manager and Device Manager.

Switch AAA Functionalities

Using the CLI or an SNMP application, you can configure AAA switch functionalities on any switch in the Cisco MDS 9000 Family.

This section includes the following topics:

- [Authentication, page 4-3](#)
- [Authorization, page 4-3](#)
- [Accounting, page 4-3](#)
- [Remote AAA Services, page 4-4](#)
- [Remote Authentication Guidelines, page 4-4](#)
- [Server Groups, page 4-4](#)

Send documentation comments to mdsfeedback-doc@cisco.com

- [AAA Service Configuration Options](#), page 4-4
- [Authentication and Authorization Process](#), page 4-6

Authentication

Authentication is the process of verifying the identity of the person or device accessing the switch. This identity verification is based on the user ID and password combination provided by the entity trying to access the switch. Cisco MDS 9000 Family switches allow you to perform local authentication (using the local lookup database) or remote authentication (using one or more RADIUS or TACACS+ servers).



Note

When you log in to a Cisco MDS switch successfully using the Fabric Manager or Device Manager through Telnet or SSH and if that switch is configured for AAA server-based authentication, a temporary SNMP user entry is automatically created with an expiry time of one day. The switch authenticates the SNMPv3 protocol data units (PDUs) with your Telnet or SSH login name as the SNMPv3 user. The management station can temporarily use the Telnet or SSH login name as the SNMPv3 **auth** and **priv** passphrase. This temporary SNMP login is only allowed if you have one or more active MDS shell sessions. If you do not have an active session at any given time, your login is deleted and you will not be allowed to perform SNMPv3 operations.

Authorization

The following authorization roles exist in all Cisco MDS switches:

- Network operator (`network-operator`)—Has permission to view the configuration only. The operator cannot make any configuration changes.
- Network administrator (`network-admin`)— Has permission to execute all commands and make configuration changes. The administrator can also create and customize up to 64 additional roles.
- Default-role—Has permission to use the GUI (Fabric Manager and Device Manager). This access is automatically granted to all users for accessing the GUI.

These roles cannot be changed or deleted. You can create additional roles and configure the following options:

- Configure role-based authorization by assigning user roles locally or using remote AAA servers.
- Configure user profiles on a remote AAA server to contain role information. This role information is automatically downloaded and used when the user is authenticated through the remote AAA server.



Note

If a user belongs only to one of the newly created roles and that role is subsequently deleted, then the user immediately defaults to the `network-operator` role.

Accounting

The accounting feature tracks and maintains a log of every management configuration used to access the switch. This information can be used to generate reports for troubleshooting and auditing purposes. Accounting logs can be stored locally or sent to remote AAA servers.

[Send documentation comments to mdsfeedback-doc@cisco.com](mailto:mdsfeedback-doc@cisco.com)

Remote AAA Services

Remote AAA services provided through RADIUS and TACACS+ protocols have the following advantages over local AAA services:

- User password lists for each switch in the fabric can be managed more easily.
- AAA servers are already deployed widely across enterprises and can be easily adopted.
- The accounting log for all switches in the fabric can be centrally managed.
- User role mapping for each switch in the fabric can be managed more easily.

Remote Authentication Guidelines

If you prefer using remote AAA servers, follow these guidelines:

- A minimum of one AAA server should be IP reachable.
- Be sure to configure a desired local AAA policy as this policy is used if all AAA servers are not reachable.
- AAA servers are easily reachable if an overlay Ethernet LAN is attached to the switch (see the *Cisco MDS 9000 Family NX-OS Configuration Guide*). We recommend this method.
- SAN networks connected to the switch should have at least one gateway switch connected to the Ethernet LAN reaching the AAA servers.

Server Groups

You can specify remote AAA servers for authentication, authorization, and accounting using server groups. A server group is a set of remote AAA servers implementing the same AAA protocol. The purpose of a server group is to provide for failover servers in case a remote AAA server fails to respond. If the first remote server in the group fails to respond, the next remote server in the group is tried until one of the servers sends a response. If all the AAA servers in the server group fail to respond, then that server group option is considered a failure. If required, you can specify multiple server groups. If the Cisco MDS switch encounters errors from the servers in the first group, it tries the servers in the next server group.

AAA Service Configuration Options

AAA configuration in Cisco MDS 9000 Family switches is service based. You can have separate AAA configurations for the following services:

- Telnet or SSH login (Fabric Manager and Device Manager login)
- Console login
- iSCSI authentication (see the *Cisco MDS 9000 Family NX-OS IP Services Configuration Guide*).
- FC-SP authentication (see [Chapter 8, “Configuring FC-SP and DHCHAP”](#)).
- Accounting

In general, server group, local, and none are the three options that can be specified for any service in an AAA configuration. Each option is tried in the order specified. If all the options fail, local is tried.

Send documentation comments to mdsfeedback-doc@cisco.com



Caution

Cisco MDS NX-OS supports user names that are created with alphanumeric characters or specific special characters (+ [plus], = [equal], _ [underscore], - [hyphen], \ [backslash], and . [period]) whether created remotely (using TACACS+ or RADIUS) or locally, provided the user name starts with an alphabetical character. Local user names cannot be created with all numbers or with any special characters (apart from those specified). If a numeric-only user name or a non-supported special character user name exists on an AAA server, and is entered during login, then the user is denied access.



Note

Even if local is not specified as one of the options, it is tried when all other configured options fail.

Table 4-1 provides the related CLI command for each AAA service configuration option.

Table 4-1 AAA Service Configuration Commands

| AAA Service Configuration Option | Related Command |
|---|--|
| Telnet or SSH login (Cisco Fabric Manager and Device Manager login) | aaa authentication login default |
| Console login | aaa authentication login console |
| iSCSI authentication | aaa authentication iscsi default |
| FC-SP authentication | aaa authentication dhchap default |
| Accounting | aaa accounting default |

Error-Enabled Status

When you log in, the login is processed by rolling over to local user database if the remote AAA servers do not respond. In this situation, the following message is displayed on your screen if you have enabled the error-enabled feature:

```
Remote AAA servers unreachable; local authentication done.
```

To enable this message display, use the **aaa authentication login error-enable** command.

To disable this message display, use the **no aaa authentication login error-enable** command.

To view the current display status, use the **show aaa authentication login error-enable** command (see [Example 4-1](#)).

Example 4-1 Displays AAA Authentication Login Information

```
switch# show aaa authentication login error-enable
enabled
```


AAA Server Monitoring

An unresponsive AAA server introduces a delay in the processing of AAA requests. An MDS switch can periodically monitor an AAA server to check whether it is responding (or alive) to save time in processing AAA requests. The MDS switch marks unresponsive AAA servers as dead and does not send AAA requests to any dead AAA servers. An MDS switch periodically monitors dead AAA servers and

Send documentation comments to mdsfeedback-doc@cisco.com

brings them to the alive state once they are responding. This monitoring process verifies that an AAA server is in a working state before real AAA requests are sent its way. Whenever an AAA server changes to the dead or alive state, an SNMP trap is generated and the MDS switch warns the administrator that a failure is taking place before it can impact performance. See [Figure 4-1](#) for AAA server states.

Figure 4-1 AAA Server States

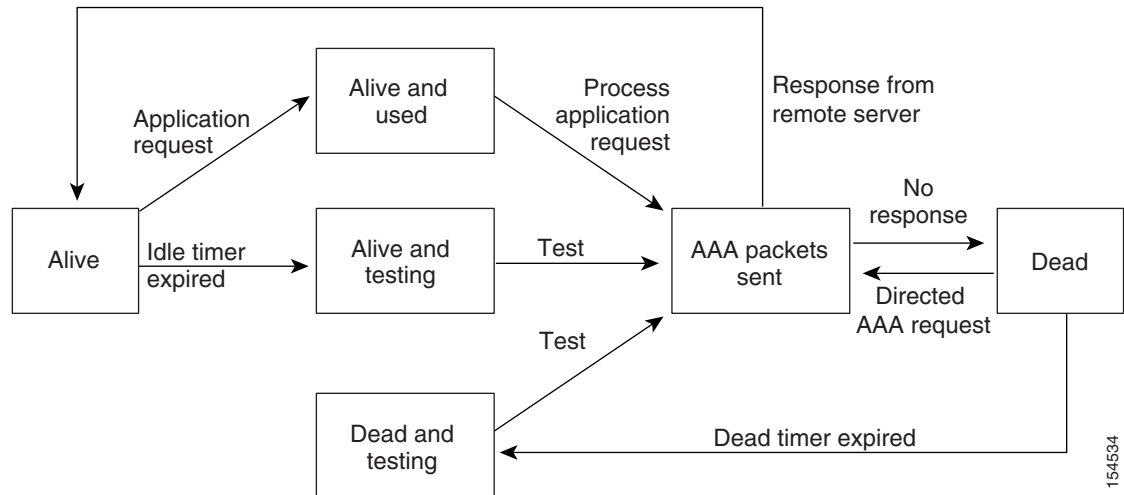

Note

The monitoring interval for alive servers and dead servers is different and can be configured by the user. The AAA server monitoring is performed by sending a test authentication request to the AAA server.

The user name and password to be used in the test packet can be configured.

See the “[Configuring RADIUS Server Monitoring Parameters](#)” section on page 4-14 and “[Displaying RADIUS Server Details](#)” section on page 4-17.

Authentication and Authorization Process

Authentication is the process of verifying the identity of the person managing the switch. This identity verification is based on the user ID and password combination provided by the person managing the switch. The Cisco MDS 9000 Family switches allow you to perform local authentication (using the lookup database) or remote authentication (using one or more RADIUS servers or TACACS+ servers).

Authorization provides access control. It is the process of assembling a set of attributes that describe what the user is authorized to perform. Based on the user ID and password combination, the user is authenticated and authorized to access the network as per the assigned role. You can configure parameters that can prevent unauthorized access by an user, provided the switches use the TACACS+ protocol.

AAA authorization is the process of assembling a set of attributes that describe what the user is authorized to perform. Authorization in the Cisco NX-OS software is provided by attributes that are downloaded from AAA servers. Remote security servers, such as RADIUS and TACACS+, authorize users for specific rights by associating attribute-value (AV) pairs, which define those rights with the appropriate user.

The following steps explain the authorization and authentication process:


Send documentation comments to mdsfeedback-doc@cisco.com

-
- Step 1** Log in to the required switch in the Cisco MDS 9000 Family, using the Telnet, SSH, Fabric Manager or Device Manager, or console login options.
- Step 2** When you have configured server groups using the server group authentication method, an authentication request is sent to the first AAA server in the group.
- If the AAA server fails to respond, then the next AAA server is contacted and so on until the remote server responds to the authentication request.
 - If all AAA servers in the server group fail to respond, then the servers in the next server group are contacted.
 - If all configured methods fail, then the local database is used for authentication.
- Step 3** When you are successfully authenticated through a remote AAA server, then the following possible actions are taken:
- If the AAA server protocol is RADIUS, then user roles specified in the **cisco-av-pair** attribute are downloaded with an authentication response.
 - If the AAA server protocol is TACACS+, then another request is sent to the same server to get the user roles specified as custom attributes for the shell.
 - If user roles are not successfully retrieved from the remote AAA server, then the user is assigned the network-operator role if the **show aaa user default-role** command is enabled. You are denied access if this command is disabled.
- Step 4** When your user name and password are successfully authenticated locally, you are allowed to log in, and you are assigned the roles configured in the local database.
-

Figure 4-2 shows a flow chart of the authorization and authentication process.

Send documentation comments to mdsfeedback-doc@cisco.com

Figure 4-2 Switch Authorization and Authentication Flow

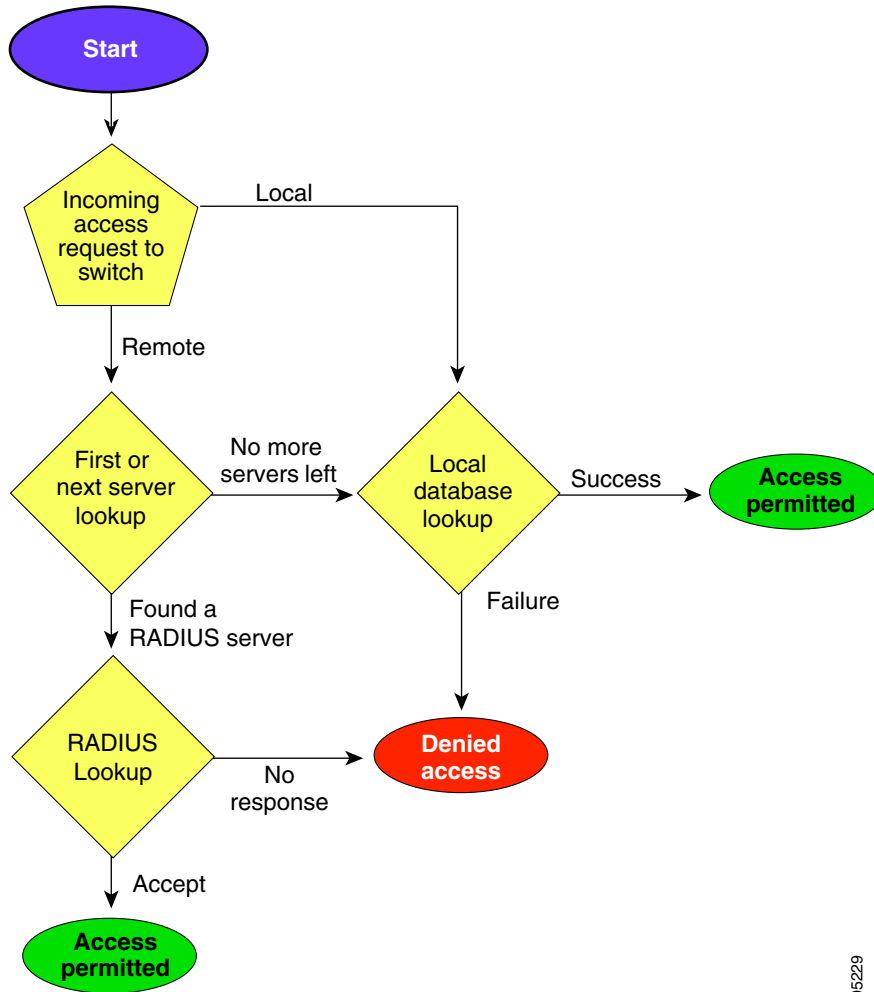

105529

**Note**

No more server groups left = no response from any server in all server groups.
 No more servers left = no response from any server within this server group.

To configure role-based authorization on TACACS+ server, follow these steps:

| | Command | Purpose |
|---------------|---|---|
| Step 1 | switch# config t | Enters configuration mode. |
| Step 2 | switch(config)# aaa authorization | Enables configuration of authorization methods. |
| Step 3 | switch(config)# aaa authorization config-commands | Enables authorization for all commands under config mode Layer2 and Layer3. |
| Step 4 | switch(config)# aaa authorization config-commands default group tac1 | Enables specified TACACS+ server group authorization. |
| Step 5 | switch(config)# aaa authorization commands | Enables AAA authorization for all EXEC mode commands. |

Send documentation comments to mdsfeedback-doc@cisco.com

| | Command | Purpose |
|--------|--|--|
| Step 6 | <code>switch(config)# aaa authorization commands default group tac1</code> | Enables specified TACACS+ server group authorization. |
| Step 7 | <code>switch(config)# aaa authorization commands default group local</code> | Enables default TACACS+ server group authorization. Authorization is based on the local-user-database. |
| Step 8 | <code>switch(config)# aaa authorization config-commands default group tac1 none</code> | Falls back to method none if group tac1 is not reachable. |
| Step 9 | <code>switch(config)# no aaa authorization command default group tac1</code> | Removes authorization for a specified function for the authenticated user. |

**Note**

Authorization configuration is provided only for authentication done using TACACS+ server.

You can use the **show** commands to display information on the AAA authorization and the default user roles assigned for remote authentication. (see [Example 4-2](#) to [Example 4-3](#)).

Example 4-2 Displays aaa Authorization Information Details

```
switch# show aaa authorization all
AAA command authorization:
    default authorization for config-commands: local
    default authorization for commands: local
    cts: group rad1
```

Example 4-3 Displays Default User Role for Remote Authentication

```
switch# show aaa user default-role
enabled
```

Verifying Authorization Profile

You can verify the authorization profile for different commands. When enabled, all commands are directed to the Access Control Server (ACS) for verification. The verification details are displayed once the verification is completed.

```
switch# terminal verify-only username Moheed
switch# config terminal
Enter configuration commands, one per line. End with CNTL/Z.
switch(config)# feature telnet
% Success
switch(config)# feature ssh
% Success
switch(config)# end
% Success
switch# exit
```

**Note**

This command only verifies the commands and does not enable the configuration.

Send documentation comments to mdsfeedback-doc@cisco.com

Testing Authorization

You can test the authorization settings for any command.

To test the authorization of a command, use the **test aaa authorization command-type** command.

```
switch(config)# test aaa authorization command-type commands user u1 command "feature
dhcp"
% Success
```

Configuring RADIUS

Cisco MDS 9000 Family switches can use the RADIUS protocol to communicate with remote AAA servers. You can configure multiple RADIUS servers and server groups and set timeout and retry counts.

RADIUS is a distributed client/server protocol that secures networks against unauthorized access. In the Cisco implementation, RADIUS clients run on Cisco MDS 9000 Family switches and send authentication requests to a central RADIUS server that contains all user authentication and network service access information.

This section defines the RADIUS operation, identifies its network environments, and describes its configuration possibilities.

Setting the RADIUS Server Address

You can add up to 64 RADIUS servers. RADIUS keys are always stored in encrypted form in persistent storage. The running configuration also displays encrypted keys.

To specify the host RADIUS server IPv4 address and other options, follow these steps:

| | Command | Purpose |
|--------|--|---|
| Step 1 | switch# config t | Enters configuration mode. |
| Step 2 | switch(config)# radius-server host 10.10.0.0 key HostKey | Specifies the preshared key for the selected RADIUS server. This key overrides the key assigned using the radius-server key command. In this example, the host is 10.10.0.0 and the key is HostKey. |
| Step 3 | switch(config)# radius-server host 10.10.0.0 auth-port 2003 | Specifies the destination UDP port number to which the RADIUS authentication messages should be sent. In this example, the host is 10.10.0.0 and the authentication port is 2003. The default authentication port is 1812, and the valid range is 0 to 65366. |
| Step 4 | switch(config)# radius-server host 10.10.0.0 acct-port 2004 | Specifies the destination UDP port number to which RADIUS accounting messages should be sent. The default accounting port is 1813, and the valid range is 0 to 65366. |

Send documentation comments to mdsfeedback-doc@cisco.com

| | Command | Purpose |
|--------|--|---|
| Step 5 | switch(config)# radius-server host 10.10.0.0 accounting | Specifies this server to be used only for accounting purposes. Note If neither the authentication nor the accounting options are specified, the server is used for both accounting and authentication purposes. |
| Step 6 | switch(config)# radius-server host 10.10.0.0 key 0 abcd | Specifies a clear text key for the specified server. The key is restricted to 64 characters. |
| | switch(config)# radius-server host 10.10.0.0 key 4 da3Asda2ioyuoIUH | Specifies an encrypted key for the specified server. The key is restricted to 64 characters. |

To specify the host RADIUS server IPv6 address and other options, follow these steps:

| | Command | Purpose |
|--------|---|--|
| Step 1 | switch# config t | Enters configuration mode. |
| Step 2 | switch(config)# radius-server host 2001:0DB8:800:200C::417A Key HostKey | Specifies the preshared key for the selected RADIUS server. This key overrides the key assigned using the radius-server key command. In this example, the host is 2001:0DB8:800:200C::417A and the key is HostKey. |
| Step 3 | switch(config)# radius-server host 2001:0DB8:800:200C::417A auth-port 2003 | Specifies the destination UDP port number to which the RADIUS authentication messages should be sent. In this example, the host is 2001:0DB8:800:200C::417A and the authentication port is 2003. The default authentication port is 1812, and the valid range is 0 to 65366. |
| Step 4 | switch(config)# radius-server host 2001:0DB8:800:200C::417A acct-port 2004 | Specifies the destination UDP port number to which RADIUS accounting messages should be sent. The default accounting port is 1813, and the valid range is 0 to 65366. |
| Step 5 | switch(config)# radius-server host 2001:0DB8:800:200C::417A accounting | Specifies this server to be used only for accounting purposes. Note If neither the authentication nor the accounting options are specified, the server is used for both accounting and authentication purposes. |
| Step 6 | switch(config)# radius-server host 2001:0DB8:800:200C::417A key 0 abcd | Specifies a clear text key for the specified server. The key is restricted to 64 characters. |
| | switch(config)# radius-server host 2001:0DB8:800:200C::417A key 4 da3Asda2ioyuoIUH | Specifies an encrypted key for the specified server. The key is restricted to 64 characters. |

Send documentation comments to mdsfeedback-doc@cisco.com

To specify the host RADIUS server DNS name and other options, follow these steps:

| | Command | Purpose |
|--------|--|---|
| Step 1 | <code>switch# config t</code> | Enters configuration mode. |
| Step 2 | <code>switch(config)# radius-server host radius2 key HostKey</code> | Specifies the preshared key for the selected RADIUS server. This key overrides the key assigned using the radius-server key command. In this example, the host is radius2 and the key is HostKey. |
| Step 3 | <code>switch(config)# radius-server host radius2 auth-port 2003</code> | Specifies the destination UDP port number to which the RADIUS authentication messages should be sent. In this example, the host is radius2 and the authentication port is 2003. The default authentication port is 1812, and the valid range is 0 to 65366. |
| Step 4 | <code>switch(config)# radius-server host radius2 acct-port 2004</code> | Specifies the destination UDP port number to which RADIUS accounting messages should be sent. The default accounting port is 1813, and the valid range is 0 to 65366. |
| Step 5 | <code>switch(config)# radius-server host radius2 accounting</code> | Specifies this server to be used only for accounting purposes. Note If neither the authentication nor the accounting options are specified, the server is used for both accounting and authentication purposes. |
| Step 6 | <code>switch(config)# radius-server host radius2 key 0 abcd</code> | Specifies a clear text key for the specified server. The key is restricted to 64 characters. |
| | <code>switch(config)# radius-server host radius2 key 4 da3Asda2ioyuoIUH</code> | Specifies an encrypted key for the specified server. The key is restricted to 64 characters. |

About the Default RADIUS Server Encryption Type and Preshared Key

You need to configure the RADIUS preshared key to authenticate the switch to the RADIUS server. The length of the key is restricted to 64 characters and can include any printable ASCII characters (white spaces are not allowed). You can configure a global key to be used for all RADIUS server configurations on the switch.

You can override this global key assignment by explicitly using the **key** option in the **radius-server host** command.

[Send documentation comments to mdsfeedback-doc@cisco.com](mailto:mdsfeedback-doc@cisco.com)

Configuring the Default RADIUS Server Encryption Type and Preshared Key

To configure the RADIUS preshared key, follow these steps:

| | Command | Purpose |
|--------|---|---|
| Step 1 | switch# config t | Enters configuration mode. |
| Step 2 | switch(config)# radius-server key AnyWord | Configures a preshared key (AnyWord) to authenticate communication between the RADIUS client and server. The default is clear text. |
| | switch(config)# radius-server key 0 AnyWord | Configures a preshared key (AnyWord) specified in clear text (indicated by 0) to authenticate communication between the RADIUS client and server. |
| | switch(config)# radius-server key 7 abe4DFeeweo00o | Configures a preshared key (specified in encrypted text) specified in encrypted text (indicated by 7) to authenticate communication between the RADIUS client and server. |

Setting the RADIUS Server Timeout Interval

You can configure a global timeout value between transmissions for all RADIUS servers.



Note

If timeout values are configured for individual servers, those values override the globally configured values.

To specify the timeout values between retransmissions to the RADIUS servers, follow these steps:

| | Command | Purpose |
|--------|--|--|
| Step 1 | switch# config t | Enters configuration mode. |
| Step 2 | switch(config)# radius-server timeout 30 | Configures the global timeout period in seconds for the switch to wait for a response from all TACACS+ servers before the switch declares a timeout failure. The time ranges from 1 to 1440 seconds. |
| | switch(config)# no radius-server timeout 30 | Reverts the transmission time to the default value (1 second). |

Setting Transmission Retry Count for the RADIUS Server

By default, a switch retries transmission to a RADIUS server only once before reverting to local authentication. You can increase this number up to a maximum of five retries per server.

Send documentation comments to mdsfeedback-doc@cisco.com

To specify the number of times that RADIUS servers should try to authenticate a user, follow these steps:

| | Command | Purpose |
|--------|--|--|
| Step 1 | switch# config t | Enters configuration mode. |
| Step 2 | switch(config)# radius-server retransmit 3 | Configures the number of times (3) the switch tries to connect to a RADIUS server(s) before reverting to local authentication. |
| | switch(config)# no radius-server retransmit | Reverts to the default retry count (1). |

Configuring RADIUS Server Monitoring Parameters

You can configure parameters for monitoring RADIUS servers. You can configure this option to test the server periodically, or you can run a one-time only test.

This section includes the following topics:

- [Configuring the Test Idle Timer, page 4-14](#)
- [Configuring Test User Name, page 4-14](#)
- [Configuring the Dead Timer, page 4-15](#)

Configuring the Test Idle Timer

The test idle timer specifies the interval during which a RADIUS server receives no requests before the MDS switch sends out a test packet.



Note

The default idle timer value is 0 minutes. When the idle time interval is 0 minutes, periodic RADIUS server monitoring is not performed.

To configure the idle timer, follow these steps:

| | Command | Purpose |
|--------|---|--|
| Step 1 | switch# config t | Enters configuration mode. |
| Step 2 | switch(config)# radius-server host 10.1.1.1 test idle-time 20 | Configures the test idle time interval value in minutes. The valid range is 1 to 1440 minutes. |
| Step 3 | switch(config)# no radius-server host 10.1.1.1 test idle-time 20 | Reverts to the default value (0 minutes). |

Configuring Test User Name

You can configure a username and password for periodic RADIUS server status testing. You do not need to configure the test username and password to issue test messages to monitor RADIUS servers. You can use the default test username (test) and default password (test).



Note

We recommend that the test username not be the same as an existing username in the RADIUS database for security reasons.

Send documentation comments to mdsfeedback-doc@cisco.com

To configure the optional username and password for periodic RADIUS server status testing, follow these steps:

| | Command | Purpose |
|--------|---|--|
| Step 1 | switch# config t | Enters configuration mode. |
| Step 2 | switch(config)# radius-server host 10.1.1.1 test username testuser | Configures the test user (testuser) with the default password (test). The default user name is test. |
| | switch(config)# no radius-server host 10.1.1.1 test username testuser | Removes the test user name (testuser). |
| | switch(config)# radius-server host 10.1.1.1 test username testuser password Ur2Gd2BH | Configures the test user (testuser) and assigns a strong password. |

Configuring the Dead Timer

The dead timer specifies the interval that the MDS switch waits, after declaring that a RADIUS server is dead, before sending out a test packet to determine if the server is now alive.



Note

The default dead timer value is 0 minutes. When the dead timer interval is 0 minutes, RADIUS server monitoring is not performed unless the RADIUS server is part of a server group and the dead-time interval for the group is greater than 0 minutes. (See the “[Server Groups](#)” section on page 4-4).



Note

If the dead timer of a dead RADIUS server expires before it is sent a RADIUS test message, that server is marked as alive again even if it is still not responding. To avoid this scenario, configure a test user with a shorter idle time than the dead timer time.

To configure the dead timer, follow these steps:

| | Command | Purpose |
|--------|---|--|
| Step 1 | switch# config t | Enters configuration mode. |
| Step 2 | switch(config)# radius-server deadtime 30 | Configures the dead timer interval value in minutes. The valid range is 1 to 1440 minutes. |
| Step 3 | switch(config)# no radius-server deadtime 30 | Reverts to the default value (0 minutes). |

Sending RADIUS Test Messages for Monitoring

You can manually send test messages to monitor a RADIUS server.

Send documentation comments to mdsfeedback-doc@cisco.com

To send the test message to the RADIUS server, follow this step:

| | Command | Purpose |
|--------|---|---|
| Step 1 | <code>switch# test aaa server radius 10.10.1.1 test test</code> | Sends a test message to a RADIUS server using the default username (test) and password (test). |
| | <code>switch# test aaa server radius 10.10.1.1 testuser Ur2Gd2BH</code> | Sends a test message to a RADIUS server using a configured test username (testuser) and password (Ur2Gd2BH). Note A configured username and password is optional (see the “Configuring Test User Name” section on page 4-14). |

About Users Specifying a RADIUS Server at Login

By default, an MDS switch forwards an authentication request to the first server in the RADIUS server group. You can configure the switch to allow the user to specify which RADIUS server to send the authentication request by enabling the directed request option. If you enable this option, the user can log in as `username@hostname`, where the `hostname` is the name of a configured RADIUS server.

Allowing Users to Specify a RADIUS Server at Login

To allow users logging into an MDS switch to select a RADIUS server for authentication, follow these steps:

| | Command | Purpose |
|--------|--|--|
| Step 1 | <code>switch# config t</code> | Enters configuration mode. |
| Step 2 | <code>switch(config)# radius-server directed-request</code> | Allows users to specify a RADIUS server to send the authentication request when logging in. |
| | <code>switch(config)# no radius-server directed-request</code> | Reverts to sending the authentication request to the first server in the server group (default). |

You can use the `show tacacs-server directed-request` command to display the RADIUS directed request configuration.

```
switch# show radius-server directed-request
disabled
```

About Vendor-Specific Attributes

The Internet Engineering Task Force (IETF) draft standard specifies a method for communicating vendor-specific attributes (VSAs) between the network access server and the RADIUS server. The IETF uses attribute 26. VSAs allow vendors to support their own extended attributes that are not suitable for general use. The Cisco RADIUS implementation supports one vendor-specific option using the format recommended in the specification. The Cisco vendor ID is 9, and the supported option is vendor type 1, which is named `cisco-avpair`. The value is a string with the following format:

```
protocol : attribute separator value *
```


Send documentation comments to mdsfeedback-doc@cisco.com

Where **protocol** is a Cisco attribute for a particular type of authorization, **separator** is = (equal sign) for mandatory attributes, and * (asterisk) is for optional attributes.

When you use RADIUS servers to authenticate yourself to a Cisco MDS 9000 Family switch, the RADIUS protocol directs the RADIUS server to return user attributes, such as authorization information, along with authentication results. This authorization information is specified through VSAs.

VSA Format

The following VSA protocol options are supported by the Cisco NX-OS software:

- **Shell** protocol—Used in Access-Accept packets to provide user profile information.
- **Accounting** protocol—Used in Accounting-Request packets. If a value contains any white spaces, it should be put within double quotation marks.

The following attributes are supported by the Cisco NX-OS software:

- **roles**—This attribute lists all the roles to which the user belongs. The value field is a string storing the list of group names delimited by white space. For example, if you belong to roles **vsan-admin** and **storage-admin**, the value field would be “**vsan-admin storage-admin**”. This subattribute is sent in the VSA portion of the Access-Accept frames from the RADIUS server, and it can only be used with the shell protocol value. These are two examples using the roles attribute:

```
shell:roles="network-admin vsan-admin"
shell:roles*"network-admin vsan-admin"
```

When an VSA is specified as **shell:roles***“**network-admin vsan-admin**”, this VSA is flagged as an optional attribute, and other Cisco devices ignore this attribute.

- **accountinginfo**—This attribute stores additional accounting information besides the attributes covered by a standard RADIUS accounting protocol. This attribute is only sent in the VSA portion of the Account-Request frames from the RADIUS client on the switch, and it can only be used with the accounting protocol-related PDUs.

Specifying SNMPv3 on AAA Servers

The vendor/custom attribute **cisco-av-pair** can be used to specify user’s role mapping using the format:

```
shell:roles="roleA roleB ..."
```

If the role option in the **cisco-av-pair** attribute is not set, the default user role is network-operator.

The VSA format optionally specifies your SNMPv3 authentication and privacy protocol attributes also as follows:

```
shell:roles="roleA roleB..." snmpv3:auth=SHA priv=AES-128
```

The SNMPv3 authentication protocol options are SHA and MD5. The privacy protocol options are AES-128 and DES. If these options are not specified in the **cisco-av-pair** attribute on the ACS server, MD5 and DES are used by default.

Displaying RADIUS Server Details

Use the **show radius-server** command to display configured RADIUS parameters as shown in [Example 4-4](#).

Send documentation comments to mdsfeedback-doc@cisco.com

Example 4-4 Displays Configured RADIUS Information

```
switch# show radius-server
Global RADIUS shared secret:*****
retransmission count:5
timeout value:10
following RADIUS servers are configured:
  myradius.cisco.users.com:
    available for authentication on port:1812
    available for accounting on port:1813
  172.22.91.37:
    available for authentication on port:1812
    available for accounting on port:1813
    RADIUS shared secret:*****
  10.10.0.0:
    available for authentication on port:1812
    available for accounting on port:1813
    RADIUS shared secret:*****
```

Example 4-5 Displays Configured RADIUS Server-Group Order

```
switch# show radius-server groups
total number of groups:4
following RADIUS server groups are configured:
  group radius:
    server: all configured radius servers
  group Group1:
    server: Server3 on auth-port 1812, acct-port 1813
    server: Server5 on auth-port 1812, acct-port 1813
  group Group5:
```

Displaying RADIUS Server Statistics

You can display RADIUS server statistics using the **show radius-server statistics** command.

Example 4-6 Displays RADIUS Server Statistics

```
switch# show radius-server statistics 10.1.3.2
Server is not monitored

Authentication Statistics
  failed transactions: 0
  successful transactions: 0
  requests sent: 0
  requests timed out: 0
  responses with no matching requests: 0
  responses not processed: 0
  responses containing errors: 0

Accounting Statistics
  failed transactions: 0
  successful transactions: 0
  requests sent: 0
  requests timed out: 0
  responses with no matching requests: 0
  responses not processed: 0
  responses containing errors:
```

Send documentation comments to mdsfeedback-doc@cisco.com

You can clear RADIUS server statistics using the **clear radius-server statistics 10.1.3.2** command.

Configuring TACACS+

A Cisco MDS switch uses the Terminal Access Controller Access Control System Plus (TACACS+) protocol to communicate with remote AAA servers. You can configure multiple TACACS+ servers and set timeout values.

This section includes the following topics:

- [About TACACS+, page 4-19](#)
- [About TACACS+ Server Default Configuration, page 4-19](#)
- [About the Default TACACS+ Server Encryption Type and Preshared Key, page 4-20](#)
- [Enabling TACACS+, page 4-20](#)
- [Setting the TACACS+ Server Address, page 4-20](#)
- [Setting the Global Secret Key, page 4-22](#)
- [Setting the Timeout Value, page 4-22](#)
- [About TACACS+ Servers, page 4-23](#)
- [Sending TACACS+ Test Messages for Monitoring, page 4-26](#)
- [Password Aging Notification through TACACS+ Server, page 4-26](#)
- [About Users Specifying a TACACS+ Server at Login, page 4-27](#)
- [Allowing Users to Specify a TACACS+ Server at Login, page 4-27](#)
- [Defining Custom Attributes for Roles, page 4-27](#)
- [Displaying TACACS+ Server Details, page 4-28](#)

About TACACS+

TACACS+ is a client/server protocol that uses TCP (TCP port 49) for transport requirements. All switches in the Cisco MDS 9000 Family provide centralized authentication using the TACACS+ protocol. The TACACS+ has the following advantages over RADIUS authentication:

- Provides independent, modular AAA facilities. Authorization can be done without authentication.
- Uses the TCP transport protocol to send data between the AAA client and server, making reliable transfers with a connection-oriented protocol.
- Encrypts the entire protocol payload between the switch and the AAA server to ensure higher data confidentiality. The RADIUS protocol only encrypts passwords.

About TACACS+ Server Default Configuration

Fabric Manager allows you to set up a default configuration that can be used for any TACACS+ server that you configure the switch to communicate with. The default configuration includes:

- Encryption type

Send documentation comments to mdsfeedback-doc@cisco.com

- Preshared key
- Timeout value
- Number of retransmission attempts
- Allowing the user to specify a TACACS+ server at login

About the Default TACACS+ Server Encryption Type and Preshared Key

You need to configure the TACACS+ preshared key to authenticate the switch to the TACACS+ server. The length of the key is restricted to 64 characters and can include any printable ASCII characters (white spaces are not allowed). You can configure a global key to be used for all TACACS+ server configurations on the switch.

You can override this global key assignment by explicitly using the **key** option when configuring and individual TACACS+ server.

Enabling TACACS+

By default, the TACACS+ feature is disabled in all switches in the Cisco MDS 9000 Family. You must explicitly enable the TACACS+ feature to access the configuration and verification commands for fabric authentication. When you disable this feature, all related configurations are automatically discarded.

To enable TACACS+ for a Cisco MDS switch, follow these steps:

| | Command | Purpose |
|--------|---|--|
| Step 1 | switch# config t | Enters configuration mode. |
| Step 2 | switch(config)# feature tacacs+ | Enables the TACACS+ in this switch. |
| | switch(config)# no feature tacacs+ | Disables (default) the TACACS+ in this switch. |

Setting the TACACS+ Server Address

If a secret key is not configured for a configured server, a warning message is issued if a global key is not configured. If a server key is not configured, the global key (if configured) is used for that server (see the “[Setting the Timeout Value](#)” section on page 4-22).



Note

You can use the dollar sign (\$) and the percent sign (%) in global secret keys.

To configure the TACACS+ server IPv4 address and other options, follow these steps:

| | Command | Purpose |
|--------|---|---|
| Step 1 | switch# config t | Enters configuration mode. |
| Step 2 | switch(config)# tacacs-server host 171.71.58.91 | Configures the TACACS+ server identified by the specified IPv4 address. |
| | switch(config)# no tacacs-server host 171.71.58.91 | Deletes the specified TACACS+ server identified by the IPv4 address. By default, no server is configured. |

Send documentation comments to mdsfeedback-doc@cisco.com

| | Command | Purpose |
|--------|---|---|
| Step 3 | <code>switch(config)# tacacs-server host 171.71.58.91 port 2</code> | Configures the TCP port for all TACACS+ requests. |
| | <code>switch(config)# no tacacs-server host 171.71.58.91 port 2</code> | Reverts to the factory default of using port 49 for server access. |
| Step 4 | <code>switch(config)# tacacs-server host 171.71.58.91 key MyKey</code> | Configures the TACACS+ server identified by the specified domain name and assigns the secret key. |
| Step 5 | <code>switch(config)# tacacs-server host 171.71.58.91 timeout 25</code> | Configures the timeout period for the switch to wait for a response from the specified server before it declares a timeout failure. |

To configure the TACACS+ server IPv6 address and other options, follow these steps:

| | Command | Purpose |
|--------|--|---|
| Step 1 | <code>switch# config t</code> | Enters configuration mode. |
| Step 2 | <code>switch(config)# tacacs-server host 2001:0DB8:800:200C::417A</code> warning: no key is configured for the host | Configures the TACACS+ server identified by the specified IPv6 address. |
| | <code>switch(config)# no tacacs-server host 2001:0DB8:800:200C::417A</code> | Deletes the specified TACACS+ server identified by the IPv6 address. By default, no server is configured. |
| Step 3 | <code>switch(config)# tacacs-server host 2001:0DB8:800:200C::417A port 2</code> | Configures the TCP port for all TACACS+ requests. |
| | <code>switch(config)# no tacacs-server host 2001:0DB8:800:200C::417A port 2</code> | Reverts to the factory default of using port 49 for server access. |
| Step 4 | <code>switch(config)# tacacs-server host 2001:0DB8:800:200C::417A key MyKey</code> | Configures the TACACS+ server identified by the specified domain name and assigns the secret key. |
| Step 5 | <code>switch(config)# tacacs-server host 2001:0DB8:800:200C::417A timeout 25</code> | Configures the timeout period for the switch to wait for a response from the specified server before it declares a timeout failure. |

To configure the TACACS+ server DNS name and other options, follow these steps:

| | Command | Purpose |
|--------|---|---|
| Step 1 | <code>switch# config t</code> | Enters configuration mode. |
| Step 2 | <code>switch(config)# tacacs-server host host1.cisco.com</code> warning: no key is configured for the host | Configures the TACACS+ server identified by the specified DNS name. |
| | <code>switch(config)# no tacacs-server host host1.cisco.com</code> | Deletes the specified TACACS+ server identified by the DNS name. By default, no server is configured. |

Send documentation comments to mdsfeedback-doc@cisco.com

| | Command | Purpose |
|--------|--|---|
| Step 3 | <code>switch(config)# tacacs-server host host1.cisco.com port 2</code> | Configures the TCP port for all TACACS+ requests. |
| | <code>switch(config)# no tacacs-server host host1.cisco.com port 2</code> | Reverts to the factory default of using port 49 for server access. |
| Step 4 | <code>switch(config)# tacacs-server host host1.cisco.com key MyKey</code> | Configures the TACACS+ server identified by the specified domain name and assigns the secret key. |
| Step 5 | <code>switch(config)# tacacs-server host host1.cisco.com timeout 25</code> | Configures the timeout period for the switch to wait for a response from the specified server before it declares a timeout failure. |

Setting the Global Secret Key

You can configure global values for the secret key for all TACACS+ servers.



Note

If secret keys are configured for individual servers, those keys override the globally configured key.



Note

You can use the dollar sign (\$) and the percent sign (%) in global secret keys.

To set the secret key for TACACS+ servers, follow these steps:

| | Command | Purpose |
|--------|--|--|
| Step 1 | <code>switch# config t</code> | Enters configuration mode. |
| Step 2 | <code>switch(config)# tacacs-server key 7 3sdaA3daKUngd</code> | Assigns the global secret key (in encrypted format) to access the TACACS+ server. This example specifies 7 to indicate the encrypted format being used. If this global key and the individual server keys are not configured, clear text messages are sent to the TACACS+ server(s). |
| | <code>switch(config)# no tacacs-server key oldPword</code> | Deletes the configured global secret key to access the TACACS+ server and reverts to the factory default of allowing access to all configured servers. |

Setting the Timeout Value

You can configure a global timeout value between transmissions for all TACACS+ servers.



Note

If timeout values are configured for individual servers, those values override the globally configured values.

Send documentation comments to mdsfeedback-doc@cisco.com

To set the global timeout value for TACACS+ servers, follow these steps:

| | Command | Purpose |
|--------|--|--|
| Step 1 | switch# confi g t | Enters configuration mode. |
| Step 2 | switch(config)# tacacs-server timeout 30 | Configures the global timeout period in seconds for the switch to wait for a response from all TACACS+ servers before the switch declares a timeout failure. The time ranges from 1 to 1440 seconds. |
| | switch(config)# no tacacs-server timeout 30 | Deletes the configured timeout period and reverts to the factory default of 5 seconds. |

About TACACS+ Servers

By default, the TACACS+ feature is disabled in all switches in the Cisco MDS 9000 Family. Fabric Manager or Device Manager enables the TACACS+ feature automatically when you configure a TACACS+ server.

If a secret key is not configured for a configured server, a warning message is issued if a global key is not configured. If a server key is not configured, the global key (if configured) is used for that server.



Note

Prior to Cisco MDS SAN-OS Release 2.1(2), you can use the dollar sign (\$) in the key but the key must be enclosed in double quotes, for example "k\$". The percent sign (%) is not allowed. In Cisco MDS SAN-OS Release 2.1(2) and later, you can use the dollar sign (\$) without double quotes and the percent sign (%) in global secret keys.

You can configure global values for the secret key for all TACACS+ servers.



Note

If secret keys are configured for individual servers, those keys override the globally configured key.

Configuring TACACS+ Server Monitoring Parameters

You can configure parameters for monitoring TACACS+ servers.

This section includes the following topics:

- [Configuring the TACACS+ Test Idle Timer, page 4-23](#)
- [Configuring Test Username, page 4-24](#)
- [Configuring the Dead Timer, page 4-24](#)

Configuring the TACACS+ Test Idle Timer

The test idle timer specifies the interval during which a TACACS+ server receives no requests before the MDS switch sends out a test packet.



Note

The default idle timer value is 0 minutes. When the idle time interval is 0 minutes, periodic TACACS+ server monitoring is not performed.

Send documentation comments to mdsfeedback-doc@cisco.com

To configure the idle timer, follow these steps:

| | Command | Purpose |
|--------|---|--|
| Step 1 | switch# config t | Enters configuration mode. |
| Step 2 | switch(config)# tacacs-server host 10.1.1.1 test idle-time 20 | Configures the test idle time interval value in minutes. The valid range is 1 to 1440 minutes. |
| Step 3 | switch(config)# no tacacs-server host 10.1.1.1 test idle-time 20 | Reverts to the default value (0 minutes). |

Configuring Test Username

You can configure a username and password for periodic TACACS+ server status testing. You do not need to configure the user name and password to monitor TACACS+ servers. You can use the default test username (test) and default password (test).

To configure the optional username and password for periodic TACACS+ server status testing, follow these steps:

| | Command | Purpose |
|--------|---|---|
| Step 1 | switch# config t | Enters configuration mode. |
| Step 2 | switch(config)# tacacs-server host 10.1.1.1 test username testuser | Configures the test user (testuser) with the default password (test). The default username is test. |
| | switch(config)# no tacacs-server host 10.1.1.1 test username testuser | Removes the test user (testuser). |
| | switch(config)# tacacs-server host 10.1.1.1 test username testuser password Ux2Gd2BH | Configures the test user (testuser) and assigns a strong password. For guidelines for creating strong passwords, see the “Characteristics of Strong Passwords” section on page 3-11. |

Configuring the Dead Timer

The dead timer specifies the interval that the MDS switch waits, after declaring a TACACS+ server is dead, before sending out a test packet to determine if the server is now alive.



Note

The default dead timer value is 0 minutes. TACACS+ server monitoring is not performed if the dead timer interval is 0 minutes, unless the TACACS+ server is a part of a bigger group with the dead-time interval greater than 0 minutes. (See [“Configuring RADIUS”](#) section on page 4-10).



Note

If the dead timer of a dead TACACS+ server expires before it is sent a TACACS+ test message, that server is marked as alive again even if it is still not responding. To avoid this scenario, configure a test user with a shorter idle time than the dead timer time.

To configure the dead timer, follow these steps:

Send documentation comments to mdsfeedback-doc@cisco.com

| | Command | Purpose |
|---------------|---|--|
| Step 1 | switch# config t | Enters configuration mode. |
| Step 2 | switch(config)# tacacs-server deadtime 30 | Configures the dead-time interval value in minutes. The valid range is 1 to 1440 minutes. |
| Step 3 | switch(config)# no tacacs-server deadtime 30 | Reverts to the default value (0 minutes). Note When the dead-time interval is 0 minutes, TACACS+ server monitoring is not performed unless the TACACS+ server is part of a server group and the dead-time interval for the group is greater than 0 minutes. (See the “ Configuring RADIUS ” section on page 4-10). |

[Send documentation comments to mdsfeedback-doc@cisco.com](mailto:mdsfeedback-doc@cisco.com)

Sending TACACS+ Test Messages for Monitoring

You can manually send test messages to monitor a TACACS+ server.

To send the test message to the TACACS+ server, follow these steps:

| Command | Purpose |
|--|---|
| switch# test aaa server tacacs+ 10.10.1.1 test test | Sends a test message to a TACACS+ server using the default username (test) and password (test). |
| switch# test aaa server tacacs+ 10.10.1.1 testuser Ur2Gd2BH | Sends a test message to a TACACS+ server using a configured test username and password. A configured username and password is optional (see the “Configuring Test Username” section on page 4-24). |

Password Aging Notification through TACACS+ Server

Password aging notification is initiated when the user authenticates to a Cisco MDS 9000 switch via a TACACS+ account. The user is notified when a password is about to expire or has expired. If the password has expired, user is prompted to change the password.



Note

As of Cisco MDS SAN-OS Release 3.2(1), only TACACS+ supports password aging notification. If you try to use RADIUS servers by enabling this feature, RADIUSs will generate a SYSLOG message and authentication will fall back to the local database.

Password aging notification facilitates the following:

- Password change—You can change your password by entering a blank password.
- Password aging notification—Notifies password aging. Notification happens only if the AAA server is configured and MSCHAP and MSCHAPv2 is disabled.
- Password change after expiration—Initiates password change after the old password expires. Initiation happens from the AAA server.



Note

Password aging notification fails if you do not disable MSCHAP and MSCHAPv2 authentication.

To enable the password aging option in the AAA server, enter the following command:

```
aaa authentication login ascii-authentication
```

To determine whether or not password aging notification is enabled or disabled in the AAA server, enter the following command:

```
show aaa authentication login ascii-authentication
```

[Send documentation comments to mdsfeedback-doc@cisco.com](mailto:mdsfeedback-doc@cisco.com)

About Users Specifying a TACACS+ Server at Login

By default, an MDS switch forwards an authentication request to the first server in the TACACS+ server group. You can configure the switch to allow the user to specify which TACACS+ server to send the authentication request. If you enable this feature, the user can log in as *username@hostname*, where the *hostname* is the name of a configured TACACS+ server.

Allowing Users to Specify a TACACS+ Server at Login

To allow users logging into an MDS switch to select a TACACS+ server for authentication, follow these steps:

| | Command | Purpose |
|--------|--|--|
| Step 1 | switch# conf t | Enters configuration mode. |
| Step 2 | switch(config)# tacacs-server directed-request | Allows users to specify a TACACS+ server to send the authentication request when logging in. |
| | switch(config)# no tacacs-server directed-request | Reverts to sending the authentication request to the first server in the server group (default). |

You can use the **show tacacs-server directed-request** command to display the TACACS+ directed request configuration.

```
switch# show tacacs-server directed-request
disabled
```

Defining Custom Attributes for Roles

Cisco MDS 9000 Family switches use the TACACS+ custom attribute for service shells to configure roles to which a user belongs. TACACS+ attributes are specified in **name=value** format. The attribute name for this custom attribute is **cisco-av-pair**. The following example illustrates how to specify roles using this attribute:

```
cisco-av-pair=shell:roles="network-admin vsan-admin"
```

You can also configure optional custom attributes to avoid conflicts with non-MDS Cisco switches using the same AAA servers.

```
cisco-av-pair*shell:roles="network-admin vsan-admin"
```

Additional custom attribute shell:roles are also supported:

```
shell:roles="network-admin vsan-admin"
```

or

```
shell:roles*"network-admin vsan-admin"
```



Note

TACACS+ custom attributes can be defined on an Access Control Server (ACS) for various services (for example, shell). Cisco MDS 9000 Family switches require the TACACS+ custom attribute for the service shell to be used for defining roles.

Send documentation comments to mdsfeedback-doc@cisco.com

Supported TACACS+ Server Parameters

The Cisco NX-OS software currently supports the following parameters for the listed TACACS+ servers:

- TACACS+


```
cisco-av-pair=shell:roles="network-admin"
```
- Cisco ACS TACACS+


```
shell:roles="network-admin"
shell:roles*"network-admin"
cisco-av-pair*shell:roles="network-admin"
cisco-av-pair*shell:roles*"network-admin"
cisco-av-pair=shell:roles*"network-admin"
```
- Open TACACS+


```
cisco-av-pair*shell:roles="network-admin"
cisco-av-pair=shell:roles*"network-admin"
```

Displaying TACACS+ Server Details

Use the **show aaa** and **show tacacs-server** commands to display information about TACACS+ server configuration in all switches in the Cisco MDS 9000 Family as shown in Examples 4-7 to 4-12.

Example 4-7 Displays Configured TACACS+ Server Information

```
switch# show tacacs-server
Global TACACS+ shared secret:*****
timeout value:30
total number of servers:3

following TACACS+ servers are configured:
  171.71.58.91:
    available on port:2
  cisco.com:
    available on port:49
  171.71.22.95:
    available on port:49
  TACACS+ shared secret:*****
```

Example 4-8 Displays AAA Authentication Information

```
switch# show aaa authentication
default: group TacServer local none
console: local
iscsi: local
dhchap: local
```

Example 4-9 Displays AAA Authentication Login Information

```
switch# show aaa authentication login error-enable
enabled
```

Example 4-10 Displays Configured TACACS+ Server Groups

```
switch# show tacacs-server groups
total number of groups:2
```

Send documentation comments to mdsfeedback-doc@cisco.com

```
following TACACS+ server groups are configured:
  group TacServer:
    server 171.71.58.91 on port 2
  group TacacsServer1:
    server ServerA on port 49
    server ServerB on port 49:
```

Example 4-11 Displays All AAA Server Groups

```
switch# show aaa groups
radius
TacServer
```

Example 4-12 Displays TACACS+ Server Statistics

```
switch# show tacacs-server statistics 10.1.2.3
Server is not monitored

Authentication Statistics
  failed transactions: 0
  successful transactions: 0
  requests sent: 0
  requests timed out: 0
  responses with no matching requests: 0
  responses not processed: 0
  responses containing errors: 0

Authorization Statistics
  failed transactions: 0
  successful transactions: 0
  requests sent: 0
  requests timed out: 0
  responses with no matching requests: 0
  responses not processed: 0
  responses containing errors: 0

Accounting Statistics
  failed transactions: 0
  successful transactions: 0
  requests sent: 0
  requests timed out: 0
  responses with no matching requests: 0
  responses not processed: 0
  responses containing errors: 0
```

Clearing TACACS+ Server Statistics

You can clear all the TACACS+ server statistics using the **clear tacacs-server statistics 10.1.2.3** command.

Configuring Server Groups

You can specify one or more remote AAA servers to authenticate users using server groups. All members of a group must belong to the same protocol, either RADIUS or TACACS+. The servers are tried in the same order in which you configure them.

Send documentation comments to mdsfeedback-doc@cisco.com

The AAA server monitoring feature can mark an AAA server as dead. You can configure a period of time in minutes to elapse before the switch sends requests to a dead AAA server. (See the “AAA Server Monitoring” section on page 4-5).

You can configure these server groups at any time but they only take effect when you apply them to an AAA service. You configure AAA policies for CLI users or Fabric Manager or Device Manager users.

To configure a RADIUS server group, follow these steps:

| | Command | Purpose |
|---------------|---|--|
| Step 1 | <code>switch# config t</code> | Enters configuration mode. |
| Step 2 | <code>switch(config)# aaa group server radius RadServer</code> <code>switch(config-radius)#</code> | Creates a server group named RadServer and enters the RADIUS server group configuration submode for that group. |
| Step 3 | <code>switch(config)# no aaa group server radius RadServer</code> <code>switch(config-radius)# server 10.71.58.91</code> | Deletes the server group called RadServer from the authentication list. Configures the RADIUS server at IPv4 address 10.71.58.91 to be tried first within the server group RadServer. Tip If the specified RADIUS server is not found, configure it using the radius-server host command and retry this command. |
| Step 4 | <code>switch(config-radius)# server 2001:0DB8:800:200C::417A</code> <code>switch(config-radius)# no server 2001:0DB8:800:200C::417A</code> | Configures the RADIUS server at IPv6 address 2001:0DB8:800:200C::417A to be tried first within the server group RadServer. Removes the RADIUS server at IPv6 address 2001:0DB8:800:200C::417A from the server group RadServer. |
| Step 5 | <code>switch(config-radius)# exit</code> | Returns to configuration mode. |
| Step 6 | <code>switch(config)# aaa group server radius RadiusServer</code> <code>switch(config-radius)#</code> | Creates a server group named RadiusServer and enters the RADIUS server group configuration submode for that group. |
| Step 7 | <code>switch(config-radius)# server ServerA</code> | Configures ServerA to be tried first within the server group called the RadiusServer1. Tip If the specified RADIUS server is not found, configure it using the radius-server host command and retry this command. |

Send documentation comments to mdsfeedback-doc@cisco.com

| | Command | Purpose |
|--------|--|--|
| Step 8 | switch(config-radius)# server ServerB | Configures ServerB to be tried second within the server group RadiusServer1. |
| Step 9 | switch(config-radius)# deadtime 30 | Configures the monitoring dead time to 30 minutes. The range is 0 through 1440. Note If the dead-time interval for an individual RADIUS server is greater than 0, that value takes precedence over the value set for the server group. |
| | switch(config-radius)# no deadtime 30 | Reverts to the default value (0 minutes). Note If the dead-time interval for both the RADIUS server group and an individual TACACS+ server in the RADIUS server group is set to 0, the switch does not mark the RADIUS server as dead when it is found to be unresponsive by periodic monitoring. Also, the switch does not perform dead server monitoring for that RADIUS server. (See the “Configuring RADIUS Server Monitoring Parameters” section on page 4-14). |

To verify the configured server group order, use the **show radius-server groups** command:

```
switch# show radius-server groups
total number of groups:2

following RADIUS server groups are configured:
  group RadServer:
    server 10.71.58.91 on port 2
  group RadiusServer1:
    server ServerA on port 49
    server ServerB on port 49:
```

To configure a TACACS+ server group, follow these steps:

| | Command | Purpose |
|--------|--|---|
| Step 1 | switch# config t | Enters configuration mode. |
| Step 2 | switch(config)# aaa group server tacacs+ TacacsServer1 switch(config-tacacs+)# | Creates a server group named TacacsServer1 and enters the submode for that group. |
| | switch(config)# no aaa group server tacacs+ TacacsServer1 | Deletes the server group called TacacsServer1 from the authentication list. |
| Step 3 | switch(config-tacacs+)# server ServerA | Configures ServerA to be tried first within the server group called the TacacsServer1. Tip If the specified TACACS+ server is not found, configure it using the tacacs-server host command and retry this command. |

Send documentation comments to mdsfeedback-doc@cisco.com

| | Command | Purpose |
|--------|--|---|
| Step 4 | <code>switch(config-tacacs+)# server ServerB</code> | Configures ServerB to be tried second within the server group TacacsServer1. |
| | <code>switch(config-tacacs+)# no server ServerB</code> | Deletes ServerB within the TacacsServer1 list of servers. |
| Step 5 | <code>switch(config-tacacs+)# deadtime 30</code> | Configures the monitoring dead time to 30 minutes. The range is 0 through 1440. Note If the dead-time interval for an individual TACACS+ server is greater than 0, that value takes precedence over the value set for the server group. |
| | <code>switch(config-tacacs+)# no deadtime 30</code> | Reverts to the default value (0 minutes). Note If the dead-time interval for both the TACACS+ server group and an individual TACACS+ server in the TACACS+ server group is set to 0, the switch does not mark the TACACS+ server as dead when it is found to be unresponsive by periodic monitoring. Also, the switch does not perform dead server monitoring for that TACACS+ server. (See the “ Configuring TACACS+ Server Monitoring Parameters ” section on page 4-23). |

**Note**

Configuration of a TACACS+ group fails if MSCHPv2 authentication is not disabled.

AAA Server Distribution

Configuration for RADIUS and TACACS+ AAA on an MDS switch can be distributed using the Cisco Fabric Services (CFS). The distribution is disabled by default (see the *Cisco MDS 9000 Family NX-OS System Management Configuration Guide*).

After enabling the distribution, the first server or global configuration starts an implicit session. All server configuration commands entered thereafter are stored in a temporary database and applied to all switches in the fabric (including the originating one) when you explicitly commit the database. The various server and global parameters are distributed, except the server and global keys. These keys are unique secrets to a switch and should not be shared with other switches.

**Note**

Server group configurations are not distributed.

**Note**

For an MDS switch to participate in AAA server configuration distribution, it must be running Cisco MDS SAN-OS Release 2.0(1b) or later, or Cisco NX-OS Release 4.1(1).

Send documentation comments to mdsfeedback-doc@cisco.com

Enabling AAA Server Distribution

Only switches where distribution is enabled can participate in the distribution activity.

To enable RADIUS server distribution, follow these steps:

| | Command | Purpose |
|--------|---|--|
| Step 1 | switch# config t | Enters configuration mode. |
| Step 2 | switch(config)# radius distribute | Enables RADIUS configuration distribution in this switch. |
| | switch(config)# no radius distribute | Disables RADIUS configuration distribution in this switch (default). |

To enable TACACS+ server distribution, follow these steps:

| | Command | Purpose |
|--------|--|---|
| Step 1 | switch# config t | Enters configuration mode. |
| Step 2 | switch(config)# tacacs+ distribute | Enables TACACS+ configuration distribution in this switch. |
| | switch(config)# no tacacs+ distribute | Disables TACACS+ configuration distribution in this switch (default). |

Starting a Distribution Session on a Switch

A distribution session starts the moment you begin a RADIUS/TACACS+ server or global configuration. For example, the following tasks start an implicit session:

- Specifying the global timeout for RADIUS servers.
- Specifying the global timeout for TACACS+ servers.



Note

After you issue the first configuration command related to AAA servers, all server and global configurations that are created (including the configuration that caused the distribution session start) are stored in a temporary buffer, not in the running configuration.

Displaying the Session Status

Once the implicit distribution session has started, you can check the session status .

Use the **show radius** command to see the distribution status on the CFS tab.

```
switch# show radius distribution status
distribution : enabled
session ongoing: yes
session owner: admin
session db: exists
merge protocol status: merge activation done
```

```
last operation: enable
last operation status: success
```

Send documentation comments to mdsfeedback-doc@cisco.com

Once the implicit distribution session has started, you can check the session status using the **show tacacs+ distribution status** command.

```
switch# show tacacs+ distribution status
distribution : enabled
session ongoing: yes
session owner: admin
session db: exists
merge protocol status: merge activation done
```

```
last operation: enable
last operation status: success
```

Displaying the Pending Configuration

To display the RADIUS or TACACS+ global and/or server configuration stored in the temporary buffer use the **show radius pending** command, follow these steps:

```
switch(config)# show radius pending-diff
+radius-server host testhost1 authentication accounting
+radius-server host testhost2 authentication accounting
```

To display the TACACS+ global and/or server configuration stored in the temporary buffer, use the **show tacacs+ pending** command.

```
switch(config)# show tacacs+ pending-diff
+tacacs-server host testhost3
+tacacs-server host testhost4
```

Committing the Distribution

The RADIUS or TACACS+ global and/or server configuration stored in the temporary buffer can be applied to the running configuration across all switches in the fabric (including the originating switch).

To commit RADIUS configuration changes, follow these steps:

| | Command | Purpose |
|--------|--------------------------------------|--|
| Step 1 | switch# config t | Enters configuration mode. |
| Step 2 | switch(config)# radius commit | Commits the RADIUS configuration changes to the running configuration. |

To commit TACACS+ configuration changes, follow these steps:

| | Command | Purpose |
|--------|---------------------------------------|---|
| Step 1 | switch# config t | Enters configuration mode. |
| Step 2 | switch(config)# tacacs+ commit | Commits the TACACS+ configuration changes to the running configuration. |

Send documentation comments to mdsfeedback-doc@cisco.com

Discarding the Distribution Session

Discarding the distribution of a session in progress causes the configuration in the temporary buffer to be dropped. The distribution is not applied.

To discard the RADIUS session-in-progress distribution, follow these steps:

| | Command | Purpose |
|--------|-------------------------------------|---|
| Step 1 | switch# config t | Enters configuration mode. |
| Step 2 | switch(config)# radius abort | Discards the RADIUS configuration changes to the running configuration. |

To discard the TACACS+ session-in-progress distribution, follow these steps:

| | Command | Purpose |
|--------|--------------------------------------|--|
| Step 1 | switch# config t | Enters configuration mode. |
| Step 2 | switch(config)# tacacs+ abort | Discards the TACACS+ configuration changes to the running configuration. |

To clear the ongoing CFS distribution session (if any) and to unlock the fabric for the RADIUS feature, enter the **clear radius session** command from any switch in the fabric.

```
switch# clear radius session
```

To clear the ongoing CFS distribution session (if any) and to unlock the fabric for the TACACS+ feature, enter the **clear tacacs+ session** command from any switch in the fabric.

```
switch# clear tacacs+ session
```

Merge Guidelines for RADIUS and TACACS+ Configurations

The RADIUS and TACACS+ server and global configuration are merged when two fabrics merge. The merged configuration is applied to CFS distribution-enabled switches.

When merging the fabric, be aware of the following conditions:

- The server groups are not merged.
- The server and global keys are not changed during the merge.
- The merged configuration contains all servers found on all CFS enabled switches.
- The timeout and retransmit parameters of the merged configuration are the largest values found per server and global configuration.



Caution

If there is a conflict between two switches in the server ports configured, the merge fails.

Use the **show radius distribution status** command to view the status of the RADIUS fabric merge as shown in [Example 4-13](#).

Example 4-13 *Displays the RADIUS Fabric Merge Status*

```
switch# show radius distribution status
```

Send documentation comments to mdsfeedback-doc@cisco.com

```
distribution : enabled
session ongoing: no
session db: does not exist
merge protocol status: merge response received
merge error: conflict: server dmtest2 has auth-port 1812 on this switch and 1999
on remote

last operation: enable
last operation status: success
```

Use the **show tacacs+ distribution status** command to view the status of the TACACS+ fabric merge as shown in [Example 4-14](#).

Example 4-14 Displays the TACACS+ Fabric Merge Status

```
switch# show tacacs+ distribution status
distribution : enabled
session ongoing: no
session db: does not exist
merge protocol status: merge activation done

last operation: enable
last operation status: success
```

MSCHAP Authentication

Microsoft Challenge Handshake Authentication Protocol (MSCHAP) is the Microsoft version of CHAP. Cisco MDS 9000 Family switches allow user logins to perform remote authentication using different versions of MSCHAP. MSCHAP is used for authentication on a RADIUS or TACACS+ server, while MSCHAPv2 is used for authentication on a RADIUS server.

About Enabling MSCHAP

By default, the switch uses Password Authentication Protocol (PAP) authentication between the switch and the remote server. If you enable MSCHAP, you need to configure your RADIUS server to recognize the MSCHAP vendor-specific attributes. See the [“About Vendor-Specific Attributes”](#) section on [page 4-16](#). [Table 4-2](#) shows the RADIUS vendor-specific attributes required for MSCHAP.

Table 4-2 MSCHAP RADIUS Vendor-Specific Attributes

| Vendor-ID Number | Vendor-Type Number | Vendor-Specific Attribute | Description |
|------------------|--------------------|---------------------------|---|
| 311 | 11 | MSCHAP-Challenge | Contains the challenge sent by an AAA server to an MSCHAP user. It can be used in both Access-Request and Access-Challenge packets. |
| 211 | 11 | MSCHAP-Response | Contains the response value provided by an user in response to the challenge. It is only used in Access-Request packets. |

Send documentation comments to mdsfeedback-doc@cisco.com

Enabling MSCHAP Authentication

To enable MSCHAP authentication, follow these steps:

| | Command | Purpose |
|--------|---|---------------------------------------|
| Step 1 | switch# config t | Enters configuration mode. |
| Step 2 | switch(config)# aaa authentication login mschap enable | Enables MSCHAP login authentication. |
| Step 3 | switch# no aaa authentication login mschap enable | Disables MSCHAP login authentication. |

To enable MSCHAPv2 authentication, follow these steps:

| | Command | Purpose |
|--------|---|---|
| Step 1 | switch# config t | Enters configuration mode. |
| Step 2 | switch(config)# aaa authentication login mschapv2 enable | Enables MSCHAPv2 login authentication. |
| Step 3 | switch# no aaa authentication login mschapv2 enable | Disables MSCHAPv2 login authentication. |



Note

Password aging, MSCHAPv2 and MSCHAP authentication can fail if one of these authentication is not disabled.



Note

A warning message is issued when you execute a command to enable MSCHAPv2 authentication on the TACACS+ server, and the configuration fails.

You can use the **show aaa authentication login mschap** command to display the MSCHAP authentication configuration.

```
switch# show aaa authentication login mschap
mschap is disabled
```

You can use the **show aaa authentication login mschapv2** command to display the MSCHAPv2 authentication configuration.

```
switch# show aaa authentication login mschapv2
mschapv2 is enabled
```

Local AAA Services

The system maintains the username and password locally and stores the password information in encrypted form. You are authenticated based on the locally stored user information.

Use the **username** command to configure local users and their roles.

Use the **show accounting log** command to view the local accounting log as shown in [Example 4-15](#).

Example 4-15 Displays the Accounting Log Information

```
switch# show accounting log
```

Send documentation comments to mdsfeedback-doc@cisco.com

```
Wed Jun 17 23:56:45 2009:type=start:id=console0:user=root:cmd=
Wed Jun 17 23:56:53 2009:type=update:id=console0:user=root:cmd=attach module 9 (
SUCCESS)
Wed Jun 17 23:57:07 2009:type=start:id=@pts/0:user=admin:cmd=
Thu Jun 18 00:48:19 2009:type=start:id=console0:user=root:cmd=
...
Sun Jun 21 10:00:12 2009:type=start:id=snmp_4124_72.163.177.190:user=admin:cmd=
Sun Jun 21 10:00:12 2009:type=update:id=snmp_4124_72.163.177.190:user=admin:cmd=
target (name:72.163.177.190/2162/0 address:72.163.177.190:2162 timeout:1500 retr
y:3 tagList:trap params:72.163.177.190/2162/0) added
Sun Jun 21 10:44:54 2009:type=start:id=@pts/0:user=admin:cmd=
```

Disabling AAA Authentication

You can turn off password verification using the **none** option. If you configure this option, users can log in without giving a valid password. But the user should at least exist locally on the Cisco MDS 9000 Family switch.



Caution

Use this option cautiously. If configured, any user can access the switch at any time.

Use the **none** option in the **aaa authentication login** command to disable password verification.

A user created by entering the **username** command will exist locally on the Cisco MDS 9000 Family switch.

Displaying AAA Authentication

The **show aaa authentication** command displays the configured authentication methods as shown in [Example 4-16](#).

Example 4-16 Displays Authentication Information

```
switch# show aaa authentication

No AAA Authentication
default: group TacServer local none
console: local none
iscsi: local
dhchap: local
```

Configuring Accounting Services

Accounting refers to the log information that is kept for each management session in a switch. This information may be used to generate reports for troubleshooting and auditing purposes. Accounting can be implemented locally or remotely (using RADIUS). The default maximum size of the accounting log is 250,000 bytes and cannot be changed.

Send documentation comments to mdsfeedback-doc@cisco.com

**Tip**

The Cisco MDS 9000 Family switch uses interim-update RADIUS accounting-request packets to communicate accounting log information to the RADIUS server. The RADIUS server must be appropriately configured to log the information communicated in these packets. Several servers typically have log update/watchdog packets flags in the AAA client configuration. Turn on this flag to ensure proper RADIUS accounting.

**Note**

Configuration operations are automatically recorded in the accounting log if they are performed in configuration mode. Additionally, important system events (for example, configuration save and system switchover) are also recorded in the accounting log.

Displaying Accounting Configuration

To display configured accounting information use **show accounting** command. See Examples 4-17 to 4-19. To specify the size of the local accounting log to be displayed, use the **show accounting log** command. By default approximately 250 KB of the accounting log is displayed.

Example 4-17 Displays Two Samples of Configured Accounting Parameters

```
switch# show accounting config
show aaa accounting
      default: local

switch# show aaa accounting
      default: group rad1
```

Example 4-18 Displays 60,000 Bytes of the Accounting Log

```
switch# show accounting log 60000
Fri Jan 16 15:28:21 1981:stop:snmp_348506901_64.104.131.208:admin:
Fri Jan 16 21:17:04 1981:start:/dev/pts/0_348527824:admin:
Fri Jan 16 21:35:45 1981:update:/dev/pts/0_348527824:admin:updated RADIUS parameters for
group:Group1
Fri Jan 16 21:35:51 1981:update:/dev/pts/0_348527824:admin:updated RADIUS parameters for
group:Group1
Fri Jan 16 21:35:51 1981:update:/dev/pts/0_348527824:admin:updated RADIUS parameters for
group:Group5
Fri Jan 16 21:35:55 1981:update:/dev/pts/0_348527824:admin:updated RADIUS parameters for
group:Group5
Fri Jan 16 21:35:55 1981:update:/dev/pts/0_348527824:admin:updated RADIUS parameters for
group:Group3
Fri Jan 16 21:58:17 1981:start:snmp_348530297_171.71.150.105:admin:
...
```

Example 4-19 Displays the Entire Log File

```
switch# show accounting log
Fri Jan 16 15:28:21 1981:stop:snmp_348506901_64.104.131.208:admin:
Fri Jan 16 21:17:04 1981:start:/dev/pts/0_348527824:admin:
Fri Jan 16 21:35:45 1981:update:/dev/pts/0_348527824:admin:updated RADIUS parameters for
group:Group1
```

Send documentation comments to mdsfeedback-doc@cisco.com

```

Fri Jan 16 21:35:51 1981:update:/dev/pts/0_348527824:admin:updated RADIUS parameters for
group:Group1
Fri Jan 16 21:35:51 1981:update:/dev/pts/0_348527824:admin:updated RADIUS parameters for
group:Group5
Fri Jan 16 21:35:55 1981:update:/dev/pts/0_348527824:admin:updated RADIUS parameters for
group:Group5
Fri Jan 16 21:35:55 1981:update:/dev/pts/0_348527824:admin:updated RADIUS parameters for
group:Group3
Fri Jan 16 21:58:17 1981:start:snmp_348530297_171.71.150.105:admin:
Fri Jan 16 21:58:17 1981:stop:snmp_348530297_171.71.150.105:admin:
Fri Jan 16 21:58:18 1981:start:snmp_348530298_171.71.150.105:admin:
Fri Jan 16 21:58:18 1981:stop:snmp_348530298_171.71.150.105:admin:
...
Fri Jan 16 23:37:02 1981:update:/dev/pts/0_348527824:admin:updated RADIUS parameters for
group:Group3
Fri Jan 16 23:37:26 1981:update:/dev/pts/0_348527824:admin:updated TACACS+ parameters for
group:TacacsServer1
Fri Jan 16 23:45:19 1981:update:/dev/pts/0_348527824:admin:updated TACACS+ parameters for
group:TacacsServer1
Fri Jan 16 23:45:19 1981:update:/dev/pts/0_348527824:admin:updated RADIUS parameters for
group:Group1
...
Fri Jan 16 23:53:51 1981:update:/dev/pts/0_348527824:admin:updated RADIUS parameters for
server:Server3
Fri Jan 16 23:54:00 1981:update:/dev/pts/0_348527824:admin:updated RADIUS parameters for
server:Server5
Fri Jan 16 23:54:22 1981:update:/dev/pts/0_348527824:admin:updated TACACS+ parameters for
server:ServerA
Fri Jan 16 23:54:25 1981:update:/dev/pts/0_348527824:admin:updated TACACS+ parameters for
server:ServerB
Fri Jan 16 23:55:03 1981:update:/dev/pts/0_348527824:admin:updated RADIUS parameters for
group:Group1
...
Sat Jan 17 00:01:41 1981:start:snmp_348537701_171.71.58.100:admin:
Sat Jan 17 00:01:41 1981:stop:snmp_348537701_171.71.58.100:admin:
Sat Jan 17 00:01:42 1981:start:snmp_348537702_171.71.58.100:admin:
Sat Jan 17 00:01:42 1981:stop:snmp_348537702_171.71.58.100:admin:
...

```

Clearing Accounting Logs

To clear out the contents of the current log, use the **clear accounting log** command.

```
switch# clear accounting log
```

Configuring Cisco Access Control Servers

The Cisco Access Control Server (ACS) uses TACACS+ and RADIUS protocols to provide AAA services that ensure a secure environment. When using the AAA server, user management is normally done using Cisco ACS. [Figure 4-3](#), [Figure 4-4](#), [Figure 4-5](#), and [Figure 4-6](#) display ACS server user setup configurations for network-admin roles and multiple roles using either RADIUS or TACACS+.




Caution

Cisco MDS NX-OS does not support all numeric usernames, whether created with RADIUS or TACACS+, or created locally. Local users with all numeric names cannot be created. If an all numeric user name exists on an AAA server and is entered during login, the user is not logged in.

Send documentation comments to mdsfeedback-doc@cisco.com

Figure 4-3 Configuring the network-admin Role When Using RADIUS

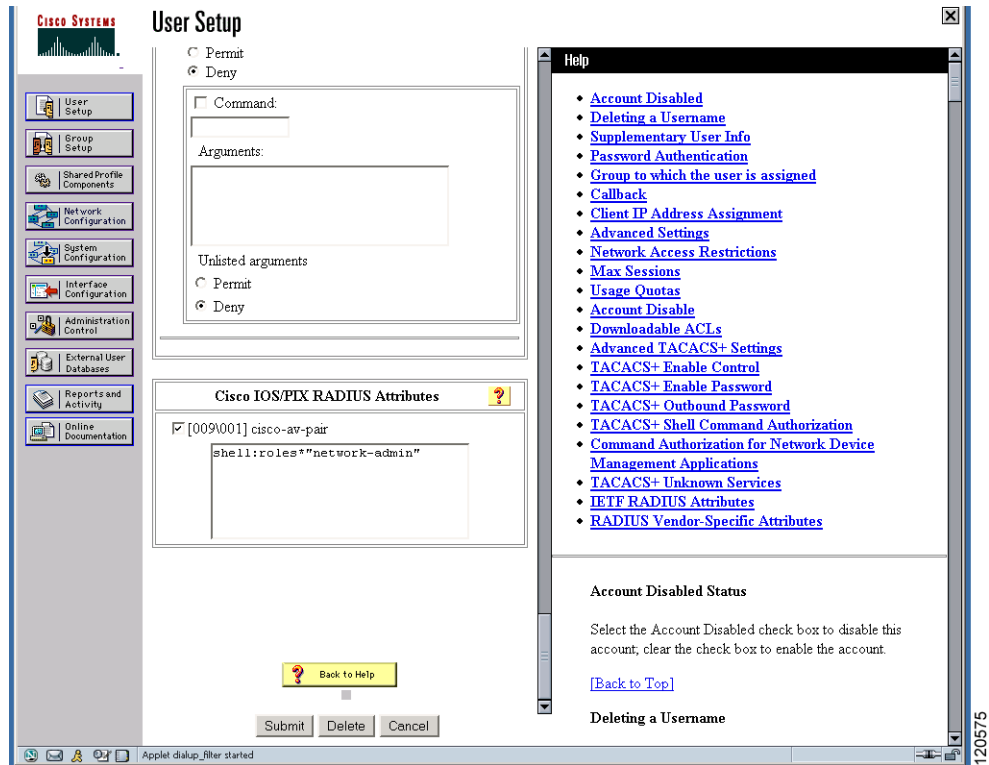

Send documentation comments to mdsfeedback-doc@cisco.com

Figure 4-4 Configuring Multiple Roles with SNMPv3 Attributes When Using RADIUS

The screenshot shows the CiscoSecure ACS web interface. The main content area is titled "User Setup" and contains the following sections:

- Per User Command Authorization:**
 - Unmatched Cisco IOS commands:
 - Permit
 - Deny
 - Command:
 - Arguments:
 - Unlisted arguments:
 - Permit
 - Deny
- Cisco IOS/PIX RADIUS Attributes:**
 - [009/001] cisco-av-pair
 - Attributes:


```
shell:roles="Role1 Role3 Role5
Role7"snmpv3:auth=MDS priv=DES
```

At the bottom of the main content area are buttons for "Submit", "Delete", and "Cancel".

On the right side, there is a "Help" panel with a list of links:

- [Account Disabled](#)
- [Deleting a Username](#)
- [Supplementary User Info](#)
- [Password Authentication](#)
- [Group to which the user is assigned](#)
- [Callback](#)
- [Client IP Address Assignment](#)
- [Advanced Settings](#)
- [Network Access Restrictions](#)
- [Max Sessions](#)
- [Usage Quotas](#)
- [Account Disable](#)
- [Downloadable ACLs](#)
- [Advanced TACACS+ Settings](#)
- [TACACS+ Enable Control](#)
- [TACACS+ Enable Password](#)
- [TACACS+ Outbound Password](#)
- [TACACS+ Shell Command Authorization](#)
- [Command Authorization for Network Device Management Applications](#)
- [TACACS+ Unknown Services](#)
- [IETF RADIUS Attributes](#)
- [RADIUS Vendor-Specific Attributes](#)

Below the links, there is a section titled "Account Disabled Status" with the text: "Select the Account Disabled check box to disable this account; clear the check box to enable the account." and a link "[Back to Top]".

At the bottom of the help panel, there is a section titled "Deleting a Username".

The status bar at the bottom of the browser window shows "Appllet dialup_filter started" and the number "120576".

Send documentation comments to mdsfeedback-doc@cisco.com

Figure 4-5 Configuring the network-admin Role with SNMPv3 Attributes When Using TACACS+

The screenshot displays the Cisco User Setup web interface. The main content area is titled "User Setup" and contains a "TACACS+ Settings" section. The settings are organized into two main groups:

- PPP IP:**
 - In access control list
 - Out access control list
 - Route
 - Routing Enabled
 - Custom attributes
- Shell (exec):**
 - Access control list
 - Auto command
 - Callback line
 - Callback rotary
 - Idle time
 - No callback verify Enabled
 - No escape Enabled
 - No hangup Enabled
 - Privilege level
 - Timeout
 - Custom attributes

Below the settings, a text area contains the following configuration commands:

```
cisco-av-pair=shell:roles="Role1
Role3"snmpv3:auth=MDS|priv=DES
```

At the bottom of the settings section are "Submit", "Delete", and "Cancel" buttons. A note states: "Note: PPP LCP will be automatically enabled if this service is enabled".

On the right side, a "Help" panel is visible, listing various links such as "Account Disabled", "Deleting a Username", "Supplementary User Info", "Password Authentication", "Group to which the user is assigned", "Callback", "Client IP Address Assignment", "Advanced Settings", "Network Access Restrictions", "Max Sessions", "Usage Quotas", "Account Disable", "Downloadable ACLs", "Advanced TACACS+ Settings", "TACACS+ Enable Control", "TACACS+ Enable Password", "TACACS+ Outbound Password", "TACACS+ Shell Command Authorization", "Command Authorization for Network Device Management Applications", "TACACS+ Unknown Services", "IETF RADIUS Attributes", and "RADIUS Vendor-Specific Attributes".

Below the help panel, there is a section titled "Account Disabled Status" with the text: "Select the Account Disabled check box to disable this account; clear the check box to enable the account." and a "[Back to Top]" link. Below that is a section titled "Deleting a Username" with the text: "The Delete button appears only when you are editing an".

The interface also features a left-hand navigation menu with options like "User Setup", "Group Setup", "Shared Profile Components", "Network Configuration", "System Configuration", "Interface Configuration", "Administration Control", "External User Databases", "Reports and Activity", and "Online Documentation".

Send documentation comments to mdsfeedback-doc@cisco.com

Figure 4-6 Configuring Multiple Roles with SNMPv3 Attributes When Using TACACS+

Default Settings

Table 4-3 lists the default settings for all switch security features in any switch.

Table 4-3 Default Switch Security Settings

| Parameters | Default |
|-----------------------------|-------------------------------------|
| Roles in Cisco MDS switches | Network operator (network-operator) |
| AAA configuration services | Local |
| Authentication port | 1812 |
| Accounting port | 1813 |
| Preshared key communication | Clear text |

Send documentation comments to mdsfeedback-doc@cisco.com

Table 4-3 *Default Switch Security Settings (continued)*

| Parameters | Default |
|----------------------------------|-----------------|
| RADIUS server timeout | 1 (one) second |
| RADIUS server retries | Once |
| Authorization | Disabled |
| aaa user default role | enabled |
| RADIUS server directed requests | Disabled |
| TACACS+ | Disabled |
| TACACS+ servers | None configured |
| TACACS+ server timeout | 5 seconds |
| TACACS+ server directed requests | Disabled |
| AAA server distribution | Disabled |
| Accounting log size | 250 KB |

Send documentation comments to mdsfeedback-doc@cisco.com