



## Additional Kits

- [Accessory Kit, on page 1](#)

### Accessory Kit

The following table lists and illustrates the contents for the accessory kit.

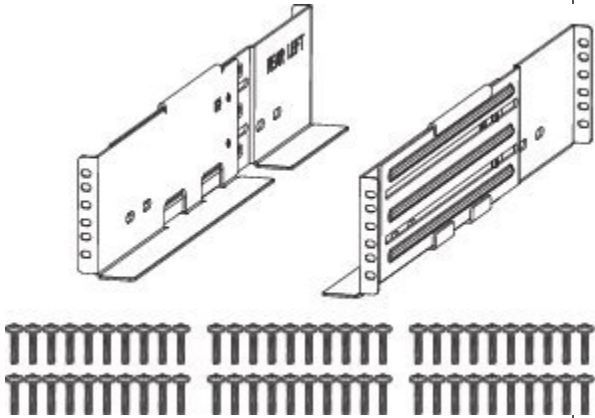
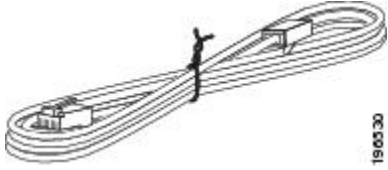


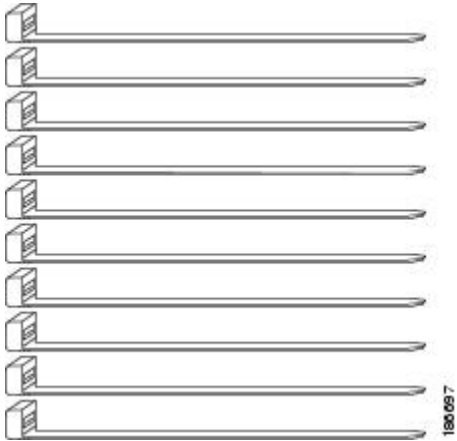

Illustration	Description	Quantity
	<p>3m-support rails kit</p> <ul style="list-style-type: none"> <li>10-32 x 3/4 in. Phillips screws (20) and nuts (20)</li> <li>12-24 x 3/4 in. Phillips screws (20)</li> <li>M6 x 19-mm Phillips screws (20)</li> <li>Adjustable bottom-support rails (2)</li> </ul>	1 kit
	RJ-45 rollover cable	1
	DB9F/RJ-45F PC terminal	1
<p>Ground lug kit</p> 	<p>Ground lug kit</p> <ul style="list-style-type: none"> <li>• Two-hole lug (1)</li> <li>• M4 x 8-mm Phillips pan-head screws (2)</li> </ul>	1 kit

Illustration	Description	Quantity
	Cable tie, 8.5 inches (10)	1 set
	ESD wrist strap (disposable)	1
Not applicable	Hazardous substances list for customers in China	1
Not applicable	Cisco Information Packet	1
Not applicable	1-Year Limited Warranty for Hardware	1
Not applicable	GR-1089 Installation and Caution Instructions	1



**Note** If you do not receive a part that is listed in this document, contact Cisco Technical Support at this URL: <http://www.cisco.com/warp/public/687/Directory/DirTAC.shtml>.

If you purchased this product through a Cisco reseller, you may receive contents in your kit, such as documentation, hardware, and power cables.

The product shipment includes a power cord for each 3-kW AC or Universal AC/DC power supply. You supply a grounding cable (6 AWG recommended) for up to 45 A.

The shipped cables depend on your specification when placing an order. The available power cords are as follows:

- AC power supply cords
  - CAB-AC-16A-AUS—power cord, 250 VAC 16 A, C19, Australia
  - CAB-AC-16A-CH—power cord, 16 A, China
  - CAB-AC-2500W-EU—power cord, 250 VAC 16 A, Europe

- CAB-AC-2500W-INT—power cord, 250 VAC 16 A, International
- CAB-AC-2500W-ISRL—power cord, 250 VAC 16 A, Israel
- CAB-AC-2500W-US1—power cord, 250 VAC 16 A, straight-blade NEMA 6
- CAB-AC-C6K-TWLK—power cord, 250 VAC 16 A, twist lock, NEMA L6-20
- CAB-C19-CBN—cabinet jumper power cord, 250 VAC 16 A, C20C
- CAB-ACS-16—power cord, 16 A, Switzerland
- CAB-L520P-C19-US—NEMA L5-20 to IEC-C19, 6 ft, US
  
- Universal AC/DC power supply cords
  - CAB-AC-20A-SG-C20—Jumper, 250 VAC 20 A, IEC C20/Saf-D-Grid, North America
  - CAB-HV-25A-SG-US1—power cord, 277 VAC/240 VDC/380 VDC 25 A, Saf-D-Grid/Saf-D-Grid, North America
  - CAB-HV-25A-SG-US2—power cord, 277 VAC/240 VDC/380 VDC 25 A, Ring Terminal/Saf-D-Grid, North America

