Configuring Multihoming in a BGP EVPN VXLAN Fabric

- Restrictions for Multi-Homing in a BGP EVPN VXLAN Fabric, on page 1
- Information About Multi-Homing in a BGP EVPN VXLAN Fabric, on page 1
- How to Configure Multi-Homing in a BGP EVPN VXLAN Fabric, on page 7
- Configuration Examples for Multi-Homing in a BGP EVPN VXLAN Fabric, on page 12

Restrictions for Multi-Homing in a BGP EVPN VXLAN Fabric

- Multi-homing in all-active redundancy mode is not supported.
- Multi-homing in single-active redundancy mode supports only dual-homing, which allows two nodes within a redundancy group.
- Cross-linking between host or access devices and VTEPs is not supported for a dual-homed network.
- A dual-homed network needs internal redundancy to avoid a network split.
- Provision and operational state of EVPN instances must be consistent on both dual-homed VTEPs. Inconsistencies in configuration or operational state of EVPN instances between the VTEPs leads to traffic blackholing.
- Do not configure EVPN-enabled VLAN and non-EVPN-enabled VLAN on an ethernet segment enabled trunk interface. This is because spanning tree protocol (STP) is disabled at the interface level when an ethernet segment is enabled, and may cause Layer 2 loops in non-EVPN-enabled VLANs.

Information About Multi-Homing in a BGP EVPN VXLAN Fabric

Multi-homing feature in a BGP EVPN VXLAN fabric provides redundancy in the connection between a host or Layer 2 switch and the EVPN VXLAN network.

In a BGP EVPN VXLAN fabric, you connect a host or Layer 2 switch to the EVPN VXLAN network either through single-homing or through multi-homing.

Cisco Catalyst 9000 Series switches support RFC 7432 and RFC 8365 for VXLAN encapsulation-based EVPN multi-homing capabilities.

Single-Homing

Single-homing allows you to connect a host or Layer 2 switch to a single VTEP in the EVPN VXLAN network. Single-homing does not support redundancy in the connection between the host or access device and the VTEP. When the active link breaks down, the connection between the host (or Layer 2 switch) and the VTEP is lost. As a result, single-homed topologies are not always reliable and efficient.

The following figure shows a single-homed topology:

Figure 1: Single-Homed Topology

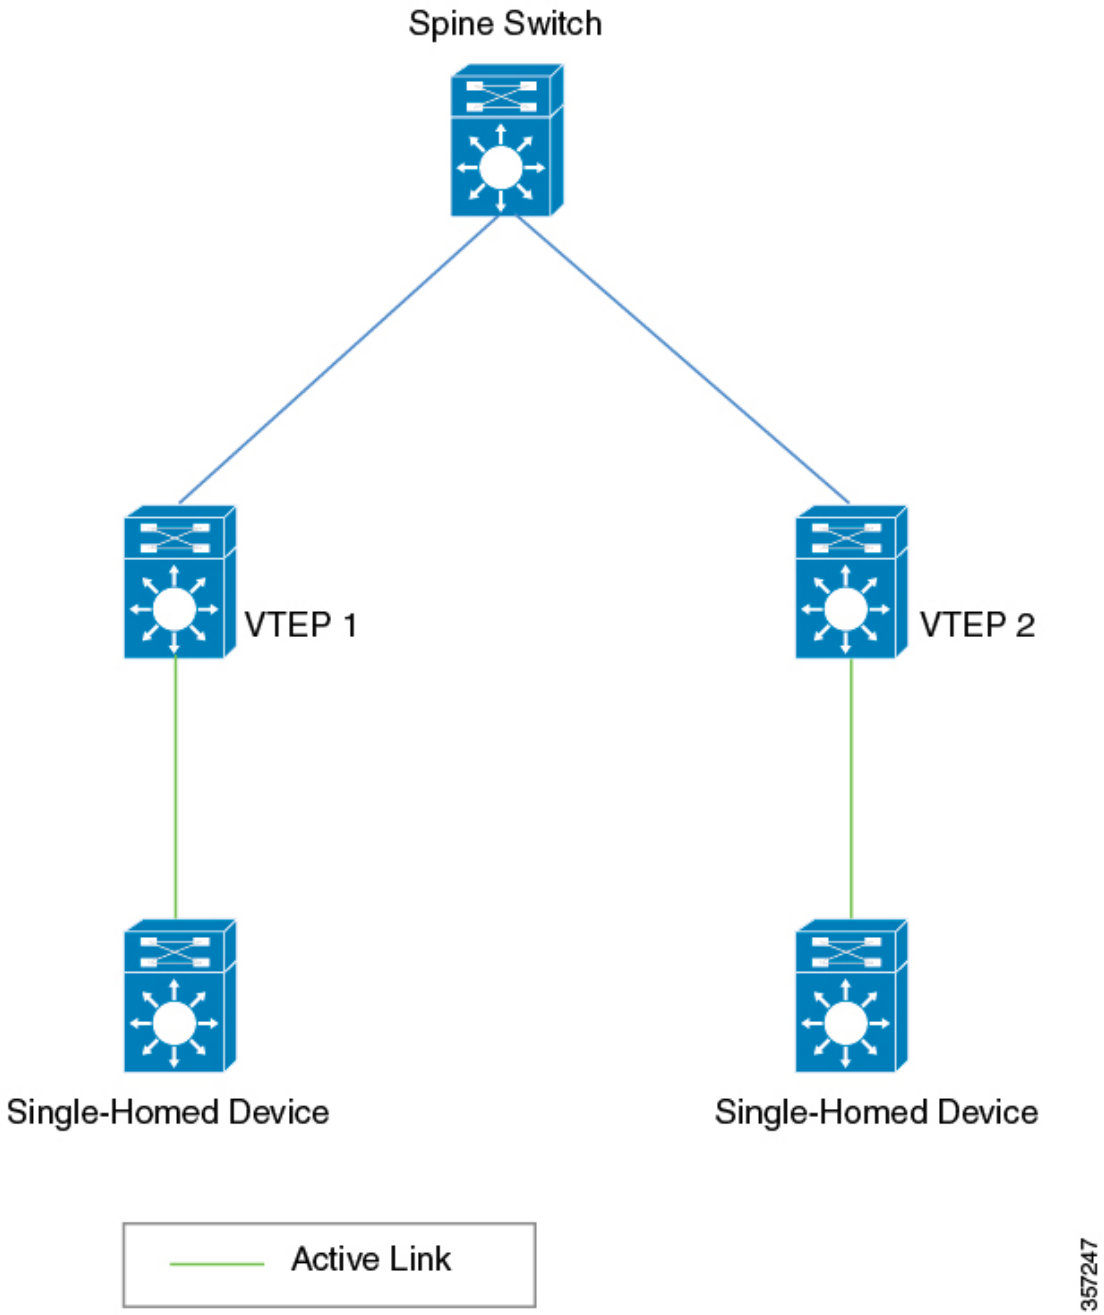

Multi-Homing

Multi-homing allows you to connect a host or Layer 2 switch to more than one VTEP in the EVPN VXLAN network. This connection provides redundancy and allows network optimization. Redundancy in the connection

with the VTEPs ensures that there's no traffic disruption when there's a network failure. Multi-homed topologies are more reliant, secure, and efficient than single-homed topologies.

Multi-homing operates in single-active and all-active redundancy modes. In both modes, the connected host or access device is represented by an ethernet segment ID. This ethernet segment ID must also be part of the configuration on the VTEP's interface that connects the multihomed host or network device. All traffic forwarded between the VTEPs and the host (or Layer 2 switch) passes through this ethernet segment.

Single-Active Redundancy Mode

In single-active redundancy mode, only a single VTEP, among a group of VTEPs that are attached to a particular Ethernet-segment, is allowed to forward traffic to and from the Ethernet segment. It results in a single-active access link between the VTEPs and the host (or Layer 2 switch) that passes through the Ethernet segment. The single access link can either be a physical link or an ether-channel.

Multi-homing in single-active redundancy mode is supported only in the form of dual-homing. Dual-homing allows a host or access device to be connected to only two VTEPs. A dual-homed topology with single-active redundancy can be deployed in one of the following ways:

- Dual-homed device
- Dual-homed network

Dual-Homed Device

In single-active dual-homed device topology, a single host or access device is connected to two VTEPs with two links that pass through a single-active Ethernet segment. The Ethernet segment contains two separate links connecting the host or access device to each VTEP, but only one link remains active at any given time. For each VLAN interface on a dual-homed host or access device, only one link remains active. When the active link breaks down, the back-up link takes over and ensures constant connectivity.

The following figure shows a dual-homed device topology:

Figure 2: Dual-Homed Device Topology

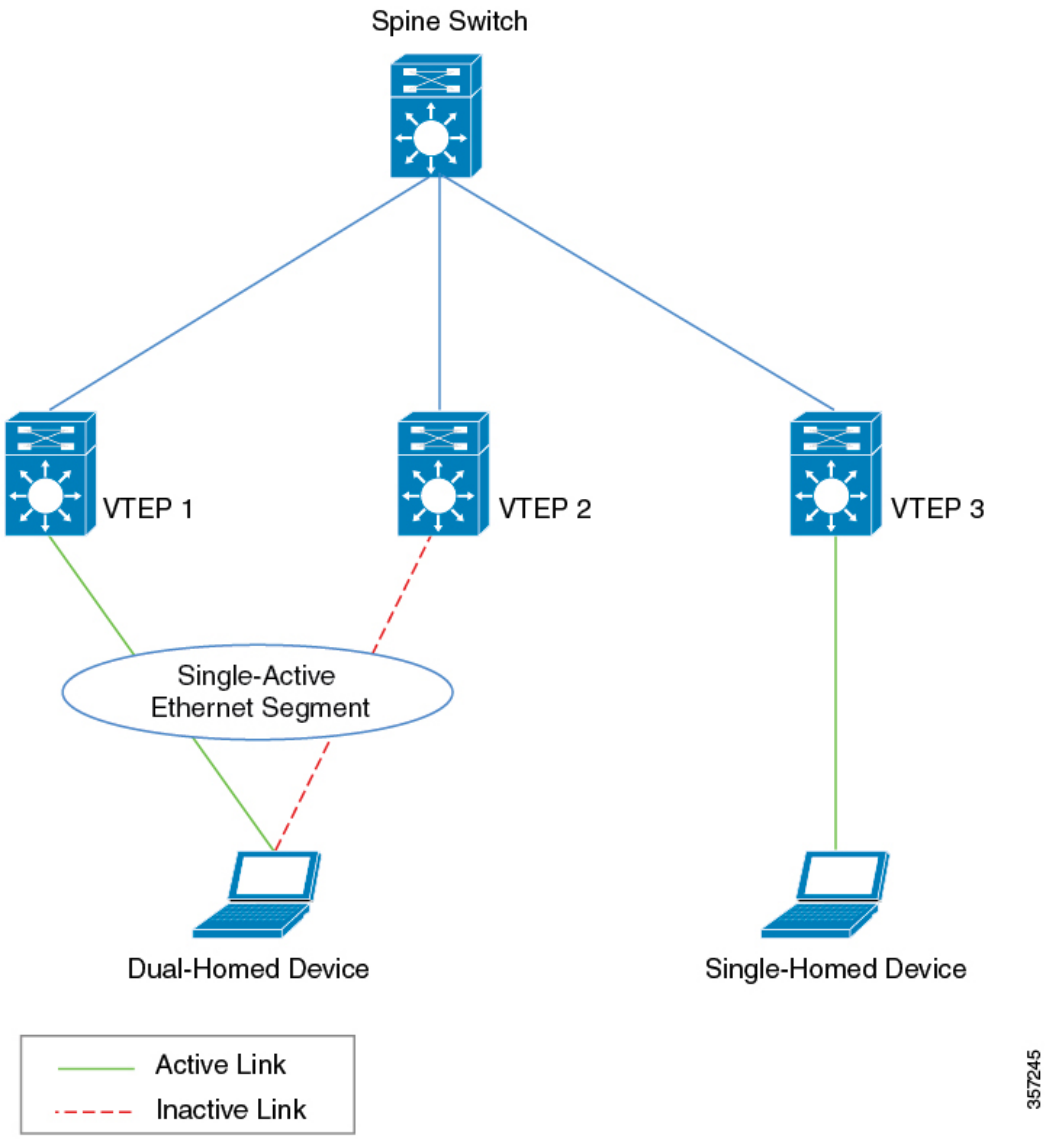

Dual-Homed Network

In single-active dual-homed network topology, two host or access devices from the same network are connected to two separate VTEPs through links that pass through a single-active Ethernet segment. At any given time, only one of these links remains active. When the active link breaks down, the back-up link takes over and ensures constant connectivity. The two host or access devices are part of a dual-homed network.

A dual-homed network topology results in a situation where the network splits into two different networks if the connectivity between the host or access devices is lost. To avoid this scenario, redundancy must also be enabled within the dual-homed network.

The following figure shows a dual-homed network topology:

Note Ensure that you enable a spanning tree within the dual-homed Layer 2 network.

Figure 3: Dual-Homed Network Topology

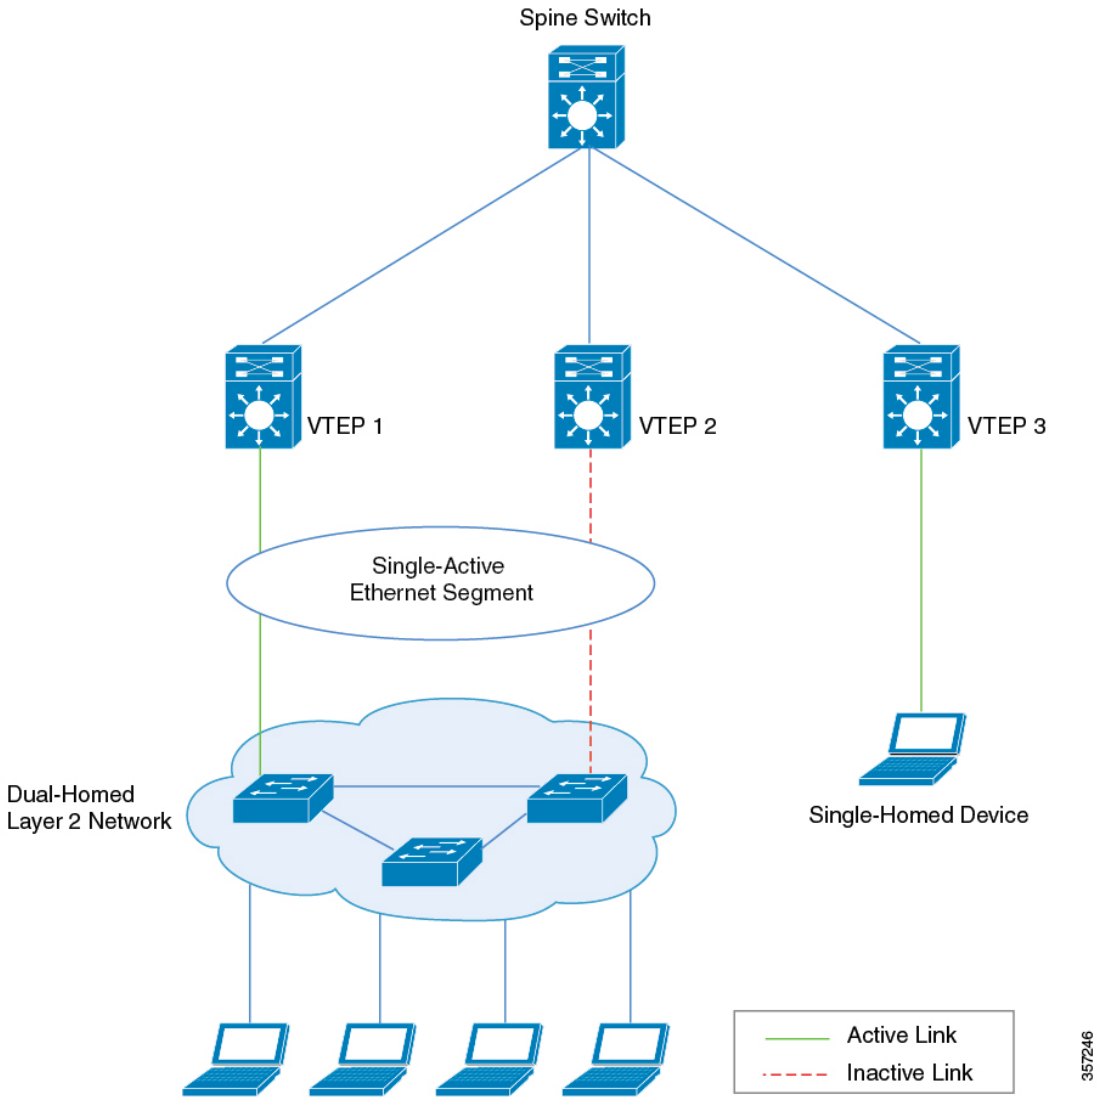

DF Election and Load Balance

A dual-homed network with a single-active Ethernet segment uses a Designated Forwarder (DF) election mechanism to load balance the traffic. The DF election is made at the Layer 2 VNI level, when the access interface from the VTEP is a trunk interface and an Ethernet segment is configured.

In the above topology, some Layer 2 VNIs use the interface connected to VTEP 1 as the active link and the others use the interface connected to VTEP 2 as the active link. This allows effective utilization of bandwidth on both the interfaces in a steady network state. Traffic in each Layer 2 VNI is load balanced for the downstream

dual-homed Layer 2 network. If any of the physical interface link to the downstream Layer 2 device goes down and is not operational, the DF election algorithm recalculates the active link interface. After the link is reestablished and both links are operational again, the DF election algorithm restores the load balancing operation to utilize the bandwidth of both the links effectively.

Migration Between Single-Homed and Multi-Homed Network Topologies

BGP EVPN VXLAN allows you to migrate your network topology from one redundancy mode to another. You can transition from a single-homed topology to a multi-homed topology. Likewise, you can also remove the redundancy from a multi-homed topology to move back to a single-homed topology.

Note When you migrate from one topology to another, ensure you make corresponding changes to the Ethernet segment configuration. If you change either of the two without making corresponding changes to the other, it results in traffic loops and traffic blackholing.

For a sample illustration and detailed steps about how to migrate from a single-homed topology to a single-active dual-homed topology, see Migrating from a Single-Homed Topology to a Single-Active Dual-Homed Topology, on page 9.

For a sample illustration and detailed steps about how to migrate from a single-active dual-homed topology to a single-homed topology, see Migrating from a Single-Active Dual-Homed Topology to a Single-Homed Topology, on page 11.

How to Configure Multi-Homing in a BGP EVPN VXLAN Fabric

Before you configure multi-homing in a BGP EVPN VXLAN fabric, ensure that you configure EVPN VXLAN Layer 2 and Layer 3 overlay networks. See #unique_180 for detailed steps.

Configuring Dual-Homing with Single Active Redundancy in a BGP EVPN VXLAN Fabric

To configure dual-homing with single-active redundancy in a BGP EVPN VXLAN fabric, perform the following set of procedures:

Configuring Redundancy on an Ethernet Segment

To configure redundancy on an ethernet segment, perform the following steps :

Procedure

	Command or Action	Purpose
Step 1	**enable** **Example:** `Device> enable`	Enters privileged EXEC mode. Enter password, if prompted.

	Command or Action	Purpose
Step 2	**configure terminal** **Example:** `Device# configure terminal`	Enters global configuration mode.
Step 3	**l2vpn evpn ethernet-segment** *ethernet-segment-id* **Example:** `Device(config)# l2vpn evpn ethernet-segment 1`	Enters Layer 2 VPN EVPN ethernet segment configuration mode.
Step 4	**identifier type** {**0** *esi-value* | **3 system-mac** *mac-addrress*} **Example:** `Device(config-evpn-es)# identifier type 0 0.0.0.0.0.0.0.0.1`	Configures the ethernet segment identifier type (ESI) and value for the ethernet segment. The following ESI types are supported: • Type 0: This type indicates an arbitrary 9-octet ESI value. The format is 00 + 9-octets of ESI value. • Type 3: This type indicates a MAC-based ESI Value. The format is 03 + system-mac (6 bytes) + value of MAC address (3 bytes).
Step 5	**redundancy** *redundancy-type* **Example:** `Device(config-evpn-es)# redundancy single-active`	Configures the redundancy type for the ethernet segment.
Step 6	**df-election wait-time** *time-period* **Example:** `Device(config-evpn-es)# df-election wait-time 1`	(Optional) Configures the designated forwarder (DF) election wait time for the ethernet segment. The range is 1 to 10 seconds. The default wait time is 3 seconds.
Step 7	**end** **Example:** `Device(config-evpn-es)# end`	Exits Layer 2 VPN EVPN ethernet segment configuration mode and enters privileged EXEC mode.

Associating an Ethernet Segment with an Interface on a VTEP

To associate the ethernet segment with an interface on a VTEP, perform the following steps :

Procedure

	Command or Action	Purpose
Step 1	**enable** **Example:**	Enters privileged EXEC mode. Enter password, if prompted.

	Command or Action	Purpose
	`Device> enable`	
Step 2	**configure terminal** **Example:** `Device# configure terminal`	Enters global configuration mode.
Step 3	**interface** *interface-id* **Example:** `Device(config)# interface GigabitEthernet1/0/10`	Specifies the interface, and enters interface configuration mode.
Step 4	**evpn ethernet-segment** *ethernet-segment-id* **Example:** `Device(config-if)# evpn ethernet-segment 1`	Associates the specified Ethernet segment with the interface. Each Ethernet segment is represented by a unique Ethernet segment ID. **Note** Ensure that you configure a unique Ethernet segment ID on any interface. Ensure that you configure the same segment ID on the link that connects the second VTEP and the dual-homed device (the second link through the Ethernet segment).
Step 5	**end** **Example:** `Device(config-if)# end`	Exits interface configuration mode and enters privileged EXEC mode.

Migrating from a Single-Homed Topology to a Single-Active Dual-Homed Topology

The following figures illustrate the migration from a single-homed topology to a single-active dual-homed topology:

Figure 4: Migration from a Single-Homed Network to a Single-Active Dual-Homed Network

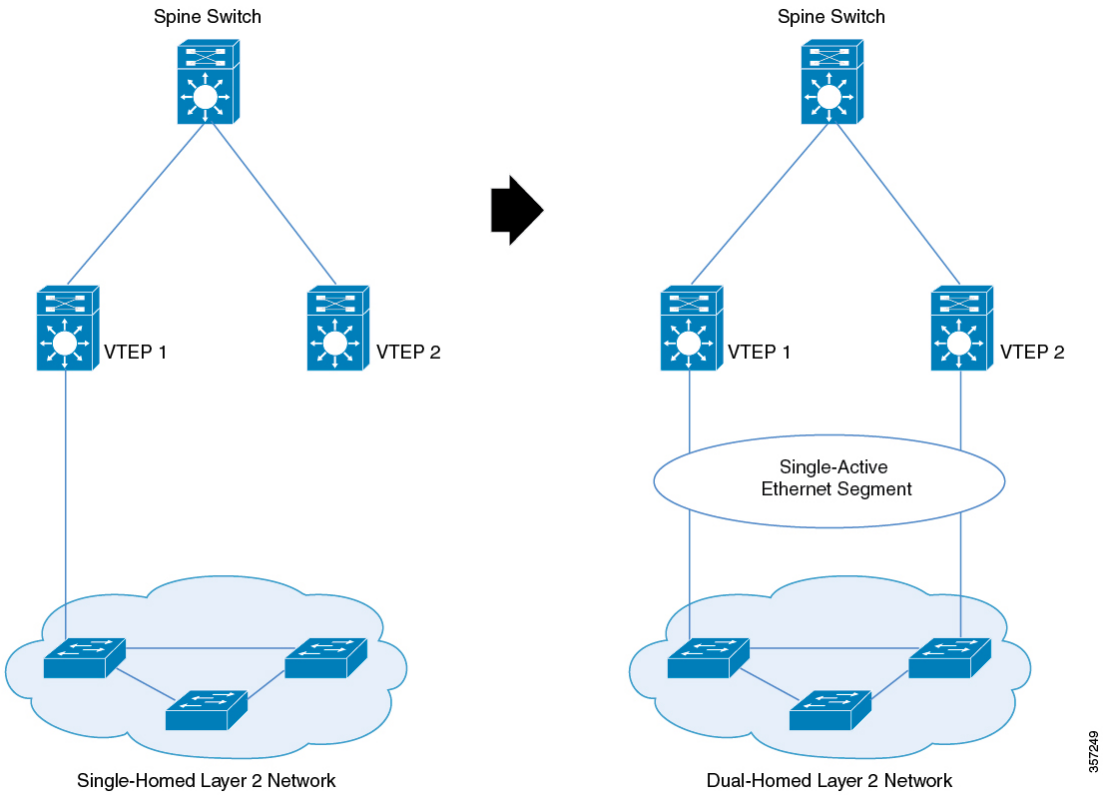

To migrate from a single-homed network to a single-active dual-homed network, perform the following steps:

Note When you migrate from one topology to another, ensure you make corresponding changes to the Ethernet segment configuration. If you change either of the two without making corresponding changes to the other, it results in traffic loops and traffic blackholing.

1. Before you migrate, we recommend that you do not configure the VTEP as the root bridge of the spanning tree, as the provision of Ethernet segment on the interface of a VTEP excludes it from spanning-tree. If the VTEP is the root bridge, its exclusion from the spanning-tree triggers an immediate spanning tree re-convergence.

Note Do not activate a link between VTEP 2 and a switch in the single-homed network yet. Activate the second only once you configure the Ethernet segment. In case a link is already activated, ensure that you deactivate the link.

2. Provision the Ethernet segment on the interface of the VTEP that has the active link. Provision of the Ethernet segment updates all the MAC addresses that are locally learned on that interface with the Ethernet segment ID of the interface.

3. Now provision the Ethernet segment on the interface of the second VTEP that needs to be connected to the switch in the single-homed network.
4. Connect the link and bring up the interface of the second VTEP. By doing this, you trigger fast convergence, Ethernet segment auto-discovery, and DF reelection.

   The single-homed network has now migrated to a dual-homed network.

Migrating from a Single-Active Dual-Homed Topology to a Single-Homed Topology

The following figures illustrate the migration from a single-active dual-homed topology to a single-homed topology:

Figure 5: Migration from a Single-Active Dual-Homed Network to a Single-Homed Network

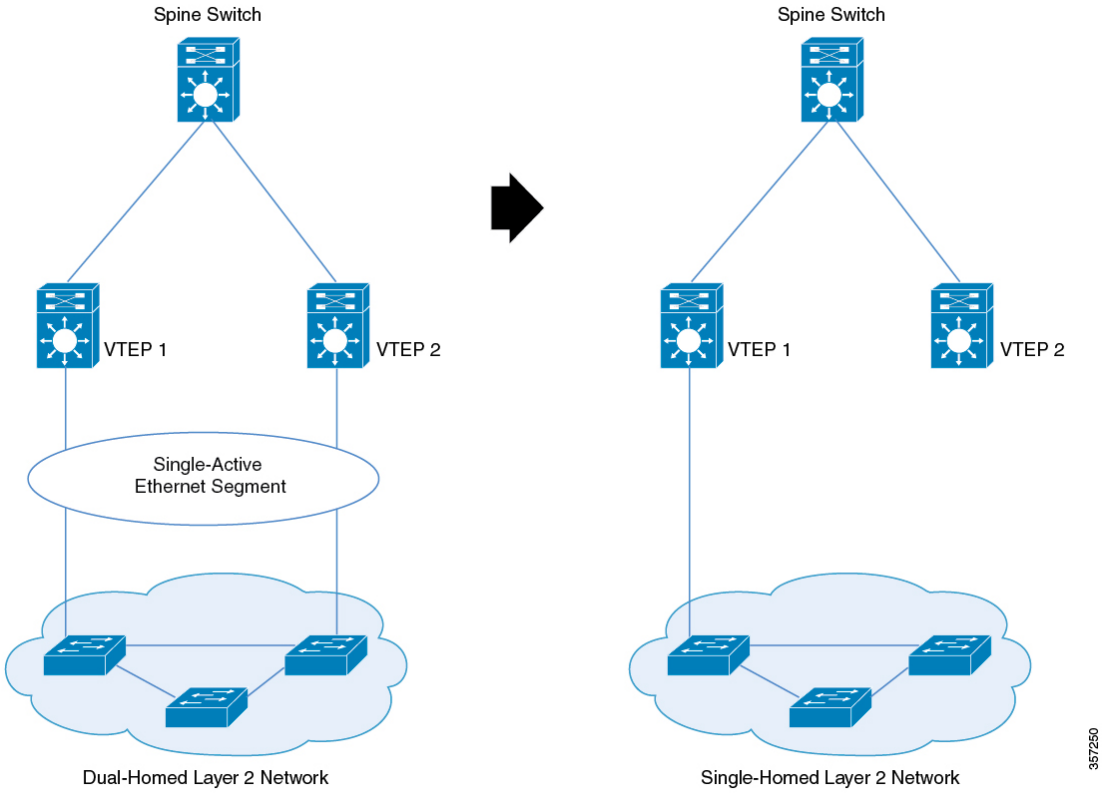

To migrate from a single-active dual-homed network to a single-homed network, perform the following steps:

Note When you migrate from one topology to another, ensure you make corresponding changes to the Ethernet segment configuration. If you change either of the two without making corresponding changes to the other, it results in traffic loops and traffic blackholing.

Note Ensure that the Ethernet segment remains configured on the dual-homed links as long as the links are up. If the Ethernet segment is removed from an active link, it causes traffic loops.

1. Before you migrate, we recommended that you configure portfast on the link you activate. Removal of Ethernet segment from an interface on the VTEP puts it back into the spanning-tree. If the interface is not configured with portfast, the port goes through block-learn-forward states and causes extensive traffic loss.
2. Shut down the interface that needs to be decommissioned. When you shut down the interface, you trigger fast convergence, Ethernet segment auto-discovery, and DF reelection. As a result, all the traffic converges into the active link.
3. Remove the Ethernet segment from the decommissioned interface. Ensure that the interface is down before you disconnect the link.

   The dual-homed network has now migrated to a single-homed network with an Ethernet segment.
4. (Optional) Remove the Ethernet segment from the interface with the active link on the VTEP.

   Removal of the Ethernet segment updates all the MAC addresses that are locally learned on that interface without the Ethernet segment ID.

   The Ethernet segment is now removed from the single-homed network homed network.

Configuration Examples for Multi-Homing in a BGP EVPN VXLAN Fabric

This section provides configuration examples for multi-homing in a BGP EVPN VXLAN fabric:

Example: Configuring Dual-Homing with Single-Active Redundancy in a BGP EVPN VXLAN Fabric

This example shows how to configure and verify dual-homing with single-active redundancy in a BGP EVPN VXLAN fabric for the following topology:

Figure 6: Dual-Homing with Single-Active Redundancy in a BGP EVPN VXLAN Fabric

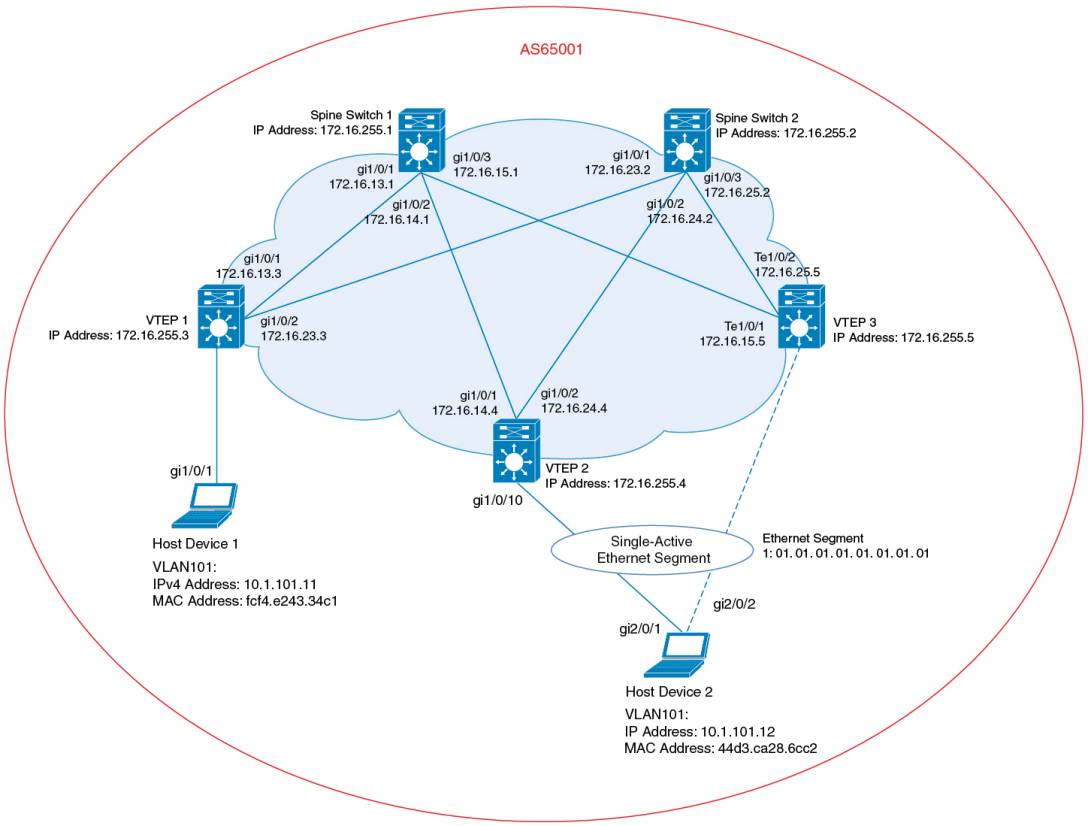

The topology shows an EVPN VXLAN network with two spine switches (Spine Switch 1 and Spine Switch 2) and three VTEPs (VTEP 1, VTEP 2, and VTEP 3). Host Device 1 is connected to VTEP 1. Host Device 2 is connected to VTEP 2 and VTEP 3 as a dual-homed single-active connection that passes through Ethernet Segment 1.

Note Ensure that you configure a unique Ethernet segment ID on any interface in the fabric. If an Ethernet segment ID is associated with one of the connecting links passing through the segment, associate the same Ethernet segment ID with the second link.

Note Do not configure a unique Ethernet segment ID per EVPN instance or VLAN or virtual network instance (VNI). For example purpose, EVPN instance 101 is used in the Verifying Dual-Homing with Single-Active Redundancy in a BGP EVPN VXLAN Fabric, on page 18 section.

Table 1: Configuring Dual-Homing with Single-Active Redundancy using VTEP 2 and VTEP 3

VTEP 2	VTEP 3
Leaf-02# **show running-config** hostname Leaf-02 ! vrf definition green rd 1:1 ! address-family ipv4 route-target export 1:1 route-target import 1:1 route-target export 1:1 stitching route-target import 1:1 stitching exit-address-family ! address-family ipv6 route-target export 1:1 route-target import 1:1 route-target export 1:1 stitching route-target import 1:1 stitching exit-address-family ! ip routing ! l2vpn evpn replication-type static router-id Loopback1 default-gateway advertise ! l2vpn evpn ethernet-segment 1 identifier type 0 01.01.01.01.01.01.01.01.01 redundancy single-active ! l2vpn evpn instance 101 vlan-based encapsulation vxlan replication-type ingress ! system mtu 9198 ! vlan configuration 101 member evpn-instance 101 vni 10101 vlan configuration 901 member vni 50901 ! interface Loopback0 ip address 172.16.255.4 255.255.255.255 ip ospf 1 area 0 !	LEaf-03# **show running-config** hostname Leaf-03 ! vrf definition green rd 1:1 ! address-family ipv4 route-target export 1:1 route-target import 1:1 route-target export 1:1 stitching route-target import 1:1 stitching exit-address-family ! address-family ipv6 route-target export 1:1 route-target import 1:1 route-target export 1:1 stitching route-target import 1:1 stitching exit-address-family ! ip routing ! l2vpn evpn replication-type static router-id Loopback1 default-gateway advertise ! l2vpn evpn ethernet-segment 1 identifier type 0 01.01.01.01.01.01.01.01.01 redundancy single-active ! l2vpn evpn instance 101 vlan-based encapsulation vxlan replication-type ingress ! system mtu 9198 ! vlan configuration 101 member evpn-instance 101 vni 10101 vlan configuration 901 member vni 50901 ! interface Loopback0 ip address 172.16.255.5 255.255.255.255 ip ospf 1 area 0 !

VTEP 2	VTEP 3
interface Loopback1 ip address 172.16.254.4 255.255.255.255 ip ospf 1 area 0 ! interface GigabitEthernet0/0 vrf forwarding Mgmt-vrf ip address 10.62.149.182 255.255.255.0 negotiation auto ! interface GigabitEthernet1/0/1 no switchport ip address 172.16.14.4 255.255.255.0 ip ospf network point-to-point ip ospf 1 area 0 ! interface GigabitEthernet1/0/2 no switchport ip address 172.16.24.4 255.255.255.0 ip ospf network point-to-point ip ospf 1 area 0 ! interface GigabitEthernet1/0/10 switchport access vlan 101 switchport mode access evpn ethernet-segment 1 spanning-tree portfast ! interface Vlan101 vrf forwarding green ip address 10.1.101.1 255.255.255.0 no autostate ! interface Vlan901 vrf forwarding green ip unnumbered Loopback1 ipv6 enable no autostate ! interface nve1 no ip address source-interface Loopback1 host-reachability protocol bgp member vni 10101 ingress-replication member vni 50901 vrf green	interface Loopback1 ip address 172.16.254.5 255.255.255.255 ip ospf 1 area 0 ! interface GigabitEthernet0/0 vrf forwarding Mgmt-vrf ip address 10.62.149.183 255.255.255.0 negotiation auto ! interface GigabitEthernet1/0/1 no switchport ip address 172.16.15.5 255.255.255.0 ip ospf network point-to-point ip ospf 1 area 0 ! interface GigabitEthernet1/0/2 no switchport ip address 172.16.25.5 255.255.255.0 ip ospf network point-to-point ip ospf 1 area 0 ! interface GigabitEthernet1/0/10 switchport access vlan 101 switchport mode access evpn ethernet-segment 1 spanning-tree portfast ! interface Vlan101 vrf forwarding green ip address 10.1.101.1 255.255.255.0 ! interface Vlan901 vrf forwarding green ip unnumbered Loopback1 ipv6 enable no autostate ! interface nve1 no ip address source-interface Loopback1 host-reachability protocol bgp member vni 10101 ingress-replication member vni 50901 vrf green

VTEP 2	VTEP 3
!	!
router ospf 1	router ospf 1
router-id 172.16.255.4	router-id 172.16.255.5
!	!
router bgp 65001	router bgp 65001
bgp log-neighbor-changes	bgp log-neighbor-changes
no bgp default ipv4-unicast	no bgp default ipv4-unicast
neighbor 172.16.255.1 remote-as 65001	neighbor 172.16.255.1 remote-as 65001
neighbor 172.16.255.1 update-source Loopback0	neighbor 172.16.255.1 update-source Loopback0
neighbor 172.16.255.2 remote-as 65001	neighbor 172.16.255.2 remote-as 65001
neighbor 172.16.255.2 update-source Loopback0	neighbor 172.16.255.2 update-source Loopback0
!	!
address-family ipv4	address-family ipv4
exit-address-family	exit-address-family
!	!
address-family l2vpn evpn	address-family l2vpn evpn
neighbor 172.16.255.1 activate	neighbor 172.16.255.1 activate
neighbor 172.16.255.1 send-community both	neighbor 172.16.255.1 send-community both
neighbor 172.16.255.2 activate	neighbor 172.16.255.2 activate
neighbor 172.16.255.2 send-community both	neighbor 172.16.255.2 send-community both
exit-address-family	exit-address-family
!	!
address-family ipv4 vrf green	address-family ipv4 vrf green
advertise l2vpn evpn	advertise l2vpn evpn
redistribute connected	redistribute connected
redistribute static	redistribute static
exit-address-family	exit-address-family
!	!
end	end
!	!
Leaf-02#	Leaf-03#

Table 2: Configuring Spine Switch 1, Spine Switch 2, and VTEP 1 to Configure Dual-Homing with Single-Active Redundancy

Spine Switch 1	Spine Switch 2	VTEP 1
Spine-01# **show running-config** hostname Spine-01 ! ip routing ! system mtu 9198 ! interface Loopback0 ip address 172.16.255.1 255.255.255.255 ip ospf 1 area 0 ! interface GigabitEthernet0/0 vrf forwarding Mgmt-vrf ip address 10.62.149.180 255.255.255.0 negotiation auto ! interface GigabitEthernet1/0/1 no switchport ip address 172.16.13.1 255.255.255.0 ip pim sparse-mode ip ospf network point-to-point ip ospf 1 area 0 ! interface GigabitEthernet1/0/2 no switchport ip address 172.16.14.1 255.255.255.0 ip pim sparse-mode ip ospf network point-to-point ip ospf 1 area 0 ! interface GigabitEthernet1/0/3 no switchport ip address 172.16.15.1 255.255.255.0 ip pim sparse-mode ip ospf network point-to-point ip ospf 1 area 0 ! router ospf 1 router-id 172.16.255.1 !	Spine-01# **show running-config** hostname Spine-01 ! ip routing ! system mtu 9198 ! interface Loopback0 ip address 172.16.255.1 255.255.255.255 ip ospf 1 area 0 ! interface GigabitEthernet0/0 vrf forwarding Mgmt-vrf ip address 10.62.149.180 255.255.255.0 negotiation auto ! interface GigabitEthernet1/0/1 no switchport ip address 172.16.13.1 255.255.255.0 ip pim sparse-mode ip ospf network point-to-point ip ospf 1 area 0 ! interface GigabitEthernet1/0/2 no switchport ip address 172.16.14.1 255.255.255.0 ip pim sparse-mode ip ospf network point-to-point ip ospf 1 area 0 ! interface GigabitEthernet1/0/3 no switchport ip address 172.16.15.1 255.255.255.0 ip pim sparse-mode ip ospf network point-to-point ip ospf 1 area 0 ! router ospf 1 router-id 172.16.255.1 !	Leaf-01# **show running-config** hostname Leaf-01 ! vrf definition green rd 1:1 ! address-family ipv4 route-target export 1:1 route-target import 1:1 route-target export 1:1 stitching route-target import 1:1 stitching exit-address-family ! address-family ipv6 route-target export 1:1 route-target import 1:1 route-target export 1:1 stitching route-target import 1:1 stitching exit-address-family ! ip routing ! l2vpn evpn replication-type static router-id Loopback1 default-gateway advertise ! l2vpn evpn instance 101 vlan-based encapsulation vxlan replication-type ingress ! ! system mtu 9198 ! vlan configuration 101 member evpn-instance 101 vni 10101 vlan configuration 901 member vni 50901 ! interface Loopback0 ip address 172.16.255.3 255.255.255.255 ip ospf 1 area 0 ! interface Loopback1 ip address 172.16.254.3 255.255.255.255 ip ospf 1 area 0 !

Spine Switch 1	Spine Switch 2	VTEP 1
router bgp 65001 bgp router-id 172.16.255.1 bgp log-neighbor-changes no bgp default ipv4-unicast neighbor 172.16.255.2 remote-as 65001 neighbor 172.16.255.2 update-source Loopback0 neighbor 172.16.255.3 remote-as 65001 neighbor 172.16.255.3 update-source Loopback0 neighbor 172.16.255.4 remote-as 65001 neighbor 172.16.255.4 update-source Loopback0 neighbor 172.16.255.5 remote-as 65001 neighbor 172.16.255.5 update-source Loopback0 ! address-family ipv4 exit-address-family ! address-family l2vpn evpn neighbor 172.16.255.2 activate neighbor 172.16.255.2 send-community both neighbor 172.16.255.3 activate neighbor 172.16.255.3 send-community both neighbor 172.16.255.3 route-reflector-client neighbor 172.16.255.4 activate neighbor 172.16.255.4 send-community both neighbor 172.16.255.4 route-reflector-client neighbor 172.16.255.5 activate neighbor 172.16.255.5 send-community both neighbor 172.16.255.5 route-reflector-client exit-address-family ! end ! Spine-01#	router bgp 65001 bgp router-id 172.16.255.2 bgp log-neighbor-changes no bgp default ipv4-unicast neighbor 172.16.255.1 remote-as 65001 neighbor 172.16.255.1 update-source Loopback0 neighbor 172.16.255.3 remote-as 65001 neighbor 172.16.255.3 update-source Loopback0 neighbor 172.16.255.4 remote-as 65001 neighbor 172.16.255.4 update-source Loopback0 neighbor 172.16.255.5 remote-as 65001 neighbor 172.16.255.5 update-source Loopback0 ! address-family ipv4 exit-address-family ! address-family l2vpn evpn neighbor 172.16.255.1 activate neighbor 172.16.255.1 send-community both neighbor 172.16.255.3 activate neighbor 172.16.255.3 send-community both neighbor 172.16.255.3 route-reflector-client neighbor 172.16.255.4 activate neighbor 172.16.255.4 send-community both neighbor 172.16.255.4 route-reflector-client neighbor 172.16.255.5 activate neighbor 172.16.255.5 send-community both neighbor 172.16.255.5 route-reflector-client exit-address-family ! end ! Spine-02#	interface GigabitEthernet0/0 vrf forwarding Mgmt-vrf ip address 10.62.149.179 255.255.255.0 negotiation auto ! interface GigabitEthernet1/0/1 no switchport ip address 172.16.13.3 255.255.255.0 ip ospf network point-to-point ip ospf 1 area 0 ! interface GigabitEthernet1/0/2 no switchport ip address 172.16.23.3 255.255.255.0 ip ospf network point-to-point ip ospf 1 area 0 ! interface GigabitEthernet1/0/10 switchport access vlan 101 switchport mode access spanning-tree portfast ! interface Vlan101 vrf forwarding green ip address 10.1.101.1 255.255.255.0 ! interface Vlan901 vrf forwarding green ip unnumbered Loopback1 ipv6 enable no autostate ! interface nve1 no ip address source-interface Loopback1 host-reachability protocol bgp member vni 10101 ingress-replication member vni 50901 vrf green ! router ospf 1 router-id 172.16.255.3 !

Verifying Dual-Homing with Single-Active Redundancy in a BGP EVPN VXLAN Fabric

The following sections provide sample outputs for **show** commands to verify dual-homing with single-active redundancy on the devices in the topology configured above:

- Outputs to Verify the Configuration on VTEP 1, on page 19
- Outputs to Verify the Configuration on VTEP 2, on page 21
- Outputs to Verify the Configuration on VTEP 3, on page 24

- Outputs to Verify the Configuration on Spine Switch 1, on page 28
- Outputs to Verify the Configuration on Spine Switch 2, on page 30

Outputs to Verify the Configuration on VTEP 1

The following example shows the output for the **show nve peer** command on VTEP 1:

```
Leaf-01# show nve peer
Interface  VNI      Type Peer-IP          RMAC/Num_RTs   eVNI     state flags UP time
nve1       50901    L3CP 172.16.254.5     7c21.0dbd.2748 50901      UP  A/M/4 01:17:04
nve1       50901    L3CP 172.16.254.4     7c21.0dbd.9548 50901      UP  A/M/4 03:26:09
nve1       10101    L2CP 172.16.254.4     8              10101      UP   N/A  03:52:15
nve1       10101    L2CP 172.16.254.5     10             10101      UP   N/A  05:25:28

Leaf-01#
```

The following example shows the output for the **show l2vpn evpn evi** *evpn-instance* **detail** command on VTEP 1:

```
Leaf-01# show l2vpn evpn evi 101 detail
EVPN instance:       101 (VLAN Based)
  RD:                172.16.254.3:101 (auto)
  Import-RTs:        65001:101
  Export-RTs:        65001:101
  Per-EVI Label:     none
  State:             Established
  Replication Type:  Ingress
  Encapsulation:     vxlan
  IP Local Learn:    Enabled (global)
  Adv. Def. Gateway: Enabled (global)
  Vlan:              101
    Ethernet-Tag:    0
    State:           Established
    Core If:         Vlan901
    Access If:       Vlan101
    NVE If:          nve1
    RMAC:            10b3.d56a.8fc8
    Core Vlan:       901
    L2 VNI:          10101
    L3 VNI:          50901
    VTEP IP:         172.16.254.3
    VRF:             green
    IPv4 IRB:        Enabled
    IPv6 IRB:        Disabled
    Pseudoports:
      GigabitEthernet1/0/10 service instance 101
        Routes: 1 MAC, 1 MAC/IP
    Peers:
      172.16.254.4
        Routes: 4 MAC, 2 MAC/IP, 1 IMET, 1 EAD
      172.16.254.5
        Routes: 6 MAC, 2 MAC/IP, 1 IMET, 1 EAD

Leaf-01#
```

The following example shows the output for the **show bgp l2vpn evpn evi** *evpn-instance* command on VTEP 1:

```
Leaf-01# show bgp l2vpn evpn evi 101
BGP table version is 6958, local router ID is 172.16.255.3
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
              r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter,
              x best-external, a additional-path, c RIB-compressed,
              t secondary path, L long-lived-stale,
Origin codes: i - IGP, e - EGP, ? - incomplete
RPKI validation codes: V valid, I invalid, N Not found

     Network          Next Hop            Metric LocPrf Weight Path
Route Distinguisher: 172.16.254.3:101
 *>i  [1][172.16.254.3:101][00010101010101010101][0]/23
                      172.16.254.5             0    100      0 ?
 *mi                   172.16.254.4             0    100      0 ?
 *>   [2][172.16.254.3:101][0][48][10B3D56A8FC1][32][10.1.101.1]/24
                      ::                                    32768 ?
 *>i  [2][172.16.254.3:101][0][48][44D3CA286C82][0][*]/20
                      172.16.254.5             0    100      0 ?
 *>i  [2][172.16.254.3:101][0][48][44D3CA286CC2][0][*]/20
                      172.16.254.5             0    100      0 ?
 *>i  [2][172.16.254.3:101][0][48][7C210DBD2741][32][10.1.101.1]/24
                      172.16.254.5             0    100      0 ?
 *>i  [2][172.16.254.3:101][0][48][7C210DBD9541][32][10.1.101.1]/24
                      172.16.254.4             0    100      0 ?
 *>   [2][172.16.254.3:101][0][48][F4CFE24334C1][0][*]/20
                      ::                                    32768 ?
 *>   [2][172.16.254.3:101][0][48][F4CFE24334C1][32][10.1.101.11]/24
                      ::                                    32768 ?
 *>   [3][172.16.254.3:101][0][32][172.16.254.3]/17
                      ::                                    32768 ?
 *>i  [3][172.16.254.3:101][0][32][172.16.254.4]/17
                      172.16.254.4             0    100      0 ?
 *>i  [3][172.16.254.3:101][0][32][172.16.254.5]/17
                      172.16.254.5             0    100      0 ?

Leaf-01#
```

The following example shows the output for the **show l2route evpn mac** command on VTEP 1:

```
Leaf-01# show l2route evpn mac
  EVI       ETag  Prod    Mac Address                    Next Hop(s) Seq Number
----- ---------- ----- -------------- ---------------------------- ----------
  101          0 L2VPN 10b3.d56a.8fc1                      Vl101:0          0
  101          0   BGP 44d3.ca28.6c82         V:10101 172.16.254.5          0
  101          0   BGP 44d3.ca28.6cc2         V:10101 172.16.254.5          0
  101          0   BGP 7c21.0dbd.2741         V:10101 172.16.254.5          0
  101          0   BGP 7c21.0dbd.9541         V:10101 172.16.254.4          0
  101          0 L2VPN f4cf.e243.34c1                 Gi1/0/10:101          0

Leaf-01#
```

The following example shows the output for the **show l2route evpn mac esi** *ethernet-segment-id* command on VTEP 1:

```
Leaf-01# show l2route evpn mac esi 0001.0101.0101.0101.0101
  EVI       ETag  Prod    Mac Address                    Next Hop(s) Seq Number
----- ---------- ----- -------------- ---------------------------- ----------
  101          0   BGP 44d3.ca28.6c82         V:10101 172.16.254.5          0
  101          0   BGP 44d3.ca28.6cc2         V:10101 172.16.254.5          0

Leaf-01#
```

The following example shows the output for the **show l2route evpn mac esi** *ethernet-segment-id* **detail** command on VTEP 1:

```
Leaf-01# show l2route evpn mac esi 0001.0101.0101.0101.0101 detail
EVPN Instance:            101
Ethernet Tag:             0
Producer Name:            BGP
MAC Address:              44d3.ca28.6c82
Num of MAC IP Route(s):   0
Sequence Number:          0
ESI:                      0001.0101.0101.0101.0101
Flags:                    B()
Next Hop(s):              V:10101 172.16.254.5
Resolved Next Hops:       V:10101 172.16.254.5, V:10101 172.16.254.4
Resolved Redundancy Mode: Single-Active

EVPN Instance:            101
Ethernet Tag:             0
Producer Name:            BGP
MAC Address:              44d3.ca28.6cc2
Num of MAC IP Route(s):   0
Sequence Number:          0
ESI:                      0001.0101.0101.0101.0101
Flags:                    B()
Next Hop(s):              V:10101 172.16.254.5
Resolved Next Hops:       V:10101 172.16.254.5, V:10101 172.16.254.4
Resolved Redundancy Mode: Single-Active

Leaf-01#
```

Return to Verifying Dual-Homing with Single-Active Redundancy in a BGP EVPN VXLAN Fabric, on page 18.

Outputs to Verify the Configuration on VTEP 2

The following example shows the output for the **show nve peer** command on VTEP 2:

```
Leaf-02# show nve peer
Interface  VNI      Type Peer-IP          RMAC/Num_RTs   eVNI     state flags UP time
nve1       50901    L3CP 172.16.254.3     10b3.d56a.8fc8 50901      UP  A/M/4 03:24:45
nve1       50901    L3CP 172.16.254.5     7c21.0dbd.2748 50901      UP  A/M/4 01:15:39
nve1       10101    L2CP 172.16.254.3     5              10101      UP   N/A  03:24:45
nve1       10101    L2CP 172.16.254.5     6              10101      UP   N/A  03:24:45

Leaf-02#
```

The following example shows the output for the **show l2vpn evpn ethernet-segment detail** command on VTEP 2:

```
Leaf-02# show l2vpn evpn ethernet-segment detail
EVPN Ethernet Segment ID: 0001.0101.0101.0101.0101
  Interface:              Gi1/0/10
  Redundancy mode:        single-active
  DF election wait time:  3 seconds
  Split Horizon label:    0
  State:                  Ready
  Encapsulation:          vxlan
  Ordinal:                0
  RD:                     172.16.254.4:7
    Export-RTs:           65001:101
```

```
  Forwarder List:         172.16.254.4 172.16.254.5

Leaf-02#
```

The following example shows the output for the **show l2vpn evpn evi** *evpn-instance* **detail** command on VTEP 2:

```
Leaf-02# show l2vpn evpn evi 101 detail
EVPN instance:       101 (VLAN Based)
  RD:                172.16.254.4:101 (auto)
  Import-RTs:        65001:101
  Export-RTs:        65001:101
  Per-EVI Label:     none
  State:             Established
  Replication Type:  Ingress
  Encapsulation:     vxlan
  IP Local Learn:    Enabled (global)
  Adv. Def. Gateway: Enabled (global)
  Vlan:              101
    Ethernet-Tag:    0
    State:           Established
    Core If:         Vlan901
    Access If:       Vlan101
    NVE If:          nve1
    RMAC:            7c21.0dbd.9548
    Core Vlan:       901
    L2 VNI:          10101
    L3 VNI:          50901
    VTEP IP:         172.16.254.4
    VRF:             green
    IPv4 IRB:        Enabled
    IPv6 IRB:        Disabled
    Pseudoports:
      GigabitEthernet1/0/10 service instance 101 (DF state: blocked)
        Routes: 0 MAC, 0 MAC/IP
    Peers:
      172.16.254.3
        Routes: 2 MAC, 2 MAC/IP, 1 IMET, 0 EAD
      172.16.254.5
        Routes: 3 MAC, 1 MAC/IP, 1 IMET, 1 EAD

Leaf-02#
```

The following example shows the output for the **show bgp l2vpn evpn route-type** command for route type 4 on VTEP 2:

```
Leaf-02# show bgp l2vpn evpn route-type 4
BGP routing table entry for [4][172.16.255.4:257][00010101010101010101][32][172.16.254.4]/23,
 version 601
Paths: (1 available, best #1, table EVPN-BGP-Table)
  Advertised to update-groups:
     1
  Refresh Epoch 1
  Local
    :: (via default) from 0.0.0.0 (172.16.255.4)
      Origin incomplete, localpref 100, weight 32768, valid, sourced, local, best
      Local vtep: 172.16.254.4
      Extended Community: ENCAP:8 EVPN ES-IMPORT:0x101:0x101:0x101
      rx pathid: 0, tx pathid: 0x0
      Updated on Jan 26 2021 19:41:40 UTC
BGP routing table entry for [4][172.16.255.5:257][00010101010101010101][32][172.16.254.5]/23,
 version 658
```

```
Paths: (2 available, best #2, table EVPN-BGP-Table)
  Not advertised to any peer
  Refresh Epoch 6
  Local
    172.16.254.5 (metric 3) (via default) from 172.16.255.2 (172.16.255.2)
      Origin incomplete, metric 0, localpref 100, valid, internal
      Extended Community: ENCAP:8 EVPN ES-IMPORT:0x101:0x101:0x101
      Originator: 172.16.255.5, Cluster list: 172.16.255.2
      rx pathid: 0, tx pathid: 0
      Updated on Jan 26 2021 19:43:19 UTC
  Refresh Epoch 6
  Local
    172.16.254.5 (metric 3) (via default) from 172.16.255.1 (172.16.255.1)
      Origin incomplete, metric 0, localpref 100, valid, internal, best
      Extended Community: ENCAP:8 EVPN ES-IMPORT:0x101:0x101:0x101
      Originator: 172.16.255.5, Cluster list: 172.16.255.1
      rx pathid: 0, tx pathid: 0x0
      Updated on Jan 26 2021 19:43:19 UTC

Leaf-02#
```

The following example shows the output for the **show bgp l2vpn evpn evi** *evpn-instance* command on VTEP 2:

```
Leaf-02# show bgp l2vpn evpn evi 101
BGP table version is 845, local router ID is 172.16.255.4
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
              r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter,
              x best-external, a additional-path, c RIB-compressed,
              t secondary path, L long-lived-stale,
Origin codes: i - IGP, e - EGP, ? - incomplete
RPKI validation codes: V valid, I invalid, N Not found

     Network          Next Hop            Metric LocPrf Weight Path
Route Distinguisher: 172.16.254.4:101
 *mi  [1][172.16.254.4:101][00010101010101010101][0]/23
                      172.16.254.5             0    100      0 ?
 *>                    ::                                    32768 ?
 *>i  [2][172.16.254.4:101][0][48][10B3D56A8FC1][32][10.1.101.1]/24
                      172.16.254.3             0    100      0 ?
 *>i  [2][172.16.254.4:101][0][48][44D3CA286C82][0][*]/20
                      172.16.254.5             0    100      0 ?
 *>i  [2][172.16.254.4:101][0][48][44D3CA286CC2][0][*]/20
                      172.16.254.5             0    100      0 ?
 *>i  [2][172.16.254.4:101][0][48][7C210DBD2741][32][10.1.101.1]/24
                      172.16.254.5             0    100      0 ?
 *>   [2][172.16.254.4:101][0][48][7C210DBD9541][32][10.1.101.1]/24
                      ::                                    32768 ?
 *>i  [2][172.16.254.4:101][0][48][F4CFE24334C1][0][*]/20
                      172.16.254.3             0    100      0 ?
 *>i  [2][172.16.254.4:101][0][48][F4CFE24334C1][32][10.1.101.11]/24
                      172.16.254.3             0    100      0 ?
 *>i  [3][172.16.254.4:101][0][32][172.16.254.3]/17
                      172.16.254.3             0    100      0 ?
 *>   [3][172.16.254.4:101][0][32][172.16.254.4]/17
                      ::                                    32768 ?
 *>i  [3][172.16.254.4:101][0][32][172.16.254.5]/17
                      172.16.254.5             0    100      0 ?

Leaf-02#
```

The following example shows the output for the **show l2route evpn mac** command on VTEP 2:

```
Leaf-02# show l2route evpn mac
  EVI       ETag  Prod    Mac Address                    Next Hop(s) Seq Number
----- ---------- ----- -------------- ------------------------------ ----------
  101          0   BGP 10b3.d56a.8fc1         V:10101 172.16.254.3          0
  101          0   BGP 44d3.ca28.6c82         V:10101 172.16.254.5          0
  101          0   BGP 44d3.ca28.6cc2         V:10101 172.16.254.5          0
  101          0   BGP 7c21.0dbd.2741         V:10101 172.16.254.5          0
  101          0 L2VPN 7c21.0dbd.9541                      Vl101:0          0
  101          0   BGP f4cf.e243.34c1         V:10101 172.16.254.3          0

Leaf-02#
```

The following example shows the output for the **show l2route evpn mac esi** *ethernet-segment-id* command on VTEP 2:

```
Leaf-02# show l2route evpn mac esi 0001.0101.0101.0101.0101
  EVI       ETag  Prod    Mac Address                    Next Hop(s) Seq Number
----- ---------- ----- -------------- ------------------------------ ----------
  101          0   BGP 44d3.ca28.6c82         V:10101 172.16.254.5          0
  101          0   BGP 44d3.ca28.6cc2         V:10101 172.16.254.5          0

Leaf-02#
```

The following example shows the output for the **show l2route evpn mac esi** *ethernet-segment-id* **detail** command on VTEP 2:

```
Leaf-02# show l2route evpn mac esi 0001.0101.0101.0101.0101 detail
EVPN Instance:            101
Ethernet Tag:             0
Producer Name:            BGP
MAC Address:              44d3.ca28.6c82
Num of MAC IP Route(s):   0
Sequence Number:          0
ESI:                      0001.0101.0101.0101.0101
Flags:                    B()
Next Hop(s):              V:10101 172.16.254.5
Resolved Next Hops:       V:10101 172.16.254.5
Resolved Redundancy Mode: Single-Active

EVPN Instance:            101
Ethernet Tag:             0
Producer Name:            BGP
MAC Address:              44d3.ca28.6cc2
Num of MAC IP Route(s):   0
Sequence Number:          0
ESI:                      0001.0101.0101.0101.0101
Flags:                    B()
Next Hop(s):              V:10101 172.16.254.5
Resolved Next Hops:       V:10101 172.16.254.5
Resolved Redundancy Mode: Single-Active

Leaf-02#
```

Return to Verifying Dual-Homing with Single-Active Redundancy in a BGP EVPN VXLAN Fabric, on page 18.

Outputs to Verify the Configuration on VTEP 3

The following example shows the output for the **show nve peer** command on VTEP 3:

```
Leaf-03# show nve peer
Interface  VNI      Type Peer-IP          RMAC/Num_RTs   eVNI     state flags UP time
nve1       50901    L3CP 172.16.254.3     10b3.d56a.8fc8 50901      UP  A/M/4 04:23:46
nve1       50901    L3CP 172.16.254.4     7c21.0dbd.9548 50901      UP  A/M/4 03:24:57
nve1       10101    L2CP 172.16.254.3     5              10101      UP   N/A  04:23:46
nve1       10101    L2CP 172.16.254.4     4              10101      UP   N/A  03:24:57

Leaf-03#
```

The following example shows the output for the **show l2vpn evpn ethernet-segment detail** command on VTEP 3:

```
Leaf-03# show l2vpn evpn ethernet-segment detail
EVPN Ethernet Segment ID: 0001.0101.0101.0101.0101
  Interface:              Gi1/0/10
  Redundancy mode:        single-active
  DF election wait time:  3 seconds
  Split Horizon label:    0
  State:                  Ready
  Encapsulation:          vxlan
  Ordinal:                1
  RD:                     172.16.254.5:9
    Export-RTs:           65001:101
  Forwarder List:         172.16.254.4 172.16.254.5

Leaf-03#
```

The following example shows the output for the **show l2vpn evpn evi** *evpn-instance* **detail** command on VTEP 3:

```
Leaf-03# show l2vpn evpn evi 101 detail
EVPN instance:       101 (VLAN Based)
  RD:                172.16.254.5:101 (auto)
  Import-RTs:        65001:101
  Export-RTs:        65001:101
  Per-EVI Label:     none
  State:             Established
  Replication Type:  Ingress
  Encapsulation:     vxlan
  IP Local Learn:    Enabled (global)
  Adv. Def. Gateway: Enabled (global)
  Vlan:              101
    Ethernet-Tag:    0
    State:           Established
    Core If:         Vlan901
    Access If:       Vlan101
    NVE If:          nve1
    RMAC:            7c21.0dbd.2748
    Core Vlan:       901
    L2 VNI:          10101
    L3 VNI:          50901
    VTEP IP:         172.16.254.5
    VRF:             green
    IPv4 IRB:        Enabled
    IPv6 IRB:        Disabled
    Pseudoports:
      GigabitEthernet1/0/10 service instance 101 (DF state: forwarding)
        Routes: 2 MAC, 0 MAC/IP
    Peers:
      172.16.254.3
        Routes: 2 MAC, 2 MAC/IP, 1 IMET, 0 EAD
      172.16.254.4
```

```
        Routes: 1 MAC, 1 MAC/IP, 1 IMET, 1 EAD

Leaf-03#
```

The following example shows the output for the **show bgp l2vpn evpn route-type** command for route type 4 on VTEP 3:

```
Leaf-03# show bgp l2vpn evpn route-type 4
BGP routing table entry for [4][172.16.255.4:257][00010101010101010101][32][172.16.254.4]/23,
 version 337
Paths: (2 available, best #2, table EVPN-BGP-Table)
  Not advertised to any peer
  Refresh Epoch 5
  Local
    172.16.254.4 (metric 3) (via default) from 172.16.255.2 (172.16.255.2)
      Origin incomplete, metric 0, localpref 100, valid, internal
      Extended Community: ENCAP:8 EVPN ES-IMPORT:0x101:0x101:0x101
      Originator: 172.16.255.4, Cluster list: 172.16.255.2
      rx pathid: 0, tx pathid: 0
      Updated on Jan 26 2021 19:38:35 UTC
  Refresh Epoch 5
  Local
    172.16.254.4 (metric 3) (via default) from 172.16.255.1 (172.16.255.1)
      Origin incomplete, metric 0, localpref 100, valid, internal, best
      Extended Community: ENCAP:8 EVPN ES-IMPORT:0x101:0x101:0x101
      Originator: 172.16.255.4, Cluster list: 172.16.255.1
      rx pathid: 0, tx pathid: 0x0
      Updated on Jan 26 2021 19:38:35 UTC
BGP routing table entry for [4][172.16.255.5:257][00010101010101010101][32][172.16.254.5]/23,
 version 1269
Paths: (1 available, best #1, table EVPN-BGP-Table)
  Advertised to update-groups:
     2
  Refresh Epoch 1
  Local
    :: (via default) from 0.0.0.0 (172.16.255.5)
      Origin incomplete, localpref 100, weight 32768, valid, sourced, local, best
      Local vtep: 172.16.254.5
      Extended Community: ENCAP:8 EVPN ES-IMPORT:0x101:0x101:0x101
      rx pathid: 0, tx pathid: 0x0
      Updated on Jan 26 2021 19:40:14 UTC

Leaf-03#
```

The following example shows the output for the **show bgp l2vpn evpn evi** *evpn-instance* command on VTEP 3:

```
Leaf-03# show bgp l2vpn evpn evi 101
BGP table version is 1284, local router ID is 172.16.255.5
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
              r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter,
              x best-external, a additional-path, c RIB-compressed,
              t secondary path, L long-lived-stale,
Origin codes: i - IGP, e - EGP, ? - incomplete
RPKI validation codes: V valid, I invalid, N Not found

     Network          Next Hop            Metric LocPrf Weight Path
Route Distinguisher: 172.16.254.5:101
 *>   [1][172.16.254.5:101][00010101010101010101][0]/23
                       ::                                   32768 ?
 *mi                    172.16.254.4             0    100      0 ?
 *>i  [2][172.16.254.5:101][0][48][10B3D56A8FC1][32][10.1.101.1]/24
```

```
                     172.16.254.3             0    100      0 ?
 *>   [2][172.16.254.5:101][0][48][44D3CA286C82][0][*]/20
                     ::                                    32768 ?
 *>   [2][172.16.254.5:101][0][48][44D3CA286CC2][0][*]/20
                     ::                                    32768 ?
 *>   [2][172.16.254.5:101][0][48][7C210DBD2741][32][10.1.101.1]/24
                     ::                                    32768 ?
 *>i  [2][172.16.254.5:101][0][48][7C210DBD9541][32][10.1.101.1]/24
                     172.16.254.4             0    100      0 ?
 *>i  [2][172.16.254.5:101][0][48][F4CFE24334C1][0][*]/20
                     172.16.254.3             0    100      0 ?
 *>i  [2][172.16.254.5:101][0][48][F4CFE24334C1][32][10.1.101.11]/24
                     172.16.254.3             0    100      0 ?
 *>i  [3][172.16.254.5:101][0][32][172.16.254.3]/17
                     172.16.254.3             0    100      0 ?
 *>i  [3][172.16.254.5:101][0][32][172.16.254.4]/17
                     172.16.254.4             0    100      0 ?
 *>   [3][172.16.254.5:101][0][32][172.16.254.5]/17
                     ::                                    32768 ?
Leaf-03#
```

The following example shows the output for the **show l2route evpn mac** command on VTEP 3:

```
Leaf-03# show l2route evpn mac
  EVI       ETag  Prod    Mac Address                  Next Hop(s) Seq Number
----- ---------- ----- -------------- ---------------------------- ----------
  101          0   BGP 10b3.d56a.8fc1         V:10101 172.16.254.3          0
  101          0 L2VPN 44d3.ca28.6c82                Gi1/0/10:101          0
  101          0 L2VPN 44d3.ca28.6cc2                Gi1/0/10:101          0
  101          0 L2VPN 7c21.0dbd.2741                     Vl101:0          0
  101          0   BGP 7c21.0dbd.9541         V:10101 172.16.254.4          0
  101          0   BGP f4cf.e243.34c1         V:10101 172.16.254.3          0

Leaf-03#
```

The following example shows the output for the **show l2route evpn mac esi** *ethernet-segment-id* command on VTEP 3:

```
Leaf-03# show l2route evpn mac esi 0001.0101.0101.0101.0101
  EVI       ETag  Prod    Mac Address                  Next Hop(s) Seq Number
----- ---------- ----- -------------- ---------------------------- ----------
  101          0 L2VPN 44d3.ca28.6c82                Gi1/0/10:101          0
  101          0 L2VPN 44d3.ca28.6cc2                Gi1/0/10:101          0

Leaf-03#
```

The following example shows the output for the **show l2route evpn mac esi** *ethernet-segment-id* **detail** command on VTEP 3:

```
Leaf-03# show l2route evpn mac esi 0001.0101.0101.0101.0101 detail
EVPN Instance:            101
Ethernet Tag:             0
Producer Name:            L2VPN
MAC Address:              44d3.ca28.6c82
Num of MAC IP Route(s):   0
Sequence Number:          0
ESI:                      0001.0101.0101.0101.0101
Flags:                    B()
Next Hop(s):              Gi1/0/10:101

EVPN Instance:            101
```

```
Ethernet Tag:              0
Producer Name:             L2VPN
MAC Address:               44d3.ca28.6cc2
Num of MAC IP Route(s):    0
Sequence Number:           0
ESI:                       0001.0101.0101.0101.0101
Flags:                     B()
Next Hop(s):               Gi1/0/10:101

Leaf-03#
```

Return to Verifying Dual-Homing with Single-Active Redundancy in a BGP EVPN VXLAN Fabric, on page 18.

Outputs to Verify the Configuration on Spine Switch 1

The following example shows the output for the **show bgp l2vpn evpn summary** command on Spine Switch 1:

```
Spine-01# show bgp l2vpn evpn summary
BGP router identifier 172.16.255.1, local AS number 65001
BGP table version is 5443, main routing table version 5443
17 network entries using 5848 bytes of memory
34 path entries using 7072 bytes of memory
13/11 BGP path/bestpath attribute entries using 3744 bytes of memory
3 BGP rrinfo entries using 120 bytes of memory
10 BGP extended community entries using 480 bytes of memory
0 BGP route-map cache entries using 0 bytes of memory
0 BGP filter-list cache entries using 0 bytes of memory
BGP using 17264 total bytes of memory
BGP activity 101/84 prefixes, 2825/2791 paths, scan interval 60 secs
25 networks peaked at 14:54:41 Jan 26 2021 UTC (05:39:56.356 ago)

Neighbor        V           AS MsgRcvd MsgSent   TblVer  InQ OutQ Up/Down  State/PfxRcd
172.16.255.2    4        65001    5664    5668     5443    0    0 05:40:29        15
172.16.255.3    4        65001     378    5690     5443    0    0 05:35:23         5
172.16.255.4    4        65001     440    1633     5443    0    0 03:36:33         6
172.16.255.5    4        65001     594    5296     5443    0    0 04:34:27         8

Spine-01#
```

The following example shows the output for the **show bgp l2vpn evpn** command on Spine Switch 1:

```
Spine-01# show bgp l2vpn evpn
BGP table version is 5443, local router ID is 172.16.255.1
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
              r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter,
              x best-external, a additional-path, c RIB-compressed,
              t secondary path, L long-lived-stale,
Origin codes: i - IGP, e - EGP, ? - incomplete
RPKI validation codes: V valid, I invalid, N Not found

     Network          Next Hop            Metric LocPrf Weight Path
Route Distinguisher: 172.16.254.4:7
 *>i  [1][172.16.254.4:7][00010101010101010101][4294967295]/23
                      172.16.254.4             0    100      0 ?
Route Distinguisher: 172.16.254.4:101
 *>i  [1][172.16.254.4:101][00010101010101010101][0]/23
                      172.16.254.4             0    100      0 ?
Route Distinguisher: 172.16.254.5:9
```

```
 *>i  [1][172.16.254.5:9][00010101010101010101][4294967295]/23
                     172.16.254.5             0    100      0 ?
 * i                  172.16.254.5             0    100      0 ?
Route Distinguisher: 172.16.254.5:101
 *>i  [1][172.16.254.5:101][00010101010101010101][0]/23
                     172.16.254.5             0    100      0 ?
 * i                  172.16.254.5             0    100      0 ?
Route Distinguisher: 172.16.254.3:101
 * i  [2][172.16.254.3:101][0][48][10B3D56A8FC1][32][10.1.101.1]/24
                     172.16.254.3             0    100      0 ?
 *>i                 172.16.254.3             0    100      0 ?
 * i  [2][172.16.254.3:101][0][48][F4CFE24334C1][0][*]/20
                     172.16.254.3             0    100      0 ?
 *>i                 172.16.254.3             0    100      0 ?
 * i  [2][172.16.254.3:101][0][48][F4CFE24334C1][32][10.1.101.11]/24
                     172.16.254.3             0    100      0 ?
 *>i                 172.16.254.3             0    100      0 ?
Route Distinguisher: 172.16.254.4:101
 * i  [2][172.16.254.4:101][0][48][7C210DBD9541][32][10.1.101.1]/24
                     172.16.254.4             0    100      0 ?
 *>i                 172.16.254.4             0    100      0 ?
Route Distinguisher: 172.16.254.5:101
 * i  [2][172.16.254.5:101][0][48][44D3CA286C82][0][*]/20
                     172.16.254.5             0    100      0 ?
 *>i                 172.16.254.5             0    100      0 ?
 * i  [2][172.16.254.5:101][0][48][44D3CA286CC2][0][*]/20
                     172.16.254.5             0    100      0 ?
 *>i                 172.16.254.5             0    100      0 ?
 * i  [2][172.16.254.5:101][0][48][7C210DBD2741][32][10.1.101.1]/24
                     172.16.254.5             0    100      0 ?
 *>i                 172.16.254.5             0    100      0 ?
Route Distinguisher: 172.16.254.3:101
 * i  [3][172.16.254.3:101][0][32][172.16.254.3]/17
                     172.16.254.3             0    100      0 ?
 *>i                 172.16.254.3             0    100      0 ?
Route Distinguisher: 172.16.254.4:101
 * i  [3][172.16.254.4:101][0][32][172.16.254.4]/17
                     172.16.254.4             0    100      0 ?
 *>i                 172.16.254.4             0    100      0 ?
Route Distinguisher: 172.16.254.5:101
 * i  [3][172.16.254.5:101][0][32][172.16.254.5]/17
                     172.16.254.5             0    100      0 ?
 *>i                 172.16.254.5             0    100      0 ?
Route Distinguisher: 172.16.255.4:257
 * i  [4][172.16.255.4:257][00010101010101010101][32][172.16.254.4]/23
                     172.16.254.4             0    100      0 ?
 *>i                 172.16.254.4             0    100      0 ?
Route Distinguisher: 172.16.255.5:257
 * i  [4][172.16.255.5:257][00010101010101010101][32][172.16.254.5]/23
                     172.16.254.5             0    100      0 ?
 *>i                 172.16.254.5             0    100      0 ?
Route Distinguisher: 1:1
 * i  [5][1:1][0][24][10.1.101.0]/17
                     172.16.254.5             0    100      0 ?
 * i                  172.16.254.4             0    100      0 ?
 *>i                 172.16.254.3             0    100      0 ?
 * i                  172.16.254.3             0    100      0 ?

Spine-01#
```

The following example shows the output for the **show ip route** command on Spine Switch 1:

```
Spine-01# show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, m - OMP
       n - NAT, Ni - NAT inside, No - NAT outside, Nd - NAT DIA
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       H - NHRP, G - NHRP registered, g - NHRP registration summary
       o - ODR, P - periodic downloaded static route, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

      172.16.0.0/16 is variably subnetted, 17 subnets, 2 masks
C        172.16.13.0/24 is directly connected, GigabitEthernet1/0/1
L        172.16.13.1/32 is directly connected, GigabitEthernet1/0/1
C        172.16.14.0/24 is directly connected, GigabitEthernet1/0/2
L        172.16.14.1/32 is directly connected, GigabitEthernet1/0/2
C        172.16.15.0/24 is directly connected, GigabitEthernet1/0/3
L        172.16.15.1/32 is directly connected, GigabitEthernet1/0/3
O        172.16.23.0/24
           [110/2] via 172.16.13.3, 05:35:46, GigabitEthernet1/0/1
O        172.16.24.0/24
           [110/2] via 172.16.14.4, 03:37:00, GigabitEthernet1/0/2
O        172.16.25.0/24
           [110/2] via 172.16.15.5, 03:38:33, GigabitEthernet1/0/3
O        172.16.254.3/32
           [110/2] via 172.16.13.3, 05:35:46, GigabitEthernet1/0/1
O        172.16.254.4/32
           [110/2] via 172.16.14.4, 03:36:50, GigabitEthernet1/0/2
O        172.16.254.5/32
           [110/2] via 172.16.15.5, 03:38:33, GigabitEthernet1/0/3
C        172.16.255.1/32 is directly connected, Loopback0
O        172.16.255.2/32
           [110/3] via 172.16.15.5, 03:38:33, GigabitEthernet1/0/3
           [110/3] via 172.16.14.4, 03:37:00, GigabitEthernet1/0/2
           [110/3] via 172.16.13.3, 05:35:46, GigabitEthernet1/0/1
O        172.16.255.3/32
           [110/2] via 172.16.13.3, 05:35:46, GigabitEthernet1/0/1
O        172.16.255.4/32
           [110/2] via 172.16.14.4, 03:36:56, GigabitEthernet1/0/2
O        172.16.255.5/32
           [110/2] via 172.16.15.5, 03:38:33, GigabitEthernet1/0/3
Spine-01#
```

Return to Verifying Dual-Homing with Single-Active Redundancy in a BGP EVPN VXLAN Fabric, on page 18.

Outputs to Verify the Configuration on Spine Switch 2

The following example shows the output for the **show bgp l2vpn evpn summary** command on Spine Switch 2:

```
Spine-02# show bgp l2vpn evpn summary
BGP router identifier 172.16.255.2, local AS number 65001
BGP table version is 5499, main routing table version 5499
17 network entries using 5848 bytes of memory
34 path entries using 7072 bytes of memory
13/11 BGP path/bestpath attribute entries using 3744 bytes of memory
3 BGP rrinfo entries using 120 bytes of memory
```

```
10 BGP extended community entries using 480 bytes of memory
0 BGP route-map cache entries using 0 bytes of memory
0 BGP filter-list cache entries using 0 bytes of memory
BGP using 17264 total bytes of memory
BGP activity 101/84 prefixes, 2823/2789 paths, scan interval 60 secs
25 networks peaked at 14:56:03 Jan 26 2021 UTC (05:40:54.652 ago)

Neighbor        V           AS MsgRcvd MsgSent   TblVer  InQ OutQ Up/Down  State/PfxRcd
172.16.255.1    4        65001    5669    5665     5499    0    0 05:41:28        15
172.16.255.3    4        65001     381    5691     5499    0    0 05:36:22         5
172.16.255.4    4        65001     440    1632     5499    0    0 03:37:31         6
172.16.255.5    4        65001     594    5291     5499    0    0 04:35:26         8

Spine-02#
```

The following example shows the output for the **show bgp l2vpn evpn** command on Spine Switch 2:

```
Spine-02# show bgp l2vpn evpn
BGP table version is 5499, local router ID is 172.16.255.2
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
              r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter,
              x best-external, a additional-path, c RIB-compressed,
              t secondary path, L long-lived-stale,
Origin codes: i - IGP, e - EGP, ? - incomplete
RPKI validation codes: V valid, I invalid, N Not found

     Network          Next Hop            Metric LocPrf Weight Path
Route Distinguisher: 172.16.254.4:7
 *>i  [1][172.16.254.4:7][00010101010101010101][4294967295]/23
                      172.16.254.4             0    100      0 ?
 * i                   172.16.254.4             0    100      0 ?
Route Distinguisher: 172.16.254.4:101
 *>i  [1][172.16.254.4:101][00010101010101010101][0]/23
                      172.16.254.4             0    100      0 ?
 * i                   172.16.254.4             0    100      0 ?
Route Distinguisher: 172.16.254.5:9
 *>i  [1][172.16.254.5:9][00010101010101010101][4294967295]/23
                      172.16.254.5             0    100      0 ?
Route Distinguisher: 172.16.254.5:101
 *>i  [1][172.16.254.5:101][00010101010101010101][0]/23
                      172.16.254.5             0    100      0 ?
Route Distinguisher: 172.16.254.3:101
 * i  [2][172.16.254.3:101][0][48][10B3D56A8FC1][32][10.1.101.1]/24
                      172.16.254.3             0    100      0 ?
 *>i                   172.16.254.3             0    100      0 ?
 * i  [2][172.16.254.3:101][0][48][F4CFE24334C1][0][*]/20
                      172.16.254.3             0    100      0 ?
 *>i                   172.16.254.3             0    100      0 ?
 * i  [2][172.16.254.3:101][0][48][F4CFE24334C1][32][10.1.101.11]/24
                      172.16.254.3             0    100      0 ?
 *>i                   172.16.254.3             0    100      0 ?
Route Distinguisher: 172.16.254.4:101
 * i  [2][172.16.254.4:101][0][48][7C210DBD9541][32][10.1.101.1]/24
                      172.16.254.4             0    100      0 ?
 *>i                   172.16.254.4             0    100      0 ?
Route Distinguisher: 172.16.254.5:101
 * i  [2][172.16.254.5:101][0][48][44D3CA286C82][0][*]/20
                      172.16.254.5             0    100      0 ?
 *>i                   172.16.254.5             0    100      0 ?
 * i  [2][172.16.254.5:101][0][48][44D3CA286CC2][0][*]/20
                      172.16.254.5             0    100      0 ?
 *>i                   172.16.254.5             0    100      0 ?
```

```
 * i  [2][172.16.254.5:101][0][48][7C210DBD2741][32][10.1.101.1]/24
                      172.16.254.5             0    100      0 ?
 *>i                   172.16.254.5             0    100      0 ?
Route Distinguisher: 172.16.254.3:101
 * i  [3][172.16.254.3:101][0][32][172.16.254.3]/17
                      172.16.254.3             0    100      0 ?
 *>i                   172.16.254.3             0    100      0 ?
Route Distinguisher: 172.16.254.4:101
 * i  [3][172.16.254.4:101][0][32][172.16.254.4]/17
                      172.16.254.4             0    100      0 ?
 *>i                   172.16.254.4             0    100      0 ?
Route Distinguisher: 172.16.254.5:101
 * i  [3][172.16.254.5:101][0][32][172.16.254.5]/17
                      172.16.254.5             0    100      0 ?
 *>i                   172.16.254.5             0    100      0 ?
Route Distinguisher: 172.16.255.4:257
 * i  [4][172.16.255.4:257][00010101010101010101][32][172.16.254.4]/23
                      172.16.254.4             0    100      0 ?
 *>i                   172.16.254.4             0    100      0 ?
Route Distinguisher: 172.16.255.5:257
 * i  [4][172.16.255.5:257][00010101010101010101][32][172.16.254.5]/23
                      172.16.254.5             0    100      0 ?
 *>i                   172.16.254.5             0    100      0 ?
Route Distinguisher: 1:1
 * i  [5][1:1][0][24][10.1.101.0]/17
                      172.16.254.5             0    100      0 ?
 * i                   172.16.254.4             0    100      0 ?
 *>i                   172.16.254.3             0    100      0 ?
 * i                   172.16.254.3             0    100      0 ?

Spine-02#
```

The following example shows the output for the **show ip route** command on Spine Switch 2:

```
Spine-02# show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, m - OMP
       n - NAT, Ni - NAT inside, No - NAT outside, Nd - NAT DIA
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       H - NHRP, G - NHRP registered, g - NHRP registration summary
       o - ODR, P - periodic downloaded static route, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

      172.16.0.0/16 is variably subnetted, 17 subnets, 2 masks
O        172.16.13.0/24
           [110/2] via 172.16.23.3, 05:36:24, GigabitEthernet1/0/1
O        172.16.14.0/24
           [110/2] via 172.16.24.4, 03:37:38, GigabitEthernet1/0/2
O        172.16.15.0/24
           [110/2] via 172.16.25.5, 03:39:11, GigabitEthernet1/0/3
C        172.16.23.0/24 is directly connected, GigabitEthernet1/0/1
L        172.16.23.2/32 is directly connected, GigabitEthernet1/0/1
C        172.16.24.0/24 is directly connected, GigabitEthernet1/0/2
L        172.16.24.2/32 is directly connected, GigabitEthernet1/0/2
C        172.16.25.0/24 is directly connected, GigabitEthernet1/0/3
L        172.16.25.2/32 is directly connected, GigabitEthernet1/0/3
O        172.16.254.3/32
```

```
           [110/2] via 172.16.23.3, 05:36:24, GigabitEthernet1/0/1
O        172.16.254.4/32
           [110/2] via 172.16.24.4, 03:37:28, GigabitEthernet1/0/2
O        172.16.254.5/32
           [110/2] via 172.16.25.5, 03:39:11, GigabitEthernet1/0/3
O        172.16.255.1/32
           [110/3] via 172.16.25.5, 03:39:11, GigabitEthernet1/0/3
           [110/3] via 172.16.24.4, 03:37:38, GigabitEthernet1/0/2
           [110/3] via 172.16.23.3, 05:36:24, GigabitEthernet1/0/1
C        172.16.255.2/32 is directly connected, Loopback0
O        172.16.255.3/32
           [110/2] via 172.16.23.3, 05:36:24, GigabitEthernet1/0/1
O        172.16.255.4/32
           [110/2] via 172.16.24.4, 03:37:34, GigabitEthernet1/0/2
O        172.16.255.5/32
           [110/2] via 172.16.25.5, 03:39:11, GigabitEthernet1/0/3

Spine-02#
```

Return to Verifying Dual-Homing with Single-Active Redundancy in a BGP EVPN VXLAN Fabric, on page 18.