



Server Specifications

This appendix contains information about the server specifications:

- [Server Specifications, on page 1](#)


Server Specifications

This appendix lists the physical, environmental, and power specifications for the server.

- [Physical Specifications, on page 1](#)
- [Environmental Specifications, on page 3](#)
- [Power Specifications, on page 4](#)

Physical Specifications

The following figure shows the height, width, and depth of the chassis as measured to different locations.

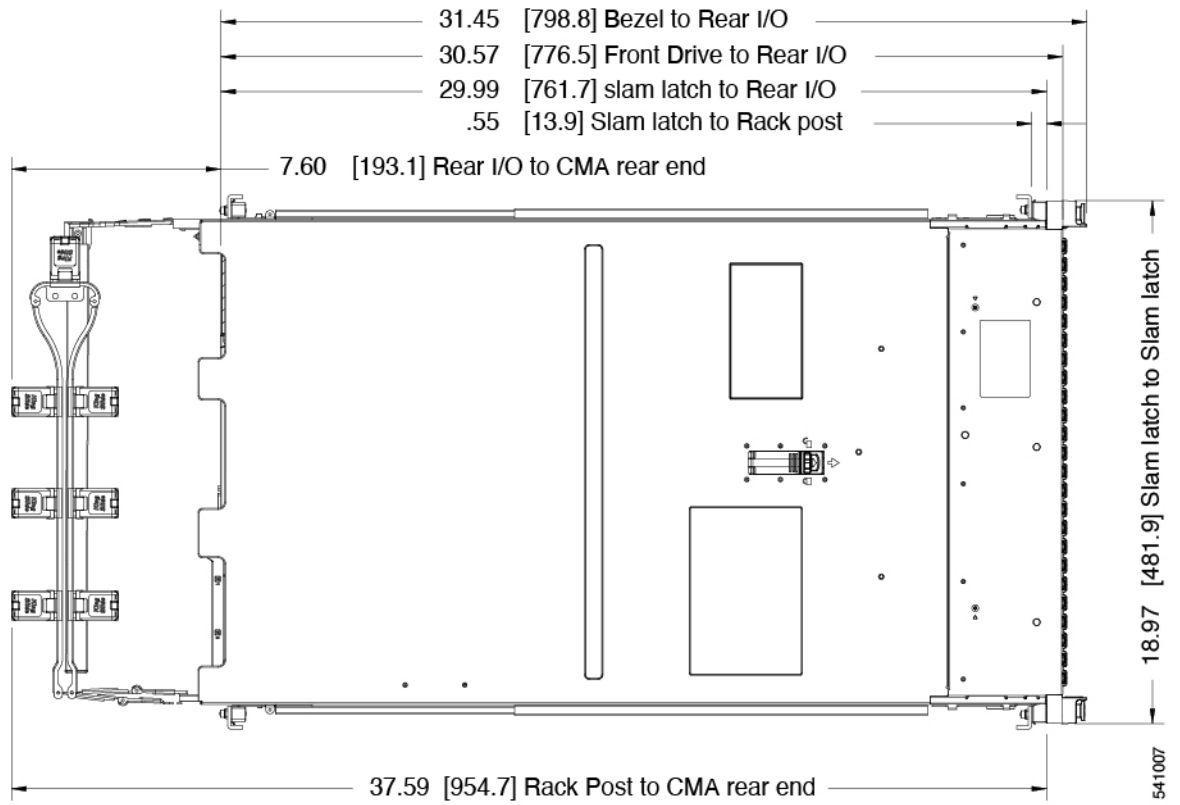

The following table lists additional physical specifications for the server versions.

Table 1: Physical Specifications

Description	Specification
Server weight	<ul style="list-style-type: none"> • SFF 12-drive server: <ul style="list-style-type: none"> • Maximum, fully configured with rail kit: 49.2 lb (20.28 kg) • Minimum, empty chassis, no rail kit: 35.7 lb (16.2 kg) • SFF 24-drive server: <ul style="list-style-type: none"> • Maximum, fully configured with rail kit: 61.7 lb (26.67 kg) • Minimum, empty chassis, no rail kit: 33.14 lb (15.03 kg) • LFF 12-drive server: <ul style="list-style-type: none"> • Maximum, fully configured with rail kit: 66.75 lb (28.0 kg) • Minimum, empty chassis, no rail kit: 39.13 lb (17.75 kg)
Front Clearance	3 in. (76 mm)
Side Clearance	1 in. (25 mm)
Rear Clearance	6 in. (152 mm)

Environmental Specifications

As a Class A2 product, the server has the following environmental specifications.

Table 2: Environmental Specifications

Description	Specification
Temperature, Operating	<p>Dry bulb temperature of 10°C to 35°C (50°F to 95°F)</p> <p>Maximum temperature change of 20°C (36°F) per hour (a temperature change within a specified period of time and not a rate of change)</p> <p>Humidity condition: Uncontrolled, not to exceed 50% RH starting condition</p> <p>Derate the maximum temperature by 1°C (33.8°F) per every 305 meters of altitude above 900m</p>

Temperature, Extended Operating	5°C to 40°C (41°F to 104°F) with no direct sunlight Humidity condition: Uncontrolled, not to exceed 50% RH starting condition Derate the maximum temperature by 1°C (33.8°F) per every 305 meters of altitude above 900m
Temperature, non-operating (when the server is stored or transported)	Dry bulb temperature of 40 °C to 65 °C (-40°F to 149 °F)
Humidity (RH), operating	10% to 90% and 28°C (82.4°F) maximum dew-point temperature, non-condensing environment Minimum to be higher (more moisture) of -12 °C (10.4 °F) dew point or 8% relative humidity Maximum to be 24 °C (75.2 °F) dew point or 90% relative humidity
Humidity (RH), non-operating (when the server is stored or transported)	5% to 93% relative humidity, non-condensing, with a maximum wet bulb temperature of 28 °C across the 20 °C to 40 °C dry bulb range.
Altitude, operating	A maximum elevation of 3050 meters (10,006 feet)
Altitude, non-operating (when the server is stored or transported)	An elevation of 0 to 12,000 meters (39,370 feet)
Maximum Operating Duration	Unlimited
Sound power level Measure A-weighted per ISO7779 LwAd (Bels) Operation at 73°F (23°C)	5.5
Sound pressure level Measure A-weighted per ISO7779 LpAm (dBA) Operation at 73°F (23°C)	40

Power Specifications



Note Do not mix power supply types or wattages in the server. Both power supplies must be identical.

You can get more specific power information for your exact server configuration by using the Cisco UCS Power Calculator:

<http://ucspowercalc.cisco.com>

The power specifications for the supported power supply options are listed in the following sections.

1050 W AC Power Supply

This section lists the specifications for each 1050 W AC power supply (Cisco part number UCSC-PSU1-1050W).

Table 3: 1050 W AC Specifications

Description	Specification
AC Input Voltage	Nominal range: 100–120 VAC, 200–240 VAC (Range: 90–132 VAC, 180–264 VAC)
AC Input Frequency	Nominal range: 50 to 60Hz (Range: 47–63 Hz)
Maximum AC Input current	12.5 A at 100 VAC 6.0 A at 208 VAC
Maximum input volt-amperes	1250 VA at 100 VAC
Maximum inrush current	15 A (sub-cycle duration)
Maximum hold-up time	12 ms at 1050 W
Maximum output power per PSU	800 W at 100–120 VAC 1050 W at 200–240 VAC
Power supply output voltage	12 VDC
Power supply standby voltage	12 VDC
Efficiency rating	Climate Savers Platinum Efficiency (80Plus Platinum certified)
Form factor	RSP2
Input connector	IEC320 C14

1050 W DC Power Supply

This section lists the specifications for each 1050 W DC power supply (Cisco part number UCSC-PSUV2-1050DC).

Table 4: 1050 W DC Specifications

Description	Specification
DC Input Voltage	Nominal range: -48 to -60 VDC (Range: -40 to -72 VDC)
Maximum DC input current	N32 A at -40 VDC
Maximum input wattage	1234 W

Maximum inrush current	35 A (sub-cycle duration)
Maximum hold-up time	5 ms at 100% load (1050 W main and 36 W standby)
Maximum output power per PSU	1050 W on 12 VDC main power 36 W on 12 VDC standby power
Power supply output voltage	12 VDC
Power supply standby voltage	12 VDC
Efficiency rating	≥ 92% at 50% load
Form factor	RSP2
Input connector	Fixed 3-wire block

1200 W AC Power Supply

This section lists the specifications for each 1200 W AC power supply (Cisco part number UCSC-PSU1-1200W-D).

Table 5: 1200 W AC Specifications

Description	Specification
AC input voltage	Range: 100–230 VAC
AC input frequency	Range: 50 to 60Hz
Maximum AC input current	12.97 A at 100 VAC
Maximum input volt-amperes	1345 VA at 208 VAC
Maximum inrush current	20 A
Maximum hold-up time	12 ms at 1200 W
Maximum output power per PSU	1100 W at 100–120 VAC 1200 W at 208–230 VAC
Power supply output voltage	12 VDC
Power supply standby voltage	12 VDC
Efficiency rating	Climate Savers Platinum Efficiency (80Plus Titanium certified)
Form factor	RSP2
Input connector	IEC320 C14

1600 W AC Power Supply

This section lists the specifications for each 1600 W AC power supply (Cisco part number UCSC-PSU1-1600W).

Table 6: 1600 W AC Specifications

Description	Specification
AC Input Voltage	Nominal range: 200–240 VAC (Range: 180–264 VAC)
AC Input Frequency	Nominal range: 50 to 60Hz (Range: 47–63 Hz)
Maximum AC Input current	9.5 A at 200 VAC
Maximum input volt-amperes	1250 VA at 200 VAC
Maximum inrush current	30 A at 35° C
Maximum hold-up time	80 ms at 1600 W
Maximum output power per PSU	1600 W at 200–240 VAC
Power supply output voltage	12 VDC
Power supply standby voltage	12 VDC
Efficiency rating	Climate Savers Platinum Efficiency (80Plus Platinum certified)
Form factor	RSP2
Input connector	IEC320 C14

2300 W AC Power Supply



Note For the 80PLUS platinum certification documented in the following table, you can find test results at <https://www.cleareresult.com/80plus/>.

This section lists the specifications for each 2300 W AC power supply (Cisco part number UCSC-PSU1-2300).

Parameter	Specification
Input Connector	IEC320 C20
Input Voltage Range (V rms)	100 to 240
Maximum Allowable Input Voltage Range (V rms)	90 to 264
Frequency Range (Hz)	50 to 60

Parameter	Specification			
Maximum Allowable Frequency Range (Hz)	47 to 63			
Maximum Rated Output (W) Limited to 800W when operating at low-line input voltage, 100-127 V	2300			
Maximum Rated Standby Output (W)	36			
Nominal Input Voltage (V rms)	100	120	208	230
Nominal Input Current (A rms)	13	11	12	10.8
Maximum Input at Nominal Input Voltage (W)	1338	1330	2490	2480
Maximum Input at Nominal Input Voltage (VA)	1351	1343	2515	2505
Maximum Rated Efficiency (%) Minimum rating required to achieve 80PLUS platinum certification.	92	92	93	93
Maximum Rated Power Factor Minimum rating required to achieve 80PLUS platinum certification.	0.99	0.99	0.97	0.97
Maximum Inrush Current (peak A)	30			
Maximum Inrush Current (ms)	0.2			
Maximum Ride-Through Time Time output voltage remains within regulation limits at 100% load, during input voltage dropout	12			

Power Cord Specifications

Each power supply in the server has a power cord. Standard power cords or jumper power cords are available for connection to the server. The shorter jumper power cords, for use in racks, are available as an optional alternative to the standard power cords.



Note Only the approved power cords or jumper power cords listed below are supported.

Table 7: Supported Power Cords

Description	Length (Feet)	Length (Meters)
-------------	---------------	-----------------

CAB-48DC-40A-8AWG DC power cord, -48 VDC, 40 A, 8 AWG Three-socket Mini-Fit connector to three-wire	11.7	3.5
CAB-C13-C14-AC AC power cord, 10 A; C13 to C14, recessed receptacle	9.8	3.0
CAB-250V-10A-AR AC power cord, 250 V, 10 A Argentina	8.2	2.5
CAB-C13-C14-2M-JP AC Power Cord, C13 to C14 Japan PSE Mark	6.6	2.0
CAB-9K10A-EU AC Power Cord, 250 V, 10 A; CEE 7/7 Plug Europe	8.2	2.5
CAB-250V-10A-IS AC Power Cord, 250 V, 10 A Israel	8.2	2.5
CAB-250V-10A-CN AC power cord, 250 V, 10 A PR China	8.2	2.5
CAB-ACTW AC power cord, 250 V, 10 A Taiwan	7.5	2.3
CAB-C13-CBN AC cabinet jumper power cord, 250, 10 A, C13 to C14	2.2	0.68
CAB-C13-C14-2M AC cabinet jumper power cord, 250 V, 10 A, C13 to C14	6.6	2.0
CAB-9K10A-AU AC power cord, 250 V, 10 A, 3112 plug, Australia	8.2	2.5

CAB-N5K6A-NA AC power cord, 200/240 V, 6 A, North America	8.2	2.5
CAB-250V-10A-ID AC power Cord, 250 V, 10 A, India	8.2	2.5
CAB-9K10A-SW AC power cord, 250 V, 10 A, MP232 plug Switzerland	8.2	2.5
CAB-250V-10A-BR AC power Cord, 250 V, 10 A Brazil	8.2	2.5
CAB-9K10A-UK AC power cord, 250 V, 10 A (13 A fuse), BS1363 plug United Kingdom	8.2	2.5
CAB-9K12A-NA AC power cord, 125 V, 13 A, NEMA 5-15 plug North America	8.2	2.5
CAB-AC-L620-C13 AC power cord, NEMA L6-20 to C13 connectors	6.6	2.0
CAB-9K10A-IT AC power cord, 250 V, 10 A, CEI 23-16/VII plug Italy	8.2	2.5
R2XX-DMYMPWRCORD No power cord; PID option for ordering server with no power cord	NA	NA