



Front Panel Layout

This section details the front panel layout, LEDs and ports.

Figure 1: Front View of the Cisco Expressway

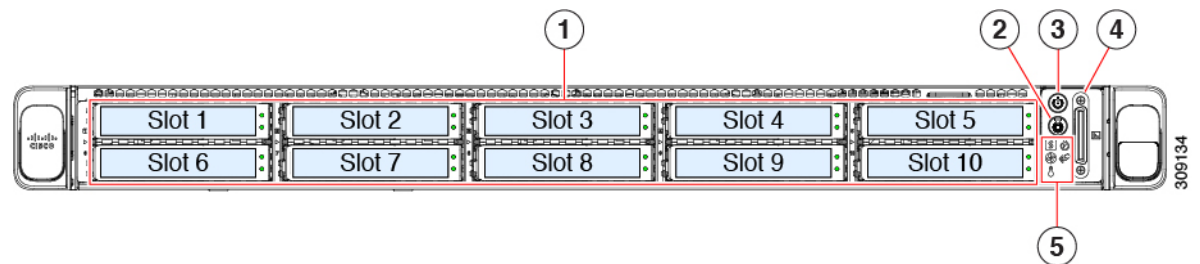


Table 1: Front panel LEDs and components

1	SED drives (Slot 1 and Slot 2 occupied only)
2	Unit identification button/LED
3	Power button/power status LED
4	KVM connector (used with KVM cable that provides one DB-15 VGA, one DB-9 serial, and two USB 2.0 connectors)
5	System LED cluster: <ul style="list-style-type: none"> • Fan status LED • System status LED • Power supply status LED • Network link activity LED • Temperature status LED <p>Note For more information on the description of the LED status, see Cisco UCS C220 M6 Server Installation and Service Guide.</p>

