



CPS Advanced Tuning Guide, Release 24.1.0

First Published: 2024-03-14

Americas Headquarters

Cisco Systems, Inc. 170 West Tasman Drive San Jose, CA 95134-1706 USA http://www.cisco.com Tel: 408 526-4000

800 553-NETS (6387)

Fax: 408 527-0883

THE SPECIFICATIONS AND INFORMATION REGARDING THE PRODUCTS IN THIS MANUAL ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL STATEMENTS, INFORMATION, AND RECOMMENDATIONS IN THIS MANUAL ARE BELIEVED TO BE ACCURATE BUT ARE PRESENTED WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED. USERS MUST TAKE FULL RESPONSIBILITY FOR THEIR APPLICATION OF ANY PRODUCTS.

THE SOFTWARE LICENSE AND LIMITED WARRANTY FOR THE ACCOMPANYING PRODUCT ARE SET FORTH IN THE INFORMATION PACKET THAT SHIPPED WITH THE PRODUCT AND ARE INCORPORATED HEREIN BY THIS REFERENCE. IF YOU ARE UNABLE TO LOCATE THE SOFTWARE LICENSE OR LIMITED WARRANTY, CONTACT YOUR CISCO REPRESENTATIVE FOR A COPY.

The Cisco implementation of TCP header compression is an adaptation of a program developed by the University of California, Berkeley (UCB) as part of UCB's public domain version of the UNIX operating system. All rights reserved. Copyright © 1981, Regents of the University of California.

NOTWITHSTANDING ANY OTHER WARRANTY HEREIN, ALL DOCUMENT FILES AND SOFTWARE OF THESE SUPPLIERS ARE PROVIDED "AS IS" WITH ALL FAULTS. CISCO AND THE ABOVE-NAMED SUPPLIERS DISCLAIM ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, THOSE OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE.

IN NO EVENT SHALL CISCO OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THIS MANUAL, EVEN IF CISCO OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.

All printed copies and duplicate soft copies of this document are considered uncontrolled. See the current online version for the latest version.

Cisco has more than 200 offices worldwide. Addresses and phone numbers are listed on the Cisco website at www.cisco.com/go/offices.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: https://www.cisco.com/c/en/us/about/legal/trademarks.html. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1721R)

© 2024 Cisco Systems, Inc. All rights reserved.



CONTENTS

PREFACE

Preface v

About This Guide v

Audience v

Additional Support vi

Conventions (all documentation) vi

Communications, Services, and Additional Information vii

Important Notes viii

CHAPTER 1

CPS Advanced Tuning 1

qns.conf 1

pb.conf 41

Performance Tuning Parameters 42

Threading Configuration 42

Notification Configuration 43

Configuring Read Operations to Use Secondary DBs 44

Reducing the Log Level Verbosity 45

Contents



Preface

- About This Guide, on page v
- Audience, on page v
- Additional Support, on page vi
- Conventions (all documentation), on page vi
- Communications, Services, and Additional Information, on page vii
- Important Notes, on page viii

About This Guide



Note

The documentation set for this product strives to use bias-free language. For purposes of this documentation set, bias-free is defined as language that does not imply discrimination based on age, disability, gender, racial identity, ethnic identity, sexual orientation, socioeconomic status, and intersectionality. While any existing biased terms are being substituted, exceptions may be present in the documentation due to language that is hardcoded in the user interfaces of the product software, language used based on RFP documentation, or language that is used by a referenced third-party product.

This document is a part of the Cisco Policy Suite documentation set.

For information about available documentation, see the CPS Documentation Map for this release at Cisco.com.



Note

The PATS/ATS, ANDSF, and MOG products have reached end of life and are not supported in this release. Any references to these products (specific or implied), their components or functions in this document are coincidental and are not supported. Full details on the end of life for these products are available at: https://www.cisco.com/c/en/us/products/wireless/policy-suite-mobile/eos-eol-notice-listing.html.

Audience

This guide is best used by these readers:

• Network administrators

- · Network engineers
- · Network operators
- System administrators

This document assumes a general understanding of network architecture, configuration, and operations.

Additional Support

For further documentation and support:

- Contact your Cisco Systems, Inc. technical representative.
- Call the Cisco Systems, Inc. technical support number.
- Write to Cisco Systems, Inc. at support@cisco.com.
- Refer to support matrix at https://www.cisco.com/c/en/us/support/index.html and to other documents related to Cisco Policy Suite.

Conventions (all documentation)

This document uses the following conventions.

Conventions	Indication
bold font	Commands and keywords and user-entered text appear in bold font.
italic font	Document titles, new or emphasized terms, and arguments for which you supply values are in <i>italic</i> font.
[]	Elements in square brackets are optional.
{x y z }	Required alternative keywords are grouped in braces and separated by vertical bars.
[x y z]	Optional alternative keywords are grouped in brackets and separated by vertical bars.
string	A nonquoted set of characters. Do not use quotation marks around the string or the string will include the quotation marks.
courier font	Terminal sessions and information the system displays appear in courier font.
<>	Nonprinting characters such as passwords are in angle brackets.

Conventions	Indication
[]	Default responses to system prompts are in square brackets.
!,#	An exclamation point (!) or a pound sign (#) at the beginning of a line of code indicates a comment line.



Note

Means reader take note. Notes contain helpful suggestions or references to material not covered in the manual.



Caution

Means reader be careful. In this situation, you might perform an action that could result in equipment damage or loss of data.



Warning

IMPORTANT SAFETY INSTRUCTIONS.

Means danger. You are in a situation that could cause bodily injury. Before you work on any equipment, be aware of the hazards involved with electrical circuitry and be familiar with standard practices for preventing accidents. Use the statement number provided at the end of each warning to locate its translation in the translated safety warnings that accompanied this device.

SAVE THESE INSTRUCTIONS



Note

Regulatory: Provided for additional information and to comply with regulatory and customer requirements.

Communications, Services, and Additional Information

- To receive timely, relevant information from Cisco, sign up at Cisco Profile Manager.
- To get the business impact you're looking for with the technologies that matter, visit Cisco Services.
- To submit a service request, visit Cisco Support.
- To discover and browse secure, validated enterprise-class apps, products, solutions and services, visit Cisco Marketplace.
- To obtain general networking, training, and certification titles, visit Cisco Press.
- To find warranty information for a specific product or product family, access Cisco Warranty Finder.

Cisco Bug Search Tool

Cisco Bug Search Tool (BST) is a web-based tool that acts as a gateway to the Cisco bug tracking system that maintains a comprehensive list of defects and vulnerabilities in Cisco products and software. BST provides you with detailed defect information about your products and software.

Important Notes



Important

Any feature or GUI functionality that is not documented may not be supported in this release or may be customer specific, and must not be used without consulting your Cisco Account representative.



CHAPTER

CPS Advanced Tuning

- qns.conf, on page 1
- pb.conf, on page 41
- Performance Tuning Parameters, on page 42
- Reducing the Log Level Verbosity, on page 45

qns.conf

qns.conf file is the main shared configuration file which is applied to all VMs (Virtual Machines) across CPS and is located in the path /etc/broadhop/qns.conf. The following example is a typical Policy Server (QNS) configuration file, however, certain parameters may vary from customer to customer.

- -DclusterFailureDetectionMS=10000
- -Dcom.broadhop.run.systemId=system-1
- -Dcom.broadhop.run.clusterId=cluster-1
- -Dcom.broadhop.config.url=http://pcrfclient01/repos/run/
- $\verb|-Dcom.broadhop.repository.credentials=broadhop/broadhop@lbvip02|\\$
- -Dcom.broadhop.referencedata.local.location=/var/broadhop/checkout
- -Denable.compression=true
- -Denable.dictionary.compression=true
- -DuseZlibCompression=true
- -Dcom.broadhop.locking.autodiscovery=true
- -DmessageSlaMs=9000
- -Dcom.broadhop.diameter.log.success.responses=true
- -DsendDiameterTooBusy=true

The following table lists the common cluster-wide configuration parameters found in /etc/broadhop/qns.conf file:



Note

For any parameter change to take effect, you need to restart the process such as, qns, lb, and so on.

Table 1: qns.conf Parameters

Parameter	Description
com.broadhop.run.clusterId	Name of the cluster. This should match with the Policy Builder configuration within system configuration and can be used to define multiple cluster specially for a GR or HA deployment.
	Default: cluster-1
com.broadhop.run.systemId	Name of the system. This should match with the Policy Builder configuration under system configuration. We can define multiple systems such as UAT, IOT, Production and single policy builder instance can configure all instances of CPS servers.
	Default: system-1
	Note System can contain one or more clusters and is used to define any common things across the clusters (such as load balancing) and it varies with the type of cluster such as, HA and GR.
balanceLocalGeoSiteTag	This parameter is applicable in GR deployments only.
	If primary member is not available, this parameter is used to read the records from available local or current site secondary members and perform the insert, update, and delete operations to the backup database on local (current) site. This parameter helps to reduce the response time for the operation in case of latency between the sites (avoid application to look into the remote site secondary members for the read).
	For this parameter to function as expected, make sure the tags are updated in the MongoDB balance replica-set configuration. For more information, refer to <i>Balance Query Restricted to Local Site</i> section in the <i>CPS Geographic Redundancy Guide</i> .
	Also, make sure the default read preference is configured in Policy Builder.
	Default read preference is configured in Policy Builder
	Example: -DbalanceLocalGeoSiteTag=Site1
	Note The value needs to be same as site1.
	The value needs to be same in both qns.conf file as well as in MongoDB balance replica-set configuration.
clusterLBIF	Application uses the configured interface assigned to this parameter to create the ZMQ TCP connection between local site Policy Director (LB) and remote site Policy Director (LB) VMs. Default: eth1
	Example: -DclusterLBIF=eth1

Parameter	Description
clusterLBIFIpv6	This parameter is applicable for GR only and depends on the value of clusterLBIF parameter.
	Suppose -DclusterLBIF=eth2 and:
	• -DclusterLBIFIpv6=true, then:
	IPv6 address of "eth2" interface is used for ZMQ connection for cross-site communication.
	• -DclusterLBIFIpv6=false, then:
	IPv4 address of "eth2" interface is used for ZMQ connection for cross-site communication.
	Example: -DclusterLBIFIpv6=true
	Default: false
	Possible Values: true, false
clusterPeers	This parameters needs to be configured when there are separate sessions and no replication across sites and provisioning event is needed to broadcast to other sites.
	By default, cross-site messaging does not happen until it is configured.
	Example:
	-DclusterPeers=failover:
	(tcp://105.250.248.144:61616,tcp://105.250.248.145:61616)
	?updateURIsSupported= false!Cluster-SITE-B.default

Parameter	Descripti	on
local.cluster.peer	1 *	meter is used to specify the local cluster name and to create ster queue.
	broadcas	meter is used with st.skipBroadcastToAllclusters. If this parameter is ed, it will not broacast to local peers.
	Example	:-Dlocal.cluster.peer=Cluster1
	Note	This parameter is applicable only when CPS act as an LDAP server to support LDAP search queries using framedIp/msisdn/imsi/framedIpv6Prefix key to get subscriber details.
		The search query can come from single or multiple clusters. The cluster which receives the request forwards the request to all other clusters based on cluster peer configuration.
		For more information, see:
		Subscriber Lookup Server Configuration section in the CPS Mobile Configuration Guide
		Subscriber Lookup Feature Installation section in the CPS Installation Guide for VMware
		<u> </u>

Parameter	Descrip	tion	
broadcast.cluster.peers	clusters LDAP S	This parameter is used to specify all the clusters including local clusters to whom the LDAP search requests (received on the CPS LDAP Server) are broadcasted for session lookup and to create rediscuttive local cluster and other clusters.	
		aster name must be separated with semicolon. Add all the including local cluster name.	
	Example	2:	
	-Dbroad	cast.cluster.peers=Cluster1;Cluster2;Cluster3	
	Note	All the broadcast clusters must be defined here.	
	Note	This parameter is applicable only when CPS act as an LDAP server to support LDAP search queries using framedIp/msisdn/imsi/framedIpv6Prefix key to get subscriber details.	
		The search query can come from single or multiple clusters. The cluster which receives the request forwards the request to all other clusters based on cluster peer configuration.	
		For more information, see:	
		Subscriber Lookup Server Configuration section in the CPS Mobile Configuration Guide	
		Subscriber Lookup Feature Installation section in the CPS Installation Guide for VMware	

Parameter	Description
geoHASessionLookupType	This parameter is used to specify the lookup type to be used in Active/Active GR deployments.
	For any incoming request, this parameter informs the application in which shard to look in. Session database is replicated across site. Session database of the site can be selected based on realm or host or local information.
	Example: -DgeoHASessionLookupType=realm
	Default: realm
	Possible Values: realm, host and local
	If -DgeoHASessionLookupType is set to "local", local session affinity feature is enabled.
	When the lookup type is set to local, you need to configure -DmigrateSessionToLocalSite=true to migrate the sessions on CCR-U/T.
	When session lookup type is set to "local", local session database is used to read/write session irrespective of site lookup configuration. For "local" session lookup type, site lookup configuration is not required. Even if it is configured, it is not used. Firstly, it searches the local site for every incoming request and if it doesn't find it, it looks in the remote site for session shard.
	You need to configure all the realms for all the interfaces (such as, Gx, Rx, and so on) here:
	addsitelookup <siteid> <lookupvalue></lookupvalue></siteid>
	where, <i><siteid></siteid></i> is the primary site ID. <i><lookupvalue></lookupvalue></i> is the realm value.
	For example, if you have multiple Gx and Gy clients connected to the CPS and the details for realms of clients are as follows:
	Client-1: pcef-1-Gx.cisco.com
	Client-2: pcef-1-Gy.cisco.com
	Client-3: pcef-2-Gx.cisco.com
	Client-4: pcef-2-Gy.cisco.com
	Let us consider, first two clients (Client-1 and Client-2) are connected to Site1 and Client-3 and Client-4 are connected to the Site2, then
	addsitelookup Sitel pcef-1-Gx.cisco.com addsitelookup Sitel pcef-1-Gy.cisco.com addsitelookup Site2 pcef-2-Gx.cisco.com addsitelookup Site2 pcef-2-Gy.cisco.com
	Note Make sure same realms should not be configured for both the sites. The configured realms of the Site1 and Site2 should be identical.

Parameter	Description
GeoSiteName	Name defined to identify chassis/cluster for a given site. It should uniquely identify the name within entire cluster. It is mandatory to configure this parameter if isGeoHAEnabled property is enabled.
	Example: -DGeoSiteName=site1
isGeoHAEnabled	This parameter is used to enable the Active/Active GR. This parameter is applicable when Geo-HA bundle is installed.
	Example: -DisGeoHAEnabled=true
	Default: false
	Possible Values: true, false
migrateSessionToLocalSite	When set to "true", sessions are migrated to local site while processing calls. Next request on same session would then be processed from local databases.
	Note Migration happens while processing primary session (GX) only.
	When set to "false", session is not migrated and continues to be fetched and updated from remote site database. Support for this parameter has been added in orchestration API also.
	Example: -DmigrateSessionToLocalSite=true
	Default: false
	Possible Values: true, false
	Note This parameter is recommended in conjunction with geoHASessionLookupType when set to local.

Parameter	Description
RemoteGeoSiteName	This parameter is applicable only for GR.
	When the session created on Site2 and SPR update or Rx call comes on Site1, CPS sends Gx RAR from Site1 and in response PCEF sends RAA and next CCR request to Site1.
	This leads to cross site call switches from Site2 to Site1. If there are lot of call switches, Site1 may get overloaded.
	By default, CPS does not prevent cross-site switching. To prevent cross-site switching, user needs to set -DRemoteGeoSiteName parameter in /etc/broadhop/qns.conf file. This parameter enables cross-site communication for outbound messages such as, for RAR, if you do not have DRA outside Policy Director (lb) and want to avoid RAR switches.
	-DRemoteGeoSiteName= <sitename></sitename>
	where,
	<sitename> is remote site name to be provided, and only to be added if you want to disable Gx-RAR switches from PCRF. It should match with the name of Geo remote site (-DGeoSiteName).</sitename>
	Prerequisite is both remote site and local site Policy Server (QNS) should be able to communicate to Policy Director (lb) on same interfaces.
	To change interface, parameter -Dcom.broadhop.q.if= <enter interface="" name="" replication=""> can be used.</enter>
	For cross-site communication, isQSystemAvailable must be enabled.
RemoteSiteId	Site ID to uniquely identify remote site chassis/cluster. RemoteSiteId belongs to other site means current site is communicating to other site in case of GR deployments. You need to specify site ID of other site here.
	Default: Site2

Parameter	Description
sessionLocalGeoSiteTag	This geo tagging is applicable only during database failover time period. In normal case, session database query/update always happens on primary member. This parameter is applicable in GR deployments only.
	If primary member is not available, this parameter makes sure that records are read from the available local or current site secondary members and perform the insert, update, and delete operations to the backup database on local (current) site. It helps to reduce the response time for the operation in case of latency between the sites (avoid application to look into the remote site secondary members for the read).
	For this parameter to function as expected, make sure the tags are updated in the MongoDB balance replica-set configuration. For more information, refer to Session Query Restribcted to Local Site during Failover in the CPS Geographic Redundancy Guide.
	-DsessionLocalGeoSiteTag= <current name="" site=""></current>
	Example: -DsessionLocalGeoSiteTag=Site1
	Note The value needs to be same in both qns.conf as well as in MongoDB session replica-set configuration.
	Policy Builder configuration for pb read preference is not available. It will always be primary.
SiteId	Site ID is used to identify name for the current site.
	Default: Site1
sprLocalGeoSiteTag	SPR doesn't have backup database. By default, SPR lookup is secondary and preferred only if the primary is not available. It has a Policy Builder configuration to control if any transactions to read a subscriber data from SPR replica set for primary are not available.
	If sprLocalGeoSiteTag is not configured and select read preference as a secondary is set in PB, there is a chance to look into other remote secondary and can see a latency response time. To avoid latency in response time, this parameter must be configured on MongoDB replica set and qns.conf file so that the application tries to read/write from locally available member results.
	This parameter overrides the read preference configured in USuM Configuration in Policy Builder. Default read preference is configured in Policy Builder.
	Example: -DsprLocalGeoSiteTag=Site1

Parameter	Description
migrateSessionToLocalSite AdditionalInterfaces	This parameter is used to trigger the session migration if the network session is found on the remote site and the incoming message is Sy or Rx.
	Example: -DmigrateSessionToLocalSiteAdditionalInterfaces=SY_V11,RX_TGPP
	Default: GX_TGPP
	Possible Values: Sy_V11, SingleSyDeviceMgr, RX_TGPP, GX_TGPP
	Note migrateSessionToLocalSite must be set to true to use the parameter migrateSessionToLocalSiteAdditionalInterfaces.
	This parameter is applicable only to GR environment.
com.broadhop.q.if	This parameter is used to perform diameter message interprocess communication transfering between Policy Server (QNS) and Policy Director (LB) VMs. Both remote site and local site policy server (QNS) should be able to communicate to load balancer on same interfaces.
	To change the interface, -Dcom.broadhop.q.if= <enter interface="" name="" replication=""> can be used.</enter>
	Example: -Dcom.broadhop.q.if=eth0
	Default: eth0
com.broadhop.q.if.ipv6	This parameter depends on the value of com.broadhop.q.if parameter. This parameter is generally not required to be changed unless you do not have IPv4 address for internal communication.
	Suppose -Dcom.broadhop.q.if=eth0 and:
	• -Dcom.broadhop.q.if.ipv6=true, then:
	IPv6 address of "eth0" interface is used for ZMQ connection for internal communication between VMS within site.
	• -Dcom.broadhop.q.if.ipv6=false, then:
	IPv4 address of "eth0" interface is used for ZMQ connection for internal communication between VMS within site.
	Example: -Dcom.broadhop.q.if.ipv6=true
	Default: false
	Possible Values: true, false

Parameter	Description
purgeUnusedQuota	When this parameter is set to true, then application removes the empty quota entries from the balance records. The quota is removed only when all the credits in that particular quota have been removed.
	This parameter depends on the credits in the quota, even if the quota is not being used but credit details are still present then quota will not auto purge but wait till all the credits are removed from it. To maintain history of credits depends on 'retainCreditsDays' parameter value.
	This parameter is not applicable for purging 'Recurring Quotas'.
	Example: -DpurgeUnusedQuota=true
	Default: false
	Possible Values: true, false
PCRF_Name	For Legacy OCS server, you need to configure <code>-DPCRF_Name</code> in <code>/etc/broadhop/qns.conf</code> file. This number is used to configure the pcrf number (in Sy NDM) to be sent in SY session-id as per your requirements for legacy OCS.
	Example: -DPCRF_Name=11
	This configures the PCRF name to be 11.
do.service.bundling.without.profiles	Virtual service can be created with or without CRD profile.
	This parameter allows the creation of virtual-services without defining CRD bundle profiles.
	If the parameter is set to false which means bundle profile is required for virtual-services.
	Example: -Ddo.service.bundling.without.profiles=false
	Default: false
	Possible Values: true, false
evaluate.session.on.service.expiration	When set to true, CPS internally triggers a session evaluation when a particular virtual-service expires. On evaluation it skips the expired virtual-service and applies new policies accordingly.
	Example: -Devaluate.session.on.service.expiration=true
	Default: false
	Possible Values: true, false

Parameter	Description	1			
virtualservice.optimize.crd	by the virtukeys) while	o true, CPS only loads the CRD tables that are affected all service (virtual service name and its AVPs used as evaluating each virtual service. If any other CRD tables ent on the results of these tables, then they too are ecursively.			
	Example: -	Dvirtualservice.optimize.crd=true			
	Default: fal	se			
	Possible Va	alues: true, false			
enable.parallel.queries mongo.session.query.pool.size	(instead of	session database across multiple shards can now be parallel serial) thus reducing the overall time required to search n case of large number of shards).			
		ing additional parameters are required to enable parallel cries for LDAP server and NAP notifications:			
	I	e.parallel.queries: This parameter is used to enable el lookup for secondary key searches.			
	Exam	ple:-Denable.parallel.queries=true			
	Default: false				
	Possible Values: true, false				
	• mongo.session.query.pool.size: This parameter is used to configure size of thread pool used to perform parallel queries for secondary keys.				
	Exam	ple: -Dmongo.session.query.pool.size=10			
	Defau	lt: 0			
	Note	If the pool size is configured as 0 (default value) then thread pool is not created and queries are not executed parallely.			
	Note	If all the pool threads (above) are busy, then the caller thread is used to perform session lookup.			
db.full.scan.tps	This parameter is used to restrict the TPS of full database scans per qns process.				
	This parameter is optional. If this parameter is not configured in qns.conf file, default value 7 is used.				
	To disable the full scan restriction to configured limit, in ${\tt qns.conf}$ file, set the value to $0.$				
	Example: -Ddb.full.scan.tps=350				
	Default: 7 ((for HA setup); 4 (for GR setup)			

Parameter	Description		
com.broadhop.license.approach	This parameter is used to configure/enable CPS to use the Cisco Smart Licensing model.		
	Example: -Dcom.broadhop.license.approach=sl		
	where, sl is used for Smart Licensing.		
	If this parameter is not present, CPS uses the legacy SWIFT/LMGRD model. For more information, see CPS Managing CPS Licenses chapter in the CPS Operations Guide.		
	Default: Not present/null		
	Note Currently, for smart license, only sl can be passed. For any other license approach, remove this parameter from qns.conf file.		
com.broadhop.config.url	The URL from which to pull the policy configuration. This URL should match with the publish URL defined in Policy Builder.		
	Default: http://lbvip02/repos/run/		
com.broadhop.repository.credentials	Username, password@hostname format is fixed and is used for SVN credential used to access the policy configuration.		
	Default: qns-svn/3300901EA069E81CE29D4F		
	77DE3C85FA@lbvip02		
	You can use <code>change_passwd.sh</code> script to change qns-svn user password after installation. However, if the changed password is not added/updated in <code>Configuration.csv</code> spreadsheet, the new password is overridden by the default value in <code>Configuration.csv</code> after running <code>reinit.sh</code> script as the qns-svn user takes the existing default password from <code>Configuration.csv</code> spreadsheet.		
	Note User/password is set in Configuration.csv. For more information, see <i>General Configuration</i> section in the <i>CPS Installation Guide for VMware</i> .		
	For more information on password encryption, see System Password Encryption in the CPS Installation Guide for VMware.		
com.broadhop.repository.	Enables or disables encryption of the runtime repository password.		
credentials.isEncrypted	Default: true		
	Note When -Dcom.broadhop.repository.credentials.isEncrypte password value is expected be in encrypted format in com.broadhop.repository.credentials.		

Parameter	Description	
com.cisco.balance.compression	This parameter is used to enable or disable balance compression. Default: true	
com.cisco.balance.dbs	This parameter is used to configured the number of shards for balance database at application level.	
	Default: 1	
retainCreditsDays	Property retainCreditsDays could be configured to control the number of days after which expired balance credits are removed. CPS calculates the age of expired credits whenever refresh happens to that quota and if age of expired credit greater than retainCreditsDays then it removes credit entry.	
	For example, -DretainCreditsDays=60 removes credit entry after 60 days of expiry (or later) when refresh is triggered for subscriber quota.	
	If the parameter is not specified, 99999 is used as default value.	
	When balance services are used, it is recommended to configure retainCreditsDays to a value based on the business requirement. If retainCreditsDays is not configured, it leads to expired credits getting accumulated thereby increasing the balance record size. The increased balance record size increases the CPU load while reading and writing the balance records and thereby affecting the system performance.	
dbSocketTimeout	The wait time in milliseconds for query/insert/update/delete on database, before it can be timed out.	
	This timeout value is used at the timeout value for all other databases unless the specific timeout parameter for the database (such as balance, CDR, and so on) is configured.	
	Default: 60000	
	Recommended: 1000	
dbSocketTimeout.balance	The wait time in milliseconds for query/insert/update/delete on the balance database, before it can be timed out.	
	If a value for this parameter is not defined, the value of dbSocketTimeout (configured or default) is used. Default: 60000	
	Detauit. 00000	

Parameter	Description		
dbSocketTimeout.cdr	The socket timeout on the CDR database in milliseconds.		
		this parameter is not defined, the value of eout (configured or default) is used.	
	Example: -Do	dbSocketTimeout.cdr=1000	
	Default: 6000	00	
dbSocketTimeout.cdrrep	The socket tin	meout in milliseconds on the reporting database.	
		this parameter is not defined, the value of eout (configured or default) is used.	
	Example: -Do	dbSocketTimeout.cdrrep=1000	
	Default: 6000	00	
	t (absocketTimeout.cdrrep parameter is applicable to the process involved in participating CDR replication (reporting database) whereas absocketTimeout.cdr parameter is used for CDR database.	
dbSocketTimeout.remoteBalance		To be used only when configuring remote balance database access via Policy Builder.	
		e in milliseconds for query/insert/update/delete on the base, before it can be timed out.	
	If a value for this parameter is not defined, the value of dbSocketTimeout (configured or default) is used.		
	Default: 6000	00	
dbSocketTimeout.remoteSpr		To be used only when configuring remote SPR database access via Policy Builder.	
		e in milliseconds for query/insert/update/delete on the e, before it can be timed out.	
		this parameter is not defined, the value of eout (configured or default) is used.	
	Default: 6000	00	

Parameter	Description	1	
dbSocketTimeout.spr	helps the M the Control preference is set to Prin	a separate socket timeout for the SPR MongoDB. This longoDB regex search function operate as expected for Center GUI and is only viable when the SPR read is set to SecondaryPreferred. If the SPR read preference mary like the Session DB, then Cisco highly recommends socketTimeout parameter is used and the same timeout PR.	
		or this parameter is not defined, the value of imeout (configured or default) is used.	
	Default: 60	000	
	Note	CPS allows you to do a regex search. By default, Disable Regex Search is checked under USuM Configuration in Policy Builder. You can uncheck this option and enable regex search through Control Center.	
dbSocketTimeout.secondary_key	MongoDB socket timeout in milliseconds. This parameter is used for SK database.		
	Example: -	DdbSocketTimeout.secondary_key=60000	
	Default: 1000		
mongo.connections.per.host	Number of concurrent application connections allowed to the MongoDB per host (qns process). If there are three session cache, then each cache can have five connections.		
	1	for this parameter is not defined, the value of nections.per.host (configured or default) is used.	
	Example: -	Dmongo.connections.per.host=1	
	Default: 5		
	Note	If the value is not present in qns.conf file, the value is 100.	
	Note	In case of 4 blade setup, change the parameter value to 20; 8 blade setup = 15; multi-chassis (16 + Blades) = 5.	
mongo.connections.per.host.balance	This parameter is used to specify the number of connections allowed per host (the pool size, per host) for the balance database.		
	If the value for this parameter is not defined, the value of mongo.connections.per.host (configured or default) is used.		
	Example: -Dmongo.connections.per.host.balance=		
	Default: 100		
	Note	In case of 4 blade setup, change the parameter value to 20; 8 blade setup = 15; multi-chassis (16 + Blades) = 10.	

Parameter	Description	ı		
mongo.connections.per.host.cdr	The numbe	r of connections on the CDR database allowed per host.		
		for this parameter is not defined, the value of nections.per.host (configured or default) is used.		
	Example: -	Dmongo.connections.per.host.cdr=10		
	Default: 10			
mongo.connections.per.host.cdrrep	The numbe host.	The number of connections on the reporting database allowed per host.		
		for this parameter is not defined, the value of nections.per.host (configured or default) is used.		
	Example: -	Dmongo.connections.per.host.cdrrep=10		
	Default: 10			
	Note	mongo.connections.per.host.cdrrep refers to both Staging database and CDR database under Policy Reporting.		
		If mongo.connections.per.host.cdrrep and mongo.connections.per.host.cdr are defined in the qns.conf, then cdr takes precedence over cdrrep for the CDR database.		
mongo.connections.per.host.reconcile	This parameter is used to specify the number of connections allowed per host for the reconcile database.			
	If the value for this parameter is not defined, the value of mongo.connections.per.host (configured or default) is used.			
	Default: 10	0		
	Note	In case of 4 blade setup, change the parameter value to 20; 8 blade setup = 15; multi-chassis (16 + Blades) = 10.		
mongo.connections.per.host.remoteBalance	This parameter is used to specify the number of connections allowed per host (the pool size, per host) for the remote balance database (in case of GR).			
	If the value for this parameter is not defined, the value of mongo.connections.per.host (configured or default) is used.			
	Example: -Dmongo.connections.per.host.remoteBalance=10			
	Default: 100			
	Note	In case of 4 blade setup, change the parameter value to 20; 8 blade setup = 15; multi-chassis (16 + Blades) = 10.		

Parameter	Description		
mongo.connections.per.host.remoteSpr		eter is used to specify the number of connections allowed the remote SPR database (in case of GR).	
		for this parameter is not defined, the value of nections.per.host (configured or default) is used.	
	Example: -	Dmongo.connections.per.host.remoteSpr=10	
	Default: 10	0	
	Note	In case of 4 blade setup, change the parameter value to 20; 8 blade setup = 15; multi-chassis (16 + Blades) = 10.	
mongo.connections.per.host.spr		eter is used to specify the number of connections allowed the SPR database.	
	If the value for this parameter is not defined, the value of mongo.connections.per.host (configured or default) is used.		
	Example: -	Dmongo.connections.per.host.spr=10	
	Default: 10	0	
	Note	In case of 4 blade setup, change the value to 20; 8 blade setup = 15; multi-chassis (16 + Blades) = 10.	
mongo.threads.allowed.to.wait. for.connection	the number become ava	eter is a multiplier for connectionsPerHost that denotes of threads that are allowed to wait for connections to illable if the pool is currently exhausted. If SPerHost is 10, and	
		be blocked. For number of threads greater than 50, an attrown.	
	Applicable for MongoDB connection.		
	Example: -1	Dmongo.threads.allowed.to.wait.for.connection=5	
	Default: 5		

Parameter	Description	Description		
mongo.threads.allowed.to.wait. for.connection.balance	the number become a connection mongo. the then 50 th	meter is a multiplier for connectionsPerHost that denotes er of threads that are allowed to wait for connections to vailable if the pool is currently exhausted. If nsPerHost is 10, and reads.allowed.to.wait.for.connection.balance is 5, areads can be blocked. For number of threads greater than ception is thrown.		
	Applicabl	e for balance database connection.		
	Example: -Dmongo.	Example: -Dmongo.threads.allowed.to.wait.for.connection.balance=5		
	Default: 5			
	Note	If the value is not configured, all the database types inherit value from mongo.threads.allowed.to.wait.for.connect parameter.		
		For example, if		
		mongo.threads.allowed.to.wait.for.connection.bala is defined then this configuration overrides the generic mongo.threads.allowed.to.wait.for.connection.		
		mongo.tmredab.arrowea.co.ware.ror.comeectom		
mongo.threads.allowed.to.wait. for.connection.cdr	be blocked threads A	for connectionsPerHost for the number of threads that can d. For example, if connectionsPerHost is 10, and llowedToBlockForConnectionMultiplier is 5, then 50 in be blocked. For number of threads greater than 50, an error is thrown.		
	Example:			
	-Dmongo.	threads.allowed.to.wait.for.connection.cdr=10		
	Default: 1	0		
	Note	If the value is not configured, all the database types inherit the value from		
		mongo.threads.allowed.to.wait.for.connection parameter.		
		For example, if		
		mongo.threads.allowed.to.wait.for.connection.cdr is defined then this configuration overrides the generic mongo.threads.allowed.to.wait.for.connection.		

Parameter	Description		
mongo.threads.allowed.to.wait. for. connection.cdrrep	be blocked threadsAl threads can	for connectionsPerHost for the number of threads that can l. For example, if connectionsPerHost is 10, and lowedToBlockForConnectionMultiplier is 5, then 50 in be blocked. For number of threads greater than 50, an error is thrown.	
	Example:		
	-Dmongo.threads.allowed.to.wait.for.connection.cdrrep=10 Default: 10		
	Note	If the value is not configured, all the database types inherit the value from mongo.threads.allowed.to.wait.for.connection parameter.	
		For example, if mongo.threads.allowed.to.wait.for.connection.cdrrep is defined then this configuration overrides the generic mongo.threads.allowed.to.wait.for.connection.	
mongo.threads.allowed.to.wait.for.connection.reconcile	the number become av	neter is a multiplier for connectionsPerHost that denotes of threads that are allowed to wait for connections to ailable if the pool is currently exhausted. If the pool is 10, and	
	5, then 50 t	eads.allowed.to.wait.for.connection.reconcile is hreads can be blocked. For number of threads greater than eption is thrown.	
	Example:	hreads.allowed.to.wait.for.connection.reconcile=5	
	Default: 5		
	Note	If the value is not configured, all the database types inherit the value from mongo.threads.allowed.to.wait.for.connectiparameter.	
		For example, if mongo.threads.allowed.to.wait.for.connection.reconci is defined then this configuration overrides the generic mongo.threads.allowed.to.wait.for.connection.	

Parameter	Description			
mongo.threads.allowed.to.wait.for.connection.remoteBalance	the number become ava connections mongo.thre is 5, then 50	neter is a multiplier for connectionsPerHost that denotes r of threads that are allowed to wait for connections to vailable if the pool is currently exhausted. If asPerHost is 10, and eads.allowed.to.wait.for.connection.remoteBalance to threads can be blocked. For number of threads greater in exception is thrown.		
	Applicable	Applicable for remote balance database connection.		
	Example:			
	-Dmongo.t	hreads.allowed.to.wait.for.connection.		
	remoteBala	.ance=5		
	Default: 5			
	Note	If the value is not configured, all the database types inherit the from mongo.threads.allowed.to.wait.for.connection parameters.		
		For example, if mongo.threads.allowed.to.wait.for.connection.remoteBa is defined then this configuration overrides the generic mongo.threads.allowed.to.wait.for.connection.		
mongo.threads.allowed.to.wait. for. connection.remoteSpr	the number become ava	neter is a multiplier for connectionsPerHost that denotes r of threads that are allowed to wait for connections to railable if the pool is currently exhausted. If asPerHost is 10, and		
	5, then 50 tl	threads can be blocked. For number of threads greater than eption is thrown.		
	Applicable	e for remote SPR database connection.		
	Example: -Dmongo.th	hreads.allowed.to.wait.for.connection.remoteSr=5		
	Default: 5	Default: 5		
	Note	If the value is not configured, all the database types inherit the value from mongo.threads.allowed.to.wait.for.connection parameter.		
		For example, if mongo.threads.allowed.to.wait.for.connection.remoteSp is defined then this configuration overrides the generic mongo.threads.allowed.to.wait.for.connection.		

Parameter	Description		
mongo.threads.allowed.to.wait. for.connection.spr	the number become aveconnection mongo.thm 50 threads an exception	neter is a multiplier for connectionsPerHost that denotes or of threads that are allowed to wait for connections to vailable if the pool is currently exhausted. If its PerHost is 10, and its allowed.to.wait.for.connection.spr is 5, then can be blocked. For number of threads greater than 50, on is thrown.	
	Applicable	e for SPR database connection.	
	Example: -Dmongo.t	chreads.allowed.to.wait.for.connection.spr=5	
	Default: 5		
	Note	If the value is not configured, all the database types inher the value from mongo.threads.allowed.to.wait.for.connection parameter.	
		For example, if	
		mongo.threads.allowed.to.wait.for.connection.sp is defined then this configuration overrides the generic mongo.threads.allowed.to.wait.for.connection.	
mongo.health.monitor.enabled	This paran	neter is used to enable MongoDB health monitor for write	
	Example:	-Dmongo.health.monitor.enabled=true	
	Default: false		
	Possible V	'alue: true, false	
mongo.health.monitor.scheduler.period	1 -	neter used to configure how frequently to execute the swrite operation health monitor thread.	
	Example:	-Dmongo.health.monitor.scheduler.period=3000	
	Default: 3000 milliseconds		
mongo.monitor.write.update.threshold	1 -	neter is used to configure number of MongoDB write to be performed on the database every time the thread	
	Example:	-Dmongo.monitor.write.update.threshold=50	
	Default: 5		
mongo.monitor.percentage.threshold	rate for M	neter is used to calculate the success threshold percentage ongoDB write operations. If success result is less than I threshold, then only MongoDB client rest operation is	
	Example:	-Dmongo.monitor.percentage.threshold=80	
	Default: 80		

Parameter	Description		
mongo.reset.scheduler.period	This parameter is used to configure how frequently to execute the thread for checking the reset MongoDB client connections in case of write operations are breached the failure threshold.		
	Example: -Dmongo.reset.scheduler.period=4000		
	Default: 4000 milliseconds		
wait.time.after.reset	This parameter is used to configure the time that thread for resetting MongoDB client connection should wait/sleep for after connection reset.		
	Example: -Dwait.time.after.reset=10000		
	Default: 10000 milliseconds		
mongo.reset.retry.counter	This parameter is used to configure maximum retry attempts for resetting MongoDB client connections in case of previous reset failure.		
	Example: -Dmongo.reset.retry.counter=2		
	Default: 2		
apirouterContextPath	This parameter is checked if		
api.ua.context.path	apirouter.disable.qnscnf.validation is set false.		
ua.context.path	Some customer may have configured the URL at multiple places and do not want to change URL. To change the endpoint so that the API router uses /ua/soap, add the following parameters in /etc/broadhop/qns.conf file. This makes API router act as unified API.		
	-DapirouterContextPath=/apirouter -Dapi.ua.context.path=/ua/soap -Dua.context.path=/ua/soap		
	Note The api.ua.context.path and ua.context.path parameters must be the same.		
	New URLs are as follows:		
	• For HA:		
	• Unified API: https://lbvip01:8443/ua/soap		
	• API Router: https://lbvip01:8443/apirouter		

Parameter	Description	
networkguard.tcp.local	This enables the option to choose an explicit interface to handle the diameter processing on Policy Director (LB) VMs. This parameter is used to bring up the Diameter stack for the Diameter process on Director (LB) VMs.	
	Note This configuration can be used for IPv4 HAProxy connections.	
	Default: eth0	
networkguard.tcp.local.ipv6	This enables the option to choose an explicit interface to handle the diameter processing on Policy Director (LB) VMs. This parameter is used to bring up the Diameter stack for the Diameter process on Director (LB) VMs.	
	Note This configuration can be used for IPv6 HAProxy connections.	
	Example: -Dnetworkguard.tcp.local.ipv6=true	
	Default: false	
	Possible Values: true, false	
diameter.default.timeout.ms	Defines the end to end timeout in milliseconds for diameter messages.	
	For example, a CCRi received at load balancer (Policy Director) and CCAi has to be sent by 1500 ms otherwise the message is marked as timed out.	
	This default setting is used only if the Action Timer (Ms) parameter is not set under Diameter Configuration > Message Timeouts and Retry Configuration in Policy Builder.	
	Default: 3000	
disableCdrReplication	This parameter is used to specify whether the process should participate in doing CDR replication or not.	
	If disableCdrReplication is set to true (as disableCdrReplication=true), then the processes using corresponding configuration file does not participate in CDR replication.	
	If disableCdrReplication is set to false (as disableCdrReplication=false), then the processes using corresponding configuration file participates in CDR replication.	
	If disableCdrReplication is not specified, then disableCdrReplication=false is used as default and corresponding behavior is applicable.	
	By default, this parameter is set as false.	

Parameter	Description	n		
enableRedisReporting	1 -	neter helps the application to decide whether to use Redistore the generated reporting data.		
	file. If this to store the	eter needs to be added in /etc/broadhop/qns.conf parameter is set to true , then application uses the Redis generated reporting data. If the parameter is set to false , oDB is used to store the generated reporting data.		
		neter needs to be added on each Policy Server (qns) node Director (lbs).		
	Example: -	-DenableRedisReporting=true		
	Default: fa	lse		
	Possible Values: true, false			
dbPassword	This param	This parameter is used to enable authentication for MongoDB.		
	Example: -	-DdbPassword=XXXX		
	where, XXX application	XX is encrypted admin database user's password for		
	from Clust	ing command is used to generate encrypted password er Manager:		
	For more in	bin/support/mongo/encrypt_passwd.sh <pre>Password>. nformation, refer to MongoDB Authentication section in stallation Guide for VMware.</pre>		
	Also, if you the applica	a modify/remove above parameter then you have to restart tion.		
	This encrypted password for admin user is applicable only when db_authentication_enabled is set to TRUE.			
	Note	No need for user name, By default, the username is admin.		
		If MongoDB authentication is not enabled, then password is not required.		
	Caution	Updating this parameter requires (-DdbPassword=XXXX) downtime, i.e.,		
		• Enable authentication		
		Disable authentication		
		Change password		
com.broadhop.andsfurl.enable	No longer	used.		

Parameter	Description
useVipInsteadOfHostnameForTrap	This parameter contain list of interface names with VIP name separated by comma. When this parameter is configured, CPS uses VIP name instead of local VM hostname in trap key and event host.
	Example:
	-DuseVipInsteadOfHostnameForTrap=Gx:
	diameter-int1-vip,Sy:diameter-int2-vip
useDiameterPeerIpForTrap	This parameter can be used to include PeerIP in "diameter peer down" alarm message and key. When set to true, peer IP is included.
	Example: -DuseDiameterPeerIpForTrap=true
	Default: false
	Possible Values: true, false
useDiameterInterfaceForTrap	This parameter can be used to include interface name in "diameter peer down" alarm message and key. When set to true, the interface name is included.
	Example: -DuseDiameterInterfaceForTrap=true
	Default: false
	Possible Values: true, false
use.ldap.vs.evaluation.order	When set to true, this parameter enables the processing of a set of LDAP attributes and its corresponding Sy virtual-service consecutively in the order they were received by CPS.
	If this parameter is not added in qns.conf file, then by default this parameter is set to true.
	Example: -Duse.ldap.vs.evaluation.order=true
	Possible Values: true, false
jdiameter.accept.unknown_desthost	This parameter is used to enable the processing of a request message received by CPS with an unknown Destination-Host.
	Example: -Djdiameter.accept.unknown_desthost=true
	Default: false
	Possible Values: true, false

Parameter	Description
jdiameter.replace.unknown_desthost	This parameter is used to enable CPS to replace the unknown Destination-Host received in the message with its own advertised FQDN.
	Example: -Djdiameter.replace.unknown_desthost=true
	Default: false
	Possible Values: true, false
	Note This parameter applies only when -Djdiameter.accept.unknown_desthost is set to true.
message.buffer.early.processing.time	The parameter can be configured in /etc/broadhop/diameter_endpoint/qns.conf file.
	This parameter is used to configure the time in milliseconds for early processing of the buffered messages if only one message is buffered or if there are no holes in the buffered messages.
	This value must always be less than the Buffer Timeout In Milliseconds defined in Policy Builder under Diameter Configuration > Message Buffering Configuration .
	Example: -Dmessage.buffer.early.processing.time=10
	Default: 5 ms

Parameter	Description		
tcp.hold.timer.after.dpr	The parameter is used to indicate the amount of time (ms) the TCP connection is held towards all the peers after sending/receiving DPR.		
	Example: -Dtcp.hold.timer.after.dpr=2500		
	Default: 2000 ms		
	Possible Range: 1 - 3000 ms		
	During the upgrade, CPS shutdowns the Diameter stack (parallel shutdown should be enabled -Dstack.parallel.shutdown=true) and sends DPR to all the peers. The diameter connection is held for the configured time so that inflight messages (messages already in queue) is processed by CPS and response is sent.		
	Policy Directors in the cluster is triggered by the upgrade to send a DPR to all diameter peers.		
	The peer sends DPA in response and then stops sending new requests to the cluster.		
	All in-flight messages are processed by the cluster and the answers sent back to the peer.		
	 The peer continues to accept answers from the cluster until the connection is terminated. This allows the peer to process in-flight messages before closing the TCP connection. No new messages are sent to CPS. 		
	This allows cluster-by-cluster upgrades. This eliminates the need to manually re-configure DRA for each cluster.		
	Restriction The in-flight messages are only processed for the duration of TCP connection hold timer. The processing stops on TCP expiry hold timer or DRA timer. It is recommended to configure hold time within 3 seconds.		
	Also, Policy Director (LB)/DRA drops the messages if the response is not received within message SLA time.		
gx.rulebasenames.delimiter	This parameter is used to specify the delimiter with which to separate multiple rule base names in Gx session field.		
	This parameter can be added in /etc/broadhop/pcrf/qns.conf file.		
	Example: -Dgx.rulebasenames.delimiter=","		
	Default: ","		
	Possible Values: String values		

Parameter	Description
session.db.init.1 session.db.init.2	This parameter is used to create the entry in shards/sk_shards collection in sharding database for HA setup which is used to store secondary keys.
	By default, there are two members for a set of ring, where session.db.init.1 is mapped to sessionmgr01 and session.db.init.2 is mapped to sessionmgr02.
	To change the mapping, you need to configure the values in qns.conf file.
	Example:
	-Dsession.db.init.1=sessionmgr03 -Dsession.db.init.2=sessionmgr04
sendErrorOnSession	When set to true, creation of the sessions is not allowed in CPS.
CreateNotAllowed	Instead, the application sends the error response for Diameter Gx request messages that are received after session limit is breached.
	Example:
	-DsendErrorOnSessionCreateNotAllowed=false
	Default: false
	Possible Values: true, false
diameter.resultCode	This parameter is used to configure the diameter result-code to be
OnSessionCreateNotAllowed	sent for the error response when session creation is not allowed.
	This paramater must be combined with parameter -DsendErrorOnSessionCreateNotAllowed=true.
	Example:
	-Ddiameter.resultCodeOnSessionCreateNotAllowed=5012
	Default: 5012

StaleSession.SupportedErrorCodes When a session is successfully processed during RAR, session expiration time (expiryDate in session data) is immediately incremented irrespective of whether there is a RAA with error there is no RAA from the peer. This parameter controls the beh of incrementing session expiryDate in case there is a RAR fail When configured with error codes, older expiryDate is retaine RAR failures for those errors. Semi-colon ";" separated list of RAR error codes must be configure enable this feature for specific error codes. Example: To enable cleanup for Timeouts and Diameter-Too-be configure -DstaleSession.SupportedErrorCodes=7000; 3004 in /etc/broadhop/qns.conf file. Default: By default, if the parameter is not configured, previous behavior of clean-up based on 5002 and 5012 error codes is supported.
to enable this feature for specific error codes. Example: To enable cleanup for Timeouts and Diameter-Too-beconfigure -DStaleSession.SupportedErrorCodes=7000; 3004 in /etc/broadhop/qns.conf file. Default: By default, if the parameter is not configured, previous behavior of clean-up based on 5002 and 5012 error codes is supported.
configure -DStaleSession.SupportedErrorCodes=7000;3004 in /etc/broadhop/qns.conf file. Default: By default, if the parameter is not configured, previous behavior of clean-up based on 5002 and 5012 error codes is supported.
/etc/broadhop/qns.conf file. Default: By default, if the parameter is not configured, previous behavior of clean-up based on 5002 and 5012 error codes is supported.
behavior of clean-up based on 5002 and 5012 error codes is supported.
ramotaSprClanupEnghlad This parameter is used to anable/disable remote SDD (subscrib
remoteSprCleanupEnabled This parameter is used to enable/disable remote SPR (subscrib records located on remote SPR Mongo databases) cleanup feat
Example: -DremoteSprCleanupEnabled=true
Default: true
Possible Values: true, false
The following parameters are also required to run the remoteSprCleanup feature:
• -Dignore.db.unavailable=true
• -DsprLocalGeoSiteTag=[siteId]
Note This parameter must be set to true only when Singl feature is used in CPS and SPR database is stored caching mechanism to store profile information.
remoteSprDeleteFrequency This parameter is used to configure the interval in milliseconds by the subscriberCleanup database is queried and deletes are executed on the Remote SPR database cross-site.
Example: -DremoteSprDeleteFrequency=5000
Default: 5000 milliseconds
remoteSprCleanupTimeToLive This parameter is used to configure Time to Live for records he subscriberCleanup database.
Example: -DremoteSprCleanupTimeToLive=84600
Default: 84600 (1 day)

Parameter	Description
sprCleanupQueueSize	This parameter is used to configure the size of locally stored queue holding subscriber details before writing to subscriber cleanup database.
	Example: -DsprCleanupQueueSize=10000
	Default: 10000
sprCleanupQueueDrainAmount	This parameter is used to configure in memory queue record count to be drained at one time.
	Example: -DsprCleanupQueueDrainAmount=1000
	Default: 1000
subscriberCleanupFetchAmount	This parameter is used to configure the batch size of the records grabbed from subscriberCleanup database.
	Example: -DsubscriberCleanupFetchAmount=1000
	Default: 1000
force.SySTR.onCCRT	When Single Sy feature is enabled and force.Systr.onccrt boolean parameter is set true in qns.conf, a Sy STR message is sent towards OCS on receiving the CCR-T for the last Gx session irrespective of whether a Sy SLA was received or a delayed Sy SLA was sent from OCS towards PCRF.
	Example: -Dforce.SySTR.onCCRT=true
	Default: false
	Possible Values: true, false
isSingleSy	This boolean parameter is used to enable Single Sy feature in PCRF.
	Example: -DisSingleSy=true
	Default: false
	Possible Values: true, false
singleSyPrimaryKey	The value for this parameter determines if we load SingleSySession based on imsi or msisdn of the parent GxSession as its primary key.
	Example: -DsingleSyPrimaryKey=msisdn
	Default: msisdn
	Possible Values: imsi, msisdn
sk.db.init.1	Default SK DB shard member1 of the MongoDB replica.
	Example: -Dsk.db.init.1=sessionmgr01
	Default: sessionmgr01
	Possible Value: hostname

sk.db.init.2 Default SK DB shard memb Example: -Dsk.db.init.2= Default: sessionmgr02	per2 of the MongoDB replica.
Default: sessionmgr02	=sessionmgr02
Possible Value: hostname	
sk.db.init.port Default SK database shard p	port number.
Example: -Dsk.db.init.po	ort=27717
Default: 27717	
Possible Value: port number	r
sk.db.skipRemote This parameter is used to sk SKDB queries fails.	tip the remote SKDB queries if local
Example: -Dsk.db.skipRem	note=false
Default: false	
Possible Value: true, false	
sk.db.skipRemotePrimary This parameter is used to sk query if secondary preferred	rip the remote SKDB primary preferred d query fails.
Example: -Dsk.db.skipRem	notePrimary=false
Default: false	
Possible Value: true, false	
	in Rx session is trying to attach with Gx in Secondary DB in the replica set and
If this parameter set to true,	primary DB look-up is skipped.
Example: -Dsk.db.skipPri	imary=false
Default: false	
Possible Value: true, false	
diameter.errorOnSaveFailure This parameter is used when fails.	n SK database or session database writes
responded with diameter err	red "true", then the diameter request is ror response for Gx and Rx messages. If a "false", then the diameter request is use is sent.
Example: -Ddiameter.erro	orOnSaveFailure=false
Default: false	
Possible Value: true, false	

Parameter	Description			
diameter.resultCode OnSessionFailure	This parameter is used to configure error-code to be returned when SK database or Session database write fails and diameter.errorOnSaveFailure is set to true.			
	If SK database or Session database writes fail and diameter.errorOnSaveFailure is set to false or not configured, diameter error 3004 is sent. Example: -Ddiameter.resultCodeOnSessionFailure=3004 Default: 3004			
	Possible Value: 3001 to 5999			
allow.sessioncreation. license.periodic.check	The value must be set to true so that the license is validated periodically but session creation will not be impacted.			
neense.perrouie.eneek	Note Only during the start/restart of Policy Server (QNS) process, licenses validation failure impacts the traffic and sessions creations are not allowed.			
	Example: -Dallow.sessioncreation.license.periodic.check=false			
	Default: false			
	Possible Value: true, false			
license.checkInterval	This parameter is used to configure the time period (in seconds) after which the license manager validates the license.			
	When session count exceeds license count, LicenseManagerProxy generates LicenseState.RATE_LIMITED. Diagnostics reports "CRITICAL" status.			
	Default: 90 seconds			
	This property is read at the time of service initialization only.			
skipUnreachableShards	The value must be set to true so that the alarms are generated:			
	When the shards collection in the ADMIN replica-set > sharding database is missing entries for the shards in a HA/GR environment			
	When a shard is created and an entry exists in the sharding database of the ADMIN replica-set, but Session Manager VM is not reachable			
	When indexes are missing on collections existing on SPR/Session database			
	Example: -DskipUnreachableShards=true			
	Default: false			
	Possible Value: true, false			

Parameter	Description
skipRemoteShardLookup	When this parameter is set to true, it forces application to lookup in local session shards only (shards belonging to local site), and skip to lookup in remote session shards (shards belonging to other site).
	Example: -DskipRemoteShardLookup=true
	Default: false
	Possible Value: true, false
fwdGxRAASyPSTA	This parameter is used to forward the success Gx-RAA and SY-prime STA to QNS instance from Policy Director (LB) nodes to QNS instance running on Policy Server (QNS) VMs. This is useful to log response details in Engine logs generated from QNS instances.
	If the parameter is set to false, the success Gx-RAA and SY-prime STA gets handled only in Policy Director (LB) diameter nodes.
	Example: -DfwdGxRAASyPSTA=true
	Default: false
	Possible Value: true, false
isMultiStackEnabled	If you configure multiple Diameter Stacks for different application interfaces (for example, Gx, Rx, Sy) in Policy Builder, then the property isMultiStackEnabled must be set to true in qns.conf file.
	When set to true, CPS identifies the corresponding interface stack realm peers to process the corresponding interface inbound and outbound messages.
	When set to false, CPS cannot identify the corresponding peer and drop the message at Policy Director (LB) itself saying Peer is null.
	Example: -isMultiStackEnabled=true
	Default: false
	Possible Value: true, false
maxRetryMongoExceptionAttempts	This parameter is used to configure the Max Retry Attempts which MongoDB Client/CPS should do if MongoDB exception is being caught during the rebalance command.
	Example: -DmaxRetryMongoExceptionAttempts=3
	Default: 3
	Value Range: 3 - 10
mail.socket.timeout	Inactivity period for a socket after which it is closed.
	Example: -Dmail.socket.timeout=30000
	Default: 30000 milliseconds

Parameter	Description	
mail.socket.connection.timeout	Timeout for connection to be established between CPS and SMTP server.	
	Example: -Dmail.socket.connection.timeout=5000	
	Default: 5000 milliseconds	
sms.response.timeout	Time period CPS should wait for the response from SMPP server.	
	Example: -Dsms.response.timeout=2000	
	Default: 2000 milliseconds	
enable.memcache.on.tcp	When this parameter is enabled (set to true), memcache is done using TCP sockets over default UDP sockets.	
	Example: -Denable.memcache.on.tcp=true	
	Default: false	
	Possible Values: true, false	
appInstanceIdListCapacity	Used to decide the capacity of the AppInstanceIdList. The AppInstanceIdList contains the AppInstanceIds that are present in the subscriber session.	
	• If the parameter value is configured <=0, then the list size is set to 10	
	• If the parameter value is configured > short.MAX_VALUE (32767), then the list size is set to 32766.	
	• If the parameter is not configured, the list size is set to the default value of 10.	
	For new subscriber session records, the AppInstanceIdList will not grow beyond beyond the configured value for the AppInstanceIdList. CPS maintains only the latest AppInstanceIds in the list according to the list size capacity that is set in the configuration. Older entries are removed/ignored.	
	Example: -DappInstanceIdListCapacity=100	
	Default: 10	
ldap.profile.overload.	This parameter is used to specify the LDAP provide overload refresh time.	
	Note LDAP plugin residing on IO manager notifies the overload condition in blank LDAP response. LDAP plugin runs on Policy Server (QNS) does not retry LDAP query in overload condition, however, it sets next profile refresh time to be 30 minutes default.	
	Example: -Dldap.profile.overload.refreshtime.mins=30	
	Default: 30 minutes	

Parameter	Description		
enable.send.receive.queue.ttl	This parameter enables support for TTL based queues for processing diameter messages.		
	Example: -Denable.send.receive.queue.ttl=true		
	Default: false		
	Possible Values: true, false		
receive.peer.queue.ttl.ms	This parameter is used to specify maximum duration (in millisecond) an inbound diameter message is stored before being discarded.		
	Example: -Dreceive.peer.queue.ttl.mss=5		
	Default: 20		
	Possible Value: integer greater than 0		
send.peer.queue.ttl.ms	This parameter is used to specify maximum duration (in millisecond) an outbound diameter message is stored before being discarded.		
	Example: -Dsend.peer.queue.ttl.ms=5		
	Default: 20		
	Possible Value: integer greater than 0		
max.discard.tps	This parameter is used to specify maximum rate of diameter messages discarded before disconnecting with peer.		
	Example: -Dmax.discard.tps=200		
	Default: 400		
	Possible Value: integer greater than 0		
max.tag.size	Determines the size (number of characters) of each individual tag in the tag list. When configured, all the tags in the tag list are of the same size. This is a one-time configuration and user must choose the value for this parameter.		
	The value configured here must be greater than max tag size observed in the system.		
	Example: -Dmax.tag.size=120		
	Default: 150		
	Possible Range: 100 to 300		
	Note If the value is not configured and the Session Tag Padding Configuration is enabled (set to true) in Policy Builder, the default value of 150 is used.		

Parameter	Description		
tag.padding.char	This parameter is used to define the padding character to be used for tags and reserved tags. The value configured for this parameter is only applicable when the Tag padding feature is enabled.		
	When featu	re is enabled but not configured, default value # is used.	
		nake sure that the character decided for padding is not secondary key.	
	Example: -	Dtag.padding.char=\$	
	Default: #		
	Warning	This is a one time configuration and changing it requires you to execute a procedure. For more information on the procedure, contact your Cisco Account representative.	
enable.primary.parallel.queries	Enable parallel query operation on primary members of SK DB replica-sets on local and remote sites.		
	To enable the parallel query the following configuration must be in qns.conf file.		
	Example: -	Denable.primary.parallel.queries =true	
	Default: fal	se	
	Possible Va	lues: true, false	
mongo.skdb.query.pool.size		executer thread pool size. If you have a thread pool size a time maximum 6 threads can be invoked.	
	Default val	ue is 0 and if it is defined as 0 then the parallel queries ir.	
	Recommen	ded value for this parameter is 2.	
	Example: -	Dmongo.skdb.query.pool.size=6	
mongo.skdb.query.thread.pool.queue.size	Provides the parallel que	e queue size for threads which are working on the SK DB ery.	
		nave to configure the thread pool queue size as 20 then onf file configuration must be as follows:	
	-Dmongo.sl	db.query.thread.pool.queue.size=20	
	Default: 10		
	Recommen	ded value for this parameter is 4.	

Parameter	Description	1		
cisco.cdr.scheduler.intervalMs	1	all at which the scheduler thread processes the reporting serts them to database.		
	Example: -Dcisco.cdr.scheduler.intervalMs=10			
	Default: 10	ms		
	It is recommended to leave the scheduler interval at default.			
	Range: 10 ms to 100 ms Maximum CDR insert rate per QNS = batchSize*1000/ cisco.cdr.scheduler.intervalMs			
replicationDelayMs	Delay in milliseconds to read CDR from MongoDB and convert to CSV files. Utilized in offsetting time sync issues between n			
	The system tuning parameter is an added measure in rare conditions of clocks going out of sync (since the nodes in the clusters are expected to be in sync) and read write occurs at the same time.			
	2000 ms must handle smaller clock shifts in such rare scenario Example: -DreplicationDelayMs=1000			
	Default: 0			
	Possible Range: 0 to 5000			
useMongoCLI	Note	This parameter needs to be configured when MongoDB is enabled on the setup.		
		true, CRD export/import calls MongoDB CLI command nport CRD data.		
	When set to	o false, CRD uses existing export/import logic.		
	Note	Import All CRD Fallback Enhancements does not work when useMongoCLI parameter is set to true in qns.conf file.		
		Import All CRD Fallback Enhancements: CPS supports backing up of the existing CRD data and push it to SVN location(s). This backup can be used to restore cust_ref_data in case of error scenario(s) after import all. This enhancement alerts the user about the system state and if the system state is in BAD state, then user has to restore cust_ref_data with old and working CRD by using import all API.		
	Example: -	DuseMongoCLI=true		
	Default: fal	se		
	Possible Va	alues: true, false		

Parameter	Description	
crd.mongo.credentials	If MongoDB authentication is enabled, configure crd.mongo.credentials along with useMongoCLI in qns.conf file.	
	Use encrypted password for admin user (refer <i>MongoDB Authenticaton</i> section in the <i>CPS Installation Guide for VMware</i>)	
	<pre><username> username for authentication <password> password for authentication <database-name> Authentication Database Name</database-name></password></username></pre>	
	Example: -Dcrd.mongo.credentials=admin/	
	3300901EA069E81CE29D4F77DE3C85FA@admin	
realtimeNotification.socketTimeout	This parameter is used to configure socket timeout (in milliseconds) of httpclient for realtime notifications to an external http or https server.	
	Example: -DrealtimeNotification.socketTimeout=1000	
	Default: 1000 ms	
useRealmAndAppIdAsKey	This parameter should be configured to stop the 3002 – DiameterAllPeersDown alarms generated every 5 minutes.	
	Example: -DuseRealmAndAppIdAsKey=true	
	Default: false	
	Possible Values: true, false	
useRealmAndHostAsKey	This parameter should be configured to stop the 3001 – DiameterPeersDown alarms generated every 5 minutes.	
	Example: -DuseRealmAndHostAsKey=true	
	Default: false	
	Possible Values: true, false	
udc.msisdn.digit	This parameter should be configured to set 15 and 11 Digit MSISDN, which is sent as part of the Gx session initiation request. By configuring this parameter:	
	QNS sends 10 digit MSISDN to UDC.	
	Country code is removed in QNS and only 10 digit MSISDN session is stored.	
	The removed country code is stored as prefix.	

filterOutDisconnectedPeers This parameter should be configured to filter out disconnect By enabling this parameter, DOWN status messages are filt show_peers.py displays only the peers currently connected Example: -DfilterOutDisconnectedPeers=true Default: false	ered out.
show_peers.py displays only the peers currently connected Example: -DfilterOutDisconnectedPeers=true Default: false	
Default: false	
Possible Values: true, false	
postgreDriver This parameter is used to specify the postgresql driver to be replication to database.	used for
Configuration is applicable only for processes that have com.broadhop.policyintel.service.feature installed a participating in database replication. It does not have any e other processes.	
oracleDriver This parameter is used to specify the oracle driver to be use replication to database.	ed for
Configuration is applicable only for processes that have	
com.broadhop.policyintel.service.feature installed a participating in database replication. It does not have any e other processes.	
send.Rx.ASR.For.AdditionalErrorCodes This parameter is used to trigger Rx-ASR for error codes s 3004, 3002, 5002. 3004. This is by default supported in the released version, even if the configuration is not enabled ex	e already
node[x]actionssendreinitdameter_Sy_SLRqps_statemor	
node[x]actionssendieritclameter_Sy_SLRqps_statsuccess Success actions count, for reinitiated SLR messages.	
mdkadinsenteritemersys Repostated in einms Total milliseconds of successful actions, for reinitiated SLR n	nessages.
node[x]actionssendieintdiameter_Sy_SLRqps_statavg Rolling five minutes average of successful executed action reinitiated SLR messages.	s, for
node[x]actionssenddiameter_Sy_SLRqns_statemor	
node[x]actionssend.diameter_Sy_SLR.qns_statsuccess Success actions count, for non-reinitiated SLR messages.	
mdfxfadirsendfamer Sy SI Rqs_stated ime in ms Total milliseconds of successful actions, for non-reinitiated messages.	l SLR
node[x].actions.send.diameter_Sy_SLR. qns_stat.avg Rolling five minutes average of successful executed action non-reinitiated SLR messages.	s, for
node[x].counters.Sy_Action_Reinitiate.qns_count be considered as messages submitted to Re-initiation queue	

pb.conf

The following table lists parameters in the /etc/broadhop/pb/pb.conf file.

Table 2: pb.conf Parameters

Description
Indicates the order of tabs in a use case template. When set to true the tabs are displayed in reverse order as follows:
Use Case Initiators > Actions > Documentation
When set to false the tabs are displayed in original order as follows:
Use Case Template > Use Case Initiators > Documentation
Example: -DshowUseCaseInitiatorTabFirst=true
Default: true
Possible Values: true, false
Indicates the number of sessions allowed per user.
Example: -Dpb.user.session.limit=10
Default: 0 (means unlimited sessions are allowed)
This flag is used to force the login security feature. When -DforceCredentials=true is added in pb.conf file, Policy Builder login panel is presented and user is required to login Policy Builder with valid user credentials.
By default, forceCredentials is configured to be true in pb.conf file.
Example: -DforceCredentials=true
Default: false
Possible Values: true, false
This flag is used to Repository URL.
Default: http://lbvip02/repos
Example: -DauthReposURL=http://lbvip02/repos
Possible value: any valid SVN URL

Parameters	Description
api.repository.disableAuthorization	Policy Builder API supports to enable/disable authorization functionality by configuring the flag api.repository.disableAuthorization in /etc/broadhop/pb/pb.conf file.
	By default, authorization support is enabled in API.
	Example: -Dapi.repository.disableAuthorization=false
	Default: false
	Possible Values: true, false
pb.readOnly.showPolicies	This parameter is used to display Policies tab to read only users.
	When enabled the Policies tab is visible to read only users.
	Note This flag only takes effect when checkbox under Tools > Preferences is checked.
showWPSGUI	When set to true, the UI fields corresponding to WPS feature on Policy Builder are visible.
	Example: -DshowWPSGUI=true
	Default: false
	Possible Values: true, false
	Note It is recommended to set the value in /etc/broadhop/pb.conf in the Installer or Cluster Manager for this value to be persistent between upgrades.

Performance Tuning Parameters

Threading Configuration

A threading configuration plug-in is provided for advanced users.

If you are planning to run the system with higher TPS then you need to configure Threading Configuration. For further information contact your Cisco Technical Representative.

An example configuration is shown below:

Figure 1: Threading Configuration



Parameter	Description
Thread Pool Name	Name of the Cisco thread pool. Examples include default.
Threads	Threads to set in the thread pool. You can set Rules Thread to 50/100 depending on call flow (based on number of lookup and per transaction round trip time).
	• rules = 50; Queue Size = 0; Scale By Cpu Core = unchecked
	• rules = 100; Queue Size = 0 (If TPS is > 2000 per Policy Server (QNS) depending on call model used e.g. if LDAP is enabled); Scale By Cpu core = unchecked
Queue Size	Size of the queue before they are rejected.
Scale By Cpu Core	Select this check box to scale the maximum number of threads by the processor cores.

Notification Configuration

CPS supports configurable parameters for email socket timeout and socket connection timeout. Also for SMS smsResponsetimeout indicating how long we wait for the response from SMPP server is supported.

The following parameters can be added in /etc/broadhop/iomanager01/qns.conf and /etc/broadhop/iomanager02/qns.conf files:

· mail.socket.timeout

Inactivity period for a socket after which it is closed.

Default value 30000 ms

• mail.socket.connection.timeout

Timeout for connection to be established between CPS and SMTP server.

Default value 5000 ms


• sms.response.timeout

How long CPS should wait for the response from SMPP server.

Default value 2000 ms

For higher TPS notification testing tune the above mentioned parameters as well as Queue Size and processing threads in **System > AsyncThreading Configuration** in PB. An example is shown below:

Figure 2: Async Threading Configuration

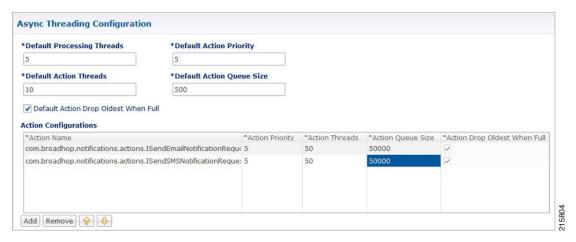

You can increase the Queue Size and processing threads for the following actions as shown in above example.

- com.broadhop.notifications.actions.ISendEmailNotificationRequest
- com.broadhop.notifications.actions.ISendSMSNotificationRequest

Configuring Read Operations to Use Secondary DBs

Step 1 In Policy Builder navigate to the system cluster or instance. Expand the Plug-in Configurations node then click Custom Reference Data Configuration.



Step 2 Set **Db Read Preference** to **SecondaryPreferred**.

This parameter determines how sessioning clients route read operations to members of a replica set.

For more information refer to http://docs.mongodb.org/manual/core/read-preference/.

Step 3 Save your changes and then Publish to Runtime Environment.

Reducing the Log Level Verbosity

By default, logging level for HA deployments is set to the 'warn' level.

To reduce/change the root log level:

- Step 1 On the Cluster Manager VM edit /etc/broadhop/logback.xml file.
- Step 2 Change the <root level=' '> element to one of the other values in the following table. The default HA level warn is shown here:

```
<!-- Configure default Loggers -->
<root level="warn">
<appender-ref ref="FILE" />
<appender-ref ref="SOCKET" />
</root>
```

These log levels are in order of verbosity.

Caution Do not set the root log lev

Do not set the root log level to anything higher than 'warn' in a production system. If needed adjust the individual loggers listed in logback.xml file.

All	Equivalent to Trace and some more messages.
Trace	Trace Debug Info Warn & Error
Debug	Debug Info Warn &Error
Info	Info Warn & Error
Warn	Warn & Error
Error	Error
Off	-

Step 3 Save your changes to logback.xml. No service restart is needed.

Note It is recommend to restart the CPS services only during a MW (Maintenance Window).

After modifying the qns.conf file to make the changes permanent for future use (when any VM is redeployed or restarted... and so on) user needs to rebuild etc.tar.gz by executing the following command:

```
/var/qps/install/current/scripts/build/build etc.sh
```

Step 5 In Cluster Manager execute the following command to synchronize the changes to the VM nodes:

 ${\tt SSHUSER_PREFERROOT=true\ copytoall.sh\ /var/qps/install/current/config/mobile/etc/broadhop/logback.xml/current/current/config/mobile/etc/broadhop/logback.xml/current/current/current/current/current/current/current/current/current/current/current/current/current/current/current/current/current/current/$