

Connecting a Connector to Cisco Catalyst 9300 Series Switches and Cisco Catalyst 9400 Series Switches Series

Connecting a Connector to Cisco Catalyst 9300 Series Switches and Cisco Catalyst 9400 Series Switches
, on page 1

Connecting a Connector to Cisco Catalyst 9300 Series Switches and Cisco Catalyst 9400 Series Switches

Before you begin

- Deploy a Connector OVA and activate it using a token from Cisco Spaces.
- The IP address of a Cisco Catalyst 9300 Series Switches and Cisco Catalyst 9400 Series Switches that is reachable from the Cisco Spaces: Connector.
- Test the Netconf commands on the Cisco Catalyst 9300 Series Switches and Cisco Catalyst 9400 Series Switches

SUMMARY STEPS

- **1.** Log in to Cisco Spaces.
- **2.** In the Cisco Spaces dashboard, choose **Setup > Wired Networks**.
- 3. From the Step 3: Add Switches area, click Add Switch.
- **4.** From the **Add Switches** page, select the Connector, enter a name to identify the switch, the switch IP address. **Netconf username**, **Netconf password**, and click the checkbox to acknowledge that you have tested these commands on the switch.
- **5.** Click **Test** to see if the connection to the switch.
- **6.** Do one of the following:
 - Click Save & Add Next Switch
 - Click Save & Close

DETAILED STEPS

- **Step 1** Log in to Cisco Spaces.
- Step 2 In the Cisco Spaces dashboard, choose Setup > Wired Networks.
- Step 3 From the Step 3: Add Switches area, click Add Switch.

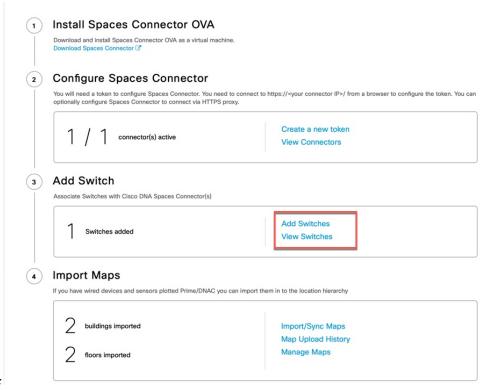


Figure 1:

- **Step 4** From the **Add Switches** page, select the Connector, enter a name to identify the switch, the switch IP address. **Netconf username**, **Netconf password**, and click the checkbox to acknowledge that you have tested these commands on the switch.
- **Step 5** Click **Test** to see if the connection to the switch.
- **Step 6** Do one of the following:
 - Click Save & Add Next Switch
 - Click Save & Close