

# Frame Relay Traffic Shaping – Token Bucket Flowchart

Document ID: 7412

## Contents

### Introduction

#### Prerequisites

- Requirements

- Components Used

- Conventions

#### Token Bucket Flowchart

#### Related Information

## Introduction

This document provides an illustration of the packet flow in Frame Relay Traffic Shaping with the use of a token bucket filter.

## Prerequisites

### Requirements

Readers of this document should be knowledgeable of Frame Relay Traffic Shaping.

### Components Used

This document is not restricted to specific software and hardware versions.

### Conventions


Refer to Cisco Technical Tips Conventions for more information on document conventions.

## Token Bucket Flowchart

This flowchart illustrates packet flow when you implement Frame Relay traffic shaping with the use of a token bucket filter.

See the Related Information section for more information on Frame Relay traffic shaping.

Refer to Policing and Shaping Overview of Cisco IOS® Software Releases 12.0 Mainline for more information on token bucket filters.

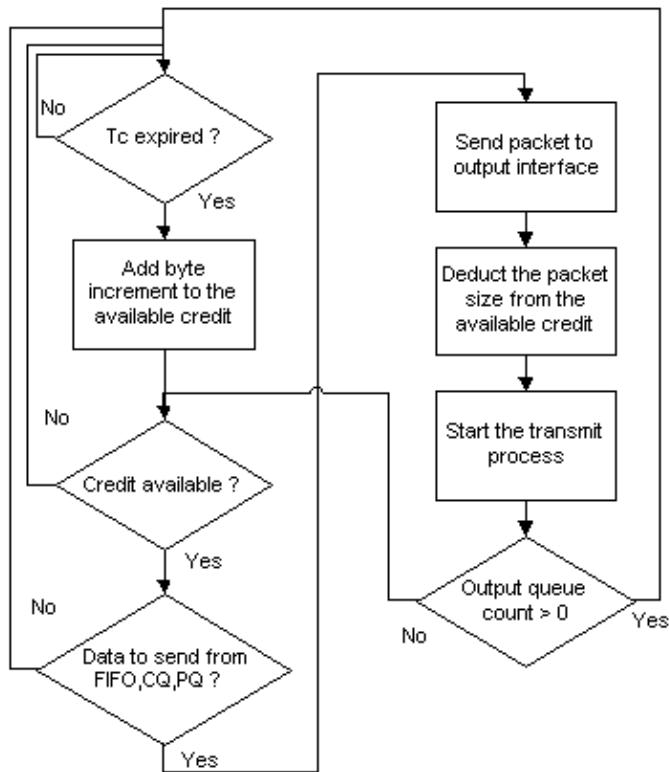

The terms in this flowchart have these definitions:

- Tc Committed Time Interval
- FIFO first-in-first-out
- CQ custom queuing
- PQ priority queuing

## Related Information

- [More Frame Relay Traffic Shaping Information](#)
- [Frame Relay Traffic Shaping Flowchart](#)
- [Configuring and Troubleshooting Frame Relay](#)
- [Frame Relay Technical Support](#)
- [Technical Support & Documentation – Cisco Systems](#)

---

[Contacts & Feedback](#) | [Help](#) | [Site Map](#)

© 2014 – 2015 Cisco Systems, Inc. All rights reserved. [Terms & Conditions](#) | [Privacy Statement](#) | [Cookie Policy](#) | [Trademarks of Cisco Systems, Inc.](#)

---

Updated: Nov 17, 2007

Document ID: 7412

---