

# Inscripción del certificado del Cisco IOS usando el ejemplo aumentado de los comandos Configuration de la inscripción

## Contenido

[Introducción](#)

[prerrequisitos](#)

[Requisitos](#)

[Componentes Utilizados](#)

[Convenciones](#)

[Antecedentes](#)

[Configurar](#)

[Diagrama de la red](#)

[Configuraciones](#)

[Verificación](#)

[Regeneración de un par de claves RSA](#)

[Cuando el par clave RSA no existe](#)

[Cuando se vence el certificado de identidad](#)

[Troubleshooting](#)

[Comandos para resolución de problemas](#)

[Depuración en los routers](#)

[Información Relacionada](#)

## [Introducción](#)

Este documento demuestra el uso de los comandos mejorados de inscripción automática de certificados. Esta feature es una mejora diseñada para facilitar la administración de los certificados en los routers. La función de inscripción auto de certificados introduce cinco nuevos submandatos del comando `crypto ca trustpoint`. Estos comandos son `ip-address (ca-trustpoint)`, `password (ca-trustpoint)`, `serial-number`, `subject-name` y `usage`. Estos comandos proporcionan nuevas opciones para solicitudes de certificado y permiten a los usuarios especificar los campos en la configuración en vez de tener que hacerlo mediante indicaciones. Sin embargo, el uso de indicaciones sigue siendo la opción predeterminada si no se habilita esta función. Los usuarios pueden cargar previamente toda la información necesaria en la configuración. Esto permite a cada router obtener su certificado automáticamente cuando se inicie.

Las autoridades de certificación del trustpoint (CA) combinan y substituyen la funcionalidad de la identidad y la Raíz confiable CA. Así, el **comando `crypto ca trustpoint`** desaprueba los **comandos `crypto ca identity` y `crypto ca trusted-root`**. Discuten los **comandos `auto-enroll regenerate` y `rsakey label`** también en este documento.

Refiérase a [cómo obtener un certificado digital de Microsoft Windows CA usando el ASDM en un ASA](#) para aprender un escenario más casi igual con el PIX/ASA 7.x.

Refiera a [configurar el Cisco VPN 3000 Concentrator 4.7.x para conseguir un certificado digital y un certificado SSL](#) para aprender un escenario más casi igual con el concentrador del Cisco VPN de la serie 3000.

## [prerrequisitos](#)

### [Requisitos](#)

No hay requisitos específicos para este documento.

### [Componentes Utilizados](#)

La información en este documento se aplica a estas versiones de software y hardware.

- Cisco 7204, 2611, y 1720 Router
- Servidores de certificados de la independiente de Microsoft
- Software Release 12.2(12.10)T y 12.2.11T de Cisco IOS®

La información que contiene este documento se creó a partir de los dispositivos en un ambiente de laboratorio específico. Todos los dispositivos que se utilizan en este documento se pusieron en funcionamiento con una configuración verificada (predeterminada). Si la red está funcionando, asegúrese de haber comprendido el impacto que puede tener cualquier comando.

### [Convenciones](#)

Consulte [Convenciones de Consejos Técnicos de Cisco](#) para obtener más información sobre las convenciones sobre documentos.

## [Antecedentes](#)

Además de los comandos de la inscripción del certificado, se discuten estos diversos comandos de la mejora de la inscripción del certificado:

- **trustpoint crypto Ca** — Declara CA que el router debe utilizar.
- **tema-nombre [x.500-name]** — Especifica el asunto en el pedido de certificado. Si el submandato del tema-nombre no se utiliza, por abandono, se utiliza el nombre de dominio completo (FQDN) del router. Esto se utiliza en el modo de configuración del Ca-trustpoint. Por ejemplo, el formato del nombre x.500 es el tema-nombre OU=ROME, O=ITALY.
- **IP address (IP address | interfaz)** — especifica una dirección IP punteada o una interfaz que se incluya en el pedido de certificado. Esto se utiliza en el modo de configuración del Ca-trustpoint.
- **cadena de contraseña** — Especifica la contraseña de revocación para el certificado. Esto se utiliza en el modo de configuración del Ca-trustpoint. Puesto que el Listas de revocación de certificados (CRL) no se utiliza en este documento, todas las contraseñas se fijan a "ningunos."
- **[none] del número de serie** — Especifica si un número de serie se debe incluir en el pedido

de certificado. Esto se utiliza en el modo de configuración del Ca-trustpoint.

- **uso method1 [method2, [method3]]** — Especifica el uso previsto para el certificado. Las opciones disponibles son Internet Key Exchange (IKE), Cliente SSL, y servidor del SSL. El uso en este documento es IKE. Esto se utiliza en el modo de configuración del Ca-trustpoint.
- **auto-aliste el [regenerate]** — Pida automáticamente un certificado del router de CA que utilice los parámetros en la configuración. Este comando genera una nueva clave del Rivest-Shamir-Adelman (RSA) solamente si una nueva clave no existe con la escritura de la etiqueta pedida. Utilizado en el modo de configuración del Ca-trustpoint, este comando marca para saber si hay certificados del router expirados. Un trustpoint para que se configura auto-alista las tentativas al reenroll cuando expira el certificado del router. Una de las ventajas de este comando es que algunos CA requieren una nueva clave para que el reenrollment trabaje. Por lo tanto, el submandato se utiliza para generar una nueva clave. El enlistamiento automático se realiza en el lanzamiento para cualquier trustpoint CA que se configura y no tiene un certificado válido. Cuando expira el certificado que es publicado por un trustpoint CA (configurado para el Autoregistro), se pide un nuevo certificado. Aunque esta característica no proporcione la renovación perfecta de certificación, proporciona recuperación autónoma de la expiración.
- **[key-size [encryption-key-size] de la clave-escritura de la etiqueta del rsakeypair]** — Especifica qué par clave a asociarse a un certificado. Este comando se utiliza en el modo de configuración del Ca-trustpoint. En muchos casos un router puede ser requerido alistar con los servidores del certificado múltiple. Sin embargo, cada servidor de CA puede tener un diverso requisito de política (por ejemplo, longitud de clave). Este submandato permite los pares claves del socio RSA de diversos tamaños a los certificados de identidad de diversos servidores de CA. Si el submandato no se utiliza, utilizan al router FQDN por abandono. La clave-escritura de la etiqueta se genera durante la inscripción si no existe ya o si publican el comando auto-enroll regenerate. Especifique el tamaño de clave para generar la clave y especifique el cifrado-clave-tamaño para pedir el cifrado, las claves de la firma, y los Certificados separados. Por ejemplo: `2611-VPN(config)#crypto ca trustpoint caserver2 2611-VPN(ca-trustpoint)#rsakeypair tacvpn 512 512` **Nota:** Por abandono, la característica del enlistamiento automático pide un nuevo certificado cuando expira el certificado viejo. La Conectividad puede ser perdida mientras que se mantiene la petición porque se borran el certificado y los pares claves actuales inmediatamente después que se genera la nueva clave. La nueva clave no tiene un certificado para hacerla juego hasta que el proceso sea completo, y las conexiones IKE entrantes no pueden ser establecidas hasta que se publique el nuevo certificado. La renovación de clave para la característica del renewal del certificado introducida en el Cisco IOS Software Release 12.3(7)T permite que el pedido de renovación del certificado sea hecho antes de que el certificado expire y conserve la clave y el certificado viejos hasta que el nuevo certificado esté disponible. Para más información sobre esta característica, refiera a la [renovación de clave para el renewal del certificado](#).


## Configurar

En esta sección se presenta información para configurar las características que este documento describe.

**Nota:** Use la herramienta [Command Lookup Tool](#) ([clientes registrados solamente](#)) para encontrar más información sobre los comandos usados en este documento.

## Diagrama de la red

Este diagrama de la red muestra al Router usado en el laboratorio, los servidores de CA, y el asunto de los certificados de identidad obtenidos por el router de los dos servidores de CA.

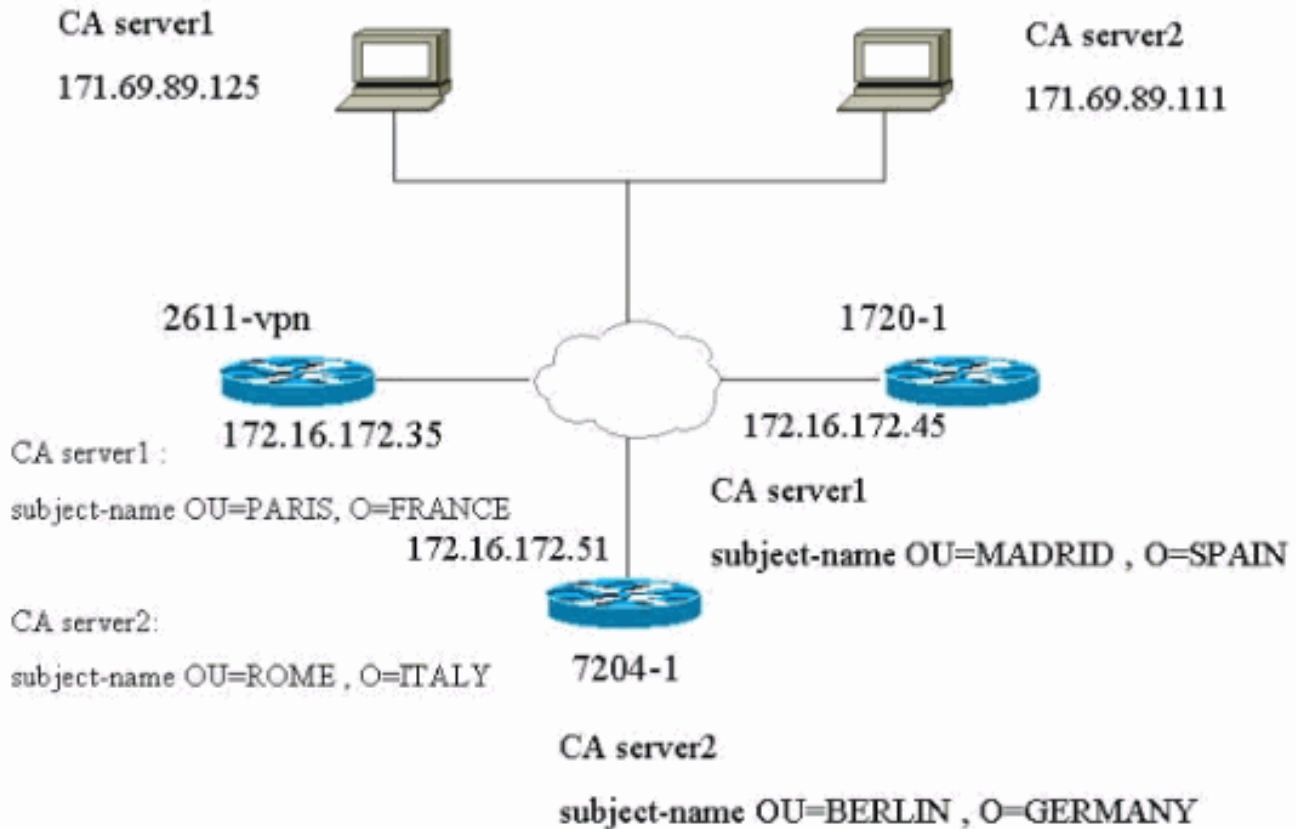

## Configuraciones

Este documento usa estas configuraciones. El 2611-VPN Router es el router de eje de conexión que se alista en el server1 de CA y el server2 de CA. Alistan al 2611-1 Router con el server1 de CA y alistan al 7204-1 Router con el server2 de CA.

- [Configuración y Certificados del router de eje de conexión 2611-VPN a partir de dos diversos servidores de CA](#)
- [Configuración y Certificados del 1720-1 Router del server1 de CA](#)
- [Configuración y Certificados del 7204-1 Router del server2 de CA](#)

### **Configuración y Certificados del router de eje de conexión 2611-VPN a partir de dos diversos servidores de CA**

```
show verify Cisco Internetwork Operating System Software
IOS (tm) C2600 Software (C2600-IK8S-M), Version
12.2(12.10)T, MAINTENANCE INTERIM SOFTWARE TAC Support:
http://www.cisco.com/tac Copyright (c) 1986-2002 by
```

```
cisco Systems, Inc. Compiled Fri 27-Sep-02 21:25 by ccai
Image text-base: 0x80008098, data-base: 0x819B8124 ROM:
System Bootstrap, Version 11.3(2)XA4, RELEASE SOFTWARE
(fc1) ROM: C2600 Software (C2600-IK8S-M), Version
12.2(12.10)T, MAINTENANCE INTERIM SOFTWARE 2611-VPN
uptime is 18 hours, 16 minutes System returned to ROM by
reload System restarted at 04:00:46 UTC Sun Oct 27 2002
System image file is "flash:c2600-ik8s-mz.122-12.10.t"
cisco 2611 (MPC860) processor (revision 0x203) with
59392K/6144K bytes of memory. Processor board ID
JAD03456979 (1914264035) M860 processor: part number 0,
mask 49 Bridging software. X.25 software, Version 3.0.0.
2 Ethernet/IEEE 802.3 interface(s) 4 Low-speed
serial(sync/async) network interface(s) 1 Virtual
Private Network (VPN) Module(s) 32K bytes of non-
volatile configuration memory. 16384K bytes of processor
board System flash (Read/Write) Configuration register
is 0x2102 2611-VPN#show run Building configuration...
Current configuration : 15431 bytes !! Last
configuration change at 22:09:05 UTC Sun Oct 27 2002 !
version 12.2 service timestamps debug datetime msec
service timestamps log datetime msec no service
password-encryption ! hostname 2611-VPN !! memory-size
iomem 10 ip subnet-zero !! ip domain name cisco.com ip
host caserver2 171.69.89.111 ip host caserver1
171.69.89.125 !! crypto ca trustpoint caserver1
enrollment retry period 5 enrollment mode ra enrollment
url http://171.69.89.125:80/certsrv/mscep/mscep.dll
usage ike serial-number fqdn 2611-vpn.cisco.com ip-
address Ethernet0/0 password 7 1107160B12 subject-name
OU=PARIS O=FRANCE crl optional rsakeypair ciscovpn auto-
enroll regenerate ! crypto ca trustpoint caserver2
enrollment retry period 5 enrollment mode ra enrollment
url http://171.69.89.111:80/certsrv/mscep/mscep.dll
usage ike serial-number fqdn 2611-vpn.cisco.com ip-
address Ethernet0/0 password 7 130B181C0E subject-name
OU=ROME O=ITALY rsakeypair tacvpn auto-enroll regenerate
crypto ca certificate chain caserver1 certificate ca
0E7EC1B68A2F14BD4C4515AF44C45732 308202BE 30820268
A0030201 0202100E 7EC1B68A 2F14BD4C 4515AF44 C4573230
0D06092A 864886F7 0D010105 05003076 310B3009 06035504
06130255 53310B30 !--- Certificate is abbreviated for
easier viewing. quit certificate 6103EE0A0000000000038
3082040F 308203B9 A0030201 02020A61 03EE0A00 00000000
38300D06 092A8648 86F70D01 01050500 3076310B 30090603
55040613 02555331 0B300906 03550408 13024341 3111300F
06035504 07130853 616E204A 6F736531 16301406 0355040A !-
-- Certificate is abbreviated for easier viewing. quit
certificate 6104020F00000000000039 3082040F 308203B9
A0030201 02020A61 04020F00 00000000 39300D06 092A8648
86F70D01 01050500 3076310B 30090603 55040613 02555331
0B300906 03550408 13024341 3111300F 06035504 07130853
616E204A 6F736531 16301406 0355040A !--- Certificate is
abbreviated for easier viewing. quit crypto ca
certificate chain caserver2 certificate
3DAA905900000000000033 308203CF 30820379 A0030201 02020A3D
AA905900 00000000 33300D06 092A8648 86F70D01 01050500
3061310B 30090603 55040613 02555331 13301106 03550408
130A6361 6C69666F 726E6961 3111300F 06035504 07130873
616E206A 6F736531 !--- Certificate is abbreviated for
easier viewing. quit certificate 3DAA867D0000000000032
308203CF 30820379 A0030201 02020A3D AA867D00 00000000
32300D06 092A8648 86F70D01 01050500 3061310B 30090603
55040613 02555331 13301106 03550408 130A6361 6C69666F
```

```

726E6961 3111300F 06035504 07130873 616E206A 6F736531 !-
-- Certificate is abbreviated for easier viewing. quit
certificate ca 3E34CD199392A0914621EA778B13F357 30820284
3082022E A0030201 0202103E 34CD1993 92A09146 21EA778B
13F35730 0D06092A 864886F7 0D010105 05003061 310B3009
06035504 06130255 53311330 11060355 0408130A 63616C69
666F726E 69613111 300F0603 55040713 0873616E !---
Certificate is abbreviated for easier viewing. quit !
crypto isakmp policy 10 hash md5 crypto isakmp identity
hostname ! ! crypto ipsec transform-set myset esp-des
esp-md5-hmac ! crypto map vpn 10 ipsec-isakmp set peer
172.16.172.45 set transform-set myset match address 101
crypto map vpn 20 ipsec-isakmp set peer 172.16.172.51
set transform-set myset match address 102 crypto map vpn
30 ipsec-isakmp set peer 172.16.172.53 set transform-set
myset match address 103 ! mta receive maximum-recipients
0 ! ! ! ! interface Ethernet0/0 ip address 172.16.172.35
255.255.255.240 half-duplex crypto map vpn ! interface
Ethernet0/1 ip address 192.168.4.1 255.255.255.0 half-
duplex ! interface Serial1/0 no ip address shutdown !
interface Serial1/1 no ip address shutdown ! interface
Serial1/2 no ip address shutdown ! interface Serial1/3
no ip address shutdown ! ip classless ip route 0.0.0.0
0.0.0.0 172.16.172.33 ip http server ! access-list 101
permit ip 192.168.4.0 0.0.0.255 20.1.1.0 0.0.0.255
access-list 102 permit ip 192.168.4.0 0.0.0.255 3.3.3.0
0.0.0.255 access-list 103 permit ip 192.168.4.0
0.0.0.255 200.1.1.0 0.0.0.255 access-list 169 deny ip
host 172.16.172.60 any access-list 169 deny ip host
172.16.172.61 any access-list 169 deny ip host
172.16.172.62 any access-list 169 permit ip any any !
call rsvp-sync ! ! mgcp profile default ! ! ! dial-peer
cor custom ! ! ! ! ! line con 0 line aux 0 line vty 0 4
login ! ! end

```

## Configuración y Certificados del 1720-1 Router del server1 de CA

```

show verify Cisco Internetwork Operating System Software
IOS (tm) C1700 Software (C1700-K9SY7-M), Version
12.2(11)T, RELEASE SOFTWARE (fc1) TAC Support:
http://www.cisco.com/tac Copyright (c) 1986-2002 by
cisco Systems, Inc. Compiled Wed 31-Jul-02 12:28 by ccai
Image text-base: 0x80008124, data-base: 0x80D1654C ROM:
System Bootstrap, Version 12.0(3)T, RELEASE SOFTWARE
(fc1) 1720-1 uptime is 18 hours, 50 minutes System
returned to ROM by reload at 12:03:01 UTC Fri Oct 25
2002 System restarted at 03:28:54 UTC Sun Oct 27 2002
System image file is "flash:c1700-k9sy7-mz.122-11.T.bin"
cisco 1720 (MPC860T) processor (revision 0x601) with
44237K/4915K bytes of memory. Processor board ID
JAD0449013N (791802990), with hardware revision 0000
MPC860T processor: part number 0, mask 32 Bridging
software. X.25 software, Version 3.0.0. 1 Ethernet/IEEE
802.3 interface(s) 1 FastEthernet/IEEE 802.3
interface(s) 1 Serial network interface(s) 1 Virtual
Private Network (VPN) Module(s) WIC T1-DSU 32K bytes of
non-volatile configuration memory. 16384K bytes of
processor board System flash (Read/Write) Configuration
register is 0x2102 1720-1#show run Building
configuration... Current configuration : 8177 bytes ! !
Last configuration change at 21:05:50 UTC Sun Oct 27
2002 ! NVRAM config last updated at 04:03:16 UTC Tue Oct
26 2004 ! version 12.2 service timestamps debug datetime

```

```

msec service timestamps log datetime msec no service
password-encryption ! hostname 1720-1 ! ! username cisco
password 0 cisco ip subnet-zero ! ! no ip domain lookup
ip domain name tac.com ip host caserver1 171.69.89.125 !
! crypto ca trustpoint caserver1 enrollment retry count
5 enrollment retry period 2 enrollment mode ra
enrollment url
http://171.69.89.125:80/certsrv/mscep/mscep.dll usage
ike serial-number ip-address FastEthernet0 subject-name
OU=MADRID O=SPAIN crl optional rsakeypair ipsecpki auto-
enroll 100 regenerate crypto ca certificate chain
caserver1 certificate ca
0E7EC1B68A2F14BD4C4515AF44C45732 308202BE 30820268
A0030201 0202100E 7EC1B68A 2F14BD4C 4515AF44 C4573230
0D06092A 864886F7 0D010105 05003076 310B3009 06035504
06130255 53310B30 !--- Certificate is abbreviated for
easier viewing. quit certificate 611652F7000000000003A
30820407 308203B1 A0030201 02020A61 1652F700 00000000
3A300D06 092A8648 86F70D01 01050500 3076310B 30090603
55040613 02555331 0B300906 03550408 !--- Certificate is
abbreviated for easier viewing. quit certificate
61165F5B000000000003B 30820407 308203B1 A0030201 02020A61
165F5B00 00000000 3B300D06 092A8648 86F70D01 01050500
3076310B 30090603 55040613 02555331 0B300906 03550408 !-
-- Certificate is abbreviated for easier viewing. quit !
crypto isakmp policy 10 hash md5 crypto isakmp identity
hostname ! ! crypto ipsec transform-set myset esp-des
esp-md5-hmac crypto map vpn 10 ipsec-isakmp set peer
172.16.172.35 set transform-set myset match address 102
! ! ! ! interface Loopback0 ip address 20.1.1.1
255.255.255.0 ! interface Ethernet0 no ip address
shutdown half-duplex ! interface FastEthernet0 ip
address 172.16.172.45 255.255.255.240 speed auto crypto
map vpn ! interface Serial0 no ip address no keepalive
shutdown ! ip classless ip route 0.0.0.0 0.0.0.0
172.16.172.33 ip http server ! ! access-list 1 permit
10.1.1.0 0.0.0.255 access-list 102 permit ip 20.1.1.0
0.0.0.255 192.168.4.0 0.0.0.255 ! ! line con 0 line aux
0 line vty 0 4 login ! ntp clock-period 17179867 ntp
master 1 end

```

## Configuración y Certificados del 7204-1 Router del server2 de CA

```

show verify Cisco Internetwork Operating System Software
IOS (tm) 7200 Software (C7200-JK903S-M), Version
12.2(11)T1, RELEASE SOFTWARE (fc2) TAC Support:
http://www.cisco.com/tac Copyright (c) 1986-2002 by
cisco Systems, Inc. Compiled Sat 28-Sep-02 12:29 by ccai
Image text-base: 0x60008940, data-base: 0x61D72000 ROM:
System Bootstrap, Version 12.1(20000824:081033)
[dbeazley-cosmos_e_LATEST 101], DEVELOPMENT SOFTWARE
7204-1 uptime is 1 hour, 16 minutes System returned to
ROM by reload at 23:22:25 PST Sat Oct 25 2003 System
restarted at 21:07:06 PST Sat Oct 26 2002 System image
file is "slot0:c7200-jk9o3s-mz.122-11.T1.bin" cisco
7204VXR (NPE300) processor (revision D) with
122880K/40960K bytes of memory. Processor board ID
23663249 R7000 CPU at 262Mhz, Implementation 39, Rev
2.1, 256KB L2, 2048KB L3 Cache 4 slot VXR midplane,
Version 2.3 Last reset from power-on Bridging software.
X.25 software, Version 3.0.0. SuperLAT software
(copyright 1990 by Meridian Technology Corp). TN3270
Emulation software. 4 Ethernet/IEEE 802.3 interface(s) 1

```

```

HSSI network interface(s) 125K bytes of non-volatile
configuration memory. 20480K bytes of Flash PCMCIA card
at slot 0 (Sector size 128K). 4096K bytes of Flash
internal SIMM (Sector size 256K). Configuration register
is 0x2102 7204-1#show run Building configuration...
Current configuration : 8245 bytes ! version 12.2
service timestamps debug datetime service timestamps log
datetime no service password-encryption service udp-
small-servers service tcp-small-servers no service dhcp
! hostname 7204-1 ! boot system flash slot boot system
flash slot0:c7200-jk9o3s-mz.122-11.T1.bin logging
buffered 50000 debugging enable secret 5
$1$l0d0$bXKx.l0gHbotsggIli0UL0 enable password tajmahal
! username cisco password 0 cisco clock timezone PST -7
ip subnet-zero ! no ip domain lookup ip domain name
cisco.com ip host caserver2 171.69.89.111 ! ! ip vrf
test no ip cef ip audit notify log ip audit po max-
events 100 ! crypto ca trustpoint caserver2 enrollment
retry period 2 enrollment mode ra enrollment url
http://171.69.89.111:80/certsrv/mscep/mscep.dll usage
ike serial-number ip-address none password 7 151C040201
subject-name OU=BERLIN O=GERMANY crl optional rsakeypair
ciscotac auto-enroll regenerate crypto ca certificate
chain caserver2 certificate 3DA1D131000000000031
308203AA 30820354 A0030201 02020A3D A1D13100 00000000
31300D06 092A8648 86F70D01 01050500 3061310B 30090603
55040613 02555331 13301106 03550408 !--- Certificate is
abbreviated for easier viewing. quit certificate
3DA1C8FA0000000000030 308203AA 30820354 A0030201 02020A3D
A1C8FA00 00000000 30300D06 092A8648 86F70D01 01050500
3061310B 30090603 55040613 02555331 13301106 03550408 !-
-- Certificate is abbreviated for easier viewing. quit
certificate ca 3E34CD199392A0914621EA778B13F357 30820284
3082022E A0030201 0202103E 34CD1993 92A09146 21EA778B
13F35730 0D06092A 864886F7 0D010105 05003061 310B3009
06035504 06130255 53311330 !--- Certificate is
abbreviated for easier viewing. quit ! crypto isakmp
policy 10 hash md5 crypto isakmp identity hostname !
crypto ipsec transform-set myset esp-des esp-md5-hmac !
crypto map vpn 10 ipsec-isakmp set peer 172.16.172.35
set transform-set myset match address 101 ! ! ! voice
call carrier capacity active ! ! ! ! interface
Ethernet1/0 no ip address duplex half ! interface
Ethernet1/1 ip address 172.16.172.51 255.255.255.240 no
ip redirects duplex half crypto map vpn ! interface
Ethernet1/2 ip address 3.3.3.2 255.255.255.0 no
keepalive duplex half ! interface Ethernet1/3 no ip
address duplex half ! interface Hssi4/0 ip address
200.1.1.1 255.255.255.0 load-interval 30 fair-queue 64
16 0 hssi dce serial restart_delay 0 clockrate 1524705 !
ip classless ip route 0.0.0.0 0.0.0.0 172.16.172.49 no
ip http server ip pim bidir-enable ! ! access-list 101
permit ip 3.3.3.0 0.0.0.255 192.168.4.0 0.0.0.255 !
snmp-server community public RO snmp-server enable traps
tty ! ! call rsvp-sync ! ! mgcp profile default ! dial-
peer cor custom ! ! ! ! gatekeeper shutdown ! ! line con
0 exec-timeout 0 0 line aux 0 line vty 0 4 privilege
level 15 password cisco login line vty 5 15 login ! no
scheduler max-task-time ! end 7204-1# 7204-1# 7204-
1#show crypto ca certificate Certificate Status:
Available Certificate Serial Number:
3DA1D131000000000031 Certificate Usage: Encryption
Issuer: CN = vpn OU = cisco O = tac L = san jose ST =
california C = US Subject: Name: 7204-1.cisco.com Serial

```



```

Number: 01691291 OU = "BERLIN O=GERMANY"
OID.1.2.840.113549.1.9.2 = 7204-1.cisco.com OID.2.5.4.5
= 1691291 CRL Distribution Point: http://tac-
2hq8cg5ti0h/CertEnroll/vpn.crl Validity Date: start
date: 17:16:57 PST Oct 26 2002 end date: 17:26:57 PST
Oct 26 2003 renew date: 17:26:55 PST Oct 26 2003
Associated Trustpoints: caserver2 Certificate Status:
Available Certificate Serial Number:
3DA1C8FA000000000030 Certificate Usage: Signature
Issuer: CN = vpn OU = cisco O = tac L = san jose ST =
california C = US Subject: Name: 7204-1.cisco.com Serial
Number: 01691291 OU = "BERLIN O=GERMANY"
OID.1.2.840.113549.1.9.2 = 7204-1.cisco.com OID.2.5.4.5
= 1691291 CRL Distribution Point: http://tac-
2hq8cg5ti0h/CertEnroll/vpn.crl Validity Date: start
date: 17:16:55 PST Oct 26 2002 end date: 17:26:55 PST
Oct 26 2003 Associated Trustpoints: caserver2 CA
Certificate Status: Available Certificate Serial Number:
3E34CD199392A0914621EA778B13F357 Certificate Usage:
Signature Issuer: CN = vpn OU = cisco O = tac L = san
jose ST = california C = US Subject: CN = vpn OU = cisco
O = tac L = san jose ST = california C = US CRL
Distribution Point: http://tac-
2hq8cg5ti0h/CertEnroll/vpn.crl Validity Date: start
date: 21:19:50 PST Dec 6 2001 end date: 21:29:42 PST Dec
6 2003 Associated Trustpoints: caserver2 7204-1#show
crypto key mypubkey rsa % Key pair was generated at:
13:55:35 PST Oct 25 2002 Key name: ciscotac Usage:
Signature Key Key Data: 305C300D 06092A86 4886F70D
01010105 00034B00 30480241 0099BC9C 175AD748 C991D24E
4F328960 997CADCB E665B876 4C53E2A0 449CA082 4C503E05
87604F32 EECDF7B5 5CA0ADB6 2C664F9D 883EBAD6 671C6A8F
A0C5D9EE 23020301 0001 % Key pair was generated at:
13:55:35 PST Oct 25 2002 Key name: ciscotac Usage:
Encryption Key Key Data: 305C300D 06092A86 4886F70D
01010105 00034B00 30480241 00D4FE8A 3DE940E6 42277A82
87DDDA45 A0F77AE4 AF47D91F BA134F65 92886D3B 7489BEBB
DE650EA1 029A5A5C 72F39FCA A83BC018 246B0D1D 270DBCFF2
B9B29587 21020301 0001 % Key pair was generated at:
22:07:13 PST Oct 26 2002 Key name: ciscotac.server
Usage: Encryption Key Key Data: 307C300D 06092A86
4886F70D 01010105 00036B00 30680261 00E47825 7E60D6AC
4C078368 925191FD 2B2AAC50 6A6D6AF1 8A01C9B6 D21C4C80
05DD8277 D63F60B1 01A2DDCF 407BE088 D333FE1D 4F5DE892
47970454 A50C54EC B962FEE4 A9BF5197 4C2B0656 503E0045
BB3168C4 2228155A B6BF0385 0B493FC5 79020301 0001 7204-
1# 7204-1# 7204-1# 7204-1#

```

## Verificación

Estas secciones proporcionan la confirmación de independientemente de si la configuración trabaja cuando usted publica estos **comandos show**. Estos comandos verify CA y si los certificados de identidad (certificados del router) fueron publicados por el servidor de CA.

[La herramienta Output Interpreter Tool \(clientes registrados solamente\)](#) (OIT) soporta ciertos comandos show. Utilice la OIT para ver un análisis del resultado del comando show.

- **muestre el certificado Ca crypto** — Muestra la información sobre los Certificados, el certificado de la autoridad de certificación, y cualquier Certificados de la autoridad de registro.

Utilice el comando **show crypto ca certificates** en el modo EXEC.

- **el Ca crypto autentica** — Autentique las autoridades de certificación (extraiga el certificado de CA). Utilice el comando **crypto ca authenticate** en el modo de configuración global.
- **mypubkey rsa del show crypto key** — Muestra las claves públicas RSA del router. Utilice el comando **show crypto key mypubkey rsa** en el modo EXEC.
- **muestre isakmp crypto sa** — Muestra todas las asociaciones actuales de la seguridad de intercambio dominante de Internet (SA) en un par. Utilice el comando **show crypto isakmp sa** en el modo EXEC.
- **muestre IPsec crypto sa** — Muestra las configuraciones usadas por el IPsec actual SA. Utilice el comando **show crypto ipsec sa** en el modo EXEC.
- **reloj de la demostración** — Muestra el tiempo de sistema actual en el router.
- **hh determinado del calendario: milímetro: día mes año ss** — Fija el tiempo de sistema de calendario. Para más información sobre los diversos relojes y fuentes de hora externa de la configuración en el router, refiera a [realizar la administración del sistema básico](#).

Para los comandos adicionales relacionados con la Interoperabilidad de CA, el IPsec, y el IKE, refieren al [SENIOR: Parte 4: Comandos de la seguridad IP y de la Interoperabilidad del cifrado y de las autoridades de certificación](#).

Esta salida es del comando **show crypto ca certificate**.

```
2611-VPN#show crypto ca certificate Certificate Status: Available Certificate Serial Number:
3DAA9059000000000033 Certificate Usage: Encryption Issuer: CN = vpn OU = cisco O = tac L = san
jose ST = california C = US Subject: !--- The received certificate from CA server2 contains the
!--- FQDN, IP address, and subject name. The renew date !--- states when the next enroll date
is. Name: 2611-vpn.cisco.com IP Address: 172.16.172.35 Serial Number: 721959E3 OU = "ROME
O=ITALY" OID.1.2.840.113549.1.9.2 = 2611-vpn.cisco.com OID.1.2.840.113549.1.9.8 = 172.16.172.35
OID.2.5.4.5 = 721959E3 CRL Distribution Point: http://tac-2hq8cg5ti0h/CertEnroll/vpn.crl
Validity Date: start date: 00:26:30 UTC Oct 27 2002 end date: 00:36:30 UTC Oct 27 2003 renew
date: 00:36:28 UTC Oct 27 2003 Associated Trustpoints: caserver2 Certificate Status: Available
Certificate Serial Number: 3DAA867D000000000032 Certificate Usage: Signature Issuer: CN = vpn OU
= cisco O = tac L = San Jose ST = California C = US Subject: Name: 2611-vpn.cisco.com IP
Address: 172.16.172.35 Serial Number: 721959E3 OU = "ROME O=ITALY" OID.1.2.840.113549.1.9.2 =
2611-vpn.cisco.com OID.1.2.840.113549.1.9.8 = 172.16.172.35 OID.2.5.4.5 = 721959E3 CRL
Distribution Point: http://tac-2hq8cg5ti0h/CertEnroll/vpn.crl Validity Date: start date:
00:26:28 UTC Oct 27 2002 end date: 00:36:28 UTC Oct 27 2003 Associated Trustpoints: caserver2 CA
Certificate Status: Available Certificate Serial Number: 3E34CD199392A0914621EA778B13F357
Certificate Usage: Signature Issuer: CN = vpn OU = cisco O = tac L = San Jose ST = California C
= US Subject: CN = vpn OU = cisco O = tac L = San Jose ST = California C = US CRL Distribution
Point: http://tac-2hq8cg5ti0h/CertEnroll/vpn.crl Validity Date: start date: 04:19:50 UTC Dec 7
2001 end date: 04:29:42 UTC DEC 7 2003 Associated Trustpoints: caserver2 CA Certificate Status:
Available Certificate Serial Number: 0E7EC1B68A2F14BD4C4515AF44C45732 Certificate Usage:
Signature Issuer: CN = SJVPNTAC-CAServer OU = TAC-VPN-SJ O = Cisco Systems L = San Jose ST = CA
C = US Subject: CN = SJVPNTAC-CAServer OU = TAC-VPN-SJ O = Cisco Systems L = San Jose ST = CA C
= US CRL Distribution Point: http://ca-server/CertEnroll/SJVPNTAC-CAServer.crl Validity Date:
start date: 20:52:48 UTC Sep 17 2002 end date: 21:02:37 UTC Sep 17 2017 Associated Trustpoints:
caserver1 Certificate Status: Available Certificate Serial Number: 6103EE0A000000000038
Certificate Usage: Signature Issuer: CN = SJVPNTAC-CAServer OU = TAC-VPN-SJ O = Cisco Systems L
= San Jose ST = CA C = US Subject: Name: 2611-vpn.cisco.com IP Address: 172.16.172.35 Serial
Number: 721959E3 OU = "PARIS O=FRANCE" OID.1.2.840.113549.1.9.2 = 2611-vpn.cisco.com
OID.1.2.840.113549.1.9.8 = 172.16.172.35 OID.2.5.4.5 = 721959E3 CRL Distribution Point:
http://ca-server/CertEnroll/SJVPNTAC-CAServer.crl Validity Date: start date: 03:33:05 UTC Oct 26
2002 end date: 03:43:05 UTC Oct 26 2003 Associated Trustpoints: caserver1 Certificate Status:
Available Certificate Serial Number: 6104020F000000000039 Certificate Usage: Encryption Issuer:
CN = SJVPNTAC-CAServer OU = TAC-VPN-SJ O = Cisco Systems L = San Jose ST = CA C = US Subject: !--
-- The received certificate from CA server2 contains the !--- FQDN, IP address, and subject
name. The renew date !--- states when the next enroll date is. Name: 2611-vpn.cisco.com IP
Address: 172.16.172.35 Serial Number: 721959E3 OU = "PARIS O=FRANCE" OID.1.2.840.113549.1.9.2 =
2611-vpn.cisco.com OID.1.2.840.113549.1.9.8 = 172.16.172.35 OID.2.5.4.5 = 721959E3 CRL
```

```

Distribution Point: http://ca-server/CertEnroll/SJVPNTAC-CAServer.crl Validity Date: start date:
03:33:10 UTC Oct 26 2002 end date: 03:43:10 UTC Oct 26 2003 renew date: 03:43:05 UTC Oct 26 2003
Associated Trustpoints: caserver1 2611-VPN#show crypto key mypubkey rsa % Key pair was generated
at: 00:14:06 UTC Mar 1 1993 Key name: ciscovpn Usage: Signature Key Key Data: 305C300D 06092A86
4886F70D 01010105 00034B00 30480241 00A2DE57 2C7A4555 BF87D3CC 4A260DBF 56574554 472FC72C
0461A35B E41B5B53 BE81A47E 264A68D7 08662555 27E4E301 2AF04B1C E472F70B 74DF38A0 6EB286F9
01020301 0001 % Key pair was generated at: 00:14:10 UTC Mar 1 1993 Key name: ciscovpn Usage:
Encryption Key Key Data: 305C300D 06092A86 4886F70D 01010105 00034B00 30480241 00D10224 8CBEC2D7
B517DF99 7363717D 6F6CA0F1 83FB7874 E60BB169 CD4AD9CA 92E04143 16D4D253 5CBF212F FF6268A5
329AB988 2655568C 8EC19017 6F4A4C86 43020301 0001 % Key pair was generated at: 00:14:59 UTC Mar
1 1993 Key name: tacvpn Usage: Signature Key Key Data: 305C300D 06092A86 4886F70D 01010105
00034B00 30480241 00AB2884 22A070D0 A8C84C3E CD45A382 F4CDB158 5B31B624 5C92632C 5DC1977E
686E1C18 DA16BE57 6FBA9518 4D2F01B8 0D59528D 447014D3 02D5A631 84E54CD4 FB020301 0001 % Key pair
was generated at: 00:15:00 UTC Mar 1 1993 Key name: tacvpn Usage: Encryption Key Key Data:
305C300D 06092A86 4886F70D 01010105 00034B00 30480241 00AB7576 9D0A2D65 7BB9B465 AF227B73
2B83AFD6 3791FA54 3A2DB845 55E4540F 35972460 B87C613E 82DBC4D2 51E6F9A7 07164C57 B02D28B8
93F8D50F D5C3444F 01020301 0001 % Key pair was generated at: 22:02:57 UTC Oct 27 2002 Key name:
ciscovpn.server Usage: Encryption Key Key Data: 307C300D 06092A86 4886F70D 01010105 00036B00
30680261 00D42A5E 4C9D27F1 195CC537 7CF9E390 935DFBA3 2DA01B3B C5E50620 57B902A3 50876FA1
1A9D83FD 0EB437F7 E0568EB7 830A46FA E9D9BA4F 3E8B132D F24A08B8 E2154944 36829D64 E48077EF
224BF142 A3A92672 F0BC57F5 063EF64A 8B775979 CD020301 0001

```

## Regeneración de un par de claves RSA

Estos comandos en el 7204-1 Router ilustran cómo utilizan al **comando auto-enroll regenerate y rsa key label**. La figura muestra la Secuencia de eventos después de que CA fuera declarado en el router y después de publicar el **comando crypto ca authenticate ca server**. El **comando auto-enroll** trabaja solamente después que usted ha autenticado CA. Una vez que se autentica CA, el router alista automáticamente con el servidor de CA. Usted no necesita publicar el **comando crypto ca enroll ca server**. Una vez que expira el certificado de identidad, el router alista automáticamente con el servidor de CA. Con la introducción de este comando no hay necesidad de alistar manualmente con el servidor de CA una vez que expira el certificado de la identidad (router).

Usted no necesita utilizar una fuente de hora externa (servidor NTP) en el router si usted fija el sistema de calendario en el router con el **comando calendar set** para fijar la hora correcta. Recargar al router sincronizes el reloj del sistema con el sistema de calendario.

**Nota:** El **comando calendar set** no está disponible en los 1700 y 2600 Router. Utilice una fuente de hora externa en este Routers.

CA se configura en el router. Esta salida detalla el enlistamiento automático de los certificados de identidad y de la regeneración del par clave RSA en el 7204-1 Router. Esta salida es intrépida en ciertas áreas acentuar la información importante.

```

crypto ca trustpoint caserver2 enrollment retry period 2 enrollment mode ra enrollment url
http://171.69.89.111:80/certsrv/mscep/mscep.dll usage ike serial-number ip-address none password
7 151C040201 subject-name OU=BERLIN O=GERMANY crl optional rsakeypair ciscotac auto-enroll
regenerate !--- Execute this command to authenticate the CA by obtaining !--- the CA's self-
signed certificate which contains the CA's public key. Because !--- the CA signs its own
certificate, the CA's public key should be manually !--- authenticated by contacting the CA
administrator to compare the CA certificate's !--- fingerprint. Note that after you execute the
command the router immediately !--- enrolls with the CA server to obtain its identity
certificate. 7204-1(config)#crypto ca authenticate caserver2 Certificate has the following
attributes: Fingerprint: A1E8B61A FD1A66D6 2DE35501 99C43D83 % Do you accept this certificate?
[yes/no]: Oct 27 06:45:09: CRYPTO_PKI: Sending CA Certificate Request: GET
/certsrv/mscep/mscep.dll/pkiclient.exe?operation=GetCACert&message;=caserver2 HTTP/1.0 Oct 27
06:45:09: CRYPTO_PKI: can not resolve server name/IP address Oct 27 06:45:09: CRYPTO_PKI: Using
unresolved IP Address 171.69.89.111 Oct 27 06:45:09: CRYPTO_PKI: http connection opened Oct 27
06:45:10: CRYPTO_PKI: HTTP response header: HTTP/1.1 200 OK Server: Microsoft-IIS/5.0 Date: Sun,

```

27 Oct 2002 02:19:09 GMT Content-Length: 2811 Content-Type: application/x-x509-ca-ra-cert  
Content-Type indicates we have received CA and RA certificates. Oct 27 06:45:10:  
CRYPTO\_PKI:crypto\_process\_ca\_ra\_cert(trustpoint=caserver2) Oct 27 06:45:10: CRYPTO\_PKI:CA and RA  
certs (cert data): 30 82 0A F7 06 09 2A 86 48 86 F7 0D 01 07 02 A0 hex data omitted 03 13 0B 73  
6A 76 70 6E 70 y **Trustpoint CA certificate accepted.** 7204-1(config)#6B 69 2D 72 61 30 81 9F 30  
0D 06 09 2A 86 48 86 F7 0D 01 01 01 05 00 hex data omitted A9 13 93 1E E6 E1 E4 30 07 31 00 Oct  
27 06:45:10: CRYPTO\_PKI: InsertCertData: subject name = 30 61 31 0B 30 09 06 03 55 04 06 13 02  
55 53 31 hex data omitted 76 70 6E Oct 27 06:45:10: CRYPTO\_PKI: InsertCertData: issuer name = 30  
61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted 76 70 6E Oct 27 06:45:10:  
CRYPTO\_PKI: InsertCertData: serial number = 3E 34 CD 19 93 92 A0 91 46 21 EA 77 8B 13 F3 57 Oct  
27 06:45:10: CRYPTO\_PKI: InsertCertData: subject name = 30 81 83 31 20 30 1E 06 09 2A 86 48 86  
F7 0D 01 hex data omitted 70 6B 69 2D 72 61 Oct 27 06:45:10: CRYPTO\_PKI: InsertCertData: issuer  
name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted 76 70 6E Oct 27  
06:45:10: CRYPTO\_PKI: InsertCertData: serial number = 14 6C F2 85 00 00 00 00 09 Oct 27  
06:45:10: CRYPTO\_PKI: WARNING: Certificate, private key or CRL was not found while selecting CRL  
Oct 27 06:45:10: CRYPTO\_PKI: InsertCertData: subject name = 30 81 83 31 20 30 1E 06 09 2A 86 48  
86 F7 0D 01 hex data omitted 70 6B 69 2D 72 61 Oct 27 06:45:10: CRYPTO\_PKI: InsertCertData:  
issuer name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted 76 70 6E Oct 27  
06:45:10: CRYPTO\_PKI: InsertCertData: serial number = 14 6C F1 A9 00 00 00 00 08 Oct 27  
06:45:10: CRYPTO\_PKI: WARNING: Certificate, private key or CRL was not found while selecting CRL  
Oct 27 06:45:10: CRYPTO\_PKI: InsertCertData: subject name = 30 61 31 0B 30 09 06 03 55 04 06 13  
02 55 53 31 hex data omitted 76 70 6E Oct 27 06:45:10: CRYPTO\_PKI: InsertCertData: issuer name =  
30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted 76 70 6E Oct 27 06:45:10:  
CRYPTO\_PKI: InsertCertData: serial number = 3E 34 CD 19 93 92 A0 91 46 21 EA 77 8B 13 F3 57 Oct  
27 06:45:10: CRYPTO\_PKI: transaction GetCACert completed Oct 27 06:45:10: CRYPTO\_PKI: CA  
certificate received. Oct 27 06:45:10: CRYPTO\_PKI: **CA certificate received.** Oct 27 06:45:10:  
CRYPTO\_PKI: crypto\_pki\_authenticate\_tp\_cert() Oct 27 06:45:10: CRYPTO\_PKI: trustpoint caserver2  
authentication status = 2 Oct 27 06:45:12: CRYPTO\_PKI: InsertCertData: subject name = 30 61 31  
0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted 76 70 6E Oct 27 06:45:12: CRYPTO\_PKI:  
InsertCertData: issuer name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted  
76 70 6E Oct 27 06:45:12: CRYPTO\_PKI: InsertCertData: serial number = 3E 34 CD 19 93 92 A0 91 46  
21 EA 77 8B 13 F3 57 Oct 27 06:45:12: CRYPTO\_PKI: crypto\_process\_ra\_certs(trust\_point=caserver2)  
7204-1#% Time to Re-enroll trust\_point caserver2 Can not select my full public key (ciscotac)%  
Start certificate enrollment .. % **The subject name in the certificate will be: OU=BERLIN  
O=GERMANY % The subject name in the certificate will be: 7204-1.cisco.com % The serial number in  
the certificate will be: 01691291 % Certificate request sent to Certificate Authority % The  
certificate request fingerprint will be displayed. % The 'show crypto ca certificate' command  
will also show the fingerprint.** Signing Certificate Reqeust Fingerprint: E92A4B6C D213B9A9  
4AD07064 23BFABAB Oct 27 06:46:32: CRYPTO\_PKI: Sending CA Certificate Request: GET  
/certsrv/mscep/mscep.dll/pkiclient.exe?operation=GetCACert&message=caserver2 HTTP/1.0 Oct 27  
06:46:32: CRYPTO\_PKI: can not resolve server name/IP address Oct 27 06:46:32: CRYPTO\_PKI: Using  
unresolved IP Address 171.69.89.111 Oct 27 06:46:32: CRYPTO\_PKI: http connection opened Oct 27  
06:46:33: CRYPTO\_PKI: HTTP response header: HTTP/1.1 200 OK Server: Microsoft-IIS/5.0 Date: Sun,  
27 Oct 2002 02:20:32 GMT Content-Length: 2811 Content-Type: application/x-x509-ca-ra-cert  
Content-Type indicates we have received CA and RA certificates. Oct 27 06:46:33:  
CRYPTO\_PKI:crypto\_process\_ca\_ra\_cert(trustpoint=caserver2) Oct 27 06:46:33: CRYPTO\_PKI:CA and RA  
certs (cert data): 30 82 0A F7 06 09 2A 86 48 86 F7 0D 01 07 02 A0 hex data omitted Encryption  
Certi0A 06 03 55 04 03 13 03 76 70 6E 30 1E 17 0D 30 32 30 39 hex data omitted A9 13 93 1E E6 E1  
E4 30 07 31 00 Oct 27 06:46:33: CRYPTO\_PKI: InsertCertData: subject name = 30 61 31 0B 30 09 06  
03 55 04 06 13 02 55 53 31 hex data omitted 76 70 6E Oct 27 06:46:33: CRYPTO\_PKI:  
InsertCertData: issuer name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted  
76 70 6E Oct 27 06:46:33: CRYPTO\_PKI: InsertCertData: serial number = 3E 34 CD 19 93 92 A0 91 46  
21 EA 77 8B 13 F3 57 Oct 27 06:46:33: CRYPTO\_PKI: InsertCertData: subject name = 30 81 83 31 20  
30 1E 06 09 2A 86 48 86 F7 0D 01 hex data omitted 70 6B 69 2D 72 61 Oct 27 06:46:33: CRYPTO\_PKI:  
InsertCertData: issuer name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted  
76 70 6E Oct 27 06:46:33: CRYPTO\_PKI: InsertCertData: serial number = 14 6C F2 85 00 00 00 00  
09 Oct 27 06:46:33: CRYPTO\_PKI: WARNING: Certificate, private key or CRL was not found while  
selecting CRL Oct 27 06:46:33: CRYPTO\_PKI: InsertCertData: subject name = 30 81 83 31 20 30 1E  
06 09 2A 86 48 86 F7 0D 01 hex data omitted 70 6B 69 2D 72 61 Oct 27 06:46:33: CRYPTO\_PKI:  
InsertCertData: issuer name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted  
76 70 6E Oct 27 06:46:33: CRYPTO\_PKI: InsertCertData: serial number = 14 6C F1 A9 00 00 00 00  
08 Oct 27 06:46:33: CRYPTO\_PKI: WARNING: Certificate, private key or CRL was not found while  
selecting CRL Oct 27 06:46:33: CRYPTO\_PKI: InsertCertData: subject name = 30 81 83 31 20 30 1E  
06 09 2A 86 48 86 F7 0D 01 hex data omitted 70 6B 69 2D 72 61 Oct 27 06:46:33: CRYPTO\_PKI:

InsertCertData: issuer name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted  
76 70 6E Oct 27 06:46:33: CRYPTO\_PKI: InsertCertData: serial number = 14 6C F1 A9 00 00 00 00 00  
08 Oct 27 06:46:33: CRYPTO\_PKI: InsertCertData: subject name = 30 81 83 31 20 30 1E 06 09 2A 86  
48 86 F7 0D 01 hex data omitted 70 6B 69 2D 72 61 Oct 27 06:46:33: CRYPTO\_PKI: InsertCertData:  
issuer name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted 76 70 6E Oct 27  
06:46:33: CRYPTO\_PKI: InsertCertData: serial number = 14 6C F2 85 00 00 00 00 00 09 Oct 27  
06:46:33: CRYPTO\_PKI: InsertCertData: subject name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55  
53 31 hex data omitted 76 70 6E Oct 27 06:46:33: CRYPTO\_PKI: InsertCertData: issuer name = 30 61  
31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted 76 70 6E Oct 27 06:46:33: CRYPTO\_PKI:  
InsertCertData: serial number = 3E 34 CD 19 93 92 A0 91 46 21 EA 77 8B 13 F3 57 Oct 27 06:46:33:  
CRYPTO\_PKI: crypto\_process\_ra\_certs(trust\_point=caserver2) Oct 27 06:46:33: CRYPTO\_PKI:  
transaction PKCSReq completed Oct 27 06:46:33: CRYPTO\_PKI: status: Oct 27 06:46:33: CRYPTO\_PKI:  
All sockets are closed for trustpoint caserver2. Oct 27 06:46:33: CRYPTO\_PKI:Write out pkcs#10  
content:319 30 82 01 3B 30 81 E6 02 01 00 30 4C 31 19 30 17 hex data omitted FB EE 80 3D 5D 62  
B9 BD 85 24 03 49 6D 2C 98 Oct 27 06:46:33: CRYPTO\_PKI:Enveloped Data for trustpoint  
caserver2... 30 80 06 09 2A 86 48 86 F7 0D 01 07 03 A0 80 30 hex data omitted 00 00 00 00 Oct 27  
06:46:33: CRYPTO\_PKI:Signed Data for trustpoint caserver2 (1410 bytes) 30 80 06 09 2A 86 48 86  
F7 0D 01 07 02 A0 80 30 hex data omitted 00 00 Oct 27 06:46:33: CRYPTO\_PKI: can not resolve  
server name/IP address Oct 27 06:46:33: CRYPTO\_PKI: Using unresolved IP Address 171.69.89.111  
Oct 27 06:46:33: CRYPTO\_PKI: http connection opened Oct 27 06:46:35: CRYPTO\_PKI:Write out  
pkcs#10 content:319 30 82 01 3B 30 81 E6 02 01 00 30 4C 31 19 30 17 hex data omitted A0 F6 FB F3  
9F E3 3C AF AB BE 24 9F 30 11 10 ficate Request Fingerprint: 3B7DB296 E21FCDDDB 3B4E29D4 A472A4A7  
Oct 27 06:47:03: CRYPTO\_PKI:Enveloped Data for trustpoint caserver2... 30 80 06 09 2A 86 48 86  
F7 0D 01 07 03 A0 80 30 hex data omitted 00 00 00 00 Oct 27 06:47:03: CRYPTO\_PKI:Signed Data for  
trustpoint caserver2 (1410 bytes) 30 80 06 09 2A 86 48 86 F7 0D 01 07 02 A0 80 30 hex data  
omitted B1 B3 DB 54 0F F9 4A 5D 56 45 00 00 00 00 00 00 00 00 Oct 27 06:47:03: CRYPTO\_PKI: can  
not resolve server name/IP address Oct 27 06:47:03: CRYPTO\_PKI: Using unresolved IP Address  
171.69.89.111 Oct 27 06:47:03: CRYPTO\_PKI: http connection opened Oct 27 06:47:05: CRYPTO\_PKI:  
received msg of 1930 bytes Oct 27 06:47:05: CRYPTO\_PKI: HTTP response header: HTTP/1.1 200 OK  
Server: Microsoft-IIS/5.0 Date: Sun, 27 Oct 2002 02:20:35 GMT Content-Length: 1784 Content-Type:  
application/x-pki-message Oct 27 06:47:05: CRYPTO\_PKI:Received pki message (PKCS7) for  
trustpoint caserver2: 1784 bytes 30 82 06 F4 06 09 2A 86 48 86 F7 0D 01 07 02 A0 hex data  
omitted 4E 15 B3 43 58 17 42 73 Oct 27 06:47:05: CRYPTO\_PKI: InsertCertData: subject name = 30  
81 83 31 20 30 1E 06 09 2A 86 48 86 F7 0D 01 hex data omitted 70 6B 69 2D 72 61 Oct 27 06:47:05:  
CRYPTO\_PKI: InsertCertData: issuer name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex  
data omitted 76 70 6E Oct 27 06:47:05: CRYPTO\_PKI: InsertCertData: serial number = 14 6C F1 A9  
00 00 00 00 00 08 Oct 27 06:47:05: CRYPTO\_PKI: WARNING: Certificate, private key or CRL was not  
found while selecting CRL Oct 27 06:47:05: CRYPTO\_PKI: signed attr: pki-message-type: 13 01 33  
Oct 27 06:47:05: CRYPTO\_PKI: signed attr: pki-status: 13 01 30 Oct 27 06:47:05: CRYPTO\_PKI:  
signed attr: pki-recipient-nonce: 04 10 46 C3 F3 B9 FA 5B B6 C0 D9 55 1D B6 E6 57 7E 67 Oct 27  
06:47:05: CRYPTO\_PKI: signed attr: pki-transaction-id: 13 20 33 33 36 34 31 39 32 38 35 37 37 33  
43 38 39 34 46 35 46 35 30 41 32 45 46 38 31 37 33 35 32 37 Oct 27 06:47:05: CRYPTO\_PKI: status  
= 100: certificate is granted Oct 27 06:47:05: CRYPTO\_PKI:Verified signed data for trustpoint  
caserver2 (1217 bytes): 30 82 04 BD 06 09 2A 86 48 86 F7 0D 01 07 03 A0 hex data omitted BE Oct  
27 06:47:05: CRYPTO\_PKI:Decrypted enveloped content: 30 82 03 D9 06 09 2A 86 48 86 F7 0D 01 07  
02 A0 hex data omitted AF 15 F0 AD BF 22 7A 41 72 49 5D 31 00 Oct 27 06:47:05: CRYPTO\_PKI:  
InsertCertData: subject name = 30 4E 31 10 30 0E 06 03 55 04 05 13 07 31 36 39 hex data omitted  
42 45 52 4C 49 4E 20 4F 3D 47 45 52 4D 41 4E 59 Oct 27 06:47:05: CRYPTO\_PKI: InsertCertData:  
issuer name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted 76 70 6E Oct 27  
06:47:05: CRYPTO\_PKI: InsertCertData: serial number = 61 11 C6 69 00 00 00 00 00 34 Oct 27  
06:47:05: CRYPTO\_PKI: WARNING: Certificate, private key or CRL was not found while selecting CRL  
Oct 27 06:47:05: CRYPTO\_PKI: InsertCertData: subject name = 30 4E 31 10 30 0E 06 03 55 04 05 13  
07 31 36 39 hex data omitted 42 45 52 4C 49 4E 20 4F 3D 47 45 52 4D 41 4E 59 Oct 27 06:47:05:  
CRYPTO\_PKI: InsertCertData: issuer name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex  
data omitted 76 70 6E Oct 27 06:47:05: CRYPTO\_PKI: InsertCertData: serial number = 61 11 C6 69  
00 00 00 00 00 34 Oct 27 06:47:05: **%CRYPTO-6-CERTRET: Certificate received from Certificate  
Authority** Oct 27 06:47:15: CRYPTO\_PKI: received msg of 1930 bytes Oct 27 06:47:15: CRYPTO\_PKI:  
HTTP response header: HTTP/1.1 200 OK Server: Microsoft-IIS/5.0 Date: Sun, 27 Oct 2002 02:21:05  
GMT Content-Length: 1784 Content-Type: application/x-pki-message Oct 27 06:47:15:  
CRYPTO\_PKI:Received pki message (PKCS7) for trustpoint caserver2: 1784 bytes 30 82 06 F4 06 09  
2A 86 48 86 F7 0D 01 07 02 A0 hex data omitted 79 37 99 3A AD 1F 3B 2F Oct 27 06:47:15:  
CRYPTO\_PKI: InsertCertData: subject name = 30 81 83 31 20 30 1E 06 09 2A 86 48 86 F7 0D 01 hex  
data omitted 70 6B 69 2D 72 61 Oct 27 06:47:15: CRYPTO\_PKI: InsertCertData: issuer name = 30 61  
31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted 76 70 6E Oct 27 06:47:15: CRYPTO\_PKI:

InsertCertData: serial number = 14 6C F1 A9 00 00 00 00 08 Oct 27 06:47:15: CRYPTO\_PKI:  
WARNING: Certificate, private key or CRL was not found while selecting CRL Oct 27 06:47:15:  
CRYPTO\_PKI: signed attr: pki-message-type: 13 01 33 Oct 27 06:47:15: CRYPTO\_PKI: signed attr:  
pki-status: 13 01 30 Oct 27 06:47:15: CRYPTO\_PKI: signed attr: pki-recipient-nonce: 04 10 66 D6  
56 C7 8C CB 3D A3 E7 B6 84 F8 EE 80 65 18 Oct 27 06:47:15: CRYPTO\_PKI: signed attr: pki-  
transaction-id: 13 20 33 33 46 33 36 30 36 45 39 37 31 43 35 34 34 46 39 32 36 34 36 30 46 42 46  
30 42 35 37 39 35 32 Oct 27 06:47:15: CRYPTO\_PKI: status = 100: certificate is granted Oct 27  
06:47:15: CRYPTO\_PKI: Verified signed data for trustpoint caserver2 (1217 bytes): 30 82 04 BD 06  
09 2A 86 48 86 F7 0D 01 07 03 A0 hex data omitted 7A 43 16 55 C5 57 97 DF FE D4 3A 0C 14 24 5D  
D1 96 Oct 27 06:47:15: CRYPTO\_PKI: Decrypted enveloped content: 30 82 03 D9 06 09 2A 86 48 86 F7  
0D 01 07 02 A0 hex data omitted 94 01 57 71 AC A9 92 C8 2D F8 24 31 00 Oct 27 06:47:15:  
CRYPTO\_PKI: InsertCertData: subject name = 30 4E 31 10 30 0E 06 03 55 04 05 13 07 31 36 39 hex  
data omitted 42 45 52 4C 49 4E 20 4F 3D 47 45 52 4D 41 4E 59 Oct 27 06:47:15: CRYPTO\_PKI:  
InsertCertData: issuer name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted  
76 70 6E Oct 27 06:47:15: CRYPTO\_PKI: InsertCertData: serial number = 61 12 3C 0A 00 00 00 00  
35 Oct 27 06:47:15: CRYPTO\_PKI: WARNING: Certificate, private key or CRL was not found while  
selecting CRL Oct 27 06:47:15: CRYPTO\_PKI: InsertCertData: subject name = 30 4E 31 10 30 0E 06  
03 55 04 05 13 07 31 36 39 hex data omitted 42 45 52 4C 49 4E 20 4F 3D 47 45 52 4D 41 4E 59 Oct  
27 06:47:15: CRYPTO\_PKI: InsertCertData: issuer name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55  
53 31 hex data omitted 76 70 6E Oct 27 06:47:15: CRYPTO\_PKI: InsertCertData: serial number = 61  
12 3C 0A 00 00 00 00 35 Oct 27 06:47:15: CRYPTO\_PKI: All enrollment requests completed for  
trustpoint caserver2. Oct 27 06:47:15: CRYPTO\_PKI: All enrollment requests completed for  
trustpoint caserver2. Oct 27 06:47:15: CRYPTO\_PKI: WARNING: Certificate, private key or CRL was  
not found while selecting CRL Oct 27 06:47:15: **CRYPTO\_PKI: All enrollment requests completed for  
trustpoint caserver2.** 7204-1# 7204-1# *!--- View detailed information on certificate.* 7204-1#**show  
crypto ca certificate** Certificate Status: Available Certificate Serial Number:  
61123C0A000000000035 Certificate Usage: Encryption Issuer: CN = vpn OU = cisco O = tac L = san  
jose ST = california C = US **Subject: Name: 7204-1.cisco.com Serial Number: 01691291 OU = "BERLIN  
O=GERMANY" OID.1.2.840.113549.1.9.2 = 7204-1.cisco.com OID.2.5.4.5 = 1691291** CRL Distribution  
Point: http://tac-2hq8cg5ti0h/CertEnroll/vpn.crl Validity Date: **start date: 19:11:05 PST Oct 26  
2002 end date: 19:21:05 PST Oct 27 2002 renew date: 19:20:35 PST Oct 27 2002 !--- Note that the  
certificate issued here is only !--- valid for a day. The router !--- auto-enrolls at the renew  
date given. Associated Trustpoints: caserver2** Certificate Status: Available Certificate Serial  
Number: 6111C669000000000034 Certificate Usage: Signature Issuer: CN = vpn OU = cisco O = tac L =  
san jose ST = california C = US **Subject: Name: 7204-1.cisco.com Serial Number: 01691291 OU =  
"BERLIN O=GERMANY" OID.1.2.840.113549.1.9.2 = 7204-1.cisco.com OID.2.5.4.5 = 1691291** CRL  
Distribution Point: http://tac-2hq8cg5ti0h/CertEnroll/vpn.crl Validity Date: **start date:  
19:10:35 PST Oct 26 2002 end date: 19:20:35 PST Oct 27 2002 Associated Trustpoints: caserver2** CA  
Certificate Status: Available Certificate Serial Number: 3E34CD199392A0914621EA778B13F357  
Certificate Usage: Signature Issuer: CN = vpn OU = cisco O = tac L = san jose ST = california C =  
US **Subject: CN = vpn OU = cisco O = tac L = san jose ST = california C = US** CRL Distribution  
Point: http://tac-2hq8cg5ti0h/CertEnroll/vpn.crl Validity Date: **start date: 21:19:50 PST Dec 6  
2001 end date: 21:29:42 PST Dec 6 2003 Associated Trustpoints: caserver2** 7204-1#**show cry key  
mypubkey rsa % Key pair was generated at: 13:55:35 PST Oct 25 2002 !--- Note that the RSA key  
pairs are regenerated once the router !--- has reenrolled for the certificates.** Key name:  
ciscotac Usage: Signature Key Key Data: 305C300D 06092A86 4886F70D 01010105 00034B00 30480241  
0099BC9C 175AD748 C991D24E 4F328960 997CADCB E665B876 4C53E2A0 449CA082 4C503E05 87604F32  
EECDF7B5 5CA0ADB6 2C664F9D 883EBAD6 671C6A8F A0C5D9EE 23020301 0001 % Key pair was generated at:  
13:55:35 PST Oct 25 2002 Key name: ciscotac Usage: Encryption Key Key Data: 305C300D 06092A86  
4886F70D 01010105 00034B00 30480241 00D4FE8A 3DE940E6 42277A82 87DDDA45 A0F77AE4 AF47D91F  
BA134F65 92886D3B 7489BEBB DE650EAL 029A5A5C 72F39FCA A83BC018 246B0D1D 270DBC2F B9B29587  
21020301 0001 % Key pair was generated at: 22:07:13 PST Oct 26 2002 Key name: ciscotac.server  
Usage: Encryption Key Key Data: 307C300D 06092A86 4886F70D 01010105 00036B00 30680261 00E47825  
7E60D6AC 4C078368 925191FD 2B2AAC50 6A6D6AF1 8A01C9B6 D21C4C80 05DD8277 D63F60B1 01A2DDCF  
407BE088 D333FE1D 4F5DE892 47970454 A50C54EC B962FEE4 A9BF5197 4C2B0656 503E0045 BB3168C4  
2228155A B6BF0385 0B493FC5 79020301 0001 7204-1# *!--- The router configuration with the  
certificates.* 7204-1#**show run** Building configuration... Current configuration : 8367 bytes ! !  
Last configuration change at 23:45:33 PST Sat Oct 26 2002 ! NVRAM config last updated at  
23:43:25 PST Sat Oct 26 2002 ! version 12.2 service timestamps debug datetime service timestamps  
log datetime no service password-encryption service udp-small-servers service tcp-small-servers  
no service dhcp ! hostname 7204-1 ! boot system flash slot boot system flash slot0:c7200-jk9o3s-  
mz.122-11.T1.bin logging buffered 50000 debugging enable secret 5 \$1\$GdwM\$YPQYieph20DPAhQeNvHa30  
enable password ipsecpki ! username cisco password 0 cisco clock timezone PST -7 ip subnet-zero  
! ! no ip domain lookup ip domain name cisco.com ip host caserver2 171.69.89.111 ! ! ip vrf test

```
no ip cef ip audit notify log ip audit po max-events 100 ! crypto ca trustpoint caserver2
enrollment retry period 2 enrollment mode ra enrollment url
http://171.69.89.111:80/certsrv/mscep/mscep.dll usage ike serial-number ip-address none password
7 151C040201 subject-name OU=BERLIN O=GERMANY crl optional rsakeypair ciscotac auto-enroll
regenerate crypto ca certificate chain caserver2 certificate 61123C0A000000000035 308203AA
30820354 A0030201 02020A61 123C0A00 00000000 35300D06 092A8648 86F70D01 01050500 3061310B
30090603 55040613 02555331 13301106 03550408 !--- Certificate is abbreviated for easier viewing.
quit certificate 6111C669000000000034 308203AA 30820354 A0030201 02020A61 11C66900 00000000
34300D06 092A8648 86F70D01 01050500 3061310B 30090603 55040613 02555331 13301106 03550408 !---
Certificate is abbreviated for easier viewing. quit certificate ca
3E34CD199392A0914621EA778B13F357 30820284 3082022E A0030201 0202103E 34CD1993 92A09146 21EA778B
13F35730 0D06092A 864886F7 0D010105 05003061 310B3009 06035504 06130255 53311330 !---
Certificate is abbreviated for easier viewing. quit ! crypto isakmp policy 10 hash md5 crypto
isakmp identity hostname ! ! crypto ipsec transform-set myset esp-des esp-md5-hmac ! crypto map
vpn 10 ipsec-isakmp set peer 172.16.172.35 set transform-set myset match address 101 ! ! ! voice
call carrier capacity active ! ! ! ! ! ! ! ! ! ! interface Ethernet1/0 no ip address duplex
half ! interface Ethernet1/1 ip address 172.16.172.51 255.255.255.240 no ip redirects duplex
half crypto map vpn ! interface Ethernet1/2 ip address 3.3.3.2 255.255.255.0 no keepalive duplex
half ! interface Ethernet1/3 no ip address duplex half ! interface Hssi4/0 ip address 200.1.1.1
255.255.255.0 load-interval 30 fair-queue 64 16 0 hssi dce serial restart_delay 0 clockrate
1524705 ! ip classless ip route 0.0.0.0 0.0.0.0 172.16.172.49 no ip http server ip pim bidir-
enable ! ! access-list 101 permit ip 3.3.3.0 0.0.0.255 192.168.4.0 0.0.0.255 ! snmp-server
community public RO snmp-server enable traps tty ! ! call rsvp-sync ! ! mgcp profile default !
dial-peer cor custom ! ! ! ! gatekeeper shutdown ! ! line con 0 exec-timeout 0 0 line aux 0 line
vty 0 4 privilege level 15 password cisco login line vty 5 15 login ! no scheduler max-task-time
! end !--- The system clock is used to view the time. 7204-1#show clock 23:54:39.059 PST Sat Oct
26 2002 7204-1#show clock 23:58:08.127 PST Sat Oct 26 2002 7204-1#show clock *19:35:57.227 PST
Sat Oct 26 2002 7204-1# 7204-1# 7204-1# 7204-1#show crypto ca certificate CA Certificate Status:
Available Certificate Serial Number: 3E34CD199392A0914621EA778B13F357 Certificate Usage:
Signature Issuer: CN = vpn OU = cisco O = tac L = san jose ST = california C = US Subject: CN =
vpn OU = cisco O = tac L = san jose ST = california C = US CRL Distribution Point: http://tac-
2hq8cg5ti0h/CertEnroll/vpn.crl Validity Date: start date: 21:19:50 PST Dec 6 2001 end date:
21:29:42 PST Dec 6 2003 Associated Trustpoints: caserver2 Certificate Status: Available
Certificate Serial Number: 6111C669000000000034 Certificate Usage: Signature Issuer: CN = vpn OU
= cisco O = tac L = san jose ST = california C = US Subject: Name: 7204-1.cisco.com Serial
Number: 01691291 OU = "BERLIN O=GERMANY" OID.1.2.840.113549.1.9.2 = 7204-1.cisco.com OID.2.5.4.5
= 1691291 CRL Distribution Point: http://tac-2hq8cg5ti0h/CertEnroll/vpn.crl Validity Date: start
date: 19:10:35 PST Oct 26 2002 end date: 19:20:35 PST Oct 27 2002 Associated Trustpoints:
caserver2 Certificate Status: Available Certificate Serial Number: 61123C0A000000000035
Certificate Usage: Encryption Issuer: CN = vpn OU = cisco O = tac L = san jose ST = california C
= US Subject: Name: 7204-1.cisco.com Serial Number: 01691291 OU = "BERLIN O=GERMANY"
OID.1.2.840.113549.1.9.2 = 7204-1.cisco.com OID.2.5.4.5 = 1691291 CRL Distribution Point:
http://tac-2hq8cg5ti0h/CertEnroll/vpn.crl Validity Date: start date: 19:11:05 PST Oct 26 2002
end date: 19:21:05 PST Oct 27 2002 renew date: 19:20:35 PST Oct 27 2002 Associated Trustpoints:
caserver2 !--- The system clock is used to view the time. 7204-1#show clock *19:38:33.387 PST
Sat Oct 26 2002 7204-1#show clock *19:38:34.735 PST Sat Oct 26 2002 7204-1# 7204-1# 7204-1#
7204-1#show clock *19:45:09.735 PST Sat Oct 26 2002 7204-1#show clock 7204-1#show clock
*17:28:30.662 PST Sun Oct 27 2002 7204-1#show clock *17:28:48.646 PST Sun Oct 27 2002 7204-1#
7204-1#show clock *17:41:15.410 PST Sun Oct 27 2002 7204-1# 7204-1#show clock *18:08:45.430 PST
Sun Oct 27 2002 7204-1#show clock *18:24:54.702 PST Sun Oct 27 2002 7204-1#show clock
*18:37:13.322 PST Sun Oct 27 2002 7204-1# show clock *18:47:53.270 PST Sun Oct 27 2002 7204-1#
show clock *18:58:56.202 PST Sun Oct 27 2002 7204-1# show clock *19:10:27.746 PST Sun Oct 27
2002 7204-1# show clock *19:10:31.254 PST Sun Oct 27 2002 7204-1# show clock *19:10:32.658 PST
Sun Oct 27 2002 7204-1# show clock *19:15:44.054 PST Sun Oct 27 2002 7204-1# show clock
*19:15:48.054 PST Sun Oct 27 2002 7204-1# show clock *19:15:49.606 PST Sun Oct 27 2002 7204-
1#show clock *19:17:02.882 PST Sun Oct 27 2002 7204-1#show clock *19:17:15.722 PST Sun Oct 27
2002 7204-1# 7204-1# 7204-1# show clock *19:17:26.038 PST Sun Oct 27 2002 7204-1#show clock
*19:17:27.170 PST Sun Oct 27 2002 7204-1#show clock *19:17:28.418 PST Sun Oct 27 2002 7204-
1#show clock *19:18:50.650 PST Sun Oct 27 2002 7204-1#show debug Cryptographic Subsystem: Crypto
PKI Msg debugging is on Crypto PKI Trans debugging is on 7204-1# 7204-1# *19:19:16.574 PST Sun
Oct 27 2002 7204-1#show clock *19:19:22.202 PST Sun Oct 27 2002 7204-1#show clock *19:19:23.762
PST Sun Oct 27 2002 7204-1#show clock *19:19:25.354 PST Sun Oct 27 2002 7204-1#show clock
*19:19:28.202 PST Sun Oct 27 2002 7204-1#show clock *19:19:34.482 PST Sun Oct 27 2002 7204-
1#show clock *19:19:53.118 PST Sun Oct 27 2002 7204-1#show clock *19:19:55.014 PST Sun Oct 27
```

2002 7204-1#show clock \*19:20:28.654 PST Sun Oct 27 2002 7204-1#show clock \*19:20:32.770 PST Sun Oct 27 2002 !--- The certificate renew date is 19:20:35 PST !--- Oct 27 2002. At the following time the router automatically enrolls !--- with CA server2 in order to obtain another identity certificate !--- before the current identity certificate expires. The router also !--- regenerates the RSA key pair. 7204-1#show clock \*19:20:34.182 PST Sun Oct 27 2002 7204-1#show clock Time to re-enroll trust\_point caserver2 Can not select my full public key (ciscotac) \*19:20:35.314 PST Sun Oct 27 2002 7204-1#% Start certificate enrollment .. % The subject name in the certificate will be: OU=BERLIN O=GERMANY % The subject name in the certificate will be: 7204-1.cisco.com % The serial number in the certificate will be: 01691291 % Certificate request sent to Certificate Authority % The certificate request fingerprint will be displayed. % The 'show crypto ca certificate' command will also show the fingerprint. \*Oct 28 02:20:35: %SSH-5-DISABLED: SSH 1.5 has been disabled \*Oct 28 02:20:35: %CRYPTO-6-AUTOGEN: Generated new 512 bit key pair Signing Certificate Reqeust Fingerprint: 2EF6D7F3 AF5B4491 E254E6D0 229878CF \*Oct 28 02:20:35: %SSH-5-ENABLED: SSH 1.5 has been enabled \*Oct 28 02:20:36: %CRYPTO-6-AUTOGEN: Generated new 512 bit key pair \*Oct 28 02:20:36: CRYPTO\_PKI:Insert Selfsigned Certificate: 30 82 01 4A 30 81 F5 02 20 35 45 35 42 44 43 39 hex data omitted 9F 2C DB 5F FA DC A2 DC E3 49 6D 28 C8 F8 \*Oct 28 02:20:36: CRYPTO\_PKI: InsertCertData: subject name = 30 21 31 1F 30 1D 06 09 2A 86 48 86 F7 0D 01 09 02 16 10 37 32 30 34 2D 31 2E 63 69 73 63 6F 2E 1 number = 35 45 35 42 44 43 39 45 30 32 45 38 41 36 42 31 45 39 46 45 32 42 33 31 45 46 45 43 45 34 38 46 \*Oct 28 02:20:36: CRYPTO\_PKI: Sending CA Certificate Request: GET /certsrv/mscep/mscep.dll/pkiclient.exe?operation=GetCACert&message=caserver2 HTTP/1.0 63 6F 6D \*Oct 28 02:20:36: CRYPTO\_PKI: InsertCertData: issuer name = 30 21 31 1F 30 1D 06 09 2A 86 48 86 F7 0D 01 09 02 16 10 37 32 30 34 2D 31 2E 63 69 73 63 6F 2E 63 6F 6D \*Oct 28 02:20:36: CRYPTO\_PKI: InsertCertData: seria Encryption Certificate Request Fingerprint: 58D999C4 BA8F34FD F5C10A30 81D7A054 \*Oct 28 02:20:36: CRYPTO\_PKI: can not resolve server name/IP address \*Oct 28 02:20:36: CRYPTO\_PKI: Using unresolved IP Address 171.69.89.111 \*Oct 28 02:20:36: CRYPTO\_PKI: http connection opened \*Oct 28 02:20:36: CRYPTO\_PKI: HTTP response header: HTTP/1.1 200 OK Server: Microsoft-IIS/5.0 Date: Mon, 28 Oct 2002 02:20:43 GMT Content-Length: 2811 Content-Type: application/x-x509-ca-ra-cert Content-Type indicates we have received CA and RA certificates. \*Oct 28 02:20:36: CRYPTO\_PKI:crypto\_process\_ca\_ra\_cKI:CA and RA certs (cert data): 30 82 0A F7 06 09 2A 86 48 86 F7 0D 01 07 02 A0 82 0A E8 30 82 0A E4ert(trustpoint-caserver2) \*Oct 28 02:20:36: CRYPTO\_P 02 01 01 31 00 30 0B 06 09 hex data omitted A9 13 93 1E E6 E1 E4 30 07 31 00 \*Oct 28 02:20:36: CRYPTO\_PKI: InsertCertData: subject name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted 76 70 6E \*Oct 28 02:20:36: CRYPTO\_PKI: InsertCertData: issuer name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted 76 70 6E \*Oct 28 02:20:36: CRYPTO\_PKI: InsertCertData: serial number = 3E 34 CD 19 93 92 A0 91 46 21 EA 77 8B 13 F3 57 \*Oct 28 02:20:36: CRYPTO\_PKI: InsertCertData: subject name = 30 81 83 31 20 30 1E 06 09 2A 86 48 86 F7 0D 01 hex data omitted 70 6B 69 2D 72 61 \*Oct 28 02:20:36: CRYPTO\_PKI: InsertCertData: issuer name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted 76 70 6E \*Oct 28 02:20:36: CRYPTO\_PKI: InsertCertData: serial number = 14 6C F2 85 00 00 00 00 09 \*Oct 28 02:20:36: CRYPTO\_PKI: WARNING: Certificate, private key or CRL was not found while selecting CRL \*Oct 28 02:20:36: CRYPTO\_PKI: InsertCertData: subject name = 30 81 83 31 20 30 1E 06 09 2A 86 48 86 F7 0D 01 hex data omitted 70 6B 69 2D 72 61 \*Oct 28 02:20:36: CRYPTO\_PKI: InsertCertData: issuer name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted 76 70 6E \*Oct 28 02:20:36: CRYPTO\_PKI: InsertCertData: serial number = 14 6C F1 A9 00 00 00 00 08 \*Oct 28 02:20:36: CRYPTO\_PKI: WARNING: Certificate, private key or CRL was not found while selecting CRL \*Oct 28 02:20:36: CRYPTO\_PKI: InsertCertData: subject name = 30 81 83 31 20 30 1E 06 09 2A 86 48 86 F7 0D 01 hex data omitted 70 6B 69 2D 72 61 \*Oct 28 02:20:36: CRYPTO\_PKI: InsertCertData: issuer name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted 76 70 6E \*Oct 28 02:20:36: CRYPTO\_PKI: InsertCertData: serial number = 14 6C F1 A9 00 00 00 00 08 \*Oct 28 02:20:36: CRYPTO\_PKI: InsertCertData: subject name = 30 81 83 31 20 30 1E 06 09 2A 86 48 86 F7 0D 01 hex data omitted 70 6B 69 2D 72 61 \*Oct 28 02:20:36: CRYPTO\_PKI: InsertCertData: issuer name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted 76 70 6E \*Oct 28 02:20:36: CRYPTO\_PKI: InsertCertData: serial number = 14 6C F2 85 00 00 00 00 09 \*Oct 28 02:20:36: CRYPTO\_PKI: InsertCertData: subject name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted 76 70 6E \*Oct 28 02:20:36: CRYPTO\_PKI: InsertCertData: issuer name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted 76 70 6E \*Oct 28 02:20:36: CRYPTO\_PKI: InsertCertData: serial number = 3E 34 CD 19 93 92 A0 91 46 21 EA 77 8B 13 F3 57 \*Oct 28 02:20:36: CRYPTO\_PKI: crypto\_process\_ra\_certs(trust\_point=caserver2) \*Oct 28 02:20:36: CRYPTO\_PKI: transaction PKCSReq completed \*Oct 28 02:20:36: CRYPTO\_PKI: status: \*Oct 28 02:20:36: CRYPTO\_PKI:Write out pkcs#10 content:319 30 82 01 3B 30 81 E6 02 01 00 30 4C 31 19 30 17 hex data omitted 9A 0E DE 86 AB 85 DD 67 79 6B 67 1F 2B 53 51 \*Oct 28 02:20:36: CRYPTO\_PKI:Enveloped Data for trustpoint caserver2... 30 80 06 09 2A 86 48 86 F7 0D 01 07 03 A0 80 30 hex data omitted 00 00 00 00 \*Oct 28 02:20:36: CRYPTO\_PKI:Signed Data for trustpoint



caserver2 (1410 bytes) 30 80 06 09 2A 86 48 86 F7 0D 01 07 02 A0 80 30 hex data omitted 00 00  
\*Oct 28 02:20:36: CRYPTO\_PKI: can not resolve server name/IP address \*Oct 28 02:20:36:  
CRYPTO\_PKI: Using unresolved IP Address 171.69.89.111 \*Oct 28 02:20:36: CRYPTO\_PKI: http  
connection opened \*Oct 28 02:20:38: CRYPTO\_PKI:Write out pkcs#10 content:319 30 82 01 3B 30 81  
E6 02 01 00 30 4C 31 19 30 17 hex data omitted 1E 74 00 9F A9 C1 ED 00 3C 7F 72 E3 61 D5 84 \*Oct  
28 02:20:38: CRYPTO\_PKI:Enveloped Data for trustpoint caserver2... 30 80 06 09 2A 86 48 86 F7 0D  
01 07 03 A0 80 30 hex data omitted 04 08 5A 0B 69 47 5E C6 23 4C 00 00 00 00 00 00 00 00 00  
\*Oct 28 02:20:38: CRYPTO\_PKI:Signed Data for trustpoint caserver2 (1410 bytes) 30 80 06 09 2A 86  
48 86 F7 0D 01 07 02 A0 80 30 hex data omitted 65 86 05 93 84 87 9F 8D B4 5F 00 00 00 00 00  
00 00 \*Oct 28 02:20:38: CRYPTO\_PKI: can not resolve server name/IP address \*Oct 28 02:20:38:  
CRYPTO\_PKI: Using unresolved IP Address 171.69.89.111 \*Oct 28 02:20:39: CRYPTO\_PKI: http  
connection opened \*Oct 28 02:20:40: %AMDP2\_FE-5-LATECOLL: Ethernet1/1 transmit error \*Oct 28  
02:20:41: %SCHED-3-STUCKTMR: Sleep with expired timer 63B997A8, time 0x51A21B4 (00:00:00 ago). -  
Process= "Crypto PKI REC ", ipl= 4, pid= 92 -Traceback= 6064AD0C 6064B0C8 607237BC 60725E60  
60796C00 6079C2B0 61CCF6D4 61CC9838 61CC9944 61CC864C 60630A98 60630A84 \*Oct 28 02:20:41:  
CRYPTO\_PKI: received msg of 1930 bytes \*Oct 28 02:20:41: CRYPTO\_PKI: HTTP response header:  
HTTP/1.1 200 OK Server: Microsoft-IIS/5.0 Date: Mon, 28 Oct 2002 02:20:46 GMT Content-Length:  
1784 Content-Type: application/x-pki-message \*Oct 28 02:20:41: CRYPTO\_PKI:Received pki message  
(PKCS7) for trustpoint caserver2: 1784 bytes 30 82 06 F4 06 09 2A 86 48 86 F7 0D 01 07 02 A0 hex  
data omitted A0 82 04 AE 30 82 04 AA 02 01 00 31 81 9E 30 81 \*Oct 28 02:20:41: %CRYPTO-6-  
CERTRET: Certificate received from Certificate Authority \*Oct 28 02:20:51: CRYPTO\_PKI: received  
msg of 1930 bytes \*Oct 28 02:20:51: CRYPTO\_PKI: HTTP response header: HTTP/1.1 200 OK Server:  
Microsoft-IIS/5.0 Date: Mon, 28 Oct 2002 02:20:49 GMT Content-Length: 1784 Content-Type:  
application/x-pki-message \*Oct 28 02:20:51: CRYPTO\_PKI:Received pki message (PKCS7) for  
trustpoint caserver2: 1784 bytes 30 82 06 F4 06 09 2A 86 48 86 F7 0D 01 07 02 A0 hex data  
omitted ED 9F 4E 20 DB 91 A7 55 \*Oct 28 02:20:51: CRYPTO\_PKI: InsertCertData: subject name = 30  
81 83 31 20 30 1E 06 09 2A 86 48 86 F7 0D 01 hex data omitted 70 6B 69 2D 72 61 \*Oct 28  
02:20:51: CRYPTO\_PKI: InsertCertData: issuer name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53  
31 hex data omitted 76 70 6E \*Oct 28 02:20:51: CRYPTO\_PKI: InsertCertData: serial number = 14 6C  
F1 A9 00 00 00 00 08 \*Oct 28 02:20:51: CRYPTO\_PKI: WARNING: Certificate, private key or CRL  
was not found while selecting CRL \*Oct 28 02:20:51: CRYPTO\_PKI: signed attr: pki-message-type:  
13 01 33 \*Oct 28 02:20:51: CRYPTO\_PKI: signed attr: pki-status: 13 01 30 \*Oct 28 02:20:51:  
CRYPTO\_PKI: signed attr: pki-recipient-nonce: 04 10 CE AB A0 E3 52 BD BF 95 D9 F8 DB 1A 07 D9 FA  
C6 \*Oct 28 02:20:51: CRYPTO\_PKI: signed attr: pki-transaction-id: 13 20 35 31 43 35 43 37 33  
42 42 30 31 38 41 33 35 35 39 34 39 39 43 39 30 42 31 44 32 37 38 31 30 \*Oct 28 02:20:51:  
**CRYPTO\_PKI: status = 100: certificate is granted** \*Oct 28 02:20:51: **CRYPTO\_PKI:Verified signed  
data for trustpoint caserver2 (1217 bytes):** 30 82 04 BD 06 09 2A 86 48 86 F7 0D 01 07 03 A0 hex  
data omitted 3A 74 B6 8F F8 E5 29 \*Oct 28 02:20:52: CRYPTO\_PKI: WARNING: Certificate, private  
key or CRL was not found while selecting CRL \*Oct 28 02:21:02: **CRYPTO\_PKI: All enrollment  
requests completed for trustpoint caserver2.** 7204-1# 7204-1# 7204-1#**show crypto ca certificate**  
Certificate Status: Available Certificate Serial Number: 053859FC000000000039 Certificate Usage:  
Encryption Issuer: CN = vpn OU = cisco O = tac L = san jose ST = california C = US Subject:  
**Name: 7204-1.cisco.com Serial Number: 01691291 OU = "BERLIN O=GERMANY" OID.1.2.840.113549.1.9.2  
= 7204-1.cisco.com OID.2.5.4.5 = 1691291 CRL Distribution Point: http://tac-  
2hq8cg5ti0h/CertEnroll/vpn.crl Validity Date: start date: 19:10:49 PST !--- Another identity  
certificate is !--- received and the renew date is now different. Oct 27 2002 end date: 19:20:49  
PST Oct 28 2002 renew date: 19:20:46 PST Oct 28 2002 Associated Trustpoints: caserver2**  
Certificate Status: Available Certificate Serial Number: 05384E3F000000000038 Certificate Usage:  
Signature Issuer: CN = vpn OU = cisco O = tac L = san jose ST = california C = US Subject: Name:  
7204-1.cisco.com Serial Number: 01691291 OU = "BERLIN O=GERMANY" OID.1.2.840.113549.1.9.2 =  
7204-1.cisco.com OID.2.5.4.5 = 1691291 CRL Distribution Point: http://tac-  
2hq8cg5ti0h/CertEnroll/vpn.crl Validity Date: start date: 19:10:46 PST Oct 27 2002 end date:  
19:20:46 PST Oct 28 2002 Associated Trustpoints: caserver2 CA Certificate Status: Available  
Certificate Serial Number: 3E34CD199392A0914621EA778B13F357 Certificate Usage: Signature Issuer:  
CN = vpn OU = cisco O = tac L = san jose ST = california C = US Subject: CN = vpn OU = cisco O =  
tac L = san jose ST = california C = US CRL Distribution Point: http://tac-  
2hq8cg5ti0h/CertEnroll/vpn.crl Validity Date: start date: 21:19:50 PST Dec 6 2001 end date:  
21:29:42 PST Dec 6 2003 Associated Trustpoints: caserver2 7204-1# **show crypto key mypubkey rsa %  
!--- The RSA key pair was regenerated at the time of !--- certificate auto-enroll. Key pair was  
generated at: 19:20:35 PST Oct 27 2002** Key name: ciscotac Usage: Signature Key Key Data:  
305C300D 06092A86 4886F70D 01010105 00034B00 30480241 00A540B1 062AEF70 081605F2 F81402EE  
A52DEAF4 05462747 CCE21BCC 8A1A21B0 C7BDF333 90728D48 68D46B81 19FC15EE 33045A3F 7BE50D85  
FDD9F3DE 55E29F6F 67020301 0001 % Key pair was generated at: 19:20:35 PST Oct 27 2002 Key name:  
ciscotac Usage: Encryption Key Key Data: 305C300D 06092A86 4886F70D 01010105 00034B00 30480241

```

00A9F8A8 4E5AA9AF 22D9B0E0 B3754D5A 4387995D 23B09D8F E9AB70B7 CDFA126A 63A25EAF 055065EB
C076B36B 5A034A9D CE82206B 031C8231 B85DE829 E35FF874 39020301 0001 % Key pair was generated at:
19:20:36 PST Oct 27 2002 Key name: ciscotac.server Usage: Encryption Key Key Data: 307C300D
06092A86 4886F70D 01010105 00036B00 30680261 00E47825 7E60D6AC 4C078368 925191FD 2B2AAC50
6A6D6AF1 8A01C9B6 D21C4C80 05DD8277 D63F60B1 01A2DDCF 407BE088 D333FE1D 4F5DE892 47970454
A50C54EC B962FEE4 A9BF5197 4C2B0656 503E0045 BB3168C4 2228155A B6BF0385 0B493FC5 79020301 0001
7204-1# 7204-1# 7204-1# !--- The router configuration with the new identity certificates. 7204-
1# 7204-1#show run Building configuration... Current configuration : 8245 bytes ! version 12.2
service timestamps debug datetime service timestamps log datetime no service password-encryption
service udp-small-servers service tcp-small-servers no service dhcp ! hostname 7204-1 ! boot
system flash slot boot system flash slot0:c7200-jk9o3s-mz.122-11.T1.bin logging buffered 50000
debugging enable secret 5 $1$GdwM$YPQYieph20DPAhQeNvHa30 enable password ipsecpkc ! username
cisco password 0 cisco clock timezone PST -7 ip subnet-zero ! ! no ip domain lookup ip domain
name cisco.com ip host caserver2 171.69.89.111 ! ! ip vrf test no ip cef ip audit notify log ip
audit po max-events 100 ! crypto ca trustpoint caserver2 enrollment retry period 2 enrollment
mode ra enrollment url http://171.69.89.111:80/certsrv/mscep/mscep.dll usage ike serial-number
ip-address none password 7 094241071C subject-name OU=BERLIN O=GERMANY crl optional rsakeypair
ciscotac auto-enroll regenerate crypto ca certificate chain caserver2 certificate
053859FC0000000000039 308203AA 30820354 A0030201 02020A05 3859FC00 00000000 39300D06 092A8648 !---
- Certificate is abbreviated for easier viewing. quit certificate 05384E3F0000000000038 308203AA
30820354 A0030201 02020A05 384E3F00 00000000 38300D06 092A8648 86F70D01 01050500 3061310B
30090603 55040613 02555331 13301106 03550408 !--- Certificate is abbreviated for easier viewing.
quit certificate ca 3E34CD199392A0914621EA778B13F357 30820284 3082022E A0030201 0202103E
34CD1993 92A09146 21EA778B 13F35730 0D06092A 864886F7 0D010105 05003061 310B3009 06035504
06130255 53311330 !--- Certificate is abbreviated for easier viewing. quit ! crypto isakmp
policy 10 hash md5 crypto isakmp identity hostname - ! ! crypto ipsec transform-set myset esp-
des esp-md5-hmac ! crypto map vpn 10 ipsec-isakmp set peer 172.16.172.35 set transform-set myset
match address 101 ! ! ! voice call carrier capacity active ! ! interface Ethernet1/0 no ip
address duplex half ! interface Ethernet1/1 ip address 172.16.172.51 255.255.255.240 no ip
redirects duplex half crypto map vpn !interface Ethernet1/2 ip address 3.3.3.2 255.255.255.0 no
keepalive duplex half ! interface Ethernet1/3 no ip address duplex half ! interface Hssi4/0 ip
address 200.1.1.1 255.255.255.0 load-interval 30 fair-queue 64 16 0 hssi dce serial
restart_delay 0 clockrate 1524705 ! ip classless ip route 0.0.0.0 0.0.0.0 172.16.172.49 no ip
http server ip pim bidir-enable ! ! access-list 101 permit ip 3.3.3.0 0.0.0.255 192.168.4.0
0.0.0.255 ! snmp-server community public RO snmp-server enable traps tty ! ! call rsvp-sync ! !
mgcp profile default ! dial-peer cor custom ! ! ! gatekeeper shutdown ! ! line con 0 exec-
timeout 0 0 line aux 0 line vty 0 4 privilege level 15 password cisco login line vty 5 15 login
! no scheduler max-task-time ! end 7204-1# 7204-1#

```

Esta salida muestra el comando **show crypto ca certificate** en el 1720-1 Router que visualiza la Regeneración de clave RSA.

```

1720-1#
1720-1#show crypto ca certificate CA Certificate Status: Available Certificate Serial Number:
0E7EC1B68A2F14BD4C4515AF44C45732 Certificate Usage: Signature Issuer: CN = SJVPNTAC-CAServer OU
= TAC-VPN-SJ O = Cisco Systems L = San Jose ST = CA C = US Subject: CN = SJVPNTAC-CAServer OU =
TAC-VPN-SJ O = Cisco Systems L = San Jose ST = CA C = US CRL Distribution Point: http://ca-
server/CertEnroll/SJVPNTAC-CAServer.crl Validity Date: start date: 20:52:48 UTC Sep 17 2002 end
date: 21:02:37 UTC Sep 17 2017 Associated Trustpoints: caserver1 Certificate Status: Available
Certificate Serial Number: 611652F7000000000003A Certificate Usage: Signature Issuer: CN =
SJVPNTAC-CAServer OU = TAC-VPN-SJ O = Cisco Systems L = San Jose ST = CA C = US Subject: Name:
1720-1.tac.com IP Address: 172.16.172.45 Serial Number: 2F31F46E OU = "MADRID O=SPAIN"
OID.1.2.840.113549.1.9.2 = 1720-1.tac.com OID.1.2.840.113549.1.9.8 = 172.16.172.45 OID.2.5.4.5 =
2F31F46E CRL Distribution Point: http://ca-server/CertEnroll/SJVPNTAC-CAServer.crl Validity
Date: start date: 03:53:11 UTC Oct 26 2002 end date: 04:03:11 UTC Oct 26 2003 Associated
Trustpoints: caserver1 Certificate Status: Available Certificate Serial Number:
61165F5B000000000003B Certificate Usage: Encryption Issuer: CN = SJVPNTAC-CAServer OU = TAC-VPN-
SJ O = Cisco Systems L = San Jose ST = CA C = US Subject: Name: 1720-1.tac.com IP Address:
172.16.172.45 Serial Number: 2F31F46E OU = "MADRID O=SPAIN" OID.1.2.840.113549.1.9.2 = 1720-
1.tac.com OID.1.2.840.113549.1.9.8 = 172.16.172.45 OID.2.5.4.5 = 2F31F46E CRL Distribution
Point: http://ca-server/CertEnroll/SJVPNTAC-CAServer.crl Validity Date: start date: 03:53:14 UTC
Oct 26 2002 end date: 04:03:14 UTC Oct 26 2003 renew date: 04:03:11 UTC Oct 26 2003 Associated
Trustpoints: caserver1

```

Esta salida muestra el comando **show crypto key** en el 1720-1 Router.

```

1720-1#show crypto key mypubkey rsa % Key pair was generated at: 00:49:35 UTC Mar 1 1993 Key
name: ipsecpki Usage: Signature Key Key Data: 305C300D 06092A86 4886F70D 01010105 00034B00
30480241 00D3D4B1 CC3DC9DE 04373E6C F3ADA37B DBE56BD4 C9945889 E24626DF DOCC45FE 7CBA196C
1DB10C15 EE6332F8 A614561E 991549DD 787E4D7C 30ECC465 B0D67BEA E1020301 0001 % Key pair was
generated at: 00:49:36 UTC Mar 1 1993 Key name: ipsecpki Usage: Encryption Key Key Data:
305C300D 06092A86 4886F70D 01010105 00034B00 30480241 00C6D61D D126D546 678D5C7D A99E9D22
E2B7C82E 72D69478 3A241FE9 A5F5B761 81A6A85D 9389FD03 D27D58CF 21122EF5 8B3F4278 B2C71C58
DD0E5485 B00A02AE 0B020301 0001 % Key pair was generated at: 21:30:31 UTC Oct 27 2002 Key name:
ipsecpki.server Usage: Encryption Key Key Data: 307C300D 06092A86 4886F70D 01010105 00036B00
30680261 00DB0878 020052BA BE67DEBF 001DA215 D6EB8CA9 8DD5B077 A27809D7 792166C4 5F1F2AD4
F4BE813B 087E1747 4677570B 7F692A78 D897951A B37A1A0B 1E167044 F6ADA763 67AECAE6 BF2D9AF3
0EA492B5 1E601EAF 7E280B80 091A2D89 2116685A 59020301 0001

```

## Cuando el par clave RSA no existe

Si el par clave RSA no existe durante el enlistamiento automático, un par de claves de los fines generales y del uso se genera automáticamente durante la inscripción, pues esta salida muestra. Este ejemplo comienza sin una configuración del certificado en el 7204-1 Router y un par clave RSA no se genera.

```

show run Building configuration... Current configuration : 1828 bytes ! version 12.2 service
timestamps debug datetime service timestamps log datetime no service password-encryption service
udp-small-servers service tcp-small-servers no service dhcp ! hostname 7204-1 ! boot system
flash slot boot system flash slot0:c7200-jk9o3s-mz.122-11.T1.bin logging buffered 50000
debugging enable secret 5 $1$GdwM$YPQYieph20DPAhQeNvHa30 enable password ipsecpki ! username
cisco password 0 cisco clock timezone PST -7 ip subnet-zero ! ! no ip domain lookup ip domain
name cisco.com ip host caserver2 171.69.89.111 ! ! ip vrf test no ip cef ip audit notify log ip
audit po max-events 100 ! crypto isakmp policy 10 hash md5 crypto isakmp identity hostname ! !
crypto ipsec transform-set myset esp-des esp-md5-hmac ! crypto map vpn 10 ipsec-isakmp set peer
172.16.172.35 set transform-set myset match address 101 ! ! voice call carrier capacity active !
! interface Ethernet1/0 no ip address duplex half ! interface Ethernet1/1 ip address
172.16.172.51 255.255.255.240 no ip redirects duplex half crypto map vpn ! interface Ethernet1/2
ip address 3.3.3.2 255.255.255.0 no keepalive duplex half ! interface Ethernet1/3 no ip address
duplex half ! interface Hssi4/0 ip address 200.1.1.1 255.255.255.0 load-interval 30 fair-queue
64 16 0 hssi dce serial restart_delay 0 clockrate 1524705 ! ip classless ip route 0.0.0.0
0.0.0.0 172.16.172.49 no ip http server ip pim bidir-enable ! ! access-list 101 permit ip
3.3.3.0 0.0.0.255 192.168.4.0 0.0.0.255 ! snmp-server community public RO snmp-server enable
traps tty ! ! call rsvp-sync ! ! mgcp profile default ! dial-peer cor custom ! ! ! gatekeeper
shutdown ! ! line con 0 exec-timeout 0 0 line aux 0 line vty 0 4 privilege level 15 password
cisco login line vty 5 15 login ! no scheduler max-task-time ! end 7204-1#show clock
*17:18:44.780 PST Mon Oct 28 2002 7204-1#conf t 7204-1#show crypto key mypubkey rsa 7204-1#show
cry key mypubkey rsa !--- An RSA key pair has not been generated. 7204-1#show cry key mypubkey
rsa 7204-1# 7204-1# 7204-1# 7204-1# 7204-1#configure terminal !--- Defining the CA server
communication parameters. Enter configuration commands, one per line. End with CNTL/Z. 7204-
1(config)#crypto ca trustpoint caserver2 7204-1(ca-trustpoint)# enrollment retry period 2 7204-
1(ca-trustpoint)# enrollment mode ra 7204-1(ca-trustpoint)# enrollment url
http://171.69.89.111:80/certsrv/mscep/mscep.dll 7204-1(ca-trustpoint)# usage ike 7204-1(ca-
trustpoint)# serial-number 7204-1(ca-trustpoint)# ip-address none 7204-1(ca-trustpoint)#
password 7 030A540503 7204-1(ca-trustpoint)# subject-name OU=BERLIN O=GERMANY 7204-1(ca-
trustpoint)# crl optional 7204-1(ca-trustpoint)# rsakeypair ciscotac 7204-1(ca-trustpoint)#
auto-enroll regenerate 7204-1(ca-trustpoint)# 7204-1(ca-trustpoint)#^Z 7204-1# 7204-1# 7204-1#
7204-1# 7204-1# *Oct 29 00:19:39: %SYS-5-CONFIG_I: Configured from console by consolesh clo
7204-1#show clock *17:19:42.656 PST Mon Oct 28 2002 7204-1#show run Building configuration...
Current configuration : 2131 bytes ! version 12.2 service timestamps debug datetime service
timestamps log datetime no service password-encryption service udp-small-servers service tcp-
small-servers no service dhcp ! hostname 7204-1 ! boot system flash slot boot system flash
slot0:c7200-jk9o3s-mz.122-11.T1.bin logging buffered 50000 debugging enable secret 5
$1$GdwM$YPQYieph20DPAhQeNvHa30 enable password ipsecpki ! username cisco password 0 cisco clock
timezone PST -7 ip subnet-zero ! ! no ip domain lookup ip domain name cisco.com ip host
caserver2 171.69.89.111 ! ! ip vrf test no ip cef ip audit notify log ip audit po max-events 100
! crypto ca trustpoint caserver2 enrollment retry period 2 enrollment mode ra enrollment url
http://171.69.89.111:80/certsrv/mscep/mscep.dll usage ike serial-number ip-address none password
7 000A1C0801 subject-name OU=BERLIN O=GERMANY crl optional rsakeypair ciscotac auto-enroll

```

```
regenerate crypto isakmp policy 10 hash md5 crypto isakmp identity hostname ! ! crypto ipsec
transform-set myset esp-des esp-md5-hmac ! crypto map vpn 10 ipsec-isakmp set peer 172.16.172.35
set transform-set myset match address 101 ! ! ! voice call carrier capacity active ! ! ! ! ! ! !
q 7204-1#debug crypto pki transactions Crypto PKI Trans debugging is on 7204-1# 7204-1#configure
terminal Enter configuration commands, one per line. End with CNTL/Z. 7204-1(config)#crypto ca
authenticate caserver2 Certificate has the following attributes: Fingerprint: A1E8B61A FD1A66D6
2DE35501 99C43D83 % Do you accept this certificate? [yes/no]: *Oct 29 00:20:56: CRYPTO_PKI:
Sending CA Certificate Request: GET
/certsrv/mscep/mscep.dll/pkiclient.exe?operation=GetCACert&message=caserver2 HTTP/1.0 *Oct 29
00:20:56: CRYPTO_PKI: can not resolve server name/IP address *Oct 29 00:20:56: CRYPTO_PKI: Using
unresolved IP Address 171.69.89.111 *Oct 29 00:20:56: CRYPTO_PKI: http connection opened *Oct 29
00:20:56: CRYPTO_PKI: HTTP response header: HTTP/1.1 200 OK Server: Microsoft-IIS/5.0 Date: Tue,
29 Oct 2002 00:21:02 GMT Content-Length: 2811 Content-Type: application/x-x509-ca-ra-cert
Content-Type indicates we have received CA and RA certificates. y Trustpoint CA certificate
accepted. 7204-1(config)# *Oct 29 00:20:56:
CRYPTO_PKI:crypto_process_ca_ra_cert(trustpoint=caserver2) *Oct 29 00:20:56: CRYPTO_PKI:
WARNING: Certificate, private key or CRL was not found while selecting CRL *Oct 29 00:20:56:
CRYPTO_PKI: WARNING: Certificate, private key or CRL was not found while selecting CRL *Oct 29
00:20:56: CRYPTO_PKI: transaction GetCACert completed *Oct 29 00:20:56: CRYPTO_PKI: CA
certificate received. *Oct 29 00:20:56: CRYPTO_PKI: CA certificate received. *Oct 29 00:20:56:
CRYPTO_PKI: crypto_pki_authenticate_tp_cert() *Oct 29 00:20:56: CRYPTO_PKI: trustpoint caserver2
authentication status = 2 *Oct 29 00:20:58: CRYPTO_PKI:
crypto_process_ra_certs(trust_point=caserver2) 7204-1(config)# 7204-1#show crypto key mypubkey
rsa !--- The RSA key pair has not yet been generated. !--- Only the CA has been authenticated.
7204-1#show crypto ca certificate !--- Only the CA certificate has been received. CA Certificate
Status: Available Certificate Serial Number: 3E34CD199392A0914621EA778B13F357 Certificate Usage:
Signature Issuer: CN = vpn OU = cisco O = tac L = san jose ST = california C = US Subject: CN =
vpn OU = cisco O = tac L = san jose ST = california C = US CRL Distribution Point: http://tac-
2hq8cg5ti0h/CertEnroll/vpn.crl Validity Date: start date: 21:19:50 PST Dec 6 2001 end date:
21:29:42 PST Dec 6 2003 Associated Trustpoints: caserver2 7204-1# Time to Re-enroll trust_point
caserver2 Can not select my full public key (ciscotac) Can not select my full public key
(ciscotac) Can not select my full public key (ciscotac)% % Start certificate enrollment .. % The
subject name in the certificate will be: OU=BERLIN O=GERMANY % The subject name in the
certificate will be: 7204-1.cisco.com % The serial number in the certificate will be: 01691291 %
Certificate request sent to Certificate Authority % The certificate request fingerprint will be
displayed. % The 'show crypto ca certificate' command will also show the fingerprint. key
mypubkey rsa Fingerprint: 6FD37B13 7329725C B524C666 2CFB08BB *Oct 29 00:22:13: %SSH-5-ENABLED:
SSH 1.5 has been enabled *Oct 29 00:22:13: %CRYPTO-6-AUTOGEN: Generated new 512 bit key pair
*Oct 29 00:22:13: CRYPTO_PKI: Sending CA Certificate Request: GET
/certsrv/mscep/mscep.dll/pkiclient.exe?operation=GetCACert&message=caserver2 HTTP/1.0 *Oct 29
00:22:13: CRYPTO_PKI: can not resolve server name/IP address *Oct 29 00:22:13: CRYPTO_PKI: Using
unresolved IP Address 171.69.89.111 *Oct 29 00:22:13: CRYPTO_PKI: http connection opened *Oct 29
00:22:14: CRYPTO_PKI: HTTP response header: HTTP/1.1 200 OK Server: Microsoft-IIS/5.0 Date: Tue,
29 Oct 2002 00:22:20 GMT Content-Length: 2811 Content-Type: application/x-x509-ca-ra-cert
Content-Type indicates we have received CA and RA certificates. *Oct 29 00:22:14:
CRYPTO_PKI:crypto_process_ca_ra_cert(trustpoint=caserver2) *Oct 29 00:22:14: CRYPTO_PKI:
WARNING: Certificate, private key or CRL was not found while selecting CRL *Oct 29 00:22:14:
CRYPTO_PKI: WARNING: Certificate, private key or CRL was not found while selecting CRL *Oct 29
00:22:14: CRYPTO_PKI: crypto_process_ra_certs(trust_point=caserver2) *Oct 29 00:22:14:
CRYPTO_PKI: transaction PKCSReq completed *Oct 29 00:22:14: CRYPTO_PKI: status: *Oct 29
00:22:14: CRYPTO_PKI: All sockets are closed for trustpoint caserver2. *Oct 29 00:22:14:
CRYPTO_PKI: can not resolve server name/IP address *Oct 29 00:22:14: CRYPTO_PKI: Using
unresolved IP Address 171.69.89.111 *Oct 29 00:22:14: CRYPTO_PKI: http connection opened *Oct 29
00:22:16: CRYPTO_PKI: received msg of 1930 bytes *Oct 29 00:22:16: CRYPTO_PKI: HTTP response
header: HTTP/1.1 200 OK Server: Microsoft-IIS/5.0 Date: Tue, 29 Oct 2002 00:22:22 GMT Content-
Length: 1784 Content-Type: application/x-pki-message *Oct 29 00:22:16: CRYPTO_PKI: WARNING:
Certificate, private key or CRL was not found while selecting CRL *Oct 29 00:22:16: CRYPTO_PKI:
status = 100: certificate is granted *Oct 29 00:22:16: CRYPTO_PKI: WARNING: Certificate, private
key or CRL was not found while selecting CRL *Oct 29 00:22:16: CRYPTO_PKI: All enrollment
requests completed for trustpoint caserver2. *Oct 29 00:22:16: CRYPTO_PKI: All enrollment
requests completed for trustpoint caserver2. *Oct 29 00:22:16: %CRYPTO-6-CERTRET: Certificate
received from Certificate Authority *Oct 29 00:22:16: CRYPTO_PKI: All enrollment requests
completed for trustpoint caserver2. *Oct 29 00:22:16: %CRYPTO-4-NOAUTOSAVE: Configuration was
modified. Issue "write memory" to save new certificate *Oct 29 00:22:16: CRYPTO_PKI: WARNING:
```

Certificate, private key or CRL was not found while selecting CRL \*Oct 29 00:22:16: CRYPTO\_PKI:  
All enrollment requests completed for trustpoint caserver2. % Key pair was generated at:  
17:22:13 PST Oct 28 2002 Key name: ciscotac Usage: General Purpose Key Key Data: 305C300D  
06092A86 4886F70D 01010105 00034B00 30480241 00B05722 43B43599 A2506398 A2205406 755D3AA2  
9888FD4C 76CF3C78 CA91BA4A 5EDB4BF8 121A924D A093D24C 282085BD 3ED9AD76 4CD8C7AD 0EA5582C  
70D4E5AF FD020301 0001 % Key pair was generated at: 17:22:13 PST Oct 28 2002 Key name:  
ciscotac.server Usage: Encryption Key Key Data: 307C300D 06092A86 4886F70D 01010105 00036B00  
30680261 00CE8A87 0698C6DF D13D7CF8 C5504394 24D23E0E 2B8367AE 11E6F5AF BD5B6A27 11E63F99  
EB768894 A234A6FD 54B90A93 F352B551 08FC32E7 5D0B1F68 2E42974A 4BEB7A9C EA989DD1 35267E59  
D1C84CC5 DA436E72 8BAB6B3B 60D0AB62 129FAB02 1F020301 0001 7204-1# 7204-1# 7204-1# 7204-1#show  
crypto key mypubkey rsa % Key pair was generated at: 17:22:13 PST Oct 28 2002 Key name: ciscotac  
!--- As defined in the configuration, a general !--- purpose RSA key pair. Usage: General  
Purpose Key was generated during auto-enrollment. Key Data: 305C300D 06092A86 4886F70D 01010105  
00034B00 30480241 00B05722 43B43599 A2506398 A2205406 755D3AA2 9888FD4C 76CF3C78 CA91BA4A  
5EDB4BF8 121A924D A093D24C 282085BD 3ED9AD76 4CD8C7AD 0EA5582C 70D4E5AF FD020301 0001 % Key pair  
was generated at: 17:22:13 PST Oct 28 2002 Key name: ciscotac.server Usage: Encryption Key Key  
Data: 307C300D 06092A86 4886F70D 01010105 00036B00 30680261 00CE8A87 0698C6DF D13D7CF8 C5504394  
24D23E0E 2B8367AE 11E6F5AF BD5B6A27 11E63F99 EB768894 A234A6FD 54B90A93 F352B551 08FC32E7  
5D0B1F68 2E42974A 4BEB7A9C EA989DD1 35267E59 D1C84CC5 DA436E72 8BAB6B3B 60D0AB62 129FAB02  
1F020301 0001 7204-1# 7204-1# 7204-1# 7204-1#show crypto ca certificate Certificate Status:  
Available Certificate Serial Number: 09F246B8000000000003C Certificate Usage: General Purpose  
Issuer: CN = vpn OU = cisco O = tac L = san jose ST = california C = US Subject: Name: 7204-  
1.cisco.com Serial Number: 01691291 OU = "BERLIN O=GERMANY" OID.1.2.840.113549.1.9.2 = 7204-  
1.cisco.com OID.2.5.4.5 = 1691291 CRL Distribution Point: http://tac-  
2hq8cg5ti0h/CertEnroll/vpn.crl Validity Date: start date: 17:12:22 PST Oct 28 2002 end date:  
17:22:22 PST Oct 29 2002 Associated Trustpoints: caserver2 CA Certificate Status: Available  
Certificate Serial Number: 3E34CD199392A0914621EA778B13F357 Certificate Usage: Signature Issuer:  
CN = vpn OU = cisco O = tac L = san jose ST = california C = US Subject: CN = vpn OU = cisco O =  
tac L = san jose ST = california C = US CRL Distribution Point: http://tac-  
2hq8cg5ti0h/CertEnroll/vpn.crl Validity Date: start date: 21:19:50 PST Dec 6 2001 end date:  
21:29:42 PST Dec 6 2003 Associated Trustpoints: caserver2 7204-1# 7204-1# !--- Generates an RSA  
usage-key pair. 7204-1# 7204-1# 7204-1#show run Building configuration... Current configuration  
: 2139 bytes ! version 12.2 service timestamps debug datetime service timestamps log datetime no  
service password-encryption service udp-small-servers service tcp-small-servers no service dhcp  
! hostname 7204-1 ! boot system flash slot boot system flash slot0:c7200-jk9o3s-mz.122-11.T1.bin  
logging buffered 50000 debugging enable secret 5 \$1\$GdwM\$YPQYieph20DPAHQeNvHa30 enable password  
ipsecpk ! username cisco password 0 cisco clock timezone PST -7 ip subnet-zero ! no ip domain  
lookup ip domain name cisco.com ip host caserver2 171.69.89.111 ! ! ip vrf test no ip cef ip  
audit notify log ip audit po max-events 100 ! crypto ca trustpoint caserver2 enrollment retry  
period 2 enrollment mode ra enrollment url http://171.69.89.111:80/certsrv/mscep/mscep.dll usage  
ike serial-number ip-address none password 7 0608002F49 subject-name OU=BERLIN O=GERMANY crl  
optional rsakeypair ciscotac 512 512 !--- The RSA key pair defined is for usage-keys. auto-  
enroll regenerate crypto isakmp policy 10 hash md5 crypto isakmp identity hostname ! ! crypto  
ipsec transform-set myset esp-des esp-md5-hmac ! crypto map vpn 10 ipsec-isakmp set peer  
172.16.172.35 set transform-set myset match address 101 ! ! ! voice call carrier capacity active  
! ! interface Ethernet1/0 no ip address duplex half ! interface Ethernet1/1 ip address  
172.16.172.51 255.255.255.240 no ip redirects duplex half crypto map vpn ! interface Ethernet1/2  
ip address 3.3.3.2 255.255.255.0 no keepalive duplex half ! interface Ethernet1/3 no ip address  
duplex half ! interface Hssi4/0 ip address 200.1.1.1 255.255.255.0 load-interval 30 fair-queue  
64 16 0 hssi dce serial restart\_delay 0 clockrate 1524705 ! ip classless ip route 0.0.0.0  
0.0.0.0 172.16.172.49 no ip http server ip pim bidir-enable ! ! access-list 101 permit ip  
3.3.3.0 0.0.0.255 192.168.4.0 0.0.0.255 ! snmp-server community public RO snmp-server enable  
traps tty ! ! call rsvp-sync ! ! mgcp profile default ! dial-peer cor custom ! ! ! gatekeeper  
shutdown ! ! line con 0 exec-timeout 0 0 line aux 0 line vty 0 4 privilege level 15 password  
cisco login line vty 5 15 login ! 7204-1# 7204-1# 7204-1# 7204-1#% Time to Re-enroll trust\_point  
caserver2% You must authenticate the Certificate Authority before you can enroll with it. sh cry  
ke 7204-1#show crypto key mypubkey rsa !--- There is no RSA key pair on the router at this time.  
7204-1# 7204-1#show clock \*17:27:54.232 PST Mon Oct 28 2002 7204-1#show crypto ca certificate  
7204-1#configure terminal Enter configuration commands, one per line. End with CNTL/Z. 7204-  
1(config)# crypto ca authenticate caserver2 7204-1#show d \*Oct 29 00:28:17: %SYS-5-CONFIG-I:  
Configured from console by consoleebug Cryptographic Subsystem: Crypto PKI Trans debugging is on  
7204-1# 7204-1# 7204-1#configure terminal 7204-1(config)#crypto ca authenticate caserver2  
Certificate has the following attributes: Fingerprint: A1E8B61A FD1A66D6 2DE35501 99C43D83 % Do  
you accept this certificate? [yes/no]: \*Oct 29 00:28:33: CRYPTO\_PKI: Sending CA Certificate

Request: GET /certsrv/mscep/mscep.dll/pkiclient.exe?operation=GetCACert&message;=caserver2  
HTTP/1.0 \*Oct 29 00:28:33: CRYPTO\_PKI: can not resolve server name/IP address \*Oct 29 00:28:33:  
CRYPTO\_PKI: Using unresolved IP Address 171.69.89.111 \*Oct 29 00:28:33: CRYPTO\_PKI: http  
connection opened \*Oct 29 00:28:34: CRYPTO\_PKI: HTTP response header: HTTP/1.1 200 OK Server:  
Microsoft-IIS/5.0 Date: Tue, 29 Oct 2002 00:28:40 GMT Content-Length: 2811 Content-Type:  
application/x-x509-ca-ra-cert Content-Type indicates we have received CA and RA certificates.  
\*Oct 29 00:28:34: CRYPTO\_PKI:crypto\_process\_ca\_ra\_cert(trustpoint=caserver2) \*Oct 29 00:28:34:  
CRYPTO\_PKI: WARNING: Certificate, private key or CRL was not found while selecting CRL \*Oct 29  
00:28:34: CRYPTO\_PKI: WARNING: Certificate, private key or CRL was not found while selecting CRL  
\*Oct 29 00:28:34: CRYPTO\_PKI: transaction GetCACert completed \*Oct 29 00:28:34: CRYPTO\_PKI: CA  
certificate received. \*Oct 29 00:28:34: CRYPTO\_PKI: CA certificate received. \*Oct 29 00:28:34:  
CRYPTO\_PKI: crypto\_pki\_authenticate\_tp\_cert() \*Oct 29 00:28:34: CRYPTO\_PKI: trustpoint caserver2  
authentication status = 2 % Please answer 'yes' or 'no'. % **Do you accept this certificate?**  
**[yes/no]: y Trustpoint CA certificate accepted.** 7204-1(config)# 7204-1(config)# 7204-1(config)#  
7204-1(config)# \*Oct 29 00:28:40: CRYPTO\_PKI: crypto\_process\_ra\_certs(trust\_point=caserver2)  
7204-1(config)# 7204-1(config)# 7204-1(config)# 7204-1(config)# 7204-1(config)# 7204-1(config)#  
7204-1(config)# 7204-1(config)# 7204-1(config)# 7204-1(config)#% **Time to Re-enroll trust point**  
**caserver2 Can not select my full public key (ciscotac) Can not select my full public key**  
**(ciscotac) Can not select my full public key (ciscotac)% Start certificate enrollment .. % The**  
**subject name in the certificate will be: OU=BERLIN O=GERMANY % The subject name in the**  
**certificate will be: 7204-1.cisco.com % The serial number in the certificate will be: 01691291 %**  
**Certificate request sent to Certificate Authority % The certificate request fingerprint will be**  
**displayed. % The 'show crypto ca certificate' command will also show the fingerprint.** \*Oct 29  
00:29:10: %CRYPTO-6-AUTOGEN: Generated new 512 bit key pair Signing Certificate Reqeust  
Fingerprint: D3EA83A5 B255CDA0 C65BF99D 4C1A978B \*Oct 29 00:29:10: %SSH-5-ENABLED: SSH 1.5 has  
been enabled \*Oct 29 00:29:10: %CRYPTO-6-AUTOGEN: Generated new 512 bit key pair \*Oct 29  
00:29:10: CRYPTO\_PKI: Sending CA Certificate Request: GET  
/certsrv/mscep/mscep.dll/pkiclient.exe?operation=GetCACert&message;=caserver2 HTTP/1.0 \*Oct 29  
00:29:10: CRYPTO\_PKI: can not resolve server name/IP address \*Oct 29 00:29:10: CRYPTO\_PKI: Using  
unresolved IP Address 171.69.89.111 \*Oct 29 00:29:11: CRYPTO\_PKI: http connection opened \*Oct 29  
00:29:11: CRYPTO\_PKI: HTTP response header: HTTP/1.1 200 OK Server: Microsoft-IIS/5.0 Date: Tue,  
29 Oct 2002 00:29:17 GMT Content-Length: 2811 Content-Type: application/x-x509-ca-ra-cert  
Content-Type indicates we have received CA and RA certificates. \*Oct 29 00:29:11:  
CRYPTO\_PKI:crypto\_process\_ca\_ra\_cert(trustpoint=caserver2) \*Oct 29 00:29:11: CRYPTO\_PKI:  
WARNING: Certificate, private key or CRL was not found while selecting CRL \*Oct 29 00:29:11:  
CRYPTO\_PKI: WARNING: Certificate, private key or CRL was not found while selecting CRL \*Oct 29  
00:29:11: CRYPTO\_PKI: crypto\_process\_ra\_certs(trust\_point=caserver2) \*Oct 29 00:29:11:  
CRYPTO\_PKI: transaction PKCSReq completed \*Oct 29 00:29:11: CRYPTO\_PKI: status: \*Oct 29  
00:29:11: CRYPTO\_PKI: All sockets are closed for trustpoint caserver2. \*Oct 29 00:29:11:  
CRYPTO\_PKI: can not resolve server name/IP address \*Oct 29 00:29:11: CRYPTO\_PKI: Using  
unresolved IP Address 171.69.89.111 \*Oct 29 00:29:11: CRYPTO\_PKI: http connection opened  
Encryption Certificate Request Fingerprint: 3258F1D9 0412BFA8 2FD14FBC B7345089 \*Oct 29  
00:29:13: CRYPTO\_PKI: can not resolve server name/IP address \*Oct 29 00:29:13: CRYPTO\_PKI: Using  
unresolved IP Address 171.69.89.111 \*Oct 29 00:29:13: CRYPTO\_PKI: http connection opened \*Oct 29  
00:29:15: CRYPTO\_PKI: received msg of 1930 bytes \*Oct 29 00:29:15: CRYPTO\_PKI: HTTP response  
header: HTTP/1.1 200 OK Server: Microsoft-IIS/5.0 Date: Tue, 29 Oct 2002 00:29:19 GMT Content-  
Length: 1784 Content-Type: application/x-pki-message \*Oct 29 00:29:15: CRYPTO\_PKI: WARNING:  
Certificate, private key or CRL was not found while selecting CRL \*Oct 29 00:29:15: CRYPTO\_PKI:  
status = 100: certificate is granted \*Oct 29 00:29:15: CRYPTO\_PKI: WARNING: Certificate, private  
key or CRL was not found while selecting CRL \*Oct 29 00:29:15: %CRYPTO-6-CERTRET: Certificate  
received from Certificate Authority \*Oct 29 00:29:25: CRYPTO\_PKI: received msg of 1930 bytes  
\*Oct 29 00:29:25: CRYPTO\_PKI: HTTP response header: HTTP/1.1 200 OK Server: Microsoft-IIS/5.0  
Date: Tue, 29 Oct 2002 00:29:21 GMT Content-Length: 1784 Content-Type: application/x-pki-message  
\*Oct 29 00:29:25: CRYPTO\_PKI: WARNING: Certificate, private key or CRL was not found while  
selecting CRL \*Oct 29 00:29:25: CRYPTO\_PKI: status = 100: certificate is granted \*Oct 29  
00:29:25: CRYPTO\_PKI: WARNING: Certificate, private key or CRL was not found while selecting CRL  
\*Oct 29 00:29:25: CRYPTO\_PKI: **All enrollment requests completed for trustpoint caserver2.** \*Oct  
29 00:29:25: CRYPTO\_PKI: **All enrollment requests completed for trustpoint caserver2.** \*Oct 29  
00:29:25: %CRYPTO-6-CERTRET: **Certificate received from Certificate Authority** \*Oct 29 00:29:25:  
CRYPTO\_PKI: **All enrollment requests completed for trustpoint caserver2.** \*Oct 29 00:29:25:  
%CRYPTO-4-NOAUTOSAVE: Configuration was modified. Issue "write memory" to save new certificate  
\*Oct 29 00:29:25: CRYPTO\_PKI: WARNING: Certificate, private key or CRL was not found while  
selecting CRL \*Oct 29 00:29:25: CRYPTO\_PKI: **All enrollment requests completed for trustpoint**  
**caserver2.** 7204-1(config)# 7204-1(config)#^Z 7204-1# 7204-1# 7204-1# \*Oct 29 00:30:32: %SYS-5-

```

CONFIG_I: Configured from console by console 7204-1# !---- An RSA usage-key pair was generated.
7204-1#show crypto key mypubkey rsa % Key pair was generated at: 17:29:10 PST Oct 28 2002 Key
name: ciscotac Usage: Signature Key Key Data: 305C300D 06092A86 4886F70D 01010105 00034B00
30480241 00E29E58 FD93989D F6997DA1 D191123C 661FEB81 789522EE 0CB8D5AD 8A4E9DED E5CDCFDC
78829A68 41962AD9 5D51AA21 F1C31271 23A7EA4D 6F632CD1 2CFD95C9 D3020301 0001 % Key pair was
generated at: 17:29:10 PST Oct 28 2002 Key name: ciscotac Usage: Encryption Key Key Data:
305C300D 06092A86 4886F70D 01010105 00034B00 30480241 009FB6F5 73B9C0D7 0BF59C1F 579606A6
E4CEE4AD 8BC307B9 3EC3955B 5FA1B355 665750E2 EC09F8EF 2B5F1D72 0E2FDB8B 0AA16911 492A749F
08113C64 6A203BB7 A9020301 0001 % Key pair was generated at: 17:29:11 PST Oct 28 2002 Key name:
ciscotac.server Usage: Encryption Key Key Data: 307C300D 06092A86 4886F70D 01010105 00036B00
30680261 00CE8A87 0698C6DF D13D7CF8 C5504394 24D23E0E 2B8367AE 11E6F5AF BD5B6A27 11E63F99
EB768894 A234A6FD 54B90A93 F352B551 08FC32E7 5D0B1F68 2E42974A 4BEB7A9C EA989DD1 35267E59
D1C84CC5 DA436E72 8BAB6B3B 60D0AB62 129FAB02 1F020301 0001 7204-1# 7204-1# 7204-1# 7204-1#show
crypto ca certificate Certificate Status: Available Certificate Serial Number:
09F8AC95000000000003E Certificate Usage: Encryption Issuer: CN = vpn OU = cisco O = tac L = san
jose ST = california C = US Subject: Name: 7204-1.cisco.com Serial Number: 01691291 OU = "BERLIN
O=GERMANY" OID.1.2.840.113549.1.9.2 = 7204-1.cisco.com OID.2.5.4.5 = 1691291 CRL Distribution
Point: http://tac-2hq8cg5ti0h/CertEnroll/vpn.crl Validity Date: start date: 17:19:21 PST Oct 28
2002 end date: 17:29:21 PST Oct 29 2002 renew date: 17:29:19 PST Oct 29 2002 Associated
Trustpoints: caserver2 Certificate Status: Available Certificate Serial Number:
09F8A45E000000000003D Certificate Usage: Signature Issuer: CN = vpn OU = cisco O = tac L = san
jose ST = california C = US Subject: Name: 7204-1.cisco.com Serial Number: 01691291 OU = "BERLIN
O=GERMANY" OID.1.2.840.113549.1.9.2 = 7204-1.cisco.com OID.2.5.4.5 = 1691291 CRL Distribution
Point: http://tac-2hq8cg5ti0h/CertEnroll/vpn.crl Validity Date: start date: 17:19:19 PST Oct 28
2002 end date: 17:29:19 PST Oct 29 2002 Associated Trustpoints: caserver2 CA Certificate Status:
Available Certificate Serial Number: 3E34CD199392A0914621EA778B13F357 Certificate Usage:
Signature Issuer: CN = vpn OU = cisco O = tac L = san jose ST = california C = US Subject: CN =
vpn OU = cisco O = tac L = san jose ST = california C = US CRL Distribution Point: http://tac-
2hq8cg5ti0h/CertEnroll/vpn.crl Validity Date: start date: 21:19:50 PST Dec 6 2001 end date:
21:29:42 PST Dec 6 2003 Associated Trustpoints: caserver2 7204-1#

```

## Quando se vence el certificado de identidad

El 2611-VPN no tiene una fuente de hora externa configurada y el reloj del sistema se utiliza para seguir el tiempo. El server2 de CA se declara en el router, se autentica el servidor de CA, y el 2611-VPN Router alista automáticamente con el servidor de CA para sus certificados de identidad. El servidor de CA se configura para publicar los certificados de identidad que son solamente válidos por un día. Una vez que expira el certificado, el router alista automáticamente con el servidor de CA y la Secuencia de eventos se muestra en esta salida.

```

2611-VPN#clock set 19:30:00 26 oct 2002 !--- Sets the system clock. 2611-VPN# 2611-
VPN(config)#crypto ca trustpoint caserver2 !--- Declares the CA server communication parameters.
2611-VPN(ca-trustpoint)# enrollment retry period 5 2611-VPN(ca-trustpoint)# enrollment mode ra
2611-VPN(ca-trustpoint)# enrollment url url http://171.69.89.111:80/certsrv/mscep/ mscep.dll
2611-VPN(ca-trustpoint)# usage ike 2611-VPN(ca-trustpoint)# serial-number 2611-VPN(ca-
trustpoint)# fqdn 2611-vpn.cisco.com 2611-VPN(ca-trustpoint)# ip-address Ethernet0/0 2611-
VPN(ca-trustpoint)# password 7 12170A1917 2611-VPN(ca-trustpoint)# subject-name OU=ROME O=ITALY
2611-VPN(ca-trustpoint)# crl optional 2611-VPN(ca-trustpoint)# rsakeypair tacvpn 2611-VPN(ca-
trustpoint)# auto-enroll regenerate 2611-VPN(ca-trustpoint)# Oct 26 19:30:53.772:
CRYPTO_PKI:Insert Selfsigned Certificate: 30 82 01 4E 30 81 F9 02 20 38 42 33 34 38 41 44 Hex
data omitted AF 16 7B C1 4E 61 99 24 86 55 30 0D 96 91 4D 47 70 62 Oct 26 19:30:53.820:
CRYPTO_PKI: InsertCertData: subject name = 30 23 31 21 30 1F 06 09 2A 86 48 86 F7 0D 01 09 02 16
12 32 36 31 31 2D 76 70 6E 2E 63 69 73 63 6F 2E 63 6F 6D Oct 26 19:30:53.828: CRYPTO_PKI:
InsertCertData: issuer name = 30 23 31 21 30 1F 06 09 2A 86 48 86 F7 0D 01 09 02 16 12 32 36 31
31 2D 76 70 6E 2E 63 69 73 63 6F 2E 63 6F 6D Oct 26 19:30:53.832: CRYPTO_PKI: InsertCertData:
serial number = 38 42 33 34 38 41 44 39 38 39 38 34 34 32 44 34 45 46 30 39 32 33 43 39 39 42 34
46 36 46 30 39 2611-VPN(config)#crypto ca authenticate caserver2 !--- Authenticates the CA
server. Certificate has the following attributes: Fingerprint: A1E8B61A FD1A66D6 2DE35501
99C43D83 % Do you accept this certificate? [yes/no]: Oct 26 19:31:10.936: CRYPTO_PKI: Sending CA
Certificate Request: GET
/certsrv/mscep/mscep.dll/pkiclient.exe?operation=GetCACert&message=caserver2 HTTP/1.0 Oct 26
19:31:10.940: CRYPTO_PKI: can not resolve server name/IP address Oct 26 19:31:10.940:

```

CRYPTO\_PKI: Using unresolved IP Address 171.69.89.111 Oct 26 19:31:10.944: CRYPTO\_PKI: http connection opened Oct 26 19:31:11.401: CRYPTO\_PKI: HTTP response header: HTTP/1.1 200 OK Server: Microsoft-IIS/5.0 Date: Sun, 27 Oct 2002 02:30:22 GMT Content-Length: 2811 Content-Type: application/x-x509-ca-ra-cert **Content-Type indicates we have received CA and RA certificates.** Oct 26 19:31:11.405: CRYPTO\_PKI:crypto\_process\_ca\_ra\_cert(trustpoint=caserver2) Oct 26 19:31:11.405: CRYPTO\_PKI:CA and RA certs (cert data): 30 82 0A F7 06 09 2A 86 48 86 F7 0D 01 07 02 A0 hex data omitted 55 04 0A 13 05 63 69 73 63 6F 31 0C 30 0A 06y **Trustpoint CA certificate accepted.** 2611-VPN(config)# 03 55 04 0B 13 03 74 61 63 31 14 30 12 06 03 55 04 hex data omitted A9 13 93 1E E6 E1 E4 30 07 31 00 Oct 26 19:31:11.801: CRYPTO\_PKI: InsertCertData: subject name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted 76 70 6E Oct 26 19:31:11.813: CRYPTO\_PKI: InsertCertData: issuer name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted 76 70 6E Oct 26 19:31:11.825: CRYPTO\_PKI: InsertCertData: serial number = 3E 34 CD 19 93 92 A0 91 46 21 EA 77 8B 13 F3 57 Oct 26 19:31:11.865: CRYPTO\_PKI: InsertCertData: subject name = 30 81 83 31 20 30 1E 06 09 2A 86 48 86 F7 0D 01 hex data omitted 70 6B 69 2D 72 61 Oct 26 19:31:11.885: CRYPTO\_PKI: InsertCertData: issuer name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted 76 70 6E Oct 26 19:31:11.897: CRYPTO\_PKI: InsertCertData: serial number = 14 6C F2 85 00 00 00 00 09 Oct 26 19:31:11.901: CRYPTO\_PKI: WARNING: Certificate, private key or CRL was not found while selecting CRL Oct 26 19:31:11.941: CRYPTO\_PKI: InsertCertData: subject name = 30 81 83 31 20 30 1E 06 09 2A 86 48 86 F7 0D 01 hex data omitted 70 6B 69 2D 72 61 Oct 26 19:31:11.957: CRYPTO\_PKI: InsertCertData: issuer name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted 76 70 6E Oct 26 19:31:11.969: CRYPTO\_PKI: InsertCertData: serial number = 14 6C F1 A9 00 00 00 00 08 Oct 26 19:31:11.977: CRYPTO\_PKI: WARNING: Certificate, private key or CRL was not found while selecting CRL Oct 26 19:31:11.981: CRYPTO\_PKI: InsertCertData: subject name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted 76 70 6E Oct 26 19:31:11.998: CRYPTO\_PKI: InsertCertData: issuer name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted 76 70 6E Oct 26 19:31:12.010: CRYPTO\_PKI: InsertCertData: serial number = 3E 34 CD 19 93 92 A0 91 46 21 EA 77 8B 13 F3 57 Oct 26 19:31:12.014: CRYPTO\_PKI: transaction GetCACert completed Oct 26 19:31:12.014: CRYPTO\_PKI: **CA certificate received.** Oct 26 19:31:12.014: CRYPTO\_PKI: CA certificate received. Oct 26 19:31:12.030: CRYPTO\_PKI: crypto\_pki\_authenticate\_tp\_cert() Oct 26 19:31:12.030: CRYPTO\_PKI: trustpoint caserver2 authentication status = 2 Oct 26 19:31:13.837: CRYPTO\_PKI: InsertCertData: subject name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted 76 70 6E Oct 26 19:31:13.849: CRYPTO\_PKI: InsertCertData: issuer name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted 76 70 6E Oct 26 19:31:13.861: CRYPTO\_PKI: InsertCertData: serial number = 3E 34 CD 19 93 92 A0 91 46 21 EA 77 8B 13 F3 57 % **Time to Re-enroll trust\_point caserver2 Can not select my full public key (tacvpn)% Start certificate enrollment .. % The subject name in the certificate will be: OU=ROME O=ITALY % The fully-qualified domain name in the certificate will be: 2611-vpn.cisco.com % The subject name in the certificate will be: 2611-vpn.cisco.com % The serial number in the certificate will be: 721959E3% Certificate request sent to Certificate Authority % The certificate request fingerprint will be displayed. % The 'show crypto ca certificate' command will also show the fingerprint.** Signing Certificate Request Fingerprint: 00599B4B 62BAAE44 1706AF6E CD689B5D Oct 26 19:32:43.532: CRYPTO\_PKI: Sending CA Certificate Request: GET /certsrv/mscep/mscep.dll/pkiclient.exe?operation=GetCACert&message;=caserver2 HTTP/1.0 Oct 26 19:32:43.532: CRYPTO\_PKI: can not resolve server name/IP address Oct 26 19:32:43.532: CRYPTO\_PKI: Using unresolved IP Address 171.69.89.111 Oct 26 19:32:43.540: CRYPTO\_PKI: http connection opened Oct 26 19:32:44.032: CRYPTO\_PKI: HTTP response header: HTTP/1.1 200 OK Server: Microsoft-IIS/5.0 Date: Sun, 27 Oct 2002 02:31:55 GMT Content-Length: 2811 Content-Type: application/x-x509-ca-ra-cert Content-Type indicates we have received CA and RA certificates. Oct 26 19:32:44.032: CRYPTO\_PKI:crypto\_process\_ca\_ra\_cert(trustpoint=caserver2) Oct 26 19:32:44.032: CRYPTO\_PKI:CA and RA certs (cert data): 30 82 0A F7 06 09 2A 86 48 86 F7 0D 01 07 02 A0 hex data omitted 61 6C 69 66 6F 72 6E 69 61 31 11 3 Encryption Certificate Request Fingerprint: 798894EE 357D6023 FD4F6C4E 75BF9611 hex data omitted A9 13 93 1E E6 E1 E4 30 07 31 00 Oct 26 19:32:44.489: CRYPTO\_PKI: InsertCertData: subject name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted 76 70 6E Oct 26 19:32:44.505: CRYPTO\_PKI: InsertCertData: issuer name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hexdata omitted 76 70 6E Oct 26 19:32:44.517: CRYPTO\_PKI: InsertCertData: serial number = 3E 34 CD 19 93 92 A0 91 46 21 EA 77 8B 13 F3 57 Oct 26 19:32:44.557: CRYPTO\_PKI: InsertCertData: subject name = 30 81 83 31 20 30 1E 06 09 2A 86 48 86 F7 0D 01 hex data omitted 70 6B 69 2D 72 61 Oct 26 19:32:44.573: CRYPTO\_PKI: InsertCertData: issuer name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted 76 70 6E Oct 26 19:32:44.589: CRYPTO\_PKI: InsertCertData: serial number = 14 6C F2 85 00 00 00 00 09 Oct 26 19:32:44.593: CRYPTO\_PKI: WARNING: Certificate, private key or CRL was not found while selecting CRL Oct 26 19:32:44.641: CRYPTO\_PKI: InsertCertData: subject name = 30 81 83 31 20 30 1E 06 09 2A 86 48 86 F7 0D 01 hex data omitted 70 6B 69 2D 72 61 Oct 26 19:32:44.657:



CRYPTO\_PKI: InsertCertData: issuer name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted 76 70 6E Oct 26 19:32:44.669: CRYPTO\_PKI: InsertCertData: serial number = 14 6C F1 A9 00 00 00 00 08 Oct 26 19:32:44.677: CRYPTO\_PKI: WARNING: Certificate, private key or CRL was not found while selecting CRL Oct 26 19:32:44.681: CRYPTO\_PKI: InsertCertData: subject name = 30 81 83 31 20 30 1E 06 09 2A 86 48 86 F7 0D 01 hex data omitted 70 6B 69 2D 72 61 Oct 26 19:32:44.697: CRYPTO\_PKI: InsertCertData: issuer name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted 63 69 73 63 6F 31 0C 30 0A 06 03 55 04 03 13 03 76 70 6E Oct 26 19:32:44.710: CRYPTO\_PKI: InsertCertData: serial number = 14 6C F1 A9 00 00 00 00 08 Oct 26 19:32:44.718: CRYPTO\_PKI: InsertCertData: subject name = 30 81 83 31 20 30 1E 06 09 2A 86 48 86 F7 0D 01 hex data omitted 70 6B 69 2D 72 61 Oct 26 19:32:44.730: CRYPTO\_PKI: InsertCertData: issuer name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted 76 70 6E Oct 26 19:32:44.742: CRYPTO\_PKI: InsertCertData: serial number = 14 6C F2 85 00 00 00 00 09 Oct 26 19:32:44.750: CRYPTO\_PKI: InsertCertData: subject name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted 76 70 6E Oct 26 19:32:44.762: CRYPTO\_PKI: InsertCertData: issuer name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted 76 70 6E Oct 26 19:32:44.774: CRYPTO\_PKI: InsertCertData: serial number = 3E 34 CD 19 93 92 A0 91 46 21 EA 77 8B 13 F3 57 Oct 26 19:32:44.778: CRYPTO\_PKI: crypto\_process\_ra\_certs(trust\_point=caserver2) Oct 26 19:32:44.782: CRYPTO\_PKI: transaction PKCSReq completed Oct 26 19:32:44.782: CRYPTO\_PKI: status: Oct 26 19:32:44.974: CRYPTO\_PKI:Write out pkcs#10 content:347 30 82 01 57 30 82 01 01 02 01 00 30 67 31 15 30 hex data omitted E0 7C A2 40 42 6B 87 AA 59 25 01 Oct 26 19:32:45.102: CRYPTO\_PKI:Enveloped Data for trustpoint caserver2... 30 80 06 09 2A 86 48 86 F7 0D 01 07 03 A0 80 30 hex data omitted 00 00 00 00 Oct 26 19:32:45.383: CRYPTO\_PKI:Signed Data for trustpoint caserver2 (1448 bytes) 30 80 06 09 2A 86 48 86 F7 0D 01 07 02 A0 80 30 hex data omitted 00 00 00 00 00 00 00 00 Oct 26 19:32:45.571: CRYPTO\_PKI: can not resolve server name/IP address Oct 26 19:32:45.571: CRYPTO\_PKI: Using unresolved IP Address 171.69.89.111 Oct 26 19:32:45.579: CRYPTO\_PKI: http connection opened Oct 26 19:32:47.779: CRYPTO\_PKI:Write out pkcs#10 content:347 30 82 01 57 30 82 01 01 02 01 00 30 67 31 15 30 hex data omitted C0 71 E0 1C B9 47 E7 DB 0E 8A 61 Oct 26 19:32:47.907: CRYPTO\_PKI:Enveloped Data for trustpoint caserver2... 30 80 06 09 2A 86 48 86 F7 0D 01 07 03 A0 80 30 hex data omitted 00 00 00 00 Oct 26 19:32:48.191: CRYPTO\_PKI:Signed Data for trustpoint caserver2 (1448 bytes) 30 80 06 09 2A 86 48 86 F7 0D 01 07 02 A0 80 30 hex data omitted 00 00 00 00 00 00 00 00 Oct 26 19:32:48.380: CRYPTO\_PKI: can not resolve server name/IP address Oct 26 19:32:48.380: CRYPTO\_PKI: Using unresolved IP Address 171.69.89.111 Oct 26 19:32:48.452: CRYPTO\_PKI: http connection opened Oct 26 19:32:50.483: CRYPTO\_PKI: received msg of 1972 bytes Oct 26 19:32:50.483: CRYPTO\_PKI: HTTP response header: HTTP/1.1 200 OK Server: Microsoft-IIS/5.0 Date: Sun, 27 Oct 2002 02:31:59 GMT Content-Length: 1826 Content-Type: application/x-pki-message Oct 26 19:32:50.487: CRYPTO\_PKI:Received pki message (PKCS7) for trustpoint caserver2: 1826 bytes 30 82 07 1E 06 09 2A 86 48 86 F7 0D 01 07 02 A0 hex data omitted 80 82 04 08 71 23 FE Oct 26 19:32:51.465: **%CRYPTO-6-CERTRET: Certificate received from Certificate Authority** Oct 26 19:33:11.469: CRYPTO\_PKI: received msg of 1972 bytes Oct 26 19:33:11.469: CRYPTO\_PKI: HTTP response header: HTTP/1.1 200 OK Server: Microsoft-IIS/5.0 Date: Sun, 27 Oct 2002 02:32:02 GMT Content-Length: 1826 Content-Type: application/x-pki-message Oct 26 19:33:11.473: CRYPTO\_PKI:Received pki message (PKCS7) for trustpoint caserver2: 1826 bytes 30 82 07 1E 06 09 2A 86 48 86 F7 0D 01 07 02 A0 hex data omitted 54 25 Oct 26 19:33:11.734: CRYPTO\_PKI: InsertCertData: subject name = 30 81 83 31 20 30 1E 06 09 2A 86 48 86 F7 0D 01 hex data omitted 70 6B 69 2D 72 61 Oct 26 19:33:11.750: CRYPTO\_PKI: InsertCertData: issuer name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted 76 70 6E Oct 26 19:33:11.762: CRYPTO\_PKI: InsertCertData: serial number = 14 6C F1 A9 00 00 00 00 08 Oct 26 19:33:11.770: CRYPTO\_PKI: WARNING: Certificate, private key or CRL was not found while selecting CRL Oct 26 19:33:11.842: CRYPTO\_PKI: signed attr: pki-message-type: 13 01 33 Oct 26 19:33:11.842: CRYPTO\_PKI: signed attr: pki-status: 13 01 30 Oct 26 19:33:11.846: CRYPTO\_PKI: signed attr: pki-recipient-nonce: 04 10 E0 59 89 15 0A E0 C5 2D 2B 44 82 72 7B E7 4D EF Oct 26 19:33:11.850: CRYPTO\_PKI: signed attr: pki-transaction-id: 13 20 41 45 32 37 39 37 41 32 33 41 41 32 44 45 30 32 38 37 45 38 34 39 35 45 36 37 30 34 33 38 34 30 Oct 26 19:33:11.854: CRYPTO\_PKI: status = 100: certificate is granted Oct 26 19:33:11.854: CRYPTO\_PKI:Verified signed data for trustpoint caserver2 (1259 bytes): 30 82 04 E7 06 09 2A 86 48 86 F7 0D 01 07 03 A0 hex data omitted 1B D5 43 D5 E3 88 F6 F5 D5 09 45 Oct 26 19:33:12.191: CRYPTO\_PKI:Decrypted enveloped content: 30 82 03 FE 06 09 2A 86 48 86 F7 0D 01 07 02 A0 hex data omitted 54 DD C1 E0 03 85 EC B3 E9 B0 63 3D FF F2 C9 7F Oct 26 19:33:12.355: CRYPTO\_PKI: InsertCertData: subject name = 30 6B 31 11 30 0F 06 03 55 04 05 13 08 37 32 31 hex data omitted 0C 52 4F 4D 45 20 4F 3D 49 54 41 4C 59 Oct 26 19:33:12.371: CRYPTO\_PKI: InsertCertData: issuer name =30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted 76 70 6E Oct 26 19:33:12.383: CRYPTO\_PKI: InsertCertData: serial number = 61 1C 41 E0 00 00 00 00 37 Oct 26 19:33:12.391: CRYPTO\_PKI: WARNING: Certificate, private key or CRL was not found while selecting CRL Oct 26 19:33:12.407: CRYPTO\_PKI: InsertCertData: subject name = 30 6B 31 11 30 0F 06 03 55 04 05 13 08 37 32 31 39 35

39 45 33 31 1C 30 1A 06 09 Oct 26 19:33:12.459: CRYPTO\_PKI: WARNING: Certificate, private key or CRL was not found while selecting CRL Oct 26 19:33:22.503: **CRYPTO\_PKI: All enrollment requests completed for trustpoint caserver2.** 2611-VPN#show crypto ca certificate Certificate Status: Available Certificate Serial Number: 611C41E0000000000037 Certificate Usage: Encryption Issuer: CN = vpn OU = cisco O = tac L = san jose ST = california C = US Subject: **Name: 2611-vpn.cisco.com** *!--- The subject name, IP address, and serial !--- numbers of the certificate issued by CA server2.* IP Address: 172.16.172.35 Serial Number: 721959E3 OU = "ROME O=ITALY" OID.1.2.840.113549.1.9.2 = 2611-vpn.cisco.com OID.1.2.840.113549.1.9.8 = 172.16.172.35 OID.2.5.4.5 = 721959E3 CRL Distribution Point: http://tac-2hq8cg5ti0h/CertEnroll/vpn.crl Validity Date: start date: 02:22:02 UTC Oct 27 2002 end date: 02:32:02 UTC Oct 28 2002 *!--- CA server2 issued a certificate with a !--- validity period of one day. !--- The renew date indicates the time for reenrollment !--- with the CA server.* renew date: 02:31:59 UTC Oct 28 2002 Associated Trustpoints: caserver2 Certificate Status: Available Certificate Serial Number: 611C3624000000000036 Certificate Usage: Signature Issuer: CN = vpn OU = cisco O = tac L = san jose ST = california C = US Subject: **Name: 2611-vpn.cisco.com IP Address: 172.16.172.35 Serial Number: 721959E3 OU = "ROME O=ITALY"** OID.1.2.840.113549.1.9.2 = 2611-vpn.cisco.com OID.1.2.840.113549.1.9.8 = 172.16.172.35 OID.2.5.4.5 = 721959E3 CRL Distribution Point: http://tac-2hq8cg5ti0h/CertEnroll/vpn.crl Validity Date: start date: 02:21:59 UTC Oct 27 2002 end date: 02:31:59 UTC Oct 28 2002 Associated Trustpoints: caserver2 CA Certificate Status: Available Certificate Serial Number: 3E34CD199392A0914621EA778B13F357 Certificate Usage: Signature Issuer: CN = vpn OU = cisco O = tac L = san jose ST = california C = US Subject: CN = vpn OU = cisco O = tac L = san jose ST = california C = US CRL Distribution Point: http://tac-2hq8cg5ti0h/CertEnroll/vpn.crl Validity Date: start date: 04:19:50 UTC Dec 7 2001 end date: 04:29:42 UTC Dec 7 2003 Associated Trustpoints: caserver2 CA Certificate Status: Available Certificate Serial Number: 0E7EC1B68A2F14BD4C4515AF44C45732 Certificate Usage: Signature Issuer: CN = SJPVNTAC-CAServer OU = TAC-VPN-SJ O = Cisco Systems L = San Jose ST = CA C = US Subject: CN = SJPVNTAC-CAServer OU = TAC-VPN-SJ O = Cisco Systems L = San Jose ST = CA C = US CRL Distribution Point: http://ca-server/CertEnroll/SJPVNTAC-CAServer.crl Validity Date: start date: 20:52:48 UTC Sep 17 2002 end date: 21:02:37 UTC Sep 17 2017 Associated Trustpoints: caserver1 Certificate Status: Available Certificate Serial Number: 6103EE0A000000000038 Certificate Usage: Signature Issuer: CN = SJPVNTAC-CAServer OU = TAC-VPN-SJ O = Cisco Systems L = San Jose ST = CA C = US Subject: **Name: 2611-vpn.cisco.com IP Address: 172.16.172.35 Serial Number: 721959E3 OU = "PARIS O=FRANCE"** OID.1.2.840.113549.1.9.2 = 2611-vpn.cisco.com OID.1.2.840.113549.1.9.8 = 172.16.172.35 OID.2.5.4.5 = 721959E3 CRL Distribution Point: http://ca-server/CertEnroll/SJPVNTAC-CAServer.crl Validity Date: start date: 03:33:05 UTC Oct 26 2002 end date: 03:43:05 UTC Oct 26 2003 Associated Trustpoints: caserver1 Certificate Status: Available Certificate Serial Number: 6104020F000000000039 Certificate Usage: Encryption Issuer: CN = SJPVNTAC-CAServer OU = TAC-VPN-SJ O = Cisco Systems L = San Jose ST = CA C = US Subject: Name: 2611-vpn.cisco.com IP Address: 172.16.172.35 Serial Number: 721959E3 OU = "PARIS O=FRANCE" OID.1.2.840.113549.1.9.2 = 2611-vpn.cisco.com OID.1.2.840.113549.1.9.8 = 172.16.172.35 OID.2.5.4.5 = 721959E3 CRL Distribution Point: http://ca-server/CertEnroll/SJPVNTAC-CAServer.crl Validity Date: start date: 03:33:10 UTC Oct 26 2002 end date: 03:43:10 UTC Oct 26 2003 renew date: 03:43:05 UTC Oct 26 2003 Associated Trustpoints: caserver1 2611-VPN#show crypto key mypubkey rsa % Key pair was generated at: 00:14:06 UTC Mar 1 1993 Key name: ciscovpn Usage: Signature Key Key Data: 305C300D 06092A86 4886F70D 01010105 00034B00 30480241 00A2DE57 2C7A4555 BF87D3CC 4A260DBF 56574554 472FC72C 0461A35B E41B5B53 BE81A47E 264A68D7 08662555 27E4E301 2AF04B1C E472F70B 74DF38A0 6EB286F9 01020301 0001 % Key pair was generated at: 00:14:10 UTC Mar 1 1993 Key name: ciscovpn Usage: Encryption Key Key Data: 305C300D 06092A86 4886F70D 01010105 00034B00 30480241 00D10224 8CBEC2D7 B517DF99 7363717D 6F6CA0F1 83FB7874 E60BB169 CD4AD9CA 92E04143 16D4D253 5CBF212F FF6268A5 329AB988 2655568C 8EC19017 6F4A4C86 43020301 0001 % Key pair was generated at: 00:14:59 UTC Mar 1 1993 *!--- The RSA key pair is generated during !--- the next auto reenroll .* Key name: tacvpn *!--- This key pair was generated before the system !--- clock was set, hence the 1993 date.* Usage: Signature Key Key Data: 305C300D 06092A86 4886F70D 01010105 00034B00 30480241 00AB2884 22A070D0 A8C84C3E CD45A382 F4CDB158 5B31B624 5C92632C 5DC1977E 686E1C18 DA16BE57 6FBA9518 4D2F01B8 0D59528D 447014D3 02D5A631 84E54CD4 FB020301 0001 % Key pair was generated at: 00:15:00 UTC Mar 1 1993 Key name: tacvpn Usage: Encryption Key Key Data: 305C300D 06092A86 4886F70D 01010105 00034B00 30480241 00AB7576 9D0A2D65 7BB9B465 AF227B73 2B83AFD6 3791FA54 3A2DB845 55E4540F 35972460 B87C613E 82DBC4D2 51E6F9A7 07164C57 B02D28B8 93F8D50F D5C3444F 01020301 0001 % Key pair was generated at: 22:02:57 UTC Oct 27 2002 Key name: ciscovpn.server Usage: Encryption Key Key Data: 307C300D 06092A86 4886F70D 01010105 00036B00 30680261 00D42A5E 4C9D27F1 195CC537 7CF9E390 935DFBA3 2DA01B3B C5E50620 57B902A3 50876FA1 1A9D83FD 0EB437F7 E0568EB7 830A46FA E9D9BA4F 3E8B132D F24A08B8 E2154944 36829D64 E48077EF 224BF142 A3A92672 F0BC57F5 063EF64A 8B775979 CD020301 0001 2611-VPN# 2611-VPN# 2611-VPN# show clock 19:29:20.304 UTC Sun Oct 27 2002 2611-VPN# 2611-VPN# 2611-VPN# *!--- The certificate from*

CA server2 expired and the router is !--- reenrolling automatically without user intervention.  
2611-VPN#% Time to Re-enroll trust\_point caserver2 Can not select my full public key (tacvpn)%  
Start certificate enrollment .. % The subject name in the certificate will be: OU=ROME O=ITALY %  
The fully-qualified domain name in the certificate will be: 2611-vpn.cisco.com % The subject  
name in the certificate will be: 2611-vpn.cisco.com % The serial number in the certificate will  
be: 721959E3% Certificate request sent to Certificate Authority % The certificate request  
fingerprint will be displayed. % The 'show crypto ca certificate' command will also show the  
fingerprint. Oct 28 02:32:01.210: %CRYPTO-6-AUTOGEN: Generated new 512 bit key pair Oct 28  
02:32:02.924: %CRYPTO-6-AUTOGEN: Generated new 512 bit key pair Oct 28 02:32:02.944: CRYPTO\_PKI:  
Sending CA Certificate Request: GET  
/certsrv/mscep/mscep.dll/pkiclient.exe?operation=GetCACert&message;=caserver2 HTTP/1.0 Oct 28  
02:32:02.944: CRYPTO\_PKI: can not resolve server name/IP address Oct 28 02:32:02.944:  
CRYPTO\_PKI: Using unresolved IP Address 171.69.89.111 Signing Certificate Reqeust Fingerprint:  
99E260CF 476B54E1 B6486AF3 98FD0F02 Oct 28 02:32:02.952: CRYPTO\_PKI: http connection opened Oct  
28 02:32:03.461: CRYPTO\_PKI: HTTP response header: HTTP/1.1 200 OK Server: Microsoft-IIS/5.0  
Date: Mon, 28 Oct 2002 09:31:15 GMT Content-Length: 2811 Content-Type: application/x-x509-ca-ra-  
cert Content-Type indicates we have received CA and RA certificates. Oct 28 02:32:03.461:  
CRYPTO\_PKI:crypto\_process\_ca\_ra\_cert(trustpoint=caserver2) Oct 28 02:32:03.461: CRYPTO\_PKI:CA  
and RA certs (cert data): 30 82 0A F7 06 09 2A 86 48 86 F7 0D 01 07 02 A0 hex data omitted 00 9D  
B4 04 E9 46 13 45 37 10 59 AE B1 F7 39 C1 73 D3 F2 DB 0C 95 5A F7 C9 F Encryption Certificate  
Request Fingerprint: BE1C5800 A6F895FF AC8DBAF9 0DED9356 A9 13 93 1E E6 E1 E4 30 07 31 00 hex  
data omitted Oct 28 02:32:03.922: CRYPTO\_PKI: InsertCertData: subject name = 30 61 31 0B 30 09  
06 03 55 04 06 13 02 55 53 31 hex data omitted 76 70 6E Oct 28 02:32:03.934: CRYPTO\_PKI:  
InsertCertData: issuer name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 13 30 11 06 03 55  
04 08 13 0A 63 61 6C 69 66 6F 72 6E 69 61 31 11 30 0F 06 03 55 04 07 13 08 73 61 6E 20 6A 6F 73  
65 31 0C 30 0A 06 03 55 04 0A 13 03 74 61 63 31 0E 30 0C 06 03 55 04 0B 13 05 63 69 73 63 6F 31  
0C 30 0A 06 03 55 04 03 13 03 76 70 6E Oct 28 02:32:03.946: CRYPTO\_PKI: InsertCertData: serial  
number = 3E 34 CD 19 93 92 A0 91 46 21 EA 77 8B 13 F3 57 Oct 28 02:32:03.990: CRYPTO\_PKI:  
InsertCertData: subject name = 30 81 83 31 20 30 1E 06 09 2A 86 48 86 F7 0D 01 hex data omitted  
70 6B 69 2D 72 61 Oct 28 02:32:04.006: CRYPTO\_PKI: InsertCertData: issuer name = 30 61 31 0B 30  
09 06 03 55 04 06 13 02 55 53 31 hex data omitted 76 70 6E Oct 28 02:32:04.018: CRYPTO\_PKI:  
InsertCertData: serial number = 14 6C F2 85 00 00 00 00 09 Oct 28 02:32:04.026: CRYPTO\_PKI:  
WARNING: Certificate, private key or CRL was not found while selecting CRL Oct 28 02:32:04.066:  
CRYPTO\_PKI: InsertCertData: subject name = 30 81 83 31 20 30 1E 06 09 2A 86 48 86 F7 0D 01 hex  
data omitted 70 6B 69 2D 72 61 Oct 28 02:32:04.082: CRYPTO\_PKI: InsertCertData: issuer name = 30  
61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 13 30 11 06 03 55 04 08 13 0A 63 61 6C 69 66 6F 72  
6E 69 61 31 11 30 0F 06 03 55 04 07 13 08 73 61 6E 20 6A 6F 73 65 31 0C 30 0A 06 03 55 04 0A 13  
03 74 61 63 31 0E 30 0C 06 03 55 04 0B 13 05 63 69 73 63 6F 31 0C 30 0A 06 03 55 04 03 13 03 76  
70 6E Oct 28 02:32:04.094: CRYPTO\_PKI: InsertCertData: serial number = 14 6C F1 A9 00 00 00 00  
00 08 Oct 28 02:32:04.098: CRYPTO\_PKI: WARNING: Certificate, private key or CRL was not found  
while selecting CRL Oct 28 02:32:04.106: CRYPTO\_PKI: InsertCertData: subject name = 30 81 83 31  
20 30 1E 06 09 2A 86 48 86 F7 0D 01 hex data omitted 70 6B 69 2D 72 61 Oct 28 02:32:04.122:  
CRYPTO\_PKI: InsertCertData: issuer name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex  
data omitted 76 70 6E Oct 28 02:32:04.134: CRYPTO\_PKI: InsertCertData: serial number = 14 6C F1  
A9 00 00 00 00 08 Oct 28 02:32:04.138: CRYPTO\_PKI: InsertCertData: subject name = 30 81 83 31  
20 30 1E 06 09 2A 86 48 86 F7 0D 01 hex data omitted 70 6B 69 2D 72 61 Oct 28 02:32:04.154:  
CRYPTO\_PKI: InsertCertData: issuer name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 13 30  
11 06 03 55 04 08 13 0A 63 61 6C 69 66 6F 72 6E 69 61 31 11 30 0F 06 03 55 04 07 13 08 73 61 6E  
20 6A 6F 73 65 31 0C 30 0A 06 03 55 04 0A 13 03 74 61 63 31 0E 30 0C 06 03 55 04 0B 13 05 63 69  
73 63 6F 31 0C 30 0A 06 03 55 04 03 13 03 76 70 6E Oct 28 02:32:04.166: CRYPTO\_PKI:  
InsertCertData: serial number = 14 6C F2 85 00 00 00 00 09 Oct 28 02:32:04.174: CRYPTO\_PKI:  
InsertCertData: subject name = 30 61 31 0B 30 09 06 03 55 04 06 13 02 55 53 31 hex data omitted  
76 70 6E Oct 28 02:32:04.186: CRYPTO\_PKI: InsertCertData: issuer name = 30 61 31 0B 30 09 06 03  
55 04 06 13 02 55 53 31 13 30 11 06 03 55 04 08 13 0A 63 61 6C 69 66 6F 72 6E 69 61 31 11 30 0F  
06 03 55 04 07 13 08 73 61 6E 20 6A 6F 73 65 31 0C 30 0A 06 03 55 04 0A 13 03 74 61 63 31 0E 30  
0C 06 03 55 04 0B 13 05 63 69 73 63 6F 31 0C 30 0A 06 03 55 04 03 13 03 76 70 6E Oct 28  
02:32:04.202: CRYPTO\_PKI: InsertCertData: serial number = 3E 34 CD 19 93 92 A0 91 46 21 EA 77 8B  
13 F3 57 Oct 28 02:32:04.202: CRYPTO\_PKI: crypto\_process\_ra\_certs(trust\_point=caserver2) Oct 28  
02:32:04.206: CRYPTO\_PKI: transaction PKCSReq completed Oct 28 02:32:04.206: CRYPTO\_PKI: status:  
Oct 28 02:32:04.399: CRYPTO\_PKI:Write out pkcs#10 content:347 30 82 01 57 30 82 01 01 02 01 00  
30 67 31 15 30 hex data omitted 79 A3 FC A6 13 E5 35 5B 6E 48 6D Oct 28 02:32:04.527:  
CRYPTO\_PKI:Enveloped Data for trustpoint caserver2... 30 80 06 09 2A 86 48 86 F7 0D 01 07 03 A0  
80 30 hex data omitted 04 08 69 29 B2 72 10 92 09 AF 00 00 00 00 00 00 00 00 00 00 Oct 28  
02:32:04.807: CRYPTO\_PKI:Signed Data for trustpoint caserver2 (2129 bytes) 30 80 06 09 2A 86 48

86 F7 0D 01 07 02 A0 80 30 hex data omitted F0 20 30 3F 15 41 BD A6 F5 00 00 00 00 00 00 00 00  
Oct 28 02:32:05.080: CRYPTO\_PKI: can not resolve server name/IP address Oct 28 02:32:05.084:  
CRYPTO\_PKI: Using unresolved IP Address 171.69.89.111 Oct 28 02:32:05.088: CRYPTO\_PKI: http  
connection opened Oct 28 02:32:07.292: CRYPTO\_PKI:Write out pkcs#10 content:347 30 82 01 57 30  
82 01 01 02 01 00 30 67 31 15 30 13 06 03 55 04 0B 13 0C 52 4F 4D 45 20 4F 3D 49 hex data  
omitted A5 FF 13 4A CF B0 2B 0C A8 7D BF Oct 28 02:32:07.416: CRYPTO\_PKI:Enveloped Data for  
trustpoint caserver2... 30 80 06 09 2A 86 48 86 F7 0D 01 07 03 A0 80 30 hex data omitted 00 00  
00 00 Oct 28 02:32:07.716: CRYPTO\_PKI:Signed Data for trustpoint caserver2 (2129 bytes) 30 80 06  
09 2A 86 48 86 F7 0D 01 07 02 A0 80 30 hex data omitted 0A F2 8F 78 FB 4E 6B C2 CB 00 00 00 00  
00 00 00 00 Oct 28 02:32:07.989: CRYPTO\_PKI: can not resolve server name/IP address Oct 28  
02:32:07.989: CRYPTO\_PKI: Using unresolved IP Address 171.69.89.111 Oct 28 02:32:08.049:  
CRYPTO\_PKI: http connection opened Oct 28 02:32:10.064: CRYPTO\_PKI: received msg of 2012 bytes  
Oct 28 02:32:10.064: CRYPTO\_PKI: HTTP response header: HTTP/1.1 200 OK Server: Microsoft-IIS/5.0  
Date: Mon, 28 Oct 2002 09:31:20 GMT Content-Length: 1866 Content-Type: application/x-pki-message  
Oct 28 02:32:10.064: CRYPTO\_PKI:Received pki message (PKCS7) for trustpoint caserver2: 1866  
bytes 30 82 07 46 06 09 2A 86 48 86 F7 0D 01 07 02 A0 hex data omitted 6D DB 94 FF 71 DD A0 E6  
1B E9 31 66 76 D2 5C FC Oct 28 02:32:11.070: **%CRYPTO-6-CERTRET: Certificate received from  
Certificate Authority** Oct 28 02:32:31.075: CRYPTO\_PKI: received msg of 2012 bytes Oct 28  
02:32:31.075: CRYPTO\_PKI: HTTP response header: HTTP/1.1 200 OK Server: Microsoft-IIS/5.0 Date:  
Mon, 28 Oct 2002 09:31:23 GMT Content-Length: 1866 Content-Type: application/x-pki-message Oct  
28 02:32:31.079: CRYPTO\_PKI:Received pki message (PKCS7) for trustpoint caserver2: 1866 bytes 30  
82 07 46 06 09 2A 86 48 86 F7 0D 01 07 02 A0 hex data omitted 95 4B D4 80 86 DC 91 FF F2 C8 30  
CF 20 42 07 BE BA F2 B1 6A 9A 24 FC 46 35 61 Oct 28 02:32:31.343: CRYPTO\_PKI: InsertCertData:  
subject name = 30 81 83 31 20 30 1E 06 09 2A 86 48 86 F7 0D 01 hex data omitted 70 6B 69 2D 72  
61 Oct 28 02:32:31.359: CRYPTO\_PKI: InsertCertData: issuer name = 30 61 31 0B 30 09 06 03 55 04  
06 13 02 55 53 31 hex data omitted 76 70 6E Oct 28 02:32:31.375: CRYPTO\_PKI: InsertCertData:  
serial number = 14 6C F1 A9 00 00 00 00 08 Oct 28 02:32:31.379: CRYPTO\_PKI: WARNING:  
Certificate, private key or CRL was not found while selecting CRL Oct 28 02:32:31.451:  
CRYPTO\_PKI: signed attr: pki-message-type: 13 01 33 Oct 28 02:32:31.455: CRYPTO\_PKI: signed  
attr: pki-status: 13 01 30 Oct 28 02:32:31.455: CRYPTO\_PKI: signed attr: pki-recipient-nonce: 04  
10 0C CF 22 65 E3 50 72 E0 0C 59 42 A2 54 6F 1F 6B Oct 28 02:32:31.459: CRYPTO\_PKI: signed attr:  
pki-transaction-id: 13 20 34 39 36 31 38 32 36 35 37 42 33 39 33 34 44 45 38 34 33 44 43 33 42  
31 42 33 36 32 41 46 34 33 Oct 28 02:32:31.467: **CRYPTO\_PKI: status = 100: certificate is granted**  
Oct 28 02:32:31.467: CRYPTO\_PKI:Verified signed data for trustpoint caserver2 (1299 bytes): 30  
82 05 0F 06 09 2A 86 48 86 F7 0D 01 07 03 A0 hex data omitted 0B 7E 8B 1F 53 17 7E 13 BC 62 9A  
3E F5 13 44 D6 2C CE 8F Oct 28 02:32:31.800: CRYPTO\_PKI:Decrypted enveloped content: 30 82 03 FE  
06 09 2A 86 48 86 F7 0D 01 07 02 A0 hex data omitted EF 3D 6E 15 63 C3 3C F9 79 54 BA 6D 57 68  
5B 43 31 00 Oct 28 02:32:31.988: CRYPTO\_PKI: InsertCertData: subject name = 30 6B 31 11 30 0F 06  
03 55 04 05 13 08 37 32 31 hex data omitted 0C 52 4F 4D 45 20 4F 3D 49 54 41 4C 59 Oct 28  
02:32:32.000: CRYPTO\_PKI: InsertCertData: issuer name = 30 61 31 0B 30 09 06 03 55 04 06 13 02  
55 53 31 hex data omitted 63 69 73 63 6F 31 0C 30 0A 06 03 55 04 03 13 03 76 70 6E Oct 28  
02:32:32.016: CRYPTO\_PKI: InsertCertData: serial number = 06 Oct 28 02:32:32.116:  
CRYPTO\_PKI:removing superceded cert serial #: 611C41E00000000000037 Oct 28 02:32:32.120:  
CRYPTO\_PKI:removing superceded cert serial #: 611C36240000000000036 **Oct 28 02:32:42.121:**  
**CRYPTO\_PKI: All enrollment requests completed for trustpoint caserver2.** 2611-VPN#show crypto key  
mypubkey rsa % Key pair was generated at: 00:14:06 UTC Mar 1 1993 Key name: ciscovpn Usage:  
Signature Key Key Data: 305C300D 06092A86 4886F70D 01010105 00034B00 30480241 00A2DE57 2C7A4555  
BF87D3CC 4A260DBF 56574554 472FC72C 0461A35B E41B5B53 BE81A47E 264A68D7 08662555 27E4E301  
2AF04B1C E472F70B 74DF38A0 6EB286F9 01020301 0001 % Key pair was generated at: 00:14:10 UTC Mar  
1 1993 Key name: ciscovpn Usage: Encryption Key Key Data: 305C300D 06092A86 4886F70D 01010105  
00034B00 30480241 00D10224 8CBEC2D7 B517DF99 7363717D 6F6CA0F1 83FB7874 E60BB169 CD4AD9CA  
92E04143 16D4D253 5CBF212F FF6268A5 329AB988 2655568C 8EC19017 6F4A4C86 43020301 0001 % Key pair  
was generated at: 02:32:01 UTC Oct 28 2002 **Key name: tacvpn Usage: Signature Key** Key Data:  
305C300D 06092A86 4886F70D 01010105 00034B00 30480241 00BFC0C4 6217E11E 96447AE7 3579A8AC  
0E3354BD 54080ABD 32A94C9D CAF009A DD441CD4 7962C6E8 82A6C63D DCBF454A 342B0815 3C7FF706  
583316D3 ABF7E53D 51020301 0001 *!--- The RSA key pair was regenerated with the !--- reenroll of  
the identity certificate.* % Key pair was generated at: 02:32:02 UTC Oct 28 2002 **Key name: tacvpn**  
**Usage: Encryption Key** Key Data: 305C300D 06092A86 4886F70D 01010105 00034B00 30480241 00E65D19  
513BCF3C 486F722E 9E9EB410 E26A8BA0 F492C824 AF276EB4 53F5D22C 5BE90B52 91889E0E C896DF08  
E4D3A899 B8F6C8CE 9884B4EE 49C787D5 DFFC9907 29020301 0001 % Key pair was generated at: 11:33:57  
UTC Oct 28 2002 Key name: ciscovpn.server Usage: Encryption Key Key Data: 307C300D 06092A86  
4886F70D 01010105 00036B00 30680261 00BBD14F A16AE1D8 98D25643 0A5BCA1B BE3809DA EED3672B  
A0CA07F3 E221A31C 3D64B59B 62A145B1 82BE03D5 5D7FA248 064BA826 CFC35CAB 330CDCDD 8994F95D  
450580DC 2B003FE1 EB834755 AC083989 4F058F63 2E00CD3A 720075F2 500D38DE C1020301 0001 2611-VPN#

```

show crypto ca certificate Certificate Status: Available Certificate Serial Number:
06C28C8B00000000003B Certificate Usage: Encryption Issuer: CN = vpn OU = cisco O = tac L = san
jose ST = california C = US Subject: Name: 2611-vpn.cisco.com IP Address: 172.16.172.35 Serial
Number: 721959E3 OU = "ROME O=ITALY" OID.1.2.840.113549.1.9.2 = 2611-vpn.cisco.com
OID.1.2.840.113549.1.9.8 = 172.16.172.35 OID.2.5.4.5 = 721959E3 CRL Distribution Point:
http://tac-2hq8cg5ti0h/CertEnroll/vpn.crl Validity Date: start date: 09:21:23 UTC Oct 28 2002 !-
-- The CA server2 issued a new !--- identity certificate with a new renew date. end date:
09:31:23 UTC Oct 29 2002 renew date: 09:31:20 UTC Oct 29 2002 Associated Trustpoints: caserver2
Certificate Status: Available Certificate Serial Number: 06C2807F00000000003A Certificate Usage:
Signature Issuer: CN = vpn OU = cisco O = tac L = san jose ST = california C = US Subject: Name:
2611-vpn.cisco.com IP Address: 172.16.172.35 Serial Number: 721959E3 OU = "ROME O=ITALY"
OID.1.2.840.113549.1.9.2 = 2611-vpn.cisco.com OID.1.2.840.113549.1.9.8 = 172.16.172.35
OID.2.5.4.5 = 721959E3 /CRL Distribution Point: http://tac-2hq8cg5ti0h/CertEnroll/vpn.crl
Validity Date: start date: 09:21:20 UTC Oct 28 2002 end date: 09:31:20 UTC Oct 29 2002
Associated Trustpoints: caserver2 CA Certificate Status: Available Certificate Serial Number:
3E34CD199392A0914621EA778B13F357 Certificate Usage: Signature Issuer: CN = vpn OU = cisco O =
tac L = san jose ST = california C = US Subject: CN = vpn OU = cisco O = tac L = san jose ST =
california C = US CRL Distribution Point: http://tac-2hq8cg5ti0h/CertEnroll/vpn.crl Validity
Date: start date: 04:19:50 UTC Dec 7 2001 end date: 04:29:42 UTC Dec 7 2003 Associated
Trustpoints: caserver2 CA Certificate Status: Available Certificate Serial Number:
0E7EC1B68A2F14BD4C4515AF44C45732 Certificate Usage: Signature Issuer: CN = SJVPNTAC-CAServer OU
= TAC-VPN-SJ O = Cisco Systems L = San Jose ST = CA C = US Subject: CN = SJVPNTAC-CAServer OU =
TAC-VPN-SJ O = Cisco Systems L = San Jose ST = CA C = US CRL Distribution Point: http://ca-
server/CertEnroll/SJVPNTAC-CAServer.crl Validity Date: start date: 20:52:48 UTC Sep 17 2002 end
date: 21:02:37 UTC Sep 17 2017 Associated Trustpoints: caserver1 Certificate Status: Available
Certificate Serial Number: 6103EE0A000000000038 Certificate Usage: Signature Issuer: CN =
SJVPNTAC-CAServer OU = TAC-VPN-SJ O = Cisco Systems L = San Jose ST = CA C = US Subject: Name:
2611-vpn.cisco.com IP Address: 172.16.172.35 Serial Number: 721959E3 OU = "PARIS O=FRANCE"
OID.1.2.840.113549.1.9.2 = 2611-vpn.cisco.com OID.1.2.840.113549.1.9.8 = 172.16.172.35
OID.2.5.4.5 = 721959E3 CRL Distribution Point: http://ca-server/CertEnroll/SJVPNTAC-CAServer.crl
Validity Date: start date: 03:33:05 UTC Oct 26 2002 end date: 03:43:05 UTC Oct 26 2003
Associated Trustpoints: caserver1 Certificate Status: Available Certificate Serial Number:
6104020F000000000039 Certificate Usage: Encryption Issuer: CN = SJVPNTAC-CAServer OU = TAC-VPN-
SJ O = Cisco Systems L = San Jose ST = CA C = US Subject: Name: 2611-vpn.cisco.com IP Address:
172.16.172.35 Serial Number: 721959E3 OU = "PARIS O=FRANCE" OID.1.2.840.113549.1.9.2 = 2611-
vpn.cisco.com OID.1.2.840.113549.1.9.8 = 172.16.172.35 OID.2.5.4.5 = 721959E3 CRL Distribution
Point: http://ca-server/CertEnroll/SJVPNTAC-CAServer.crl Validity Date: start date: 03:33:10 UTC
Oct 26 2002 end date: 03:43:10 UTC Oct 26 2003 renew date: 03:43:05 UTC Oct 26 2003 Associated
Trustpoints: caserver1 !--- Router with the new certificate !--- after automatic reenrollment.
2611-VPN#show run Building configuration... Current configuration : 15523 bytes ! ! Last
configuration change at 19:31:48 UTC Sat Oct 26 2002 ! NVRAM config last updated at 23:37:39 UTC
Sun Oct 27 2002 ! version 12.2 service timestamps debug datetime msec service timestamps log
datetime msec no service password-encryption ! hostname 2611-VPN ! ! memory-size iomem 10 ip
subnet-zero ! ! ip domain name cisco.com ip host caserver2 171.69.89.111 ip host caserver1
171.69.89.125 ! ! crypto ca trustpoint caserver1 enrollment retry period 5 enrollment mode ra
enrollment url http://171.69.89.125:80/certsrv/mscep/mscep.dll usage ike serial-number fqdn
2611-vpn.cisco.com ip-address Ethernet0/0 password 7 011D090A5E subject-name OU=PARIS O=FRANCE
crl optional rsakeypair ciscovpn auto-enroll regenerate ! crypto ca trustpoint caserver2
enrollment retry period 5 enrollment mode ra enrollment url
http://171.69.89.111:80/certsrv/mscep/mscep.dll usage ike serial-number fqdn 2611-vpn.cisco.com
ip-address Ethernet0/0 password 7 151C040201 subject-name OU=ROME O=ITALY crl optional
rsakeypair tacvpn auto-enroll regenerate crypto ca certificate chain caserver1 certificate ca
0E7EC1B68A2F14BD4C4515AF44C45732 308202BE 30820268 A0030201 0202100E 7EC1B68A 2F14BD4C 4515AF44
C4573230 0D06092A 864886F7 0D010105 05003076 310B3009 06035504 06130255 53310B30 !---
Certificate is abbreviated for easier viewing. quit certificate 6103EE0A000000000038 3082040F
308203B9 A0030201 02020A61 03EE0A00 00000000 38300D06 092A8648 86F70D01 01050500 3076310B
30090603 55040613 02555331 0B300906 03550408 !--- Certificate is abbreviated for easier viewing.
quit certificate 6104020F000000000039 3082040F 308203B9 A0030201 02020A61 04020F00 00000000
39300D06 092A8648 86F70D01 01050500 3076310B 30090603 55040613 02555331 0B300906 03550408 !---
Certificate is abbreviated for easier viewing. quit crypto ca certificate chain caserver2
certificate 06C28C8B00000000003B 308203CF 30820379 A0030201 02020A06 C28C8B00 00000000 3B300D06
092A8648 86F70D01 01050500 3061310B 30090603 55040613 02555331 13301106 03550408 !---
Certificate is abbreviated for easier viewing. 97363 quit certificate 06C2807F00000000003A
308203CF 30820379 A0030201 02020A06 C2807F00 00000000 3A300D06 092A8648 !--- Certificate is

```

```
abbreviated for easier viewing. quit certificate ca 3E34CD199392A0914621EA778B13F357 30820284
3082022E A0030201 0202103E 34CD1993 92A09146 21EA778B 13F35730 0D06092A 864886F7 0D010105
05003061 310B3009 06035504 06130255 53311330 !--- Certificate is abbreviated for easier viewing.
quit ! crypto isakmp policy 10 hash md5 crypto isakmp identity hostname ! ! crypto ipsec
transform-set myset esp-des esp-md5-hmac ! crypto map vpn 10 ipsec-isakmp set peer 172.16.172.45
set transform-set myset match address 101 crypto map vpn 20 ipsec-isakmp set peer 172.16.172.51
set transform-set myset match address 102 crypto map vpn 30 ipsec-isakmp set peer 172.16.172.53
set transform-set myset match address 103 ! ! ! ! ! ! ! ! ! ! mta receive maximum-recipients
0 ! ! ! ! interface Ethernet0/0 ip address 172.16.172.35 255.255.255.240 half-duplex crypto map
vpn interface Ethernet0/1 ip address 192.168.4.1 255.255.255.0 half-duplex ! interface Serial1/0
no ip address shutdown ! interface Serial1/1 no ip address shutdown ! interface Serial1/2 no ip
address shutdown ! interface Serial1/3 no ip address shutdown ! ip classless ip route 0.0.0.0
0.0.0.0 172.16.172.33 ip http server ! ! access-list 101 permit ip 192.168.4.0 0.0.0.255
20.1.1.0 0.0.0.255 access-list 102 permit ip 192.168.4.0 0.0.0.255 3.3.3.0 0.0.0.255 access-list
103 permit ip 192.168.4.0 0.0.0.255 200.1.1.0 0.0.0.255 access-list 169 deny ip host
172.16.172.60 any access-list 169 deny ip host 172.16.172.61 any access-list 169 deny ip host
172.16.172.62 any access-list 169 permit ip any any ! call rsvp-sync ! ! mgcp profile default !
! ! dial-peer cor custom ! line con 0 exec-timeout 0 0 line aux 0 line vty 0 4 login ! ! end
2611-VPN#
```

## Troubleshooting

En esta sección encontrará información que puede utilizar para solucionar problemas de configuración.

### Comandos para resolución de problemas

La herramienta [Output Interpreter](#) (sólo para clientes [registrados](#)) permite utilizar algunos comandos “show” y ver un análisis del resultado de estos comandos.

**Nota:** [Antes de ejecutar un comando de depuración, consulte Información importante sobre comandos de depuración.](#)

- **debug crypto pki transaction**
- **debug crypto pki messages**
- **debug crypto ipsec**
- [debug crypto isakmp](#)

### Depuración en los routers

El IKE y los debugs del IPSec del tres Routers se muestran en esta salida. Durante las negociaciones IKE con un peer IPSec, el 2600 Router tiene que decidir qué servidor de CA a utilizar. En el escenario de prueba, el 1720-1 y los 7204 inició el túnel IPsec al 2600-VPN Router.

Esta salida muestra los debugs del IPSec IKE/en el 2611-VPN Router con los **comandos show crypto**.

```
2611-VPN#show debug Cryptographic Subsystem: Crypto ISAKMP debugging is on Crypto IPSEC
debugging is on !--- Debugs on the router when the 1720-1 router has initiated !--- an IPSec
tunnel to the router. Oct 27 22:20:23.337: ISAKMP (0:0): received packet from 172.16.172.45
dport 500 sport 500 (N) NEW SA Oct 27 22:20:23.337: ISAKMP: local port 500, remote port 500 Oct
27 22:20:23.341: ISAKMP (0:408): Input = IKE_MESG_FROM_PEER, IKE_MM_EXCH Oct 27 22:20:23.341:
ISAKMP (0:408): Old State = IKE_READY New State = IKE_R_MM1 Oct 27 22:20:23.341: ISAKMP (0:408):
processing SA payload. message ID = 0 Oct 27 22:20:23.341: ISAKMP (0:408): Checking ISAKMP
transform 1 against priority 10 policy Oct 27 22:20:23.341: ISAKMP: encryption DES-CBC Oct 27
22:20:23.341: ISAKMP: hash MD5 Oct 27 22:20:23.345: ISAKMP: default group 1 Oct 27 22:20:23.345:
```

ISAKMP: auth RSA sig Oct 27 22:20:23.345: ISAKMP: life type in seconds Oct 27 22:20:23.345:  
ISAKMP: life duration (VPI) of 0x0 0x1 0x51 0x80 Oct 27 22:20:23.345: ISAKMP (0:408): atts are  
acceptable. Next payload is 3 Oct 27 22:20:23.389: ISAKMP (0:408): Input = IKE\_MSG\_INTERNAL,  
IKE\_PROCESS\_MAIN\_MODE Oct 27 22:20:23.389: ISAKMP (0:408): Old State = IKE\_R\_MM1 New State =  
IKE\_R\_MM1 Oct 27 22:20:23.389: ISAKMP (0:408): sending packet to 172.16.172.45 my\_port 500  
peer\_port 500 (R) MM\_SA\_SETUP Oct 27 22:20:23.393: ISAKMP (0:408): Input = IKE\_MSG\_INTERNAL,  
IKE\_PROCESS\_COMPLETE Oct 27 22:20:23.393: ISAKMP (0:408): Old State = IKE\_R\_MM1 New State =  
IKE\_R\_MM2 Oct 27 22:20:23.538: ISAKMP (0:408): received packet from 172.16.172.45 dport 500  
sport 500 (R) MM\_SA\_SETUP Oct 27 22:20:23.538: ISAKMP (0:408): Input = IKE\_MSG\_FROM\_PEER,  
IKE\_MM\_EXCH Oct 27 22:20:23.538: ISAKMP (0:408): Old State = IKE\_R\_MM2 New State = IKE\_R\_MM3 Oct  
27 22:20:23.542: ISAKMP (0:408): processing KE payload. message ID = 0 Oct 27 22:20:23.582:  
ISAKMP (0:408): processing NONCE payload. message ID = 0 Oct 27 22:20:23.626: ISAKMP (0:408):  
SKEYID state generated Oct 27 22:20:23.630: ISAKMP (0:408): processing CERT\_REQ payload. message  
ID = 0 Oct 27 22:20:23.630: ISAKMP (0:408): peer wants a CT\_X509\_SIGNATURE cert Oct 27  
22:20:23.634: ISAKMP (0:408): **peer want cert issued by CN = SJVPNTAC-CAServer, OU = TAC-VPN-SJ,  
O = Cisco Systems, L = San Jose, ST = CA, C = US !--- The router has determined that the !---  
IPSec peer sends a certificate !--- that CA server1 has issued.** Oct 27 22:20:23.642: ISAKMP  
(0:408): **Choosing trustpoint caserver1 as issuer** Oct 27 22:20:23.642: ISAKMP (0:408): processing  
vendor id payload Oct 27 22:20:23.642: ISAKMP (0:408): vendor ID is Unity Oct 27 22:20:23.642:  
ISAKMP (0:408): processing vendor id payload Oct 27 22:20:23.646: ISAKMP (0:408): vendor ID is  
DPD Oct 27 22:20:23.646: ISAKMP (0:408): processing vendor id payload Oct 27 22:20:23.646:  
ISAKMP (0:408): speaking to another IOS box! Oct 27 22:20:23.646: ISAKMP (0:408): Input =  
IKE\_MSG\_INTERNAL, IKE\_PROCESS\_MAIN\_MODE Oct 27 22:20:23.646: ISAKMP (0:408): Old State =  
IKE\_R\_MM3 New State = IKE\_R\_MM3 Oct 27 22:20:23.666: ISAKMP (0:408): sending packet to  
172.16.172.45 my\_port 500 peer\_port 500 (R) MM\_KEY\_EXCH Oct 27 22:20:23.670: ISAKMP (0:408):  
Input = IKE\_MSG\_INTERNAL, IKE\_PROCESS\_COMPLETE Oct 27 22:20:23.670: ISAKMP (0:408): Old State =  
IKE\_R\_MM3 New State = IKE\_R\_MM4 Oct 27 22:20:24.207: ISAKMP (0:408): received packet from  
172.16.172.45 dport 500 sport 500 (R) MM\_KEY\_EXCH Oct 27 22:20:24.219: ISAKMP (0:408): Input =  
IKE\_MSG\_FROM\_PEER, IKE\_MM\_EXCH Oct 27 22:20:24.219: ISAKMP (0:408): Old State = IKE\_R\_MM4 New  
State = IKE\_R\_MM5 Oct 27 22:20:24.223: ISAKMP (0:408): processing ID payload. message ID = 0 Oct  
27 22:20:24.223: ISAKMP (408): Process ID payload type : 2 FQDN name : 1720-1.tac.com protocol :  
17 port : 500 length : 14 Oct 27 22:20:24.223: ISAKMP (0:408): processing CERT payload. message  
ID = 0 Oct 27 22:20:24.223: ISAKMP (0:408): processing a CT\_X509\_SIGNATURE cert Oct 27  
22:20:24.267: ISAKMP (0:408): peer's pubkey isn't cached Oct 27 22:20:24.319: ISAKMP (0:408):  
cert approved with warning **!--- Subject name of 1720-1 router's !--- certificates from CA  
server1. !--- FQDN of 1720-1.** Oct 27 22:20:24.383: ISAKMP (0:408): **OU = MADRID O=SPAIN** Oct 27  
22:20:24.419: ISAKMP (0:408): processing SIG payload. message ID = 0 Oct 27 22:20:24.419: ISAKMP  
(408): **sa->peer.name = , sa->peer.id.id.fqdn.fqdn = 1720-1.tac.com** Oct 27 22:20:24.475:  
ISAKMP (0:408): processing NOTIFY\_INITIAL\_CONTACT protocol 1 spi 0, message ID = 0, sa =  
82F6FE80 Oct 27 22:20:24.475: ISAKMP (0:408): **Process initial contact, bring down existing phase  
1 and 2 SA's with local 172.16.172.35 remote 172.16.172.45** Oct 27 22:20:24.479: ISAKMP (0:408):  
**SA has been authenticated with 172.16.172.45** Oct 27 22:20:24.479: ISAKMP (0:408): Input =  
IKE\_MSG\_INTERNAL, IKE\_PROCESS\_MAIN\_MODE Oct 27 22:20:24.479: ISAKMP (0:408): Old State =  
IKE\_R\_MM5 New State = IKE\_R\_MM5 Oct 27 22:20:24.479: IPSEC(key\_engine): got a queue event... Oct  
27 22:20:24.483: ISAKMP (0:408): SA is doing RSA signature authentication using id type ID\_FQDN  
Oct 27 22:20:24.483: ISAKMP (408): ID payload next-payload : 6 type : 2 FQDN name : 2611-  
vpn.cisco.com protocol : 17 port : 0 length : 22 Oct 27 22:20:24.483: ISAKMP (408): Total  
payload length: 26 Oct 27 22:20:24.495: ISAKMP: growing send buffer from 1024 to 3072 Oct 27  
22:20:24.507: ISAKMP (0:408): using the caserver1 trustpoint's keypair to sign Oct 27  
22:20:24.956: ISAKMP (0:408): sending packet to 172.16.172.45 my\_port 500 peer\_port 500 (R)  
MM\_KEY\_EXCH Oct 27 22:20:24.956: ISAKMP (0:408): Input = IKE\_MSG\_INTERNAL, IKE\_PROCESS\_COMPLETE  
Oct 27 22:20:24.956: ISAKMP (0:408): Old State = IKE\_R\_MM5 New State = IKE\_P1\_COMPLETE Oct 27  
22:20:24.960: ISAKMP (0:408): Input = IKE\_MSG\_INTERNAL, IKE\_PHASE1\_COMPLETE Oct 27  
22:20:24.960: ISAKMP (0:408): Old State = IKE\_P1\_COMPLETE New State = IKE\_P1\_COMPLETE Oct 27  
22:20:25.168: ISAKMP (0:408): received packet from 172.16.172.45 dport 500 sport 500 (R) QM\_IDLE  
Oct 27 22:20:25.172: ISAKMP: set new node -2090109070 to QM\_IDLE Oct 27 22:20:25.192: ISAKMP  
(0:408): processing HASH payload. message ID = -2090109070 Oct 27 22:20:25.192: ISAKMP (0:408):  
processing SA payload. message ID = -2090109070 Oct 27 22:20:25.192: ISAKMP (0:408): Checking  
IPSec proposal 1 Oct 27 22:20:25.192: ISAKMP: transform 1, ESP\_DES Oct 27 22:20:25.192: ISAKMP:  
attributes in transform: Oct 27 22:20:25.192: ISAKMP: encaps is 1 Oct 27 22:20:25.192: ISAKMP:  
SA life type in seconds Oct 27 22:20:25.196: ISAKMP: SA life duration (basic) of 3600 Oct 27  
22:20:25.196: ISAKMP: SA life type in kilobytes Oct 27 22:20:25.196: ISAKMP: SA life duration  
(VPI) of 0x0 0x46 0x50 0x0 Oct 27 22:20:25.196: ISAKMP: authenticator is HMAC-MD5 Oct 27  
22:20:25.196: ISAKMP (0:408): atts are acceptable. Oct 27 22:20:25.196:

IPSEC(validate\_proposal\_request): proposal part #1, (key eng. msg.) INBOUND local=172.16.172.35, remote= 172.16.172.45, local\_proxy= 192.168.4.0/255.255.255.0/0/0 (type=4), remote\_proxy= 20.1.1.0/255.255.255.0/0/0 (type=4), protocol= ESP, transform= esp-des esp-md5-hmac , lifedur= 0s and 0kb, spi= 0x0(0), conn\_id= 0, keysize= 0, flags= 0x2 Oct 27 22:20:25.200: ISAKMP (0:408): processing NONCE payload. message ID = -2090109070 Oct 27 22:20:25.200: ISAKMP (0:408): processing ID payload. message ID = -2090109070 Oct 27 22:20:25.204: ISAKMP (0:408): processing ID payload. message ID = -2090109070 Oct 27 22:20:25.204: ISAKMP (0:408): asking for 1 spis from ipsec Oct 27 22:20:25.204: ISAKMP (0:408): Node -2090109070, Input = IKE\_MSG\_FROM\_PEER, IKE\_QM\_EXCH Oct 27 22:20:25.204: ISAKMP (0:408): Old State = IKE\_QM\_READY New State = IKE\_QM\_SPI\_STARVE Oct 27 22:20:25.204: IPSEC(key\_engine): got a queue event... Oct 27 22:20:25.208: IPSEC(spi\_response): getting spi 2951036365 for SA from 172.16.172.35 to 172.16.172.45 for prot 3 Oct 27 22:20:25.208: ISAKMP: received ke message (2/1) Oct 27 22:20:25.493: ISAKMP (0:408): sending packet to 172.16.172.45 my\_port 500 peer\_port 500 (R) QM\_IDLE Oct 27 22:20:25.493: ISAKMP (0:408): Node -2090109070, Input = IKE\_MSG\_FROM\_IPSEC, IKE\_SPI\_REPLY Oct 27 22:20:25.493: ISAKMP (0:408): Old State = IKE\_QM\_SPI\_STARVE New State = IKE\_QM\_R\_QM2 Oct 27 22:20:25.577: ISAKMP (0:408): received packet from 172.16.172.45 dport 500 sport 500 (R) QM\_IDLE Oct 27 22:20:25.669: ISAKMP (0:408): Creating IPsec SAs Oct 27 22:20:25.669: inbound SA from 172.16.172.45 to 172.16.172.35 (proxy 20.1.1.0 to 192.168.4.0) Oct 27 22:20:25.669: has spi 0xAF53DCD and conn\_id 420 and flags 2 Oct 27 22:20:25.669: lifetime of 3600 seconds Oct 27 22:20:25.669: lifetime of 4608000 kilobytes Oct 27 22:20:25.669: has client flags 0x0 Oct 27 22:20:25.673: outbound SA from 172.16.172.35 to 172.16.172.45 (proxy 192.168.4.0 to 20.1.1.0 ) Oct 27 22:20:25.673: has spi 563992317 and conn\_id 421 and flags A Oct 27 22:20:25.673: lifetime of 3600 seconds Oct 27 22:20:25.673: lifetime of 4608000 kilobytes Oct 27 22:20:25.673: has client flags 0x0 Oct 27 22:20:25.673: ISAKMP (0:408): deleting node -2090109070 error FALSE reason "quick mode done (await())" Oct 27 22:20:25.673: ISAKMP (0:408): Node -2090109070, Input = IKE\_MSG\_FROM\_PEER, IKE\_QM\_EXCH Oct 27 22:20:25.677: ISAKMP (0:408): Old State = IKE\_QM\_R\_QM2 New State = IKE\_QM\_PHASE2\_COMPLETE Oct 27 22:20:25.677: IPSEC(key\_engine): got a queue event... Oct 27 22:20:25.677: IPSEC(initialize\_sas): , (key eng. msg.) INBOUND local= 172.16.172.35, remote= 172.16.172.45, local\_proxy= 192.168.4.0/255.255.255.0/0/0 (type=4), remote\_proxy= 20.1.1.0/255.255.255.0/0/0 (type=4), protocol= ESP, transform= esp-des esp-md5-hmac , lifedur= 3600s and 4608000kb, spi= 0xAF53DCD(2951036365), conn\_id= 420, keysize= 0, flags= 0x2 Oct 27 22:20:25.681: IPSEC(initialize\_sas): , (key eng. msg.) OUTBOUND local= 172.16.172.35, remote= 172.16.172.45, local\_proxy= 192.168.4.0/255.255.255.0/0/0 (type=4), remote\_proxy= 20.1.1.0/255.255.255.0/0/0 (type=4), protocol= ESP, transform= esp-des esp-md5-hmac , lifedur= 3600s and 4608000kb, spi= 0x219DD6FD(563992317), conn\_id= 421, keysize= 0, flags= 0xA Oct 27 22:20:25.681: IPSEC(add mtree): src 192.168.4.0, dest 20.1.1.0, dest\_port 0 Oct 27 22:20:25.681: IPSEC(create\_sa): sa created, (sa) sa\_dest= 172.16.172.35, sa\_prot= 50, sa\_spi= 0xAF53DCD(2951036365), sa\_trans= esp-des esp-md5-hmac , sa\_conn\_id= 420 Oct 27 22:20:25.685: IPSEC(create\_sa): sa created, (sa) sa\_dest= 172.16.172.45, sa\_prot= 50, sa\_spi= 0x219DD6FD(563992317), sa\_trans= esp-des esp-md5-hmac , sa\_conn\_id= 421 Oct 27 22:20:26.070: ISAKMP (0:407): purging SA., sa=82F7ADE0, delme=82F7ADE0 2611-VPN# 2611-VPN# 2611-VPN# 2611-VPN# *!--- Debugs on the router when the 7204-1 router has initiated !--- an IPsec tunnel to the router.* Oct 27 22:32:02.740: ISAKMP (0:0): received packet from 172.16.172.51 dport 500 sport 500 (N) NEW SA Oct 27 22:32:02.740: ISAKMP: local port 500, remote port 500 Oct 27 22:32:02.740: ISAKMP (0:412): Input = IKE\_MSG\_FROM\_PEER, IKE\_MM\_EXCH Oct 27 22:32:02.744: ISAKMP (0:412): Old State = IKE\_READY New State = IKE\_R\_MM1 Oct 27 22:32:02.744: ISAKMP (0:412): processing SA payload. message ID = 0 Oct 27 22:32:02.744: ISAKMP (0:412): Checking ISAKMP transform 1 against priority 10 policy Oct 27 22:32:02.744: ISAKMP: encryption DES-CBC Oct 27 22:32:02.744: ISAKMP: hash MD5 Oct 27 22:32:02.744: ISAKMP: default group 1 Oct 27 22:32:02.748: ISAKMP: auth RSA sig Oct 27 22:32:02.748: ISAKMP: life type in seconds Oct 27 22:32:02.748: ISAKMP: life duration (VPI) of 0x0 0x1 0x51 0x80 Oct 27 22:32:02.748: ISAKMP (0:412): atts are acceptable. Next payload is 3 Oct 27 22:32:02.792: ISAKMP (0:412): Input = IKE\_MSG\_INTERNAL, IKE\_PROCESS\_MAIN\_MODE Oct 27 22:32:02.792: ISAKMP (0:412): Old State = IKE\_R\_MM1 New State = IKE\_R\_MM1 Oct 27 22:32:02.792: ISAKMP (0:412): sending packet to 172.16.172.51 my\_port 500 peer\_port 500 (R) MM\_SA\_SETUP Oct 27 22:32:02.796: ISAKMP (0:412): Input = IKE\_MSG\_INTERNAL, IKE\_PROCESS\_COMPLETE Oct 27 22:32:02.796: ISAKMP (0:412): Old State = IKE\_R\_MM1 New State = IKE\_R\_MM2 Oct 27 22:32:02.820: ISAKMP (0:412): received packet from 172.16.172.51 dport 500 sport 500 (R) MM\_SA\_SETUP Oct 27 22:32:02.820: ISAKMP (0:412): Input = IKE\_MSG\_FROM\_PEER, IKE\_MM\_EXCH Oct 27 22:32:02.824: ISAKMP (0:412): Old State = IKE\_R\_MM2 New State = IKE\_R\_MM3 Oct 27 22:32:02.824: ISAKMP (0:412): processing KE payload. message ID = 0 Oct 27 22:32:02.868: ISAKMP (0:412): processing NONCE payload. message ID = 0 Oct 27 22:32:02.908: ISAKMP (0:412): SKEYID state generated Oct 27 22:32:02.912: ISAKMP (0:412): processing CERT\_REQ payload. message ID = 0 Oct 27 22:32:02.912: ISAKMP (0:412): peer wants a CT\_X509\_SIGNATURE cert Oct 27 22:32:02.916: ISAKMP (0:412): **peer want cert issued by CN = vpn, OU = cisco, O = tac, L =**



san jose, ST = california, C = US !--- The router has determined that the !--- IPsec peer is sending a certificate !--- that CA server2 has issued. Oct 27 22:32:02.924: ISAKMP (0:412): **Choosing trustpoint caserver2 as issuer** Oct 27 22:32:02.928: ISAKMP (0:412): processing vendor id payload Oct 27 22:32:02.928: ISAKMP (0:412): vendor ID is Unity Oct 27 22:32:02.928: ISAKMP (0:412): processing vendor id payload Oct 27 22:32:02.928: ISAKMP (0:412): vendor ID is DPD Oct 27 22:32:02.928: ISAKMP (0:412): processing vendor id payload Oct 27 22:32:02.928: ISAKMP (0:412): speaking to another IOS box! Oct 27 22:32:02.932: ISAKMP (0:412): Input = IKE\_MSG\_INTERNAL, IKE\_PROCESS\_MAIN\_MODE Oct 27 22:32:02.932: ISAKMP (0:412): Old State = IKE\_R\_MM3 New State = IKE\_R\_MM3 Oct 27 22:32:02.952: ISAKMP (0:412): sending packet to 172.16.172.51 my\_port 500 peer\_port 500 (R) MM\_KEY\_EXCH Oct 27 22:32:02.952: ISAKMP (0:412): Input = IKE\_MSG\_INTERNAL, IKE\_PROCESS\_COMPLETE Oct 27 22:32:02.952: ISAKMP (0:412): Old State = IKE\_R\_MM3 New State = IKE\_R\_MM4 Oct 27 22:32:03.016: ISAKMP (0:412): received packet from 172.16.172.51 dport 500 sport 500 (R) MM\_KEY\_EXCH Oct 27 22:32:03.032: ISAKMP (0:412): Input = IKE\_MSG\_FROM\_PEER, IKE\_MM\_EXCH Oct 27 22:32:03.032: ISAKMP (0:412): Old State = IKE\_R\_MM4 New State = IKE\_R\_MM5 Oct 27 22:32:03.032: ISAKMP (0:412): processing ID payload. message ID = 0 Oct 27 22:32:03.032: ISAKMP (412): Process ID payload type : 2 FQDN name : 7204-1.cisco.com protocol : 17 port : 500 length : 16 Oct 27 22:32:03.032: ISAKMP (0:412): processing CERT payload. message ID = 0 Oct 27 22:32:03.036: ISAKMP (0:412): processing a CT\_X509\_SIGNATURE cert Oct 27 22:32:03.076: ISAKMP (0:412): peer's pubkey isn't cached Oct 27 22:32:03.129: ISAKMP (0:412): cert approved with warning !--- **Subject name of 7204-1 router's certificate issued by CA server2.** Oct 27 22:32:03.189: ISAKMP (0:412): **OU = BERLIN O=GERMANY** Oct 27 22:32:03.229: ISAKMP (0:412): processing SIG payload. message ID = 0 !--- **FQDN of 7204-1.** Oct 27 22:32:03.229: ISAKMP (412): **sa->peer.name = , sa->peer.id.id.fqdn.fqdn = 7204-1.cisco.com** Oct 27 22:32:03.265: ISAKMP (0:412): processing NOTIFY\_INITIAL\_CONTACT protocol 1 spi 0, message ID = 0, sa = 82F69D84 Oct 27 22:32:03.269: ISAKMP (0:412): **Process initial contact, bring down existing phase 1 and 2 SA's with local 172.16.172.35 remote 172.16.172.51** Oct 27 22:32:03.269: ISAKMP (0:412): **SA has been authenticated with 172.16.172.51** Oct 27 22:32:03.269: ISAKMP (0:412): Input = IKE\_MSG\_INTERNAL, IKE\_PROCESS\_MAIN\_MODE Oct 27 22:32:03.269: ISAKMP (0:412): Old State = IKE\_R\_MM5 New State = IKE\_R\_MM5 Oct 27 22:32:03.269: IPSEC(key\_engine): got a queue event... Oct 27 22:32:03.273: ISAKMP (0:412): SA is doing RSA signature authentication using id type ID\_FQDN Oct 27 22:32:03.273: ISAKMP (412): ID payload next-payload : 6 type : 2 FQDN name : 2611-vpn.cisco.com protocol : 17 port : 0 length : 22 Oct 27 22:32:03.273: ISAKMP (412): Total payload length: 26 Oct 27 22:32:03.285: ISKAMP: growing send buffer from 1024 to 3072 Oct 27 22:32:03.297: ISAKMP (0:412): using the caserver2 trustpoint's keypair to sign Oct 27 22:32:03.762: ISAKMP (0:412): sending packet to 172.16.172.51 my\_port 500 peer\_port 500 (R) MM\_KEY\_EXCH Oct 27 22:32:03.762: ISAKMP (0:412): Input = IKE\_MSG\_INTERNAL, IKE\_PROCESS\_COMPLETE Oct 27 22:32:03.766: ISAKMP (0:412): Old State = IKE\_R\_MM5 New State = IKE\_P1\_COMPLETE Oct 27 22:32:03.766: ISAKMP (0:412): Input = IKE\_MSG\_INTERNAL, IKE\_PHASE1\_COMPLETE Oct 27 22:32:03.766: ISAKMP (0:412): Old State = IKE\_P1\_COMPLETE New State = IKE\_P1\_COMPLETE Oct 27 22:32:03.790: ISAKMP (0:412): received packet from 172.16.172.51 dport 500 sport 500 (R) QM\_IDLE Oct 27 22:32:03.790: ISAKMP: set new node 1631242332 to QM\_IDLE Oct 27 22:32:03.810: ISAKMP (0:412): processing HASH payload. message ID = 1631242332 Oct 27 22:32:03.810: ISAKMP (0:412): processing SA payload. message ID = 1631242332 Oct 27 22:32:03.810: ISAKMP (0:412): Checking IPsec proposal 1 Oct 27 22:32:03.810: ISAKMP: transform 1, ESP\_DES Oct 27 22:32:03.810: ISAKMP: attributes in transform: Oct 27 22:32:03.810: ISAKMP: encaps is 1 Oct 27 22:32:03.814: ISAKMP: SA life type in seconds Oct 27 22:32:03.814: ISAKMP: SA life duration (basic) of 3600 Oct 27 22:32:03.814: ISAKMP: SA life type in kilobytes Oct 27 22:32:03.814: ISAKMP: SA life duration (VPI) of 0x0 0x46 0x50 0x0 Oct 27 22:32:03.814: ISAKMP: authenticator is HMAC-MD5 Oct 27 22:32:03.814: ISAKMP (0:412): atts are acceptable. Oct 27 22:32:03.818: IPSEC(validate\_proposal\_request): proposal part #1, (key eng. msg.) INBOUND local=172.16.172.35, remote=172.16.172.51, local\_proxy=192.168.4.0/255.255.255.0/0/0 (type=4), remote\_proxy=3.3.3.0/255.255.255.0/0/0 (type=4), protocol=ESP, transform=esp-des esp-md5-hmac, lifedur=0s and 0kb, spi=0x0(0), conn\_id=0, keysize=0, flags=0x2 Oct 27 22:32:03.818: ISAKMP (0:412): processing NONCE payload. message ID = 1631242332 Oct 27 22:32:03.822: ISAKMP (0:412): processing ID payload. message ID = 1631242332 Oct 27 22:32:03.822: ISAKMP (0:412): processing ID payload. message ID = 1631242332 Oct 27 22:32:03.822: ISAKMP (0:412): asking for 1 spis from ipsec Oct 27 22:32:03.822: ISAKMP (0:412): Node 1631242332, Input = IKE\_MSG\_FROM\_PEER, IKE\_QM\_EXCH Oct 27 22:32:03.822: ISAKMP (0:412): Old State = IKE\_QM\_READY New State = IKE\_QM\_SPI\_STARVE Oct 27 22:32:03.822: IPSEC(key\_engine): got a queue event... Oct 27 22:32:03.826: IPSEC(spi\_response): getting spi 3365950736 for SA from 172.16.172.35 to 172.16.172.51 for prot 3 Oct 27 22:32:03.826: ISAKMP: received ke message (2/1) Oct 27 22:32:04.090: ISAKMP (0:412): sending packet to 172.16.172.51 my\_port 500 peer\_port 500 (R) QM\_IDLE Oct 27 22:32:04.094: ISAKMP (0:412): Node 1631242332, Input = IKE\_MSG\_FROM\_IPSEC, IKE\_SPI\_REPLY Oct 27 22:32:04.094: ISAKMP (0:412): Old State = IKE\_QM\_SPI\_STARVE New State =

IKE\_QM\_R\_QM2 Oct 27 22:32:04.102: ISAKMP (0:412): received packet from 172.16.172.51 dport 500 sport 500 (R) QM\_IDLE Oct 27 22:32:04.190: ISAKMP (0:412): Creating IPsec SAs Oct 27 22:32:04.190: inbound SA from 172.16.172.51 to 172.16.172.35 (proxy 3.3.3.0 to 192.168.4.0) Oct 27 22:32:04.190: has spi 0xC8A05510 and conn\_id 422 and flags 2 Oct 27 22:32:04.190: lifetime of 3600 seconds Oct 27 22:32:04.190: lifetime of 4608000 kilobytes Oct 27 22:32:04.190: has client flags 0x0 Oct 27 22:32:04.194: outbound SA from 172.16.172.35 to 172.16.172.51 (proxy 192.168.4.0 to 3.3.3.0 ) Oct 27 22:32:04.194: has spi -788374095 and conn\_id 423 and flags A Oct 27 22:32:04.194: lifetime of 3600 seconds Oct 27 22:32:04.194: lifetime of 4608000 kilobytes Oct 27 22:32:04.194: has client flags 0x0 Oct 27 22:32:04.194: ISAKMP (0:412): deleting node 1631242332 error FALSE reason "quick mode done (await())" Oct 27 22:32:04.194: ISAKMP (0:412): Node 1631242332, Input = IKE\_MSG\_FROM\_PEER, IKE\_QM\_EXCH Oct 27 22:32:04.198: ISAKMP (0:412): Old State = IKE\_QM\_R\_QM2 New State = IKE\_QM\_PHASE2\_COMPLETE Oct 27 22:32:04.198: IPSEC(key\_engine): got a queue event... Oct 27 22:32:04.198: IPSEC(initialize\_sas): , (key eng. msg.) INBOUND local= 172.16.172.35, remote= 172.16.172.51, local\_proxy= 192.168.4.0/255.255.255.0/0/0 (type=4), remote\_proxy= 3.3.3.0/255.255.255.0/0/0 (type=4), protocol= ESP, transform= esp-des esp-md5-hmac , lifedur= 3600s and 4608000kb, spi= 0xC8A05510(3365950736), conn\_id= 422, keysize= 0, flags= 0x2 Oct 27 22:32:04.202: IPSEC(initialize\_sas): , (key eng. msg.) OUTBOUND local= 172.16.172.35, remote= 172.16.172.51, local\_proxy= 192.168.4.0/255.255.255.0/0/0 (type=4), remote\_proxy= 3.3.3.0/255.255.255.0/0/0 (type=4), protocol= ESP, transform= esp-des esp-md5-hmac , lifedur= 3600s and 4608000kb, spi= 0xD1025DB1(3506593201), conn\_id= 423, keysize= 0, flags= 0xA Oct 27 22:32:04.202: IPSEC(add mtree): src 192.168.4.0, dest 3.3.3.0, dest\_port 0 Oct 27 22:32:04.202: IPSEC(create\_sa): sa created, (sa) sa\_dest= 172.16.172.35, sa\_prot= 50, sa\_spi= 0xC8A05510(3365950736), sa\_trans= esp-des esp-md5-hmac , sa\_conn\_id= 422 Oct 27 22:32:04.206: IPSEC(create\_sa): sa created, (sa) sa\_dest= 172.16.172.51, sa\_prot= 50, sa\_spi= 0xD1025DB1(3506593201), sa\_trans= esp-des esp-md5-hmac , sa\_conn\_id= 423 2611-VPN# 2611-VPN# 2611-VPN#show crypto en conn ac ID Interface IP-Address State Algorithm Encrypt Decrypt 411 Ethernet0/0 172.16.172.35 set HMAC\_MD5+DES\_56\_CB 0 0 412 Ethernet0/0 172.16.172.35 set HMAC\_MD5+DES\_56\_CB 0 0 420 Ethernet0/0 172.16.172.35 set HMAC\_MD5+DES\_56\_CB 0 8 421 Ethernet0/0 172.16.172.35 set HMAC\_MD5+DES\_56\_CB 8 0 422 Ethernet0/0 172.16.172.35 set HMAC\_MD5+DES\_56\_CB 0 9 423 Ethernet0/0 172.16.172.35 set HMAC\_MD5+DES\_56\_CB 9 0 2611-VPN# 2611-VPN# 2611-VPN# 2611-VPN# 2611-VPN#show crypto map Crypto Map "vpn" 10 ipsec-isakmp Peer = 172.16.172.45 Extended IP access list 101 access-list 101 permit ip 192.168.4.0 0.0.0.255 20.1.1.0 0.0.0.255 Current peer: 172.16.172.45 Security association lifetime: 4608000 kilobytes/3600 seconds PFS (Y/N): N Transform sets={ myset, } Crypto Map "vpn" 20 ipsec-isakmp Peer = 172.16.172.51 Extended IP access list 102 access-list 102 permit ip 192.168.4.0 0.0.0.255 3.3.3.0 0.0.0.255 Current peer: 172.16.172.51 Security association lifetime: 4608000 kilobytes/3600 seconds PFS (Y/N): N Transform sets={ myset, } Crypto Map "vpn" 30 ipsec-isakmp Peer = 172.16.172.53 Extended IP access list 103 access-list 103 permit ip 192.168.4.0 0.0.0.255 200.1.1.0 0.0.0.255 Current peer: 172.16.172.53 Security association lifetime: 4608000 kilobytes/3600 seconds PFS (Y/N): N Transform sets={ myset, } Interfaces using crypto map vpn: Ethernet0/0 2611-VPN#show crypto isa sa dst src state conn-id slot 172.16.172.35 172.16.172.51 QM\_IDLE 412 0 172.16.172.35 172.16.172.45 QM\_IDLE 411 0 2611-VPN#show crypto ipsec sa interface: Ethernet0/0 Crypto map tag: vpn, local addr. 172.16.172.35 local ident (addr/mask/prot/port): (192.168.4.0/255.255.255.0/0/0) remote ident (addr/mask/prot/port): (200.1.1.0/255.255.255.0/0/0) current\_peer: 172.16.172.53:500 PERMIT, flags={origin\_is\_acl,} #pkts encaps: 0, #pkts encrypt: 0, #pkts digest 0 #pkts decaps: 0, #pkts decrypt: 0, #pkts verify 0 #pkts compressed: 0, #pkts decompressed: 0 #pkts not compressed: 0, #pkts compr. failed: 0 #pkts not decompressed: 0, #pkts decompress failed: 0 #send errors 0, #recv errors 0 local crypto endpt.: 172.16.172.35, remote crypto endpt.: 172.16.172.53 path mtu 1500, media mtu 1500 current outbound spi: 0 inbound esp sas: inbound ah sas: inbound pcp sas: outbound esp sas: outbound ah sas: outbound pcp sas: local ident (addr/mask/prot/port): (192.168.4.0/255.255.255.0/0/0) remote ident (addr/mask/prot/port): (3.3.3.0/255.255.255.0/0/0) current\_peer: 172.16.172.51:500 PERMIT, flags={origin\_is\_acl,} #pkts encaps: 9, #pkts encrypt: 9, #pkts digest 9 #pkts decaps: 9, #pkts decrypt: 9, #pkts verify 9 #pkts compressed: 0, #pkts decompressed: 0 #pkts not compressed: 0, #pkts compr. failed: 0 #pkts not decompressed: 0, #pkts decompress failed: 0 #send errors 0, #recv errors 0 local crypto endpt.: 172.16.172.35, remote crypto endpt.: 172.16.172.51 path mtu 1500, media mtu 1500 current outbound spi: D1025DB1 inbound esp sas: spi: 0xC8A05510(3365950736) transform: esp-des esp-md5-hmac , in use settings ={Tunnel, } slot: 0, conn id: 422, flow\_id: 3, crypto map: vpn sa timing: remaining key lifetime (k/sec): (4607998/3519) IV size: 8 bytes replay detection support: Y inbound ah sas: inbound pcp sas: outbound esp sas: spi: 0xD1025DB1(3506593201) transform: esp-des esp-md5-hmac , in use settings ={Tunnel, } slot: 0, conn id: 423, flow\_id: 4, crypto map: vpn sa timing: remaining key lifetime (k/sec): (4607998/3519) IV size: 8 bytes replay detection support: Y outbound ah sas: outbound pcp sas: local ident (addr/mask/prot/port): (192.168.4.0/255.255.255.0/0/0) remote

```
ident (addr/mask/prot/port): (20.1.1.0/255.255.255.0/0/0) current_peer: 172.16.172.45:500
PERMIT, flags={origin_is_acl,} #pkts encaps: 8, #pkts encrypt: 8, #pkts digest 8 #pkts decaps:
8, #pkts decrypt: 8, #pkts verify 8 #pkts compressed: 0, #pkts decompressed: 0 #pkts not
compressed: 0, #pkts compr. failed: 0 #pkts not decompressed: 0, #pkts decompress failed: 0
#send errors 0, #recv errors 0 local crypto endpt.: 172.16.172.35, remote crypto endpt.:
172.16.172.45 path mtu 1500, media mtu 1500 current outbound spi: 5F57E177 inbound esp sas: spi:
0xC7DB301B(3353030683) transform: esp-des esp-md5-hmac , in use settings = {Tunnel, } slot: 0,
conn id: 420, flow_id: 1, crypto map: vpn sa timing: remaining key lifetime (k/sec):
(4607998/3410) IV size: 8 bytes replay detection support: Y inbound ah sas: inbound pcp sas:
outbound esp sas: spi: 0x5F57E177(1599594871) transform: esp-des esp-md5-hmac , in use settings
={Tunnel, } slot: 0, conn id: 421, flow_id: 2, crypto map: vpn sa timing: remaining key lifetime
(k/sec): (4607998/3409) IV size: 8 bytes replay detection support: Y outbound ah sas: outbound
pcp sas: 2611-VPN# 2611-VPN#
```

**Esta salida muestra los debugs del IPSec IKE/en el 1720-1 Router con los comandos show crypto. Esta salida inicia un túnel IPsec al 2611-VPN Router.**

```
Oct 27 22:21:04.994: IPSEC(sa_request): ,
(key eng. msg.) OUTBOUND local= 172.16.172.45, remote= 172.16.172.35,
local_proxy= 20.1.1.0/255.255.255.0/0/0 (type=4),
remote_proxy= 192.168.4.0/255.255.255.0/0/0 (type=4),
protocol= ESP, transform= esp-des esp-md5-hmac ,
lifedur= 3600s and 4608000kb,
spi= 0x219DD6FD(563992317), conn_id= 0, keysize=
0, flags= 0x400C
Oct 27 22:21:04.998: ISAKMP: received ke message (1/1)
Oct 27 22:21:04.998: ISAKMP: local port 500, remote port 500
Oct 27 22:21:05.002: ISAKMP (0:3): Input = IKE_MSG_FROM_IPSEC, IKE_SA_REQ_MM
Oct 27 22:21:05.002: ISAKMP (0:3): Old State = IKE_READY New
State = IKE_I_MM1
Oct 27 22:21:05.002: ISAKMP (0:3): beginning Main Mode exchange
Oct 27 22:21:05.002: ISAKMP (0:3): sending packet to 172.16.172.35
(I) MM_NO_STATE
Oct 27 22:21:05.062: ISAKMP (0:3): received packet from 172.16.172.35
(I) MM_NO_STATE
Oct 27 22:21:05.062: ISAKMP (0:3): Input = IKE_MSG_FROM_PEER, IKE_MM_EXCH
Oct 27 22:21:05.066: ISAKMP (0:3): Old State = IKE_I_MM1 New
State = IKE_I_MM2
Oct 27 22:21:05.066: ISAKMP (0:3): processing SA payload. message ID
= 0
Oct 27 22:21:05.066: ISAKMP (0:3): Checking ISAKMP transform 1 against
priority 10 policy
Oct 27 22:21:05.066: ISAKMP: encryption
DES-CBC
Oct 27 22:21:05.066: ISAKMP: hash MD5
Oct 27 22:21:05.066: ISAKMP: default
group 1
Oct 27 22:21:05.066: ISAKMP: auth RSA
sig
Oct 27 22:21:05.066: ISAKMP: life type
in seconds
Oct 27 22:21:05.070: ISAKMP: life duration
(VPI) of 0x0 0x1 0x51 0x80
Oct 27 22:21:05.070: ISAKMP (0:3): atts are acceptable. Next payload
is 0
Oct 27 22:21:05.190: ISAKMP (0:3): Input = IKE_MSG_INTERNAL, IKE_PROCESS_MAIN_MODE
Oct 27 22:21:05.190: ISAKMP (0:3): Old State = IKE_I_MM2 New
State = IKE_I_MM2
Oct 27 22:21:05.202: ISAKMP (0:3): sending packet to 172.16.172.35.
(I) MM_SA_SETUP
Oct 27 22:21:05.202: ISAKMP (0:3): Input = IKE_MSG_INTERNAL, IKE_PROCESS_COMPLETE
Oct 27 22:21:05.202: ISAKMP (0:3): Old State = IKE_I_MM2 New
State = IKE_I_MM3
Oct 27 22:21:05.338: ISAKMP (0:3): received packet from 172.16.172.35
```

(I) MM\_SA\_SETUP

Oct 27 22:21:05.342: ISAKMP (0:3): Input = IKE\_MESG\_FROM\_PEER, IKE\_MM\_EXCH  
Oct 27 22:21:05.342: ISAKMP (0:3): Old State = IKE\_I\_MM3 New  
State = IKE\_I\_MM4  
Oct 27 22:21:05.342: ISAKMP (0:3): processing KE payload. message ID  
= 0  
Oct 27 22:21:05.466: ISAKMP (0:3): processing NONCE payload. message  
ID = 0  
Oct 27 22:21:05.490: ISAKMP (0:3): SKEYID state generated  
Oct 27 22:21:05.490: ISAKMP (0:3): processing CERT\_REQ payload. message  
ID = 0  
Oct 27 22:21:05.490: ISAKMP (0:3): peer wants a CT\_X509\_SIGNATURE cert  
Oct 27 22:21:05.494: ISAKMP (0:3): peer want cert issued by CN = vpn,  
OU = cisco, O = tac, L = san jose, ST = california, C = US  
Oct 27 22:21:05.498: ISAKMP (0:3): processing CERT\_REQ payload. message  
ID = 0  
Oct 27 22:21:05.498: ISAKMP (0:3): peer wants a CT\_X509\_SIGNATURE cert  
Oct 27 22:21:05.502: ISAKMP (0:3): **peer want cert issued by CN = SJVPNTAC-CAServer, OU = TAC-  
VPN-SJ, O = Cisco Systems, L = San Jose, ST = CA, C = US** Oct 27 22:21:05.506: ISAKMP (0:3):  
Choosing **trustpoint caserver1 as issuer** Oct 27 22:21:05.506: ISAKMP (0:3): processing vendor id  
payload Oct 27 22:21:05.506: ISAKMP (0:3): vendor ID is Unity Oct 27 22:21:05.510: ISAKMP (0:3):  
processing vendor id payload Oct 27 22:21:05.510: ISAKMP (0:3): vendor ID is DPD Oct 27  
22:21:05.510: ISAKMP (0:3): processing vendor id payload Oct 27 22:21:05.510: ISAKMP (0:3):  
speaking to another IOS box! Oct 27 22:21:05.510: ISAKMP (0:3): processing vendor id payload Oct  
27 22:21:05.510: I.!!! Success rate is 60 percent (3/5), round-trip min/avg/max = 4/5/8 ms 1720-  
1#SAKMP (0:3): Input = IKE\_MESG\_INTERNAL, IKE\_PROCESS\_MAIN\_MODE Oct 27 22:21:05.510: ISAKMP  
(0:3): Old State = IKE\_I\_MM4 New State = IKE\_I\_MM4 Oct 27 22:21:05.514: ISAKMP (0:3): Send  
initial contact Oct 27 22:21:05.514: ISAKMP (0:3): SA is doing RSA signature authentication  
using id type ID\_FQDN Oct 27 22:21:05.514: ISAKMP (3): ID payload next-payload : 6 type : 2  
protocol : 17 port : 500 length : 18 Oct 27 22:21:05.514: ISAKMP (3): Total payload length: 22  
Oct 27 22:21:05.530: ISKAMP: growing send buffer from 1024 to 3072 Oct 27 22:21:05.538: ISAKMP  
(0:3): using the caserver1 trustpoint's keypair to sign Oct 27 22:21:05.870: ISAKMP (0:3):  
sending packet to 172.16.172.35 (I) MM\_KEY\_EXCH Oct 27 22:21:05.870: ISAKMP (0:3): Input =  
IKE\_MESG\_INTERNAL, IKE\_PROCESS\_COMPLETE Oct 27 22:21:05.874: ISAKMP (0:3): Old State = IKE\_I\_MM4  
New State = IKE\_I\_MM5 Oct 27 22:21:06.630: ISAKMP (0:3): received packet from 172.16.172.35 (I)  
MM\_KEY\_EXCH Oct 27 22:21:06.638: ISAKMP (0:3): Input = IKE\_MESG\_FROM\_PEER, IKE\_MM\_EXCH Oct 27  
22:21:06.638: ISAKMP (0:3): Old State = IKE\_I\_MM5 New State = IKE\_I\_MM6 Oct 27 22:21:06.638:  
ISAKMP (0:3): processing ID payload. message ID = 0 Oct 27 22:21:06.638: ISAKMP (0:3):  
processing CERT payload. message ID = 0 Oct 27 22:21:06.638: ISAKMP (0:3): processing a  
CT\_X509\_SIGNATURE cert Oct 27 22:21:06.670: ISAKMP (0:3): peer's pubkey isn't cached Oct 27  
22:21:06.714: ISAKMP (0:3): cert approved with warning Oct 27 22:21:06.762: ISAKMP (0:3): **OU =  
PARIS O=FRANCE** <----- The certificate subject name from 2621-VPN router Oct 27  
22:21:06.794: ISAKMP (0:3): processing SIG payload. message ID = 0 Oct 27 22:21:06.794: ISAKMP  
(3): **sa->peer.name = , sa->peer\_id.id.id\_fqdn.fqdn = 2611-vpn.cisco.com** Oct 27 22:21:06.818:  
ISAKMP (0:3): SA has been **authenticated with 172.16.172.35** Oct 27 22:21:06.822: ISAKMP (0:3):  
Input = IKE\_MESG\_INTERNAL, IKE\_PROCESS\_MAIN\_MODE Oct 27 22:21:06.822: ISAKMP (0:3): Old State =  
IKE\_I\_MM6 New State = IKE\_I\_MM6 Oct 27 22:21:06.822: ISAKMP (0:3): Input = IKE\_MESG\_INTERNAL,  
IKE\_PROCESS\_COMPLETE Oct 27 22:21:06.826: ISAKMP (0:3): Old State = IKE\_I\_MM6 New State =  
IKE\_P1\_COMPLETE Oct 27 22:21:06.826: ISAKMP (0:3): beginning Quick Mode exchange, M-ID of -  
2090109070 Oct 27 22:21:06.834: ISAKMP (0:3): sending packet to 172.16.172.35 (I) QM\_IDLE Oct 27  
22:21:06.838: ISAKMP (0:3): Node -2090109070, Input = IKE\_MESG\_INTERNAL, IKE\_INIT\_QM Oct 27  
22:21:06.838: ISAKMP (0:3): Old State = IKE\_QM\_READY New State = IKE\_QM\_I\_QM1 Oct 27  
22:21:06.838: ISAKMP (0:3): Input = IKE\_MESG\_INTERNAL, IKE\_PHASE1\_COMPLETE Oct 27 22:21:06.838:  
ISAKMP (0:3): Old State = IKE\_P1\_COMPLETE New State = IKE\_P1\_COMPLETE Oct 27 22:21:07.162:  
ISAKMP (0:3): received packet from 172.16.172.35 (I) QM\_IDLE Oct 27 22:21:07.174: ISAKMP (0:3):  
processing HASH payload. message ID = -2090109070 Oct 27 22:21:07.174: ISAKMP (0:3): processing  
SA payload. message ID = -2090109070 Oct 27 22:21:07.174: ISAKMP (0:3): Checking IPsec proposal  
1 Oct 27 22:21:07.174: ISAKMP: transform 1, ESP\_DES Oct 27 22:21:07.174: ISAKMP: attributes in  
transform: Oct 27 22:21:07.174: ISAKMP: encaps is 1 Oct 27 22:21:07.174: ISAKMP: SA life type in  
seconds Oct 27 22:21:07.174: ISAKMP: SA life duration (basic) of 3600 Oct 27 22:21:07.174:  
ISAKMP: SA life type in kilobytes Oct 27 22:21:07.178: ISAKMP: SA life duration (VPI) of 0x0  
0x46 0x50 0x0 Oct 27 22:21:07.178: ISAKMP: authenticator is HMAC-MD5 Oct 27 22:21:07.178: ISAKMP  
(0:3): atts are acceptable. Oct 27 22:21:07.178: IPSEC(validate\_proposal\_request): proposal part  
#1, (key eng. msg.) INBOUND local= 172.16.172.45, remote= 172.16.172.35, local\_proxy=

```

20.1.1.0/255.255.255.0/0/0 (type=4), remote_proxy= 192.168.4.0/255.255.255.0/0/0 (type=4),
protocol= ESP, transform= esp-des esp-md5-hmac , lifedur= 0s and 0kb, spi= 0x0(0), conn_id= 0,
keysize= 0, flags= 0x4 Oct 27 22:21:07.182: ISAKMP (0:3): processing NONCE payload. message ID =
-2090109070 Oct 27 22:21:07.182: ISAKMP (0:3): processing ID payload. message ID = -2090109070
Oct 27 22:21:07.182: ISAKMP (0:3): processing ID payload. message ID = -2090109070 Oct 27
22:21:07.230: ISAKMP (0:3): Creating IPsec SAs Oct 27 22:21:07.230: inbound SA from
172.16.172.35 to 172.16.172.45 (proxy 192.168.4.0 to 20.1.1.0) Oct 27 22:21:07.230: has spi
0x219DD6FD and conn_id 200 and flags 4 Oct 27 22:21:07.234: lifetime of 3600 seconds Oct 27
22:21:07.234: lifetime of 4608000 kilobytes Oct 27 22:21:07.234: outbound SA from 172.16.172.45
to 172.16.172.35 (proxy 20.1.1.0 to 192.168.4.0 ) Oct 27 22:21:07.234: has spi -1343930931 and
conn_id 201 and flags C Oct 27 22:21:07.234: lifetime of 3600 seconds Oct 27 22:21:07.234:
lifetime of 4608000 kilobytes Oct 27 22:21:07.234: IPSEC(key_engine): got a queue event... Oct
27 22:21:07.234: IPSEC(initialize_sas): , (key eng. msg.) INBOUND local= 172.16.172.45, remote=
172.16.172.35, local_proxy= 20.1.1.0/255.255.255.0/0/0 (type=4), remote_proxy=
192.168.4.0/255.255.255.0/0/0 (type=4), protocol= ESP, transform= esp-des esp-md5-hmac ,
lifedur= 3600s and 4608000kb, spi= 0x219DD6FD(563992317), conn_id= 200, keysize= 0, flags= 0x4
Oct 27 22:21:07.238: IPSEC(initialize_sas): , (key eng. msg.) OUTBOUND local= 172.16.172.45,
remote= 172.16.172.35, local_proxy= 20.1.1.0/255.255.255.0/0/0 (type=4), remote_proxy=
192.168.4.0/255.255.255.0/0/0 (type=4), protocol= ESP, transform= esp-des esp-md5-hmac ,
lifedur= 3600s and 4608000kb, spi= 0xAF53DCD(2951036365), conn_id= 201, keysize= 0, flags= 0xC
Oct 27 22:21:07.238: IPSEC(create_sa): sa created, (sa) sa_dest= 172.16.172.45, sa_prot= 50,
sa_spi= 0x219DD6FD(563992317), sa_trans= esp-des esp-md5-hmac , sa_conn_id= 200 Oct 27
22:21:07.242: IPSEC(create_sa): sa created, (sa) sa_dest= 172.16.172.35, sa_prot= 50, sa_spi=
0xAF53DCD(2951036365), sa_trans= esp-des esp-md5-hmac , sa_conn_id= 201 Oct 27 22:21:07.246:
ISAKMP (0:3): sending packet to 172.16.172.35 (I) QM_IDLE Oct 27 22:21:07.246: ISAKMP (0:3):
deleting node -2090109070 error FALSE reason "" Oct 27 22:21:07.246: ISAKMP (0:3): Node -
2090109070, Input = IKE_MSG_FROM_PEER, IKE_QM_EXCH Oct 27 22:21:07.246: ISAKMP (0:3): Old State
= IKE_QM_I_QM1 New State = IKE_QM_PHASE2_COMPLETE Oct 27 22:21:07.710: ISAKMP (0:2): purging
SA., sa=8182AB8C, delme=8182AB8C 1720-1# show crypto map Crypto Map "vpn" 10 ipsec-isakmp Peer =
172.16.172.35 Extended IP access list 102 access-list 102 permit ip 20.1.1.0 0.0.0.255
192.168.4.0 0.0.0.255 Current peer: 172.16.172.35 Security association lifetime: 4608000
kilobytes/3600 seconds PFS (Y/N): N Transform sets={ myset, } Interfaces using crypto map vpn:
FastEthernet0 1720-1#show crypto en conn ac Oct 27 22:21:57.246: ISAKMP (0:3): purging node -
2090109070onn ac ID Interface IP-Address State Algorithm Encrypt Decrypt 3 <none> <none> set
HMAC_MD5+DES_56_CB 0 0 200 FastEthernet0 172.16.172.45 set HMAC_MD5+DES_56_CB 0 8 201
FastEthernet0 172.16.172.45 set HMAC_MD5+DES_56_CB 8 0 1720-1#show crypto isa sa dst src state
conn-id slot 172.16.172.35 172.16.172.45 QM_IDLE 3 0 1720-1#show crypto ipsec sa interface:
FastEthernet0 Crypto map tag: vpn, local addr. 172.16.172.45 local ident (addr/mask/prot/port):
(20.1.1.0/255.255.255.0/0/0) remote ident (addr/mask/prot/port): (192.168.4.0/255.255.255.0/0/0)
current_peer: 172.16.172.35 PERMIT, flags={origin_is_acl,} #pkts encaps: 8, #pkts encrypt: 8,
#pkts digest 8 #pkts decaps: 8, #pkts decrypt: 8, #pkts verify 8 #pkts compressed: 0, #pkts
decompressed: 0 #pkts not compressed: 0, #pkts compr. failed: 0, #pkts decompress failed: 0
#send errors 2, #recv errors 0 local crypto endpt.: 172.16.172.45, remote crypto endpt.:
172.16.172.35 path mtu 1500, media mtu 1500 current outbound spi: AFE53DCD inbound esp sas: spi:
0x219DD6FD(563992317) transform: esp-des esp-md5-hmac , in use settings ={Tunnel, } slot: 0,
conn id: 200, flow_id: 1, crypto map: vpn sa timing: remaining key lifetime (k/sec):
(4607998/3530) IV size: 8 bytes replay detection support: Y inbound ah sas: inbound pcp sas:
outbound esp sas: spi: 0xAF53DCD(2951036365) transform: esp-des esp-md5-hmac , in use settings
={Tunnel, } slot: 0, conn id: 201, flow_id: 2, crypto map: vpn sa timing: remaining key lifetime
(k/sec): (4607998/3521) IV size: 8 bytes replay detection support: Y outbound ah sas: outbound
pcp sas: 1720-1# 1720-1#

```

Esta salida muestra los debugs del IPsec IKE/en el 7204-1 Router con los comandos **show crypto** que inician un túnel IPsec al 2611-VPN Router.

```

Oct 27 05:24:23: IPSEC(sa_request): ,
(key eng. msg.) OUTBOUND local= 172.16.172.51, remote= 172.16.172.35,
local_proxy= 3.3.3.0/255.255.255.0/0/0 (type=4),
remote_proxy= 192.168.4.0/255.255.255.0/0/0 (type=4),
protocol= ESP, transform= esp-des esp-md5-hmac ,
lifedur= 3600s and 4608000kb,
spi= 0xD1025DB1(3506593201), conn_id= 0, keysize=
0, flags= 0x400C
Oct 27 05:24:23: ISAKMP: received ke message (1/1)

```

Oct 27 05:24:23: ISAKMP: local port 500, remote port 500  
Oct 27 05:24:23: ISAKMP (0:1): Input = IKE\_MESG\_FROM\_IPSEC, IKE\_SA\_REQ\_MM  
Oct 27 05:24:23: ISAKMP (0:1): Old State = IKE\_READY New State  
= IKE\_I\_MM1  
Oct 27 05:24:23: ISAKMP (0:1): beginning Main Mode exchange  
Oct 27 05:24:23: ISAKMP (0:1): sending packet to 172.16.172.35 (I)  
MM\_NO\_STATE  
Oct 27 05:24:23: ISAKMP (0:1): received packet from 172.16.172.35 (I)  
MM\_NO\_STATE  
Oct 27 05:24:23: ISAKMP (0:1): Input = IKE\_MESG\_FROM\_PEER, IKE\_MM\_EXCH  
Oct 27 05:24:23: ISAKMP (0:1): Old State = IKE\_I\_MM1 New State  
= IKE\_I\_MM2  
  
Oct 27 05:24:23: ISAKMP (0:1): processing SA payload. message ID = 0  
Oct 27 05:24:23: ISAKMP (0:1): Checking ISAKMP transform 1 against  
priority 10 policy  
Oct 27 05:24:23: ISAKMP: encryption DES-CBC  
Oct 27 05:24:23: ISAKMP: hash MD5  
Oct 27 05:24:23: ISAKMP: default group  
1  
Oct 27 05:24:23: ISAKMP: auth RSA sig  
Oct 27 05:24:23: ISAKMP: life type in  
seconds  
Oct 27 05:24:23: ISAKMP: life duration  
(VPI) of 0x0 0x1 0x51 0x80  
Oct 27 05:24:23: ISAKMP (0:1): atts are acceptable. Next payload is  
0  
Oct 27 05:24:23: ISAKMP (0:1): Input = IKE\_MESG\_INTERNAL, IKE\_PROCESS\_MAIN\_MODE  
Oct 27.!!!!  
Success rate is 80 percent (4/5), round-trip min/avg/max = 4/8/16 ms  
7204-1# 05:24:23: ISAKMP (0:1): Old State = IKE\_I\_MM2 New State  
= IKE\_I\_MM2  
  
Oct 27 05:24:23: ISAKMP (0:1): sending packet to 172.16.172.35 (I) MM\_SA\_SETUP  
Oct 27 05:24:23: ISAKMP (0:1): Input = IKE\_MESG\_INTERNAL, IKE\_PROCESS\_COMPLETE  
Oct 27 05:24:23: ISAKMP (0:1): Old State = IKE\_I\_MM2 New State  
= IKE\_I\_MM3  
  
Oct 27 05:24:23: ISAKMP (0:1): received packet from 172.16.172.35 (I)  
MM\_SA\_SETUP  
Oct 27 05:24:23: ISAKMP (0:1): Input = IKE\_MESG\_FROM\_PEER, IKE\_MM\_EXCH  
Oct 27 05:24:23: ISAKMP (0:1): Old State = IKE\_I\_MM3 New State  
= IKE\_I\_MM4  
  
Oct 27 05:24:23: ISAKMP (0:1): processing KE payload. message ID = 0  
Oct 27 05:24:23: ISAKMP (0:1): processing NONCE payload. message ID  
= 0  
Oct 27 05:24:23: ISAKMP (0:1): SKEYID state generated  
Oct 27 05:24:23: ISAKMP (0:1): processing CERT\_REQ payload. message  
ID = 0  
Oct 27 05:24:23: ISAKMP (0:1): peer wants a CT\_X509\_SIGNATURE cert  
Oct 27 05:24:23: ISAKMP (0:1): **peer want cert issued by CN = vpn, OU = cisco, O = tac, L = san  
jose, ST = california, C = US** Oct 27 05:24:23: CRYPTO\_PKI: Trust-Point caserver2 picked up Oct  
27 05:24:23: ISAKMP (0:1): **Choosing trustpoint caserver2 as issuer** Oct 27 05:24:23: ISAKMP  
(0:1): processing CERT\_REQ payload. message ID = 0 Oct 27 05:24:23: ISAKMP (0:1): peer wants a  
CT\_X509\_SIGNATURE cert Oct 27 05:24:23: ISAKMP (0:1): **peer want cert issued by CN = SJVPNTAC-  
CAServer, OU = TAC-VPN-SJ, O = Cisco Systems, L = San Jose, ST = CA, C = US** Oct 27 05:24:23:  
ISAKMP (0:1): processing vendor id payload Oct 27 05:24:23: ISAKMP (0:1): vendor ID is Unity Oct  
27 05:24:23: ISAKMP (0:1): processing vendor id payload Oct 27 05:24:23: ISAKMP (0:1): vendor ID  
is DPD Oct 27 05:24:23: ISAKMP (0:1): processing vendor id payload Oct 27 05:24:23: ISAKMP

(0:1): speaking to another IOS box! Oct 27 05:24:23: ISAKMP (0:1): processing vendor id payload  
Oct 27 05:24:23: ISAKMP (0:1): Input = IKE\_MSG\_INTERNAL, IKE\_PROCESS\_MAIN\_MODE Oct 27 05:24:23:  
ISAKMP (0:1): Old State = IKE\_I\_MM4 New State = IKE\_I\_MM4 Oct 27 05:24:23: ISAKMP (0:1): Send  
initial contact Oct 27 05:24:23: ISAKMP (0:1): SA is doing RSA signature authentication using id  
type ID\_FQDN Oct 27 05:24:23: ISAKMP (1): ID payload next-payload : 6 type : 2 protocol : 17  
port : 500 length : 20 Oct 27 05:24:23: ISAKMP (1): Total payload length: 24 Oct 27 05:24:23:  
ISAKMP (0:1): using the caserver2 trustpoint's keypair to sign Oct 27 05:24:23: ISAKMP: growing  
send buffer from 1024 to 3072 Oct 27 05:24:23: ISAKMP (0:1): sending packet to 172.16.172.35 (I)  
MM\_KEY\_EXCH Oct 27 05:24:23: ISAKMP (0:1): Input = IKE\_MSG\_INTERNAL, IKE\_PROCESS\_COMPLETE Oct  
27 05:24:23: ISAKMP (0:1): Old State = IKE\_I\_MM4 New State = IKE\_I\_MM5 Oct 27 05:24:24: ISAKMP  
(0:1): received packet from 172.16.172.35 (I) MM\_KEY\_EXCH Oct 27 05:24:24: ISAKMP (0:1): Input =  
IKE\_MSG\_FROM\_PEER, IKE\_MM\_EXCH Oct 27 05:24:24: ISAKMP (0:1): Old State = IKE\_I\_MM5 New State =  
IKE\_I\_MM6 Oct 27 05:24:24: ISAKMP (0:1): processing ID payload. message ID = 0 Oct 27 05:24:24:  
ISAKMP (0:1): processing CERT payload. message ID = 0 Oct 27 05:24:24: ISAKMP (0:1): processing  
a CT\_X509\_SIGNATURE cert Oct 27 05:24:24: ISAKMP (0:1): peer's pubkey isn't cached Oct 27  
05:24:24: CRYPTO\_PKI: WARNING: Certificate, private key or CRL was not found while selecting CRL  
Oct 27 05:24:24: CRYPTO\_PKI: cert revocation status unknown. *!--- The subject name of the  
certificate from the 2611-VPN router !--- obtained from CA server2.* Oct 27 05:24:24: ISAKMP  
(0:1): **cert approved with warning** Oct 27 05:24:24: ISAKMP (0:1): **OU = ROME O=ITALY** Oct 27  
05:24:24: ISAKMP (0:1): processing SIG payload. message ID = 0 Oct 27 05:24:24: ISAKMP (1): **sa-  
>peer.name = , sa->peer.id.id.fqdn.fqdn = 2611-vpn.cisco.com** Oct 27 05:24:24: ISAKMP (0:1):  
**SA has been authenticated with 172.16.172.35** Oct 27 05:24:24: ISAKMP (0:1): Input =  
IKE\_MSG\_INTERNAL, IKE\_PROCESS\_MAIN\_MODE Oct 27 05:24:24: ISAKMP (0:1): Old State = IKE\_I\_MM6  
New State = IKE\_I\_MM6 Oct 27 05:24:24: ISAKMP (0:1): Input = IKE\_MSG\_INTERNAL,  
IKE\_PROCESS\_COMPLETE Oct 27 05:24:24: ISAKMP (0:1): Old State = IKE\_I\_MM6 New State =  
IKE\_P1\_COMPLETE Oct 27 05:24:24: ISAKMP (0:1): beginning Quick Mode exchange, M-ID of 1631242332  
Oct 27 05:24:24: ISAKMP (0:1): sending packet to 172.16.172.35 (I) QM\_IDLE Oct 27 05:24:24:  
ISAKMP (0:1): Node 1631242332, Input = IKE\_MSG\_INTERNAL, IKE\_INIT\_QM Oct 27 05:24:24: ISAKMP  
(0:1): Old State = IKE\_QM\_READY New State = IKE\_QM\_I\_QM1 Oct 27 05:24:24: ISAKMP (0:1): Input =  
IKE\_MSG\_INTERNAL, IKE\_PHASE1\_COMPLETE Oct 27 05:24:24: ISAKMP (0:1): Old State =  
IKE\_P1\_COMPLETE New State = IKE\_P1\_COMPLETE Oct 27 05:24:24: ISAKMP (0:1): received packet from  
172.16.172.35 (I) QM\_IDLE Oct 27 05:24:24: ISAKMP (0:1): processing HASH payload. message ID =  
1631242332 Oct 27 05:24:24: ISAKMP (0:1): processing SA payload. message ID = 1631242332 Oct 27  
05:24:24: ISAKMP (0:1): Checking IPsec proposal 1 Oct 27 05:24:24: ISAKMP: transform 1, ESP\_DES  
Oct 27 05:24:24: ISAKMP: attributes in transform: Oct 27 05:24:24: ISAKMP: encaps is 1 Oct 27  
05:24:24: ISAKMP: SA life type in seconds Oct 27 05:24:24: ISAKMP: SA life duration (basic) of  
3600 Oct 27 05:24:24: ISAKMP: SA life type in kilobytes Oct 27 05:24:24: ISAKMP: SA life  
duration (VPI) of 0x0 0x46 0x50 0x0 Oct 27 05:24:24: ISAKMP: authenticator is HMAC-MD5 Oct 27  
05:24:24: ISAKMP (0:1): atts are acceptable. Oct 27 05:24:24: IPSEC(validate\_proposal\_request):  
proposal part #1, (key eng. msg.) INBOUND local= 172.16.172.51, remote= 172.16.172.35,  
local\_proxy= 3.3.3.0/255.255.255.0/0/0 (type=4), remote\_proxy= 192.168.4.0/255.255.255.0/0/0  
(type=4), protocol= ESP, transform= esp-des esp-md5-hmac , lifedur= 0s and 0kb, spi= 0x0(0),  
conn\_id= 0, keysize= 0, flags= 0x4 Oct 27 05:24:24: ISAKMP (0:1): processing NONCE payload.  
message ID = 1631242332 Oct 27 05:24:24: ISAKMP (0:1): processing ID payload. message ID =  
1631242332 Oct 27 05:24:24: ISAKMP (0:1): processing ID payload. message ID = 1631242332 Oct 27  
05:24:24: ISAKMP (0:1): Creating IPsec SAs Oct 27 05:24:24: inbound SA from 172.16.172.35 to  
172.16.172.51 (proxy 192.168.4.0 to 3.3.3.0) Oct 27 05:24:24: has spi 0xD1025DB1 and conn\_id  
2000 and flags 4 Oct 27 05:24:24: lifetime of 3600 seconds Oct 27 05:24:24: lifetime of 4608000  
kilobytes Oct 27 05:24:24: outbound SA from 172.16.172.51 to 172.16.172.35 (proxy 3.3.3.0 to  
192.168.4.0 ) Oct 27 05:24:24: has spi -929016560 and conn\_id 2001 and flags C Oct 27 05:24:24:  
lifetime of 3600 seconds Oct 27 05:24:24: lifetime of 4608000 kilobytes Oct 27 05:24:24: ISAKMP  
(0:1): sending packet to 172.16.172.35 (I) QM\_IDLE Oct 27 05:24:24: ISAKMP (0:1): deleting node  
1631242332 error FALSE reason "" Oct 27 05:24:24: ISAKMP (0:1): Node 1631242332, Input =  
IKE\_MSG\_FROM\_PEER, IKE\_QM\_EXCH Oct 27 05:24:24: ISAKMP (0:1): Old State = IKE\_QM\_I\_QM1 New  
State = IKE\_QM\_PHASE2\_COMPLETE Oct 27 05:24:24: IPSEC(key\_engine): got a queue event... Oct 27  
05:24:24: IPSEC(initialize\_sas): , (key eng. msg.) INBOUND local= 172.16.172.51, remote=  
172.16.172.35, local\_proxy= 3.3.3.0/255.255.255.0/0/0 (type=4), remote\_proxy=  
192.168.4.0/255.255.255.0/0/0 (type=4), protocol= ESP, transform= esp-des esp-md5-hmac ,  
lifedur= 3600s and 4608000kb, spi= 0xD1025DB1(3506593201), conn\_id= 2000, keysize= 0, flags= 0x4  
Oct 27 05:24:24: IPSEC(initialize\_sas): , (key eng. msg.) OUTBOUND local= 172.16.172.51, remote=  
172.16.172.35, local\_proxy= 3.3.3.0/255.255.255.0/0/0 (type=4), remote\_proxy=  
192.168.4.0/255.255.255.0/0/0 (type=4), protocol= ESP, transform= esp-des esp-md5-hmac ,  
lifedur= 3600s and 4608000kb, spi= 0xC8A05510(3365950736), conn\_id= 2001, keysize= 0, flags= 0xC  
Oct 27 05:24:24: IPSEC(create\_sa): sa created, (sa) sa\_dest= 172.16.172.51, sa\_prot= 50, sa\_spi=

```

0xD1025DB1(3506593201), sa_trans= esp-des esp-md5-hmac , sa_conn_id= 2000 Oct 27 05:24:24:
IPSEC(create_sa): sa created, (sa) sa_dest= 172.16.172.35, sa_prot= 50, sa_spi=
0xC8A05510(3365950736), sa_trans= esp-des esp-md5-hmac , sa_conn_id= 2001 7204-1# 7204-1# 7204-
1# 7204-1# 7204-1# 7204-1#show crypto isa sa dst src state conn-id slot 172.16.172.35
172.16.172.51 QM_IDLE 1 0 7204-1#show crypto en conn ac ID Interface IP-Address State Algorithm
Encrypt Decrypt 1 <none> <none> set HMAC_MD5+DES_56_CB 0 0 2000 Ethernet1/1 172.16.172.51 set
HMAC_MD5+DES_56_CB 0 9 2001 Ethernet1/1 172.16.172.51 set HMAC_MD5+DES_56_CB 9 0 7204-1#show
crypto ipsec sa interface: Ethernet1/1 Crypto map tag: vpn, local addr. 172.16.172.51 local
ident (addr/mask/prot/port): (3.3.3.0/255.255.255.0/0/0) remote ident (addr/mask/prot/port):
(192.168.4.0/255.255.255.0/0/0) current_peer: 172.16.172.35 PERMIT, flags={origin_is_acl,} #pkts
encaps: 13, #pkts encrypt: 13, #pkts digest 13 #pkts decaps: 13, #pkts decrypt: 13, #pkts verify
13 #pkts compressed: 0, #pkts decompressed: 0 #pkts not compressed: 0, #pkts compr. failed: 0,
#pkts decompress failed: 0 #send errors 32, #recv errors 0 local crypto endpt.: 172.16.172.51,
remote crypto endpt.: 172.16.172.35 path mtu 1500, media mtu 1500 current outbound spi: C8A05510
inbound esp sas: spi: 0xD1025DB1(3506593201) transform: esp-des esp-md5-hmac , in use settings
={Tunnel, } slot: 0, conn id: 2000, flow_id: 1, crypto map: vpn sa timing: remaining key
lifetime (k/sec): (4607998/3435) IV size: 8 bytes replay detection support: Y inbound ah sas:
inbound pcp sas: outbound esp sas: spi: 0xC8A05510(3365950736) transform: esp-des esp-md5-hmac ,
in use settings ={Tunnel, } slot: 0, conn id: 2001, flow_id: 2, crypto map: vpn sa timing:
remaining key lifetime (k/sec): (4607998/3435) IV size: 8 bytes replay detection support: Y
outbound ah sas: outbound pcp sas: 7204-1# show crypto en conf crypto engine name: unknown
crypto engine type: software serial number: 01691291 crypto engine state: installed crypto
engine in slot: N/A platform: predator crypto_engine Encryption Process Info: input queue size:
500 input queue top: 26 input queue bot: 26 input queue count: 0 Crypto Adjacency Counts: Lock
Count: 0 Unlock Count: 0 7204-1#show crypto map Crypto Map "vpn" 10 ipsec-isakmp Peer =
172.16.172.35 Extended IP access list 101 access-list 101 permit ip 3.3.3.0 0.0.0.255
192.168.4.0 0.0.0.255 Current peer: 172.16.172.35 Security association lifetime: 4608000
kilobytes/3600 seconds PFS (Y/N): N Transform sets={ myset, } Interfaces using crypto map vpn:
Ethernet1/1 7204-1# 7204-1# 7204-1#

```

## [Información Relacionada](#)

- [Referencia de Comandos de Seguridad de Cisco IOS, Versión 12.2](#)
- [Guía de Configuración de Seguridad de Cisco IOS, Release 12.2](#)
- [Cómo configurar un IPSec del LAN a LAN entre un router y un PIX usando los Certificados digitales](#)
- [IPSec Negotiation/IKE Protocol](#)
- [Soporte Técnico y Documentación - Cisco Systems](#)