

Ejemplo de configuración del IPSec dinámico entre un ASA estáticamente dirigido y un router IOS dinámicamente dirigido con el NAT

Contenido

[Introducción](#)

[prerrequisitos](#)

[Requisitos](#)

[Componentes Utilizados](#)

[Convenciones](#)

[Antecedentes](#)

[Configurar](#)

[Diagrama de la red](#)

[Configuraciones](#)

[Borre las asociaciones de seguridad \(los SA\)](#)

[Verificación](#)

[Dispositivo de seguridad ASA - comandos show](#)

[Router IOS remoto - comandos show](#)

[Troubleshooting](#)

[ASA - salidas de los debugs](#)

[Router IOS remoto - salidas de los debugs](#)

[Información Relacionada](#)

Introducción

Este documento proporciona una configuración de muestra para que cómo permita al dispositivo de seguridad adaptante (ASA) para validar las conexiones dinámicas del IPSec del router IOS.

Prerrequisitos

Requisitos

Antes de que usted intente esta configuración, asegúrese de que el ASA y el router tengan conectividad a Internet para establecer el túnel IPsec.

Este documento asume que usted ha asignado ya los IP Addresses en ambas las interfaces públicas y privadas y que usted puede hacer ping la dirección IP del dispositivo VPN remoto.

Componentes Utilizados

La información que contiene este documento se basa en las siguientes versiones de software y hardware.

- Cisco 2900 Router con el Cisco IOS Software Release 15.2(4)M3
- Versión de software adaptante del dispositivo de seguridad de Cisco 9.4(1)

La información que contiene este documento se creó a partir de los dispositivos en un ambiente de laboratorio específico. Todos los dispositivos que se utilizan en este documento se pusieron en funcionamiento con una configuración verificada (predeterminada). Si la red está funcionando, asegúrese de haber comprendido el impacto que puede tener cualquier comando.

Convenciones

Consulte [Convenciones de Consejos Técnicos de Cisco](#) para obtener más información sobre las convenciones sobre documentos.

Antecedentes

El router remoto realiza la Traducción de Dirección de Red (NAT) si la red privada 10.1.1.x tiene acceso a Internet. El tráfico de 10.1.1.x a la red privada 10.2.2.x detrás del ASA se excluye del proceso NAT. El túnel IPsec establece solamente si el tráfico (10.1.1.x) inicia la conexión del router con el ASA que tiene una red remota (10.2.2.x). El router puede iniciar las conexiones al ASA, pero el ASA no puede iniciar las conexiones al router.

Esta configuración permite al ASA para crear un túnel dinámico del LAN a LAN del IPsec (L2L) con un VPN Router remoto. Este router recibe dinámicamente a su IP Address público exterior de su Proveedor de servicios de Internet. El Protocolo de configuración dinámica de host (DHCP) proporciona este mecanismo para afectar un aparato los IP Addresses dinámicamente del proveedor. Esto permite que los IP Addresses sean reutilizados cuando los host los necesitan no más.

En el ASA usted puede configurar un NAT manual para asegurarse que el tráfico que pasa a través del túnel no consigue traducido. En este ejemplo, si usted está en la red de 10.2.2.0 y va a la red de 10.1.1.0, el **NATis manual** usado para permitir que el tráfico de la red de 10.1.1.0 sea cifrado sin ser traducido a la dirección IP de la interfaz exterior. En el router, utilizan a los **comandos route-map and access-list** de permitir que el tráfico de la red de 10.1.1.0 sea cifrado sin el NAT. Sin embargo, cuando usted va en cualquier parte (como Internet), le traducen a la dirección IP de la interfaz exterior con el Port Address Translation (PAT).

Nota: Refiera a [aplicar el NAT](#) para más información sobre el NAT

Éstos son los comandos configuration requeridos en el ASA para que el tráfico no ejecutarse a través de la PALMADITA sobre el túnel, y tráfico a Internet a ejecutarse a través de la PALMADITA

```
object network LOCAL
  subnet 10.2.2.0 255.255.255.0
object network REMOTE
  subnet 10.1.1.0 255.255.255.0nat (inside,outside) source static LOCAL LOCAL destination static
REMOTE REMOTEobject network LOCAL
  nat (inside,outside) dynamic interface
```


Configurar

En esta sección encontrará la información para configurar las funciones descritas en este

documento.

Diagrama de la red

En este documento, se utiliza esta configuración de red:

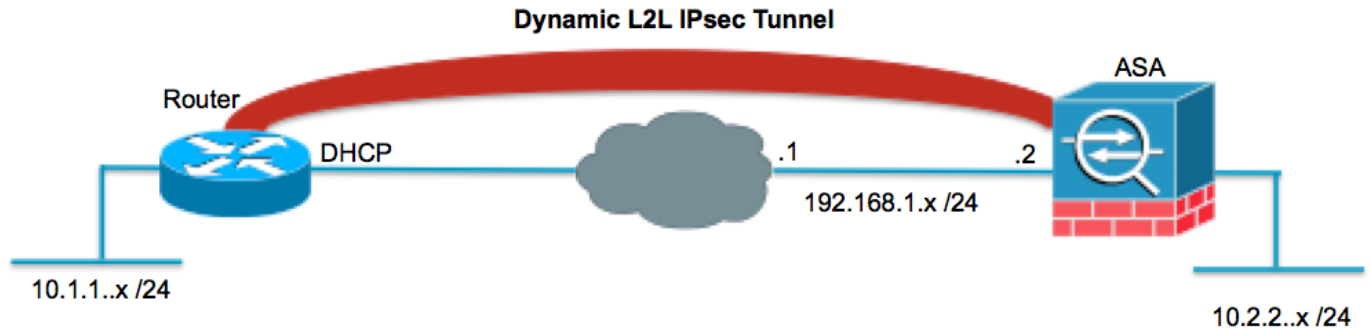

Configuraciones

En este documento, se utilizan estas configuraciones:

Router

```
Router#show running-config
Current configuration : 1354 bytes
!
version 15.2
service timestamps debug datetime msec
service timestamps log datetime msec
no service password-encryption
!
hostname Router
!
boot-start-marker
boot-end-marker
!
!
no aaa new-model
!
resource policy
!
ip cef

!--- Configuration for IKE policies.
!--- Enables the IKE policy configuration (config-isakmp)
!--- command mode, where you can specify the parameters that
!--- are used during an IKE negotiation.

crypto isakmp policy 1
 encryption aes 256
 hash sha
 authentication pre-share
 group 2
```

!--- Specifies the preshared key "cisco123" which should
!--- be identical at both peers. This is a global
!--- configuration mode command.

```
crypto isakmp key cisco123 address 192.168.1.2  
!  
!
```

!--- Configuration for IPsec policies.
!--- Enables the crypto transform configuration mode,
!--- where you can specify the transform sets that are used
!--- during an IPsec negotiation.

```
crypto ipsec transform-set myset esp-aes 256 esp-sha-hmac
```

!--- Indicates that IKE is used to establish
!--- the IPsec Security Association for protecting the
!--- traffic specified by this crypto map entry.

```
crypto map mymap 10 ipsec-isakmp
```

!--- Sets the IP address of the remote end.

```
set peer 192.168.1.2
```

!--- Configures IPsec to use the transform-set
!--- "myset" defined earlier in this configuration.

```
set transform-set myset
```

!--- Specifies the interesting traffic to be encrypted.

```
match address 101  
!  
!  
!  
!
```

```
interface FastEthernet0/0
```

!--- The interface dynamically learns its IP address
!--- from the service provider.

```
ip address DHCP
```

```
ip virtual-reassembly  
half-duplex
```

!--- Configures the interface to use the
!--- crypto map "mymap" for IPsec.

```
crypto map mymap  
!  
interface FastEthernet1/0
```

```
no ip address
shutdown
duplex auto
speed auto
!
interface Serial2/0
ip address 10.1.1.2 255.255.255.0
ip nat inside
ip virtual-reassembly
no fair-queue
!
interface Serial2/1
no ip address
shutdown
!
interface Serial2/2
no ip address
shutdown
!
interface Serial2/3
no ip address
shutdown
!
ip http server
no ip http secure-server
!
ip route 0.0.0.0 0.0.0.0 FastEthernet0/0
!
ip nat inside source route-map nonat interface FastEthernet0/0 overload
!

!--- This crypto ACL 101 -permit identifies the
!--- matching traffic flows to be protected via encryption.

access-list 101 permit ip 10.1.1.0 0.0.0.255 10.2.2.0 0.0.0.255

!--- This ACL 110 identifies the traffic flows using route map and
!--- are PATed via outside interface (Ethernet0/0).

access-list 110 deny ip 10.1.1.0 0.0.0.255 10.2.2.0 0.0.0.255
access-list 110 permit ip 10.1.1.0 0.0.0.255 any

!
route-map nonat permit 10
match ip address 110
!
!
control-plane
!

!
line con 0
line aux 0
line vty 0 4
!
!
end
```

ASA

```
ASA#show running-config
ASA Version 9.4(1)
!
hostname ASA
enable password 8Ry2YjIyt7RRXU24 encrypted
names
!

!--- Configure the outside and inside interfaces.

interface GigabitEthernet0/0
 nameif outside
 security-level 0
 ip address 192.168.1.2 255.255.255.0
!
interface GigabitEthernet0/1
 nameif inside
 security-level 100
 ip address 10.2.2.1 255.255.255.0
!
!

!--- Output is suppressed.

!
passwd 2KFQnbNIdI.2KYOU encrypted
ftp mode passive

!--- Manual NAT prevents NAT for networks specified in the statement - nonat.
!--- The Object NAT 1 command specifies PAT using
!--- the outside interface for all other traffic.

object network LOCAL
 subnet 10.2.2.0 255.255.255.0
object network REMOTE
 subnet 10.1.1.0 255.255.255.0

pager lines 24
mtu outside 1500
mtu inside 1500
no failover
no asdm history enable
arp timeout 14400

!--- Manual NAT prevents NAT for networks specified in the statement - nonat.
!--- The Object NAT 1 command specifies PAT using
!--- the outside interface for all other traffic.

nat (inside,outside) source static LOCAL LOCAL destination static REMOTE REMOTE
!
object network LOCAL
 nat (inside,outside) dynamic interface

route outside 0.0.0.0 0.0.0.0 192.168.1.1 1

timeout xlate 3:00:00
```

```
timeout conn 1:00:00 half-closed 0:10:00 udp 0:02:00 icmp 0:00:02
timeout sunrpc 0:10:00 h323 0:05:00 h225 1:00:00 mgcp 0:05:00 mgcp-pat 0:05:00
timeout sip 0:30:00 sip_media 0:02:00 sip-invite 0:03:00 sip-disconnect 0:02:00
timeout uauth 0:05:00 absolute
no snmp-server location
no snmp-server contact
snmp-server enable traps snmp authentication linkup linkdown coldstart
```

```
!--- PHASE 2 CONFIGURATION ---!
!--- The encryption types for Phase 2 are defined here.
```

```
crypto ipsec ikev1 transform-set myset esp-aes-256 esp-sha-hmac
```

```
!--- Defines a dynamic crypto map with
!--- the specified encryption settings.
```

```
crypto dynamic-map cisco 1 set ikev1 transform-set myset
```

```
!--- Binds the dynamic map to the IPsec/ISAKMP process.
```

```
crypto map dyn-map 10 ipsec-isakmp dynamic cisco
```

```
!--- Specifies the interface to be used with
!--- the settings defined in this configuration.
```

```
crypto map dyn-map interface outside
```

```
!--- PHASE 1 CONFIGURATION ---!
```

```
!--- This configuration uses isakmp policy 10.
!--- The configuration commands here define the Phase
!--- 1 policy parameters that are used.
```

```
crypto ikev1 enable outside
crypto isakmp policy 10
  authentication pre-share
  encryption aes-256
  hash sha
  group 2
  lifetime 86400
```

```
!--- The security appliance provides the default tunnel groups
!--- for Lan to Lan access (DefaultL2LGroup) and configure the preshared key
!--- (cisco123) to authenticate the remote router.
```

```
tunnel-group DefaultL2LGroup ipsec-attributes
  pre-shared-key cisco123
```

```
telnet timeout 5
ssh timeout 5
console timeout 0
```

```
!
class-map inspection_default
  match default-inspection-traffic
```

```

!
!
policy-map type inspect dns preset_dns_map
  parameters
    message-length maximum 512
policy-map global_policy
  class inspection_default
    inspect dns preset_dns_map
    inspect ftp
    inspect h323 h225
    inspect h323 ras
    inspect netbios
    inspect rsh
    inspect rtsp
    inspect skinny
    inspect esmtp
    inspect sqlnet
    inspect sunrpc
    inspect tftp
    inspect sip
    inspect xdmcp
!
service-policy global_policy global
prompt hostname context
Cryptochecksum:6ed4a7bce392a439d0a16e86743e2663
: end

```

Borre las asociaciones de seguridad (los SA)

En el modo del privilegio del ASA, utilice estos comandos:

- **clear crypto ipsec sa** — Borra el IPSec activo SA. La palabra clave crypto es opcional.
- **clear crypto isakmp sa** — Borra el IKE activo SA. La palabra clave crypto es opcional.

Verificación

Use esta sección para confirmar que su configuración funciona correctamente.

[El analizador del CLI de Cisco \(clientes registrados solamente\)](#) apoya los ciertos comandos show. Utilice el analizador del CLI de Cisco para ver una análisis de la salida del comando show.

Dispositivo de seguridad ASA - comandos show

- **show crypto isakmp sa** — Muestra todas las IKE SAs actuales en un par. `ASA#show crypto isakmp sa`

```

Active SA: 1
Rekey SA: 0 (A tunnel will report 1 Active and 1 Rekey SA during rekey)
Total IKE SA: 1

```

```

1  IKE Peer: 172.16.1.3
   Type    : L2L           Role    : responder
   Rekey   : no           State   : MM_ACTIVE

```

- **muestre IPSec crypto sa** — Muestra todo el SA de IPSec actual en un par. `ASA#show crypto ipsec sa`

```

interface: outside
Crypto map tag: cisco, seq num: 1, local addr: 192.168.1.2

```



```

local ident (addr/mask/prot/port): (10.2.2.0/255.255.255.0/0/0)
remote ident (addr/mask/prot/port): (10.1.1.0/255.255.255.0/0/0)
current_peer: 172.16.1.3

#pkts encaps: 4, #pkts encrypt: 4, #pkts digest: 4
#pkts decaps: 4, #pkts decrypt: 4, #pkts verify: 4
#pkts compressed: 0, #pkts decompressed: 0
#pkts not compressed: 4, #pkts comp failed: 0, #pkts decomp failed: 0
#pre-frag successes: 0, #pre-frag failures: 0, #fragments created: 0
#PMTUs sent: 0, #PMTUs rcvd: 0, #decapsulated frgs needing reassembly: 0
#send errors: 0, #recv errors: 0

local crypto endpt.: 192.168.1.2, remote crypto endpt.: 172.16.1.3

path mtu 1500, ipsec overhead 58, media mtu 1500
current outbound spi: 28C8C1BD

```

```

inbound esp sas:
spi: 0x33785672 (863524466)
transform: esp-3des esp-md5-hmac
in use settings = {L2L, Tunnel, }
slot: 0, conn_id: 6, crypto-map: cisco
sa timing: remaining key lifetime (kB/sec): (4274999/3564)
IV size: 8 bytes
replay detection support: Y
outbound esp sas:
spi: 0x28C8C1BD (684245437)
transform: esp-3des esp-md5-hmac
in use settings = {L2L, Tunnel, }
slot: 0, conn_id: 6, crypto-map: cisco
sa timing: remaining key lifetime (kB/sec): (4274999/3562)
IV size: 8 bytes
replay detection support: Y

```

Router IOS remoto - comandos show

- **show crypto isakmp sa** — Muestra todas las IKE SAs actuales en un par. Router#`show crypto isakmp sa`

```

dst          src          state          conn-id slot status
192.168.1.2  172.16.1.3  QM_IDLE        1      0  ACTIVE

```

- **muestre IPsec crypto sa** — Muestra todo el SA de IPsec actual en un par. Router#`show crypto ipsec sa`

```

interface: Ethernet0/0
Crypto map tag: pix, local addr 172.16.1.3

protected vrf: (none)
local ident (addr/mask/prot/port): (10.1.1.0/255.255.255.0/0/0)
remote ident (addr/mask/prot/port): (10.2.2.0/255.255.255.0/0/0)
current_peer 192.168.1.2 port 500
PERMIT, flags={origin_is_acl,}
#pkts encaps: 4, #pkts encrypt: 4, #pkts digest: 4
#pkts decaps: 4, #pkts decrypt: 4, #pkts verify: 4
#pkts compressed: 0, #pkts decompressed: 0
#pkts not compressed: 0, #pkts compr. failed: 0
#pkts not decompressed: 0, #pkts decompress failed: 0
#send errors 62, #recv errors 0

local crypto endpt.: 172.16.1.3, remote crypto endpt.: 192.168.1.2
path mtu 1500, ip mtu 1500, ip mtu idb Ethernet0/0
current outbound spi: 0x33785672(863524466)

```

```

inbound esp sas:
spi: 0x28C8C1BD(684245437)
transform: esp-3des esp-md5-hmac ,
in use settings ={Tunnel, }
conn id: 2002, flow_id: SW:2, crypto map: pix
sa timing: remaining key lifetime (k/sec): (4431817/3288)
IV size: 8 bytes
replay detection support: Y
Status: ACTIVE

inbound ah sas:

inbound pcp sas:

outbound esp sas:
spi: 0x33785672(863524466)
transform: esp-3des esp-md5-hmac ,
in use settings ={Tunnel, }
conn id: 2001, flow_id: SW:1, crypto map: pix
sa timing: remaining key lifetime (k/sec): (4431817/3286)
IV size: 8 bytes
replay detection support: Y
Status: ACTIVE

outbound ah sas:

outbound pcp sas:

```

Troubleshooting

En esta sección encontrará información que puede utilizar para solucionar problemas de configuración.

[El analizador del CLI de Cisco \(clientes registrados solamente\)](#) apoya los ciertos comandos show. Utilice el analizador del CLI de Cisco para ver una análisis de la salida del comando show.

Nota: Consulte [Información Importante sobre Comandos Debug](#) y [Troubleshooting de Seguridad IP - Comprensión y Uso de Comandos debug](#) antes de usar los comandos **debug**

- [Dispositivo de seguridad adaptante - salidas de los debugs](#) **IPSec 7 del debug crypto** — Visualiza los IPSec Negotiations de la fase 2. **isakmp 7 del debug crypto** — Visualiza negociaciones ISAKMP de la fase 1.
- [Router IOS remoto - salidas de los debugs](#) **IPSec del debug crypto** — Visualiza los IPSec Negotiations de la fase 2. **isakmp del debug crypto** — Visualiza negociaciones ISAKMP de la fase 1.

ASA - salidas de los debugs

```

ASA#debug crypto isakmp 7
Jan 01 21:42:13 [IKEv1]: IP = 172.16.1.3, IKE_DECODE RECEIVED Message (msgid=0) with payloads : HDR + SA (1) + VENDOR (13) + VENDOR (13) + VENDOR (13) + NONE (0) total length : 144
Jan 01 21:42:13 [IKEv1 DEBUG]: IP = 172.16.1.3, processing SA payload
Jan 01 21:42:13 [IKEv1 DEBUG]: IP = 172.16.1.3, Oakley proposal is acceptable
Jan 01 21:42:13 [IKEv1 DEBUG]: IP = 172.16.1.3, processing VID payload

```

Jan 01 21:42:13 [IKEv1 DEBUG]: IP = 172.16.1.3, processing VID payload
Jan 01 21:42:13 [IKEv1 DEBUG]: IP = 172.16.1.3, Received NAT-Traversal ver 03 VID
Jan 01 21:42:13 [IKEv1 DEBUG]: IP = 172.16.1.3, processing VID payload
Jan 01 21:42:13 [IKEv1 DEBUG]: IP = 172.16.1.3, Received NAT-Traversal ver 02 VID
Jan 01 21:42:13 [IKEv1 DEBUG]: IP = 172.16.1.3, processing IKE SA payload
Jan 01 21:42:13 [IKEv1 DEBUG]: IP = 172.16.1.3, IKE SA Proposal # 1, Transform #
1 acceptable Matches global IKE entry # 3
Jan 01 21:42:13 [IKEv1 DEBUG]: IP = 172.16.1.3, constructing ISAKMP SA payload
Jan 01 21:42:13 [IKEv1 DEBUG]: IP = 172.16.1.3, constructing Fragmentation VID +
extended capabilities payload
Jan 01 21:42:13 [IKEv1]: IP = 172.16.1.3, IKE_DECODE SENDING Message (msgid=0) w
ith payloads : HDR + SA (1) + VENDOR (13) + NONE (0) total length : 108
Jan 01 21:42:13 [IKEv1]: IP = 172.16.1.3, IKE_DECODE RECEIVED Message (msgid=0)
with payloads : HDR + KE (4) + NONCE (10) + VENDOR (13) + VENDOR (13) + VENDOR (
13) + VENDOR (13) + NONE (0) total length : 256
Jan 01 21:42:13 [IKEv1 DEBUG]: IP = 172.16.1.3, processing ke payload
Jan 01 21:42:13 [IKEv1 DEBUG]: IP = 172.16.1.3, processing ISA_KE payload
Jan 01 21:42:13 [IKEv1 DEBUG]: IP = 172.16.1.3, processing nonce payload
Jan 01 21:42:13 [IKEv1 DEBUG]: IP = 172.16.1.3, processing VID payload
Jan 01 21:42:13 [IKEv1 DEBUG]: IP = 172.16.1.3, Received Cisco Unity client VID
Jan 01 21:42:13 [IKEv1 DEBUG]: IP = 172.16.1.3, processing VID payload
Jan 01 21:42:13 [IKEv1 DEBUG]: IP = 172.16.1.3, Received DPD VID
Jan 01 21:42:13 [IKEv1 DEBUG]: IP = 172.16.1.3, processing VID payload
Jan 01 21:42:13 [IKEv1 DEBUG]: IP = 172.16.1.3, Processing IOS/PIX Vendor ID pay
load (version: 1.0.0, capabilities: 0000077f)
Jan 01 21:42:13 [IKEv1 DEBUG]: IP = 172.16.1.3, processing VID payload
Jan 01 21:42:13 [IKEv1 DEBUG]: IP = 172.16.1.3, Received xauth V6 VID
Jan 01 21:42:13 [IKEv1 DEBUG]: IP = 172.16.1.3, constructing ke payload
Jan 01 21:42:13 [IKEv1 DEBUG]: IP = 172.16.1.3, constructing nonce payload
Jan 01 21:42:13 [IKEv1 DEBUG]: IP = 172.16.1.3, constructing Cisco Unity VID payload
Jan 01 21:42:13 [IKEv1 DEBUG]: IP = 172.16.1.3, constructing xauth V6 VID payload
Jan 01 21:42:13 [IKEv1 DEBUG]: IP = 172.16.1.3, Send IOS VID
Jan 01 21:42:13 [IKEv1 DEBUG]: IP = 172.16.1.3, Constructing ASA spoofing IOS Ve
ndor ID payload (version: 1.0.0, capabilities: 20000001)
Jan 01 21:42:13 [IKEv1 DEBUG]: IP = 172.16.1.3, constructing VID payload
Jan 01 21:42:13 [IKEv1 DEBUG]: IP = 172.16.1.3, Send Altiga/Cisco
VPN3000/CiscoASA GW VID
Jan 01 21:42:13 [IKEv1]: IP = 172.16.1.3, Connection landed on tunnel_group
DefaultL2LGroup
Jan 01 21:42:13 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.16.1.3, Generat
ing keys for Responder...
Jan 01 21:42:13 [IKEv1]: IP = 172.16.1.3, IKE_DECODE SENDING Message (msgid=0) w
ith payloads : HDR + KE (4) + NONCE (10) + VENDOR (13) + VENDOR (13) + VENDOR (1
3) + VENDOR (13) + NONE (0) total length : 256
Jan 01 21:42:13 [IKEv1]: IP = 172.16.1.3, IKE_DECODE RECEIVED Message (msgid=0)
with payloads : HDR + ID (5) + HASH (8) + NOTIFY (11) + NONE (0) total length :88
Jan 01 21:42:13 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.16.1.3,
processing ID payload
Jan 01 21:42:13 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.16.1.3,
processing hash payload
Jan 01 21:42:13 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.16.1.3,
Computing hash for ISAKMP
Jan 01 21:42:13 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.16.1.3,
processing notify payload
Jan 01 21:42:13 [IKEv1]: IP = 172.16.1.3, Connection landed on tunnel_group
DefaultL2LGroup
Jan 01 21:42:13 [IKEv1]: Group = DefaultL2LGroup, IP = 172.16.1.3, Freeing
previously allocated memory for authorization-dn-attributes
Jan 01 21:42:13 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.16.1.3,
constructing ID payload
Jan 01 21:42:13 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.16.1.3,
constructing hash payload
Jan 01 21:42:13 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.16.1.3,
Computing hash for ISAKMP

Jan 01 21:42:13 [IKEv1 DEBUG]: IP = 172.16.1.3, Constructing IOS keep alive payload: proposal=32767/32767 sec.

Jan 01 21:42:13 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.16.1.3, constructing dpd vid payload

Jan 01 21:42:13 [IKEv1]: IP = 172.16.1.3, IKE_DECODE SENDING Message (msgid=0) with payloads : HDR + ID (5) + HASH (8) + IOS KEEPALIVE (128) + VENDOR (13) + NONE (0) total length : 92

Jan 01 21:42:13 [IKEv1]: Group = DefaultL2LGroup, IP = 172.16.1.3, **PHASE 1 COMPLETED**

Jan 01 21:42:13 [IKEv1]: IP = 172.16.1.3, Keep-alive type for this connection: DPD

Jan 01 21:42:13 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.16.1.3, Starting P1 rekey timer: 82080 seconds.

Jan 01 21:42:13 [IKEv1]: IP = 172.16.1.3, IKE_DECODE RECEIVED Message (msgid=4bc07a70) with payloads : HDR + HASH (8) + SA (1) + NONCE (10) + ID (5) + ID (5) + NONE (0) total length : 164

Jan 01 21:42:13 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.16.1.3, processing hash payload

Jan 01 21:42:13 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.16.1.3, processing SA payload

Jan 01 21:42:13 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.16.1.3, processing nonce payload

Jan 01 21:42:13 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.16.1.3, processing ID payload

Jan 01 21:42:13 [IKEv1]: Group = DefaultL2LGroup, IP = 172.16.1.3, Received remote IP Proxy Subnet data in ID Payload:
Address 10.1.1.0, Mask 255.255.255.0, Protocol 0, Port 0

Jan 01 21:42:13 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.16.1.3, processing ID payload

Jan 01 21:42:13 [IKEv1]: Group = DefaultL2LGroup, IP = 172.16.1.3, Received local IP Proxy Subnet data in ID Payload:
Address 10.2.2.0, Mask 255.255.255.0, Protocol 0, Port 0

Jan 01 21:42:13 [IKEv1]: Group = DefaultL2LGroup, IP = 172.16.1.3, QM IsRekeyedold sa not found by addr

Jan 01 21:42:13 [IKEv1]: Group = DefaultL2LGroup, IP = 172.16.1.3, IKE Remote Peer configured for crypto map: cisco

Jan 01 21:42:13 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.16.1.3, processing IPSec SA payload

Jan 01 21:42:13 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.16.1.3, IPSec SA Proposal # 1, Transform # 1 acceptable Matches global IPSec SA entry # 1

Jan 01 21:42:13 [IKEv1]: Group = DefaultL2LGroup, IP = 172.16.1.3, IKE: requesting SPI!

Jan 01 21:42:13 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.16.1.3, IKE got SPI from key engine: SPI = 0xc3fe4fb0

Jan 01 21:42:13 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.16.1.3, oakleyconstucting quick mode

Jan 01 21:42:13 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.16.1.3, constructing blank hash payload

Jan 01 21:42:13 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.16.1.3, constructing IPSec SA payload

Jan 01 21:42:13 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.16.1.3, constructing IPSec nonce payload

Jan 01 21:42:13 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.16.1.3, constructing proxy ID

Jan 01 21:42:13 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.16.1.3, Transmitting Proxy Id:

Remote subnet: 10.1.1.0 Mask 255.255.255.0 Protocol 0 Port 0

Local subnet: 10.2.2.0 mask 255.255.255.0 Protocol 0 Port 0

Jan 01 21:42:13 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.16.1.3, constructing qm hash payload

Jan 01 21:42:13 [IKEv1]: IP = 172.16.1.3, IKE_DECODE SENDING Message (msgid=4bc07a70) with payloads : HDR + HASH (8) + SA (1) + NONCE (10) + ID (5) + ID (5) + NONE (0) total length : 164

Jan 01 21:42:13 [IKEv1]: IP = 172.16.1.3, IKE_DECODE RECEIVED Message (msgid=4bc07a70) with payloads : HDR + HASH (8) + NONE (0) total length : 48

Jan 01 21:42:13 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.16.1.3,

```
processing hash payload
Jan 01 21:42:13 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.16.1.3,
loading all IPSEC SAs
Jan 01 21:42:13 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.16.1.3,
Generating Quick Mode Key!
Jan 01 21:42:13 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.16.1.3,
Generating Quick Mode Key!
Jan 01 21:42:13 [IKEv1]: Group = DefaultL2LGroup, IP = 172.16.1.3, Security nego
tiation complete for LAN-to-LAN Group (DefaultL2LGroup) Responder,
Inbound SPI= 0xc3fe4fb0, Outbound SPI = 0x9acle72c
Jan 01 21:42:13 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.16.1.3,
IKE got a KEY_ADD msg for SA: SPI = 0x9acle72c
Jan 01 21:42:13 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.16.1.3,
Pitcher: received KEY_UPDATE, spi 0xc3fe4fb0
Jan 01 21:42:13 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.16.1.3,
Starting P2 rekey timer: 3420 seconds.
Jan 01 21:42:13 [IKEv1]: Group = DefaultL2LGroup, IP = 172.16.1.3, PHASE 2 COMPL
ETED (msgid=4bc07a70)
```

pixfirewall#debug crypto ipsec 7

```
pixfirewall# IPSEC: New embryonic SA created @ 0x028B6EE0,
```

```
SCB: 0x028B6E50,
Direction: inbound
SPI      : 0x97550AC8
Session ID: 0x00000009
VPIF num : 0x00000001
Tunnel type: l2l
Protocol  : esp
Lifetime  : 240 seconds
```

```
IPSEC: New embryonic SA created @ 0x028B75E8,
```

```
SCB: 0x028B7528,
Direction: outbound
SPI      : 0xB857E226
Session ID: 0x00000009
VPIF num : 0x00000001
Tunnel type: l2l
Protocol  : esp
Lifetime  : 240 seconds
```

```
IPSEC: Completed host OBSA update, SPI 0xB857E226
```

```
IPSEC: Creating outbound VPN context, SPI 0xB857E226
```

```
Flags: 0x00000005
SA     : 0x028B75E8
SPI    : 0xB857E226
MTU    : 1500 bytes
VCID   : 0x00000000
Peer   : 0x00000000
SCB    : 0x028B7528
Channel: 0x01693F28
```

```
IPSEC: Completed outbound VPN context, SPI 0xB857E226
```

```
VPN handle: 0x0002524C
```

```
IPSEC: New outbound encrypt rule, SPI 0xB857E226
```

```
Src addr: 10.2.2.0
Src mask: 255.255.255.0
Dst addr: 10.1.1.0
Dst mask: 255.255.255.0
```

```
Src ports
```

```
Upper: 0
Lower: 0
Op     : ignore
```

```
Dst ports
```

```
Upper: 0
Lower: 0
Op     : ignore
```

Protocol: 0
Use protocol: false
SPI: 0x00000000
Use SPI: false
IPSEC: Completed outbound encrypt rule, SPI 0xB857E226
Rule ID: 0x028A9988
IPSEC: New outbound permit rule, SPI 0xB857E226
Src addr: 192.168.1.2
Src mask: 255.255.255.255
Dst addr: 172.16.1.3
Dst mask: 255.255.255.255
Src ports
Upper: 0
Lower: 0
Op : ignore
Dst ports
Upper: 0
Lower: 0
Op : ignore
Protocol: 50
Use protocol: true
SPI: 0xB857E226
Use SPI: true
IPSEC: Completed outbound permit rule, SPI 0xB857E226
Rule ID: 0x028B5D90
IPSEC: Completed host IBSA update, SPI 0x97550AC8
IPSEC: Creating inbound VPN context, SPI 0x97550AC8
Flags: 0x00000006
SA : 0x028B6EE0
SPI : 0x97550AC8
MTU : 0 bytes
VCID : 0x00000000
Peer : 0x0002524C
SCB : 0x028B6E50
Channel: 0x01693F28
IPSEC: Completed inbound VPN context, SPI 0x97550AC8
VPN handle: 0x0002B344
IPSEC: Updating outbound VPN context 0x0002524C, SPI 0xB857E226
Flags: 0x00000005
SA : 0x028B75E8
SPI : 0xB857E226
MTU : 1500 bytes
VCID : 0x00000000
Peer : 0x0002B344
SCB : 0x028B7528
Channel: 0x01693F28
IPSEC: Completed outbound VPN context, SPI 0xB857E226
VPN handle: 0x0002524C
IPSEC: Completed outbound inner rule, SPI 0xB857E226
Rule ID: 0x028A9988
IPSEC: Completed outbound outer SPD rule, SPI 0xB857E226
Rule ID: 0x028B5D90
IPSEC: New inbound tunnel flow rule, SPI 0x97550AC8
Src addr: 10.1.1.0
Src mask: 255.255.255.0
Dst addr: 10.2.2.0
Dst mask: 255.255.255.0
Src ports
Upper: 0
Lower: 0
Op : ignore
Dst ports
Upper: 0
Lower: 0

```
Op : ignore
Protocol: 0
Use protocol: false
SPI: 0x00000000
Use SPI: false
IPSEC: Completed inbound tunnel flow rule, SPI 0x97550AC8
Rule ID: 0x027FF7F8
IPSEC: New inbound decrypt rule, SPI 0x97550AC8
Src addr: 172.16.1.3
Src mask: 255.255.255.255
Dst addr: 192.168.1.2
Dst mask: 255.255.255.255
Src ports
Upper: 0
Lower: 0
Op : ignore
Dst ports
Upper: 0
Lower: 0
Op : ignore
Protocol: 50
Use protocol: true
SPI: 0x97550AC8
Use SPI: true
IPSEC: Completed inbound decrypt rule, SPI 0x97550AC8
Rule ID: 0x028BB318
IPSEC: New inbound permit rule, SPI 0x97550AC8
Src addr: 172.16.1.3
Src mask: 255.255.255.255
Dst addr: 192.168.1.2
Dst mask: 255.255.255.255
Src ports
Upper: 0
Lower: 0
Op : ignore
Dst ports
Upper: 0
Lower: 0
Op : ignore
Protocol: 50
Use protocol: true
SPI: 0x97550AC8
Use SPI: true
IPSEC: Completed inbound permit rule, SPI 0x97550AC8
Rule ID: 0x028A7460
```

Router IOS remoto - salidas de los debugs

```
Router#debug crypto isakmp
*Dec 31 01:18:51.830: ISAKMP: received ke message (1/1)
*Dec 31 01:18:51.830: ISAKMP:(0:0:N/A:0): SA request profile is (NULL)
*Dec 31 01:18:51.830: ISAKMP: Created a peer struct for 192.168.1.2, peer port 500
*Dec 31 01:18:51.830: ISAKMP: New peer created peer = 0x64DC2CB4 peer_handle = 0
x80000022
*Dec 31 01:18:51.834: ISAKMP: Locking peer struct 0x64DC2CB4, IKE refcount 1 for
isakmp_initiator
*Dec 31 01:18:51.834: ISAKMP: local port 500, remote port 500
*Dec 31 01:18:51.834: ISAKMP: set new node 0 to QM_IDLE
*Dec 31 01:18:51.834: insert sa successfully sa = 640D2660
*Dec 31 01:18:51.834: ISAKMP:(0:0:N/A:0):Can not start Aggressive mode,
trying Main mode.
*Dec 31 01:18:51.834: ISAKMP:(0:0:N/A:0):found peer pre-shared key
matching 192.168.1.2
*Dec 31 01:18:51.838: ISAKMP:(0:0:N/A:0): constructed NAT-T vendor-07 ID
```

*Dec 31 01:18:51.838: ISAKMP:(0:0:N/A:0): constructed NAT-T vendor-03 ID
*Dec 31 01:18:51.838: ISAKMP:(0:0:N/A:0): constructed NAT-T vendor-02 ID
*Dec 31 01:18:51.838: ISAKMP:(0:0:N/A:0):Input = IKE_MESG_FROM_IPSEC, IKE_SA_REQ_MM
*Dec 31 01:18:51.838: ISAKMP:(0:0:N/A:0):Old State = IKE_READY New State = IKE_I_MM1

*Dec 31 01:18:51.838: ISAKMP:(0:0:N/A:0): **beginning Main Mode exchange**
*Dec 31 01:18:51.842: ISAKMP:(0:0:N/A:0): sending packet to 192.168.1.2 my_port
500 peer_port 500 (I) MM_NO_STATE
*Dec 31 01:18:51.846: ISAKMP (0:0): received packet from 192.168.1.2 dport 500 s
port 500 Global (I) MM_NO_STATE
*Dec 31 01:18:51.850: ISAKMP:(0:0:N/A:0):Input = IKE_MESG_FROM_PEER, IKE_MM_EXCH
*Dec 31 01:18:51.850: ISAKMP:(0:0:N/A:0):Old State = IKE_I_MM1 New State = IKE_I_MM2

*Dec 31 01:18:51.850: ISAKMP:(0:0:N/A:0): processing SA payload. message ID = 0
*Dec 31 01:18:51.850: ISAKMP:(0:0:N/A:0): processing vendor id payload
*Dec 31 01:18:51.850: ISAKMP:(0:0:N/A:0): vendor ID seems Unity/DPD but
major 194 mismatch
*Dec 31 01:18:51.850: ISAKMP:(0:0:N/A:0):**found peer pre-shared key
matching 192.168.1.2**

*Dec 31 01:18:51.854: ISAKMP:(0:0:N/A:0): local preshared key found
*Dec 31 01:18:51.854: ISAKMP : Scanning profiles for xauth ...
*Dec 31 01:18:51.854: ISAKMP:(0:0:N/A:0):Checking ISAKMP transform 1
against priority 1 policy
*Dec 31 01:18:51.854: ISAKMP: encryption 3DES-CBC
*Dec 31 01:18:51.854: ISAKMP: hash MD5
*Dec 31 01:18:51.854: ISAKMP: default group 2
*Dec 31 01:18:51.854: ISAKMP: auth pre-share
*Dec 31 01:18:51.854: ISAKMP: life type in seconds
*Dec 31 01:18:51.854: ISAKMP: life duration (VPI) of 0x0 0x1 0x51 0x80
*Dec 31 01:18:51.858: ISAKMP:(0:0:N/A:0):atts are acceptable. Next payload is 0
*Dec 31 01:18:51.998: ISAKMP:(0:1:SW:1): processing vendor id payload
*Dec 31 01:18:51.998: ISAKMP:(0:1:SW:1): vendor ID seems Unity/DPD but
major 194 mismatch
*Dec 31 01:18:51.998: ISAKMP:(0:1:SW:1):Input = IKE_MESG_INTERNAL,
IKE_PROCESS_MAIN_MODE
*Dec 31 01:18:51.998: ISAKMP:(0:1:SW:1):Old State = IKE_I_MM2 New State = IKE_I_MM2
*Dec 31 01:18:52.002: ISAKMP:(0:1:SW:1): sending packet to 192.168.1.2 my_port 5
00 peer_port 500 (I) MM_SA_SETUP
*Dec 31 01:18:52.006: ISAKMP:(0:1:SW:1):Input = IKE_MESG_INTERNAL,
IKE_PROCESS_COMPLETE

*Dec 31 01:18:52.006: ISAKMP:(0:1:SW:1):Old State = IKE_I_MM2 New State = IKE_I_MM3
*Dec 31 01:18:52.066: ISAKMP (0:134217729): received packet from 192.168.1.2 dpo
rt 500 sport 500 Global (I) MM_SA_SETUP
*Dec 31 01:18:52.066: ISAKMP:(0:1:SW:1):Input = IKE_MESG_FROM_PEER, IKE_MM_EXCH
*Dec 31 01:18:52.066: ISAKMP:(0:1:SW:1):Old State = IKE_I_MM3 New State = IKE_I_MM4
*Dec 31 01:18:52.070: ISAKMP:(0:1:SW:1): processing KE payload. message ID = 0
*Dec 31 01:18:52.246: ISAKMP:(0:1:SW:1): processing NONCE payload. message ID =0
*Dec 31 01:18:52.246: ISAKMP:(0:1:SW:1):found peer pre-shared key matching 192.168.1.2
*Dec 31 01:18:52.250: ISAKMP:(0:1:SW:1):SKEYID state generated
*Dec 31 01:18:52.250: ISAKMP:(0:1:SW:1): processing vendor id payload
*Dec 31 01:18:52.250: ISAKMP:(0:1:SW:1): vendor ID is Unity
*Dec 31 01:18:52.250: ISAKMP:(0:1:SW:1): processing vendor id payload
*Dec 31 01:18:52.250: ISAKMP:(0:1:SW:1): vendor ID seems Unity/DPD but
major 227 mismatch
*Dec 31 01:18:52.250: ISAKMP:(0:1:SW:1): vendor ID is XAUTH
*Dec 31 01:18:52.250: ISAKMP:(0:1:SW:1): processing vendor id payload
*Dec 31 01:18:52.254: ISAKMP:(0:1:SW:1): speaking to another IOS box!
*Dec 31 01:18:52.254: ISAKMP:(0:1:SW:1): processing vendor id payload
*Dec 31 01:18:52.254: ISAKMP:(0:1:SW:1):vendor ID seems Unity/DPD but hash mismatch
*Dec 31 01:18:52.254: ISAKMP:(0:1:SW:1):Input = IKE_MESG_INTERNAL,
IKE_PROCESS_MAIN_MODE
*Dec 31 01:18:52.254: ISAKMP:(0:1:SW:1):Old State = IKE_I_MM4 New State = IKE_I_MM4
*Dec 31 01:18:52.262: ISAKMP:(0:1:SW:1):Send initial contact
*Dec 31 01:18:52.262: ISAKMP:(0:1:SW:1):**SA is doing pre-shared key**

authentication using id type ID_IPV4_ADDR

```
*Dec 31 01:18:52.266: ISAKMP (0:134217729): ID payload
  next-payload : 8
  type         : 1
  address      : 172.16.1.3
  protocol     : 17
  port        : 500
  length      : 12
*Dec 31 01:18:52.266: ISAKMP:(0:1:SW:1):Total payload length: 12
*Dec 31 01:18:52.266: ISAKMP:(0:1:SW:1): sending packet to 192.168.1.2 my_port 5
00 peer_port 500 (I) MM_KEY_EXCH
*Dec 31 01:18:52.270: ISAKMP:(0:1:SW:1):Input = IKE_MESG_INTERNAL, IKE_PROCESS_COMPLETE
*Dec 31 01:18:52.270: ISAKMP:(0:1:SW:1):Old State = IKE_I_MM4 New State = IKE_I_MM5
*Dec 31 01:18:52.342: ISAKMP (0:134217729): received packet from 192.168.1.2 dpo
rt 500 sport 500 Global (I) MM_KEY_EXCH
*Dec 31 01:18:52.342: ISAKMP:(0:1:SW:1): processing ID payload. message ID = 0
*Dec 31 01:18:52.342: ISAKMP (0:134217729): ID payload
  next-payload : 8
  type         : 1
  address      : 192.168.1.2
  protocol     : 17
  port        : 500
  length      : 12
*Dec 31 01:18:52.342: ISAKMP:(0:1:SW:1):: peer matches *none* of the profiles
*Dec 31 01:18:52.346: ISAKMP:(0:1:SW:1): processing HASH payload. message ID = 0
*Dec 31 01:18:52.346: ISAKMP:received payload type 17
*Dec 31 01:18:52.346: ISAKMP:(0:1:SW:1): processing vendor id payload
*Dec 31 01:18:52.346: ISAKMP:(0:1:SW:1): vendor ID is DPD
*Dec 31 01:18:52.346: ISAKMP:(0:1:SW:1):SA authentication status: authenticated
*Dec 31 01:18:52.346: ISAKMP:(0:1:SW:1):SA has been authenticated with 192.168.1.2
*Dec 31 01:18:52.346: ISAKMP: Trying to insert a peer 172.16.1.3/192.168.1.2/500
/, and inserted successfully 64DC2CB4.
*Dec 31 01:18:52.346: ISAKMP:(0:1:SW:1):Input = IKE_MESG_FROM_PEER, IKE_MM_EXCH
*Dec 31 01:18:52.350: ISAKMP:(0:1:SW:1):Old State = IKE_I_MM5 New State =
IKE_I_MM6
*Dec 31 01:18:52.350: ISAKMP:(0:1:SW:1):Input = IKE_MESG_INTERNAL,
IKE_PROCESS_MAIN_MODE
*Dec 31 01:18:52.350: ISAKMP:(0:1:SW:1):Old State = IKE_I_MM6 New State = IKE_I_MM6
*Dec 31 01:18:52.354: ISAKMP:(0:1:SW:1):Input = IKE_MESG_INTERNAL,
IKE_PROCESS_COMPLETE
*Dec 31 01:18:52.354: ISAKMP:(0:1:SW:1):Old State = IKE_I_MM6 New State =
IKE_P1_COMPLETE
*Dec 31 01:18:52.358: ISAKMP:(0:1:SW:1):beginning Quick Mode exchange, M-ID
of 1270905456
*Dec 31 01:18:52.362: ISAKMP:(0:1:SW:1): sending packet to 192.168.1.2 my_port 5
00 peer_port 500 (I) QM_IDLE
*Dec 31 01:18:52.362: ISAKMP:(0:1:SW:1):Node 1270905456, Input =
IKE_MESG_INTERNAL, IKE_INIT_QM
*Dec 31 01:18:52.362: ISAKMP:(0:1:SW:1):Old State = IKE_QM_READY
New State = IKE_QM_I_QM1
*Dec 31 01:18:52.362: ISAKMP:(0:1:SW:1):Input = IKE_MESG_INTERNAL,
IKE_PHASE1_COMPLETE
*Dec 31 01:18:52.366: ISAKMP:(0:1:SW:1):Old State = IKE_P1_COMPLETE
New State = IKE_P1_COMPLETE
*Dec 31 01:18:52.374: ISAKMP (0:134217729): received packet from 192.168.1.2 dpo
rt 500 sport 500 Global (I) QM_IDLE
*Dec 31 01:18:52.378: ISAKMP:(0:1:SW:1): processing HASH payload.
message ID = 1270905456
*Dec 31 01:18:52.378: ISAKMP:(0:1:SW:1): processing SA payload.
message ID = 1270905456
*Dec 31 01:18:52.378: ISAKMP:(0:1:SW:1):Checking IPsec proposal 1
*Dec 31 01:18:52.378: ISAKMP: transform 1, ESP_3DES
*Dec 31 01:18:52.378: ISAKMP:  attributes in transform:
```

*Dec 31 01:18:52.378: ISAKMP: SA life type in seconds
*Dec 31 01:18:52.378: ISAKMP: SA life duration (basic) of 3600
*Dec 31 01:18:52.378: ISAKMP: SA life type in kilobytes
*Dec 31 01:18:52.378: ISAKMP: SA life duration (VPI) of 0x0 0x46 0x50 0x0
*Dec 31 01:18:52.378: ISAKMP: encaps is 1 (Tunnel)
*Dec 31 01:18:52.382: ISAKMP: authenticator is HMAC-MD5
*Dec 31 01:18:52.382: ISAKMP:(0:1:SW:1):atts are acceptable.
*Dec 31 01:18:52.382: ISAKMP:(0:1:SW:1): processing NONCE payload.
message ID =1270905456
*Dec 31 01:18:52.382: ISAKMP:(0:1:SW:1): processing ID payload.
message ID = 1270905456
*Dec 31 01:18:52.382: ISAKMP:(0:1:SW:1): processing ID payload.
message ID = 1270905456
*Dec 31 01:18:52.386: ISAKMP: Locking peer struct 0x64DC2CB4,
IPSEC refcount 1 for for stuff_ke
*Dec 31 01:18:52.390: ISAKMP:(0:1:SW:1): Creating IPsec SAs
*Dec 31 01:18:52.390: inbound SA from 192.168.1.2 to 172.16.1.3 (f/i) 0
/ 0
(proxy 10.2.2.0 to 10.1.1.0)
*Dec 31 01:18:52.390: has spi 0x9AC1E72C and conn_id 0 and flags 2
*Dec 31 01:18:52.390: lifetime of 3600 seconds
*Dec 31 01:18:52.390: lifetime of 4608000 kilobytes
*Dec 31 01:18:52.390: has client flags 0x0
*Dec 31 01:18:52.390: outbound SA from 172.16.1.3 to 192.168.1.2 (f/i) 0
/0
(proxy 10.1.1.0 to 10.2.2.0)
*Dec 31 01:18:52.394: has spi -1006743632 and conn_id 0 and flags A
*Dec 31 01:18:52.394: lifetime of 3600 seconds
*Dec 31 01:18:52.394: lifetime of 4608000 kilobytes
*Dec 31 01:18:52.394: has client flags 0x0
*Dec 31 01:18:52.394: ISAKMP:(0:1:SW:1): sending packet to 192.168.1.2 my_port 5
00 peer_port 500 (I) QM_IDLE
*Dec 31 01:18:52.398: ISAKMP:(0:1:SW:1):deleting node 1270905456 error
FALSE reason "No Error"
*Dec 31 01:18:52.398: ISAKMP:(0:1:SW:1):Node 1270905456, Input =
IKE_MSG_FROM_PEER, IKE_QM_EXCH
*Dec 31 01:18:52.398: ISAKMP:(0:1:SW:1):Old State = IKE_QM_I_QM1
New State = IKE_QM_PHASE2_COMPLETE
*Dec 31 01:18:52.402: ISAKMP: Locking peer struct 0x64DC2CB4, IPSEC
refcount 2 for from create_transforms
*Dec 31 01:18:52.402: ISAKMP: Unlocking IPSEC struct 0x64DC2CB4 from
create_transforms, count 1
*Dec 31 01:19:06.130: ISAKMP (0:134217729): received packet from 192.168.1.2 dpo
rt 500 sport 500 Global (I) QM_IDLE
*Dec 31 01:19:06.130: ISAKMP: set new node 372376968 to QM_IDLE
*Dec 31 01:19:06.130: ISAKMP:(0:1:SW:1): processing HASH payload.
message ID = 372376968
*Dec 31 01:19:06.134: ISAKMP:(0:1:SW:1): processing NOTIFY DPD/R_U_THERE protocol 1
spi 0, message ID = 372376968, sa = 640D2660
*Dec 31 01:19:06.134: ISAKMP:(0:1:SW:1):deleting node 372376968 error
FALSE reason "Informational (in) state 1"
*Dec 31 01:19:06.134: ISAKMP:(0:1:SW:1):Input = IKE_MSG_FROM_PEER,
IKE_INFO_NOTIFY
*Dec 31 01:19:06.134: ISAKMP:(0:1:SW:1):Old State = IKE_P1_COMPLETE
New State = IKE_P1_COMPLETE

*Dec 31 01:19:06.134: ISAKMP:(0:1:SW:1):DPD/R_U_THERE received from
peer 192.168.1.2, sequence 0x7E805468
*Dec 31 01:19:06.138: ISAKMP: set new node 2096423279 to QM_IDLE
*Dec 31 01:19:06.138: ISAKMP:(0:1:SW:1):Sending NOTIFY DPD/R_U_THERE_ACK protocol 1
spi 1689358936, message ID = 2096423279
*Dec 31 01:19:06.138: ISAKMP:(0:1:SW:1): seq. no 0x7E805468
*Dec 31 01:19:06.138: ISAKMP:(0:1:SW:1): sending packet to 192.168.1.2 my_port 5
00 peer_port 500 (I) QM_IDLE

```
*Dec 31 01:19:06.142: ISAKMP:(0:1:SW:1):purging node 2096423279
*Dec 31 01:19:06.142: ISAKMP:(0:1:SW:1):Input = IKE_MSG_FROM_PEER,
IKE_MSG_KEEP_ALIVE
*Dec 31 01:19:06.142: ISAKMP:(0:1:SW:1):Old State = IKE_P1_COMPLETE
New State = IKE_P1_COMPLETE
Router#debug crypto ipsec
*Dec 31 01:29:05.402: IPSEC(sa_request): ,
  (key eng. msg.) OUTBOUND local= 172.16.1.3, remote= 192.168.1.2,
    local_proxy= 10.1.1.0/255.255.255.0/0/0 (type=4),
    remote_proxy= 10.2.2.0/255.255.255.0/0/0 (type=4),
    protocol= ESP, transform= esp-3des esp-md5-hmac (Tunnel),
    lifedur= 3600s and 4608000kb,
    spi= 0xB857E226(3092767270), conn_id= 0, keysize= 0, flags= 0x400A
*Dec 31 01:29:05.774: IPSEC(validate_proposal_request): proposal part #1,
  (key eng. msg.) INBOUND local= 172.16.1.3, remote= 192.168.1.2,
    local_proxy= 10.1.1.0/255.255.255.0/0/0 (type=4),
    remote_proxy= 10.2.2.0/255.255.255.0/0/0 (type=4),
    protocol= ESP, transform= esp-3des esp-md5-hmac (Tunnel),
    lifedur= 0s and 0kb,
    spi= 0x0(0), conn_id= 0, keysize= 0, flags= 0x2
*Dec 31 01:29:05.778: Crypto mapdb : proxy_match
  src addr      : 10.1.1.0
  dst addr      : 10.2.2.0
  protocol      : 0
  src port      : 0
  dst port      : 0
*Dec 31 01:29:05.782: IPSEC(key_engine): got a queue event with 2 kei messages
*Dec 31 01:29:05.782: IPSEC(initialize_sas): ,
  (key eng. msg.) INBOUND local= 172.16.1.3, remote= 192.168.1.2,
    local_proxy= 10.1.1.0/255.255.255.0/0/0 (type=4),
    remote_proxy= 10.2.2.0/255.255.255.0/0/0 (type=4),
    protocol= ESP, transform= esp-3des esp-md5-hmac (Tunnel),
    lifedur= 3600s and 4608000kb,
    spi= 0xB857E226(3092767270), conn_id= 0, keysize= 0, flags= 0x2
*Dec 31 01:29:05.786: IPSEC(initialize_sas): ,
  (key eng. msg.) OUTBOUND local= 172.16.1.3, remote= 192.168.1.2,
    local_proxy= 10.1.1.0/255.255.255.0/0/0 (type=4),
    remote_proxy= 10.2.2.0/255.255.255.0/0/0 (type=4),
    protocol= ESP, transform= esp-3des esp-md5-hmac (Tunnel),
    lifedur= 3600s and 4608000kb,
    spi= 0x97550AC8(2538932936), conn_id= 0, keysize= 0, flags= 0xA
*Dec 31 01:29:05.786: Crypto mapdb : proxy_match
  src addr      : 10.1.1.0
  dst addr      : 10.2.2.0
  protocol      : 0
  src port      : 0
  dst port      : 0
*Dec 31 01:29:05.786: IPSEC(crypto_ipsec_sa_find_ident_head): reconnecting with
the same proxies and 192.168.1.2
*Dec 31 01:29:05.786: IPsec: Flow_switching Allocated flow for sibling 80000006
*Dec 31 01:29:05.786: IPSEC(policy_db_add_ident): src 10.1.1.0, dest 10.2.2.0, d
est_port 0
*Dec 31 01:29:05.790: IPSEC(create_sa): sa created,
  (sa) sa_dest= 172.16.1.3, sa_proto= 50,
    sa_spi= 0xB857E226(3092767270),
    sa_trans= esp-3des esp-md5-hmac , sa_conn_id= 2001
*Dec 31 01:29:05.790: IPSEC(create_sa): sa created,
  (sa) sa_dest= 192.168.1.2, sa_proto= 50,
    sa_spi= 0x97550AC8(2538932936),
    sa_trans= esp-3des esp-md5-hmac , sa_conn_id= 2002
```

Información Relacionada

- [Firewall de la última generación de las 5500-X Series de Cisco ASA](#)
- [Referencias de comandos de Cisco ASA](#)
- [Página de Soporte de IPSec Negotiation/IKE Protocols](#)
- [Solicitudes de Comentarios \(RFC\)](#)
- [Soporte Técnico y Documentación - Cisco Systems](#)