

# Esempio di configurazione della sovrapposizione IPV6 di EVPN Vxlan

## Sommario

[Introduzione](#)

[Prerequisiti](#)

[Componenti usati](#)

[Esempio di rete](#)

[Configurazione di alto livello](#)

[Configurazione](#)

[Verifica](#)

[Risoluzione dei problemi](#)

## Introduzione

In questo documento viene descritto come distribuire la sovrapposizione IPv6 della VXLAN (Virtual Extensible LAN) L2 Ethernet VPN (EVPN) su Nexus 9000.

## Prerequisiti

### Requisiti

Cisco raccomanda la conoscenza dei seguenti argomenti:

- Border Gateway Protocol (BGP)
- OSPF (Open Shortest Path First)
- EVPN
- IPV6


## Componenti usati

Le informazioni fornite in questo documento si basano sulle seguenti versioni software e hardware:

- Cisco N9K-C93180YC-FX con versione 9.3(9)
- Cisco N9K-C93216TC-FX2 con versione 9.3(7)
- Cisco Aggregation Service Router (ASR) con host finale abilitato per IPv4 e IPv6
- Cisco N9K-C93180YC-EX con versione 9.3(8)

Le informazioni discusse in questo documento fanno riferimento a dispositivi usati in uno specifico ambiente di emulazione. Su tutti i dispositivi menzionati nel documento la configurazione è stata ripristinata ai valori predefiniti. Se la rete è operativa, valutare attentamente eventuali conseguenze derivanti dall'uso dei comandi.

## Esempio di rete

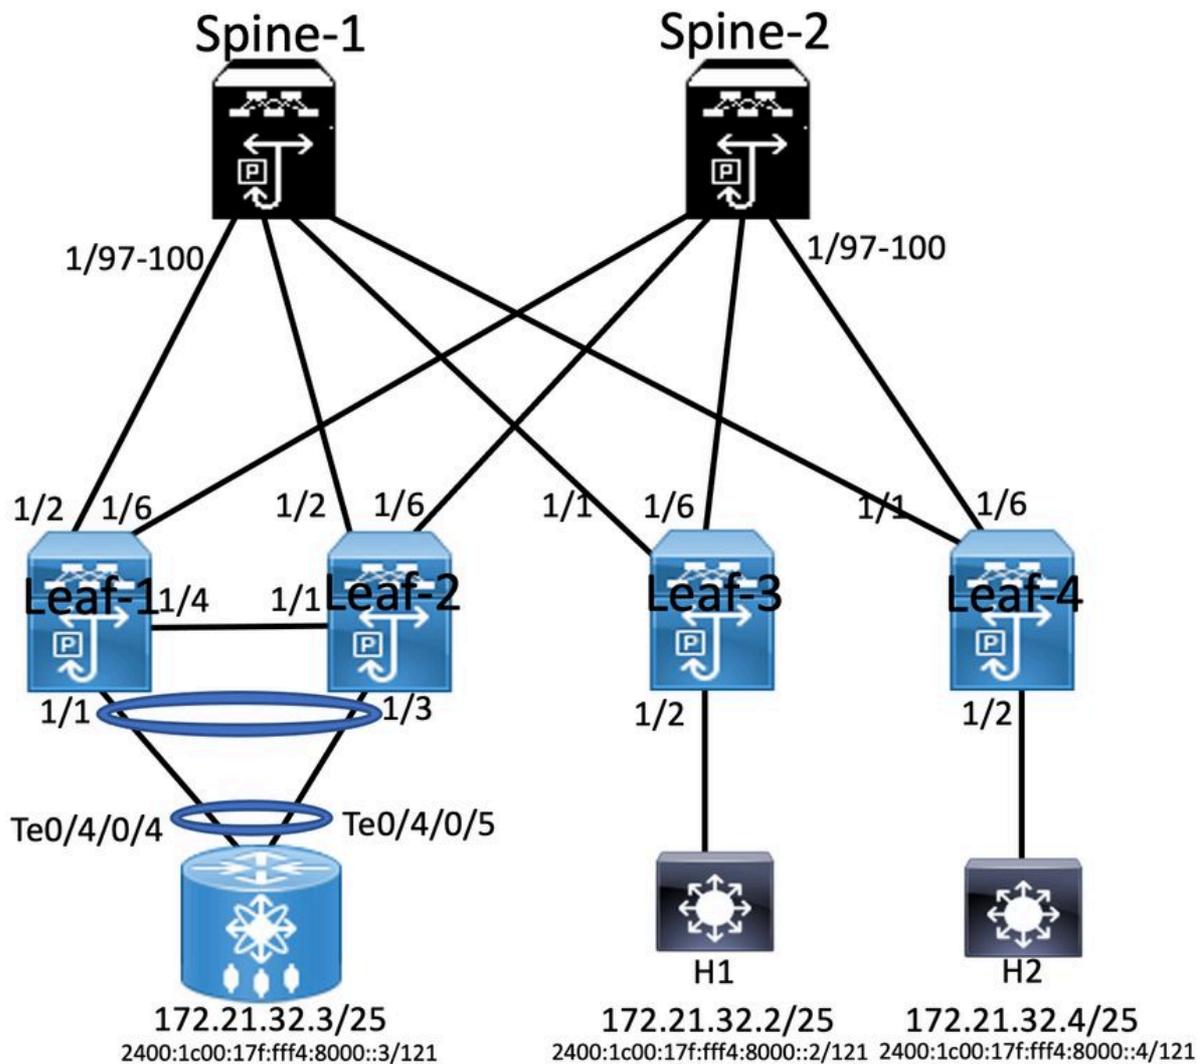

## Configurazione di alto livello

1. Funzionalità di installazione
2. Configura indirizzo IP - Sottolineato
3. Configurare IGP - OSPF
4. Configurazione MP - BGP
5. Configurazione della sovrapposizione VLAN ed EVPN
6. Configurazione di e-BGP tra host e FOGLIA

## Configurazione

Enabling Features	Interface Configuration	BGP/EVPN Configuration	VPC Configuration	VTEP Configuration
<pre> nv overlay evpn feature ospf feature bgp feature pim feature fabric forwarding feature interface-plan feature vn-segment-vlan-based feature l3cp feature vpc feature nv overlay fabric forwarding anycast-gateway-mac 0000.2222.3333 ip pim rp-address 10.3.1.1 group-list 224.0.0.0/4 ip pim ssm range 232.0.0.0/8 vlan 1,10,20,100,511-513,708-709,711,1179,1664-1665,1667-1668,1894 vlan 100 vn-segment 10100 vlan 511 vn-segment 10511  route-map PERMIT-ALL permit 10 router ospf 100 router-id 10.1.1.1           </pre>	<pre> interface loopback0 ip address 10.1.1.1/32 ip address 10.10.10.10/32 secondary ip router ospf 100 area 0.0.0.0 ip pim sparse-mode ipcam monitor scale  interface ethernet1/2 mtu 9216 ip address 192.168.0.1/24 ip router ospf 100 area 0.0.0.0 ip pim sparse-mode  vrf context SGI_IAC vni 10100 rd auto address-family ipv4 unicast route-target both auto route-target both auto evpn address-family ipv6 unicast route-target both auto route-target auto evpn           </pre>	<pre> router bgp 6500 router-id 10.1.1.1 address-family ipv4 unicast address-family ipv6 unicast address-family l2vpn evpn advertise-pip neighbour 10.3.1.1 remote-as 6500 update-source loopback0 address-family l2vpn evpn send-community send-community extended  vrf SGI_IAC Address-family ipv4 unicast  evpn vni 10511 l2 rd auto route-target import auto route-target export auto           </pre>	<pre> vpc domain 10 peer-switch peer-keepalive destination 10.122.163.140 source 10.122.176.45 peer-gateway ipv6 nd synchronize ip arp synchronize interface port-channel10 switchport switchport mode trunk spanning-tree port type network vpc peer-link interface ethernet 1/4 switchport switchport mode trunk channel-group 10 mode trunk interface port-channel 20 switchport switchport mode trunk switchport trunk allowed vlan 511 vpc 10 interface ethernet1/1 switchport switchport mode trunk switchport trunk allowed vlan 511 channel-group 20           </pre>	<pre> interface vlan100 vrf member SGI_IAC no ip redirects ip forward no ipv6 redirects  interface vlan511 vrf member SGI_IAC no ip redirects ip address 172.21.32.6/25 ip6 address 2400:1000:17f:fff4:8000::4/121 no ipv6 redirects fabric forwarding mode any-cast-gateway  interface vte1 advertise virtual-rmac host-reachability-protocol bgp source-interface loopback0 member vni 10100 associate-vhf member vni 10511 suppress-arp mcast-group 239.1.1.1           </pre>

Leaf-2				
Enabling Feature	Interface Configuration	BGP/EVPN Configuration	Vpc Configuration	VTEP Configuration
nv overlay evpn feature ospf feature bgp feature pim feature fabric forwarding feature interface-plan feature vn-segment-vlan-based feature lacp feature vpc feature nv overlay fabric forwarding anycast-gateway-mac 0000.2222.3333 ip pim rp-address 1.1.1.1 group-list 224.0.0.0/4 ip pim ssm range 232.0.0.0/8 vlan 1,10,20,100,511-513,708-709,711,1179,1664-1665,1667-1668,1894 vlan 100 vn-segment 10100 vni 511 vn-segment 10511 route-map PERMIT-ALL permit 10 router ospf 100 router-id 10.2.1.1	interface loopback0 ip address 10.2.1.1/32 ip address 10.10.10.10/32 secondary ip router ospf 100 area 0.0.0.0 ip pim sparse-mode icam monitor scale interface ethernet1/2 mtu 9216 ip address 192.168.3.2/24 ip router ospf 100 area 0.0.0.0 ip pim sparse-mode vrf context SGI_IAC vni 10100 rd auto address-family ipv4 unicast route-target both auto evpn address-family ipv6 unicast route-target both auto route-target auto evpn	router bgp 6500 router-id 10.2.1.1 address-family ipv4 unicast address-family ipv6 unicast address-family l2vpn evpn advertise-pip neighbour 10.3.1.1 remote-as 6500 update-source loopback0 address-family l2vpn evpn send-community send-community extended vrf SGI_IAC Address-family ipv4 unicast evpn vni 10511 l2 rd auto route-target import auto route-target export auto	vpc domain 10 peer-switch peer-keepalive destination 10.122.176.45 source 10.122.163.140 peer-gateway ipv6 rd synchronize ip arp synchronize interface port-channel10 switchport switchport mode trunk spanning-tree port type network vpc peer-link interface ethernet 1/4 switchport switchport mode trunk channel-group 10 mode trunk interface port-channel 20 switchport switchport mode trunk switchport trunk allowed vlan 511 vpc 10 interface ethernet1/1 switchport switchport mode trunk switchport trunk allowed vlan 511 channel-group 20	interface vian100 vrf member SGI_IAC no ip redirects ip forward no ipv6 redirects interface vian511 vrf member SGI_IAC no ip redirects ip address 172.21.32.6/25 ipv6 address 2400:1c00:17f:fff4:8000::4/121 no ipv6 redirects fabric forwarding mode any cast-gateway interface vne1 advertise virtual-rmac host-reachability protocol bgp source-interface loopback0 member vni 10100 associate-vhf member vni 10511 suppress-arp mcast-group 239.1.1.1

Spine-1 Configuration		
Enabling Features	Interface Configuration	BGP/EVPN Configuration
nv overlay evpn feature ospf feature bgp feature pim feature fabric forwarding feature interface-plan feature vn-segment-vlan-based feature lacp feature nv overlay ip pim rp-address 10.3.1.1 group-list 224.0.0.0/4 ip pim ssm range 232.0.0.0/8 vlan 1,10,20,100,511-513,708-709,711,1179,1664-1665,1667-1668,1894 Interface loopback0 IP address 1.1.1.1/32 Ip router ospf 100 area 0.0.0.0 Ip pim sparse-mode Icam monitor scale Router ospf 100 Router-id 10.3.1.1 Router bgp 6500 Router-id 10.3.1.1	interface Ethernet1/97 mtu 9216 ip address 172.168.0.2/24 ip router ospf 100 area 0.0.0.0 ip pim sparse-mode interface Ethernet1/98 mtu 9216 ip address 172.168.2.2/24 ip router ospf 100 area 0.0.0.0 ip pim sparse-mode interface Ethernet1/99 mtu 9216 ip address 192.168.1.2/24 ip router ospf 100 area 0.0.0.0 ip pim sparse-mode interface Ethernet1/100 mtu 9216 ip address 172.168.3.1/24 ip router ospf 100 area 0.0.0.0 ip pim sparse-mode	router bgp 6500 address-family ipv4 unicast address-family ipv6 unicast address-family l2vpn evpn neighbour 10.1.1.1 remote-as 6500 update-source loopback0 address-family l2vpn evpn send-community send-community extended route-reflector-client neighbour 10.2.1.1 remote-as 6500 update-source loopback0 address-family l2vpn evpn send-community send-community extended route-reflector-client neighbour 10.4.1.1 remote-as 6500 update-source loopback0 address-family l2vpn evpn send-community send-community extended route-reflector-client

Leaf-3			
Enabling Features	Interface Configuration	BGP/EVPN Configuration	VTEP Configuration
nv overlay evpn feature ospf feature bgp feature pim feature fabric forwarding feature interface-plan feature vn-segment-vlan-based feature lacp feature nv overlay fabric forwarding anycast-gateway-mac 0000.2222.3333 ip pim rp-address 10.3.1.1 group-list 224.0.0.0/4 ip pim ssm range 232.0.0.0/8 vlan 1,10,20,100,511-513,708-709,711,1179,1664-1665,1667-1668,1894 vlan 100 vn-segment 10100 vni 511 vn-segment 10511 route-map PERMIT-ALL permit 10 router ospf 100 router-id 10.4.1.1	interface loopback0 ip address 10.4.1.1/32 ip router ospf 100 area 0.0.0.0 ip pim sparse-mode icam monitor scale interface ethernet1/1 mtu 9216 ip address 192.168.1.1/24 ip router ospf 100 area 0.0.0.0 ip pim sparse-mode vrf context SGI_IAC vni 10100 rd auto address-family ipv4 unicast route-target both auto route-target both auto evpn address-family ipv6 unicast route-target both auto route-target auto evpn	router bgp 6500 router-id 10.4.1.1 address-family ipv4 unicast address-family ipv6 unicast address-family l2vpn evpn neighbour 10.3.1.1 remote-as 6500 update-source loopback0 address-family l2vpn evpn send-community send-community extended vrf SGI_IAC address-family ipv4 unicast address-family ipv6 unicast evpn vni 10511 l2 rd auto route-target import auto route-target export auto	interface vian100 vrf member SGI_IAC no ip redirects ip forward no ipv6 redirects interface vian511 vrf member SGI_IAC no ip redirects ip address 172.21.32.6/25 ipv6 address 2400:1c00:17f:fff4:8000::4/121 no ipv6 redirects fabric forwarding mode any cast-gateway interface vne1 no shutdown host-reachability protocol bgp source-interface loopback0 member vni 10100 associate-vhf member vni 10511 suppress-arp mcast-group 239.1.1.1

Host 1 Configuration	ASR Router	Host 2 Configuration
interface Bundle-Ether1.511 description JE-PCN01-PC-UP-SGI_IAC vrf SGI_IAC ipv4 address 172.21.32.2 255.255.255.128 ipv6 address 2400:1c00:17f:fff4:8000::2/121 encapsulation dot1q511	interface Bundle-Ether1.511 description JE-PCN01-PC-UP-SGI_IAC vrf SGI_IAC ipv4 address 172.21.32.3 255.255.255.128 ipv6 address 2400:1c00:17f:fff4:8000::3/121 encapsulation dot1q511	interface Bundle-Ether1.511 description JE-PCN01-PC-UP-SGI_IAC vrf SGI_IAC ipv4 address 172.21.32.4 255.255.255.128 ipv6 address 2400:1c00:17f:fff4:8000::5/121 encapsulation dot1q511

## Verifica

Fare riferimento a questa sezione per verificare che la configurazione funzioni correttamente.

<pre>RP/0/RSP1/CPU0:ASR-9906-A#ping vrf SGi_IAC 172.21.32.2 Tue Jul 12 03:35:33.528 UTC Type escape sequence to abort. Sending 5, 100-byte ICMP Echos to 172.21.32.2, timeout is 2 seconds: !!!! Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/3 ms RP/0/RSP1/CPU0:ASR-9906- A#ping vrf SGi_IAC 2400:1c00:17f:fff4:8000::2 Tue Jul 12 03:35:36.536 UTC Type escape sequence to abort. Sending 5, 100-byte ICMP Echos to 2400:1c00:17f:fff4:8000::2, timeout is 2 seconds: !!!! Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/1 ms</pre>	<pre>H1#ping 172.21.32.3 Tue Jul 12 03:36:00.993 UTC Type escape sequence to abort. Sending 5, 100-byte ICMP Echos to 172.21.32.3, timeout is 2 seconds: !!!! Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/1 ms H1#ping vrf SGi_IAC 2400:1c00:17f:fff4:8000::3 Tue Jul 12 03:36:03.789 UTC Type escape sequence to abort. Sending 5, 100-byte ICMP Echos to 2400:1c00:17f:fff4:8000::3, timeout is 2 seconds: !!!! Success rate is 100 percent (5/5), round-trip min/avg/max = 1/2/3 ms</pre>
---	--

## Risoluzione dei problemi

Le informazioni contenute in questa sezione permettono di risolvere i problemi relativi alla configurazione.

Utilizzare questi comandi per risolvere i problemi relativi alla configurazione:

**#show bgp l2vpn evpn**

**#show nve peer**

**#show nve vni**

**# show ip arp <> >> On host side**

## Informazioni su questa traduzione

Cisco ha tradotto questo documento utilizzando una combinazione di tecnologie automatiche e umane per offrire ai nostri utenti in tutto il mondo contenuti di supporto nella propria lingua. Si noti che anche la migliore traduzione automatica non sarà mai accurata come quella fornita da un traduttore professionista. Cisco Systems, Inc. non si assume alcuna responsabilità per l'accuratezza di queste traduzioni e consiglia di consultare sempre il documento originale in inglese (disponibile al link fornito).