

# 6400 UAC を使用する 2 つの ISP に接続するためにマシンを PPPoE クライアントとして設定する方法

## 目次

[はじめに](#)

[前提条件](#)

[要件](#)

[使用するコンポーネント](#)

[表記法](#)

[設定](#)

[ネットワーク図](#)

[設定](#)

[debug 出力例](#)

[madrid.com への接続のデバッグ: 6400 NRP のデバッグ](#)

[madrid.com への接続のデバッグ: madrid.com のデバッグ](#)

[barcelona.com への接続のデバッグ: barcelona.com のデバッグ](#)

[関連情報](#)

## [はじめに](#)

この資料に 2 つの異なるインターネットサービスプロバイダー ( ISP ) に PC を接続するのに Point-to-Point Protocol over Ethernet ( PPPoE ) クライアントソフトウェアを使用する方法をその使用異なるユーザー ユーザー名記述されています:

- madrid.com に ISP を接続する asier@madrid.com ( パスワード「パスワード」 )
- barcelona.com に ISP を接続する asier@barcelona.com ( パスワード「パスワード」 )

## [前提条件](#)

### [要件](#)

このドキュメントに関しては個別の要件はありません。

### [使用するコンポーネント](#)

このドキュメントは、特定のソフトウェアやハードウェアのバージョンに限定されるものではありません。

## 表記法

ドキュメント表記の詳細は、『[シスコテクニカルティップスの表記法](#)』を参照してください。


## 設定

この項では、このドキュメントで説明する機能の設定に必要な情報を提供します。

注: このセクションで使用されているコマンドの詳細を調べるには、[Command Lookup Tool](#) ( [登録ユーザ専用](#) ) を使用してください。

## ネットワーク図

このドキュメントでは、次のネットワーク構成を使用しています。

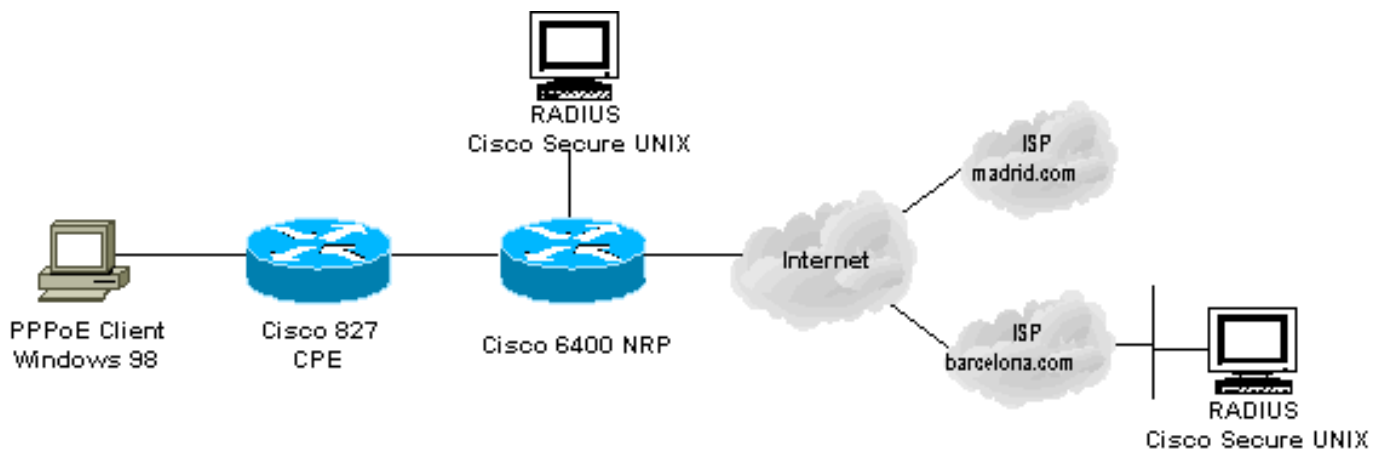

## 設定

注: Cisco 6400 NRP 設定では、最大伝送ユニット ( MTU ) を設定しました。MTU サイズを変更する方法に関する詳細については [PPPoE ダイアル接続のMTU サイズのトラブルシューティング](#) を参照して下さい。

### Cisco 827 CPE

```
no ip routing
!  
!  
interface Ethernet0  
no ip address  
no ip directed-broadcast  
bridge-group 1  
!  
interface ATM0  
no ip address  
no ip directed-broadcast  
no atm ilmi-keepalive  
pvc 3/33  
!  
encapsulation aal5snap  
!  
bridge-group 1  
!
```

```
bridge 1 protocol ieee
```

```
!
```

## Cisco 6400 NRP

```
aaa new-model
aaa authentication login default none
aaa authentication ppp default group radius local
aaa authorization network default group radius
!
ip cef
!
vpdn enable
vpdn search-order domain
!
vpdn-group 1
  accept-dialin
  protocol pppoe
  virtual-template 1
  pppoe limit per-mac 4
  pppoe limit per-vc 4
!
vc-class atm BridgedUsers
  protocol pppoe
  ubr 10000 10000
  encapsulation aal5snap
!
interface ATM0/0/0.333 point-to-point
  pvc 3/33
  class-vc BridgedUsers
  ubr 400
!
interface Virtual-Template1
  description USED FOR PPPoE
  ip unnumbered FastEthernet0/0/0
  ip mtu 1492
  ip mroute-cache
  load-interval 30
  no peer default ip address
  ppp authentication pap
!
radius-server host 10.200.56.16 auth-port 1645 acct-port
1646 key cisco
radius-server retransmit 3
radius-server attribute nas-port format d
radius-server key cisco
!
```

ユーザは ATM 0/0/0.333 をインターフェイスさせるために接続します。このインターフェイスは vc-class BridgedUsers にリンクされるので、PPPoE を使用しています。PPPoE ユーザ向けに、vpdn-group 1.に従って Virtual-template 1 適用する必要があります

ユーザ ( ppp authentication pap ) を認証するために、barcelona.com か madrid.com にトンネルを作成するために情報を送信 する RADIUSサーバに行ってください。

## Cisco Secure UNIX: madrid.com

```
root@canonball[/opt/csecure/CLI]./ViewProfile -p 9900 -u
madrid.com
User Profile Information
user = madrid.com{
```

```
profile_id = 70
profile_cycle = 12
radius=SSG-6400 {
check_items= {
2=password
}
reply_attributes= {
9,1="vpdn:tunnel-id=MADRID"
9,1="vpdn:tunnel-type=l2tp"
9,1="vpdn:ip-addresses=10.200.56.9"
9,1="vpdn:l2tp-tunnel-password=password"
}
}
}
```

### Cisco Secure UNIX: barcelona.com

```
root@canonball[/opt/csecure/CLI]./ViewProfile -p 9900 -u
barcelona.com
User Profile Information
user = barcelona.com{
profile_id = 71
profile_cycle = 13
radius=SSG-6400 {
check_items= {
2=password
}
reply_attributes= {
9,1="vpdn:tunnel-id=BARCELONA"
9,1="vpdn:tunnel-type=l2tp"
9,1="vpdn:ip-addresses=10.200.56.8"
9,1="vpdn:l2tp-tunnel-password=password"
}
}
}
```

madrid.com ISP はローカルで認証します。DNSサーバのための IP アドレスおよび IP アドレス顧客を送信する必要があります。

### ISP madrid.com

```
ip name-server 144.254.6.135
ip name-server 144.254.6.143
!
username asier@madrid.com password 0 password
!
vpdn-group MADRID
accept-dialin
protocol l2tp
virtual-template 1
terminate-from hostname MADRID
local name TO-MADRID
l2tp tunnel password 0 password
!
!
interface Virtual-Templat1
description USED FOR PPPoA
ip unnumbered FastEthernet0/0/0
no ip route-cache cef
load-interval 30
```

```
peer default ip address pool MADRID
no ppp lcp fast-start
ppp authentication pap
!
ip local pool MADRID 31.0.0.1
!
```

barcelona.com を使用するとき、ルータは RADIUSサーバから IP アドレスを得、PPPoE クライアントに送信をそれ。

### ISP barcelona.com

```
aaa new-model
aaa authentication login default none
aaa authentication ppp default group radius local
aaa authorization network default group radius
!
!
vpdn-group BARCELONA
accept-dialin
protocol l2tp
virtual-template 2
terminate-from hostname BARCELONA
local name TO-BARCELONA
l2tp tunnel password 7 070C285F4D06
!
!
interface Virtual-Template2
ip unnumbered FastEthernet0/0/0
no ip route-cache cef
load-interval 30
no peer default ip address
no ppp lcp fast-start
ppp authentication pap
!
radius-server host 10.200.56.16 auth-port 1645 acct-port
1646 key cisco
radius-server retransmit 3
radius-server attribute nas-port format d
radius-server key cisco
```

### バルセロナ RADIUSサーバ

```
root@barcelona-radius[/opt/csecure/CLI]../ViewProfile -p
9900
-u asier@barcelona.com
!--- This output should be on one line on the screen.

User Profile Information
user = asier@barcelona.com{
profile_id = 69
profile_cycle = 8
radius=SSG-6400 {
check_items= {
2=password
}
reply_attributes= {
6=2
7=1
8=452984833
9=4294967295
}
```

```
}  
}  
root@barcelona-radius[/opt/csecure/CLI]
```

## debug 出力例

[Output Interpreter Tool](#) ( OIT ) ( [登録ユーザ専用](#) ) では、特定の show コマンドがサポートされています。OIT を使用して、show コマンド出力の解析を表示できます。

注: [debug](#) コマンドを使用する前に、『[debug コマンドの重要な情報](#)』を参照してください。

## [madrid.com への接続のデバッグ: 6400 NRP のデバッグ](#)

```
6400_nrp1#show debug  
General OS:  
  AAA Authentication debugging is on  
  AAA Authorization debugging is on  
VPN:  
  L2X protocol events debugging is on  
Radius protocol debugging is on  
6400_nrp1#  
6400_nrp1#  
00:54:54: %LINK-3-UPDOWN: Interface Virtual-Access1, changed state to up  
00:54:54: Vi1 AAA/AUTHOR/FSM: (0): LCP succeeds trivially  
00:54:56: AAA: parse name=Virtual-Access1 idb type=21 tty=-1  
00:54:56: AAA: name=Virtual-Access1 flags=0x11 type=7 shelf=0 slot=0 adapter=0  
port=1 channel=0  
00:54:56: AAA/MEMORY: create_user (0x61561D74) user='madrid.com' ruser=''  
port='Virtual-Access1' rem_addr='' authen_type=NONE service=LOGIN priv=0  
00:54:56: Virtual-Access1 AAA/AUTHOR/VPDN (2958969022): Port='Virtual-Access1'  
list='default' service=NET  
00:54:56: AAA/AUTHOR/VPDN: Virtual-Access1 (2958969022) user='madrid.com'  
00:54:56: Virtual-Access1 AAA/AUTHOR/VPDN (2958969022): send AV service=ppp  
00:54:56: Virtual-Access1 AAA/AUTHOR/VPDN (2958969022): send AV protocol=vpdn  
00:54:56: Virtual-Access1 AAA/AUTHOR/VPDN (2958969022): found list "default"  
00:54:56: Virtual-Access1 AAA/AUTHOR/VPDN (2958969022): Method=radius (radius)  
00:54:56: RADIUS: authenticating to get author data  
00:54:56: RADIUS: ustruct sharecount=2  
00:54:56: RADIUS: Initial Transmit Virtual-Access1 id 8 10.200.56.16:1645,  
Access-Request, len 74  
00:54:56:      Attribute 4 6 0AC83803  
00:54:56:      Attribute 5 6 20030021  
00:54:56:      Attribute 61 6 00000005  
00:54:56:      Attribute 1 12 6D616472  
00:54:56:      Attribute 2 18 A6921C76  
00:54:56:      Attribute 6 6 00000005  
00:54:56: RADIUS: Received from id 8 10.200.56.16:1645, Access-Accept, len 158  
00:54:56:      Attribute 26 30 0000000901187670  
00:54:56:      Attribute 26 30 0000000901187670  
00:54:56:      Attribute 26 38 0000000901207670  
00:54:56:      Attribute 26 40 0000000901227670  
00:54:56: RADIUS: saved authorization data for user 61561D74 at 61559AD0  
00:54:56: RADIUS: cisco AVPair "vpdn:tunnel-id=MADRID"  
00:54:56: RADIUS: cisco AVPair "vpdn:tunnel-type=l2tp"  
00:54:56: RADIUS: cisco AVPair "vpdn:ip-addresses=10.200.56.9"  
00:54:56: RADIUS: cisco AVPair "vpdn:l2tp-tunnel-password=cisco"  
00:54:56: AAA/AUTHOR (2958969022): Post authorization status = PASS_ADD
```

```
00:54:56: AAA/AUTHOR/VPDN: Processing AV service=ppp
00:54:56: AAA/AUTHOR/VPDN: Processing AV protocol=vpdn
00:54:56: AAA/AUTHOR/VPDN: Processing AV tunnel-id=MADRID
00:54:56: AAA/AUTHOR/VPDN: Processing AV tunnel-type=l2tp
00:54:56: AAA/AUTHOR/VPDN: Processing AV ip-addresses=10.200.56.9
00:54:56: AAA/AUTHOR/VPDN: Processing AV l2tp-tunnel-password=cisco
00:54:56: AAA/MEMORY: free_user (0x61561D74) user='madrid.com' ruser=''
port='Virtual-Access1' rem_addr='' authen_type=NONE service=LOGIN priv=0
00:54:56: Tnl 8945 L2TP: SM State idle
00:54:56: Tnl 8945 L2TP: O SCCRQ
00:54:56: Tnl 8945 L2TP: Tunnel state change from idle to wait-ctl-reply
00:54:56: Tnl 8945 L2TP: SM State wait-ctl-reply
00:54:56: Tnl 8945 L2TP: I SCCRQ from TO-MADRID
00:54:56: Tnl 8945 L2TP: Got a challenge from remote peer, TO-MADRID
00:54:56: Tnl 8945 L2TP: Got a response from remote peer, TO-MADRID
00:54:56: Tnl 8945 L2TP: Tunnel Authentication success
00:54:56: Tnl 8945 L2TP: Tunnel state change from wait-ctl-reply to established
00:54:56: Tnl 8945 L2TP: O SCCCN to TO-MADRID tnlid 20349
00:54:56: Tnl 8945 L2TP: SM State established
00:54:56: AAA: parse name=Virtual-Access1 idb type=21 tty=-1
00:54:56: AAA: name=Virtual-Access1 flags=0x11 type=7 shelf=0 slot=0 adapter=0
port=1 channel=0
00:54:56: AAA/MEMORY: create_user (0x6155AA68) user='asier@madrid.com' ruser=''
port='Virtual-Access1' rem_addr='' authen_type=CHAP service=PPP priv=1
00:54:56: Tnl/Cl 8945/10 L2TP: Session FS enabled
00:54:56: Tnl/Cl 8945/10 L2TP: Session state change from idle to wait-for-tunnel
00:54:56: Vi1 Tnl/Cl 8945/10 L2TP: Create session
00:54:56: Tnl 8945 L2TP: SM State established
00:54:56: Vi1 Tnl/Cl 8945/10 L2TP: O ICRQ to TO-MADRID 20349/0
00:54:56: Vi1 Tnl/Cl 8945/10 L2TP: Session state change from wait-for-tunnel
to wait-reply
00:54:56: Vi1 Tnl/Cl 8945/10 L2TP: O ICCN to TO-MADRID 20349/42
00:54:56: Vi1 Tnl/Cl 8945/10 L2TP: Session state change from wait-reply
to established
00:54:57: %LINEPROTO-5-UPDOWN: Line protocol on Interface Virtual-Access1,
changed state to up
```

```
6400_nrp1#
6400_nrp1#
6400_nrp1#sh vpdn tunn
```

```
L2TP Tunnel Information Total tunnels 1 sessions 1
```

LocID	RemID	Remote Name	State	Remote Address	Port	Sessions
8945	20349	TO-MADRID	est	10.200.56.9	1701	1

```
%No active L2F tunnels
```

```
PPPoE Tunnel Information Total tunnels 1 sessions 1
```

```
PPPoE Tunnel Information
```

```
Session count: 1
```

```
6400_nrp1#
```

[madrid.com への接続のデバッグ: madrid.com のデバッグ](#)

```
madrid#show debug
```

```
VPN:
```

```
  L2X protocol events debugging is on
```

```
PPP:
```

```
  PPP authentication debugging is on
```

```
  PPP protocol negotiation debugging is on
```

madrid#  
3d22h: Tnl 62700 L2TP: O StopCCN to MADRID tnlid 57782  
3d22h: Tnl 62700 L2TP: Tunnel state change from no-sessions-left to shutting-down  
3d22h: Tnl 62700 L2TP: Shutdown tunnel  
3d22h: Tnl 62700 L2TP: Tunnel state change from shutting-down to idle  
3d22h: L2TP: I SCCRQ from MADRID tnl 41083  
3d22h: Tnl 39515 L2TP: Got a challenge in SCCRQ, MADRID  
3d22h: Tnl 39515 L2TP: New tunnel created for remote MADRID, address 10.200.56.4  
3d22h: Tnl 39515 L2TP: O SCCRP to MADRID tnlid 41083  
3d22h: Tnl 39515 L2TP: Tunnel state change from idle to wait-ctl-reply  
3d22h: Tnl 39515 L2TP: I SCCCN from MADRID tnl 41083  
3d22h: Tnl 39515 L2TP: Got a Challenge Response in SCCCN from MADRID  
3d22h: Tnl 39515 L2TP: Tunnel Authentication success  
3d22h: Tnl 39515 L2TP: Tunnel state change from wait-ctl-reply to established  
3d22h: Tnl 39515 L2TP: SM State established  
3d22h: Tnl 39515 L2TP: I ICRQ from MADRID tnl 41083  
3d22h: Tnl/Cl 39515/44 L2TP: Session FS enabled  
3d22h: Tnl/Cl 39515/44 L2TP: Session state change from idle to wait-connect  
3d22h: Tnl/Cl 39515/44 L2TP: New session created  
3d22h: Tnl/Cl 39515/44 L2TP: O ICRP to MADRID 41083/12  
3d22h: Tnl/Cl 39515/44 L2TP: I ICCN from MADRID tnl 41083, cl 12  
3d22h: Tnl/Cl 39515/44 L2TP: Session state change from wait-connect to established  
3d22h: Vi1 PPP: Phase is DOWN, Setup [0 sess, 0 load]  
3d22h: %LINK-3-UPDOWN: Interface Virtual-Access1, changed state to up  
3d22h: Vi1 PPP: Treating connection as a dedicated line  
3d22h: Vi1 PPP: Phase is ESTABLISHING, Active Open [0 sess, 0 load]  
3d22h: Vi1 LCP: O CONFREQ [Closed] id 1 len 14  
3d22h: Vi1 LCP: AuthProto PAP (0x0304C023)  
3d22h: Vi1 LCP: MagicNumber 0x64D04BCB (0x050664D04BCB)  
3d22h: Vi1 PPP: Using set call direction  
3d22h: Vi1 PPP: Treating connection as a callin  
3d22h: Vi1 LCP: I FORCED CONFREQ len 10  
3d22h: Vi1 LCP: AuthProto PAP (0x0304C023)  
3d22h: Vi1 LCP: MagicNumber 0x10B541C6 (0x050610B541C6)  
3d22h: Vi1 PPP: Phase is AUTHENTICATING, by this end [0 sess, 0 load]  
3d22h: Vi1 PAP: I AUTH-REQ id 1 len 30 from "asier@madrid.com"  
3d22h: Vi1 PAP: Authenticating peer asier@madrid.com  
3d22h: Vi1 PAP: O AUTH-ACK id 1 len 5  
3d22h: Vi1 PPP: Phase is UP [0 sess, 0 load]  
3d22h: Vi1 IPCP: O CONFREQ [Closed] id 1 len 10  
3d22h: Vi1 IPCP: Address 10.200.56.9 (0x03060AC83809)  
3d22h: Vi1 IPCP: I CONFREQ [REQsent] id 1 len 34  
3d22h: Vi1 IPCP: Address 0.0.0.0 (0x030600000000)  
3d22h: Vi1 IPCP: PrimaryDNS 0.0.0.0 (0x810600000000)  
3d22h: Vi1 IPCP: PrimaryWINS 0.0.0.0 (0x820600000000)  
3d22h: Vi1 IPCP: SecondaryDNS 0.0.0.0 (0x830600000000)  
3d22h: Vi1 IPCP: SecondaryWINS 0.0.0.0 (0x840600000000)  
3d22h: Vi1 IPCP: Pool returned 31.0.0.1  
3d22h: Vi1 IPCP: O CONFREQ [REQsent] id 1 len 16  
3d22h: Vi1 IPCP: PrimaryWINS 0.0.0.0 (0x820600000000)  
3d22h: Vi1 IPCP: SecondaryWINS 0.0.0.0 (0x840600000000)  
3d22h: Vi1 IPCP: I CONFACK [REQsent] id 1 len 10  
3d22h: Vi1 IPCP: Address 10.200.56.9 (0x03060AC83809)  
3d22h: Vi1 IPCP: I CONFREQ [ACKrcvd] id 2 len 22  
3d22h: Vi1 IPCP: Address 0.0.0.0 (0x030600000000)  
3d22h: Vi1 IPCP: PrimaryDNS 0.0.0.0 (0x810600000000)  
3d22h: Vi1 IPCP: SecondaryDNS 0.0.0.0 (0x830600000000)  
3d22h: Vi1 IPCP: O CONFNAK [ACKrcvd] id 2 len 22  
3d22h: Vi1 IPCP: Address 31.0.0.1 (0x03061F000001)  
3d22h: Vi1 IPCP: PrimaryDNS 144.254.6.135 (0x810690FE0687)  
3d22h: Vi1 IPCP: SecondaryDNS 144.254.6.143 (0x830690FE068F)  
3d22h: Vi1 IPCP: I CONFREQ [ACKrcvd] id 3 len 22  
3d22h: Vi1 IPCP: Address 31.0.0.1 (0x03061F000001)  
3d22h: Vi1 IPCP: PrimaryDNS 144.254.6.135 (0x810690FE0687)



```
3d22h: Vi1 IPCP: SecondaryDNS 144.254.6.143 (0x830690FE068F)
3d22h: Vi1 IPCP: O CONFACK [ACKrcvd] id 3 len 22
3d22h: Vi1 IPCP: Address 31.0.0.1 (0x03061F000001)
3d22h: Vi1 IPCP: PrimaryDNS 144.254.6.135 (0x810690FE0687)
3d22h: Vi1 IPCP: SecondaryDNS 144.254.6.143 (0x830690FE068F)
3d22h: Vi1 IPCP: State is Open
3d22h: Vi1 IPCP: Install route to 31.0.0.1
3d22h: %LINEPROTO-5-UPDOWN: Line protocol on Interface Virtual-Access1,
changed state to up
```

## [barcelona.com への接続のデバッグ: barcelona.com のデバッグ](#)

```
barcelona#show debug
```

```
General OS:
```

```
AAA Authentication debugging is on
```

```
AAA Authorization debugging is on
```

```
PPP:
```

```
PPP authentication debugging is on
```

```
PPP protocol negotiation debugging is on
```

```
barcelona#
```

```
barcelona#
```

```
*Oct 23 07:32:08.257: Vi1 LCP: I ECHOREQ [Open] id 114 len 12 magic 0x1FE02867
*Oct 23 07:32:08.257: Vi1 LCP: O ECHOREP [Open] id 114 len 12 magic 0x6DBBA9F4
*Oct 23 07:32:16.813: Vi2 PPP: Phase is DOWN, Setup [0 sess, 1 load]
*Oct 23 07:32:16.925: %LINK-3-UPDOWN: Interface Virtual-Access2, changed state to up
*Oct 23 07:32:16.925: Vi2 PPP: Treating connection as a dedicated line
*Oct 23 07:32:16.925: Vi2 PPP: Phase is ESTABLISHING, Active Open [0 sess, 1 load]
*Oct 23 07:32:16.925: Vi2 AAA/AUTHOR/FSM: (0): LCP succeeds trivially
*Oct 23 07:32:16.925: Vi2 LCP: O CONFREQ [Closed] id 1 len 14
*Oct 23 07:32:16.925: Vi2 LCP: AuthProto PAP (0x0304C023)
*Oct 23 07:32:16.925: Vi2 LCP: MagicNumber 0x6E69874A (0x05066E69874A)
*Oct 23 07:32:16.925: Vi2 PPP: Using set call direction
*Oct 23 07:32:16.925: Vi2 PPP: Treating connection as a callin
*Oct 23 07:32:16.925: Vi2 LCP: I FORCED CONFREQ len 10
*Oct 23 07:32:16.925: Vi2 LCP: AuthProto PAP (0x0304C023)
*Oct 23 07:32:16.925: Vi2 LCP: MagicNumber 0x10C2B619 (0x050610C2B619)
*Oct 23 07:32:16.925: Vi2 PPP: Phase is AUTHENTICATING, by this end [0 sess, 1 load]
*Oct 23 07:32:16.925: Vi2 PAP: I AUTH-REQ id 1 len 33 from "asier@barcelona.com"
*Oct 23 07:32:16.925: Vi2 PAP: Authenticating peer asier@barcelona.com
*Oct 23 07:32:16.925: AAA: parse name=Virtual-Access2 idb type=21 tty=-1
*Oct 23 07:32:16.925: AAA: name=Virtual-Access2 flags=0x11 type=5 shelf=0 slot=0
adapter=0 port=2 channel=0
*Oct 23 07:32:16.925: AAA/MEMORY: create_user (0x6187732C) user='asier@barcelona.com'
ruser='' port='Virtual-Access2' rem_addr='' authen_type=PAP service=PPP priv=1
*Oct 23 07:32:16.925: AAA/AUTHEN/START (3921030273): port='Virtual-Access2' list=''
action=LOGIN service=PPP
*Oct 23 07:32:16.929: AAA/AUTHEN/START (3921030273): using "default" list
*Oct 23 07:32:16.929: AAA/AUTHEN/START (3921030273): Method=radius (radius)
*Oct 23 07:32:16.933: AAA/AUTHEN (3921030273): status = PASS
*Oct 23 07:32:16.933: Vi2 AAA/AUTHOR/LCP: Authorize LCP
*Oct 23 07:32:16.933: Vi2 AAA/AUTHOR/LCP (230701808): Port='Virtual-Access2'
list='' service=NET
*Oct 23 07:32:16.933: AAA/AUTHOR/LCP: Vi2 (230701808) user='asier@barcelona.com'
*Oct 23 07:32:16.933: Vi2 AAA/AUTHOR/LCP (230701808): send AV service=ppp
*Oct 23 07:32:16.933: Vi2 AAA/AUTHOR/LCP (230701808): send AV protocol=lcp
*Oct 23 07:32:16.933: Vi2 AAA/AUTHOR/LCP (230701808): found list "default"
*Oct 23 07:32:16.933: Vi2 AAA/AUTHOR/LCP (230701808): Method=radius (radius)
*Oct 23 07:32:16.933: Vi2 AAA/AUTHOR (230701808): Post authorization status = PASS_REPL
*Oct 23 07:32:16.933: Vi2 AAA/AUTHOR/LCP: Processing AV service=ppp
*Oct 23 07:32:16.933: Vi2 PAP: O AUTH-ACK id 1 len 5
*Oct 23 07:32:16.933: Vi2 PPP: Phase is UP [0 sess, 1 load]
*Oct 23 07:32:16.933: Vi2 AAA/AUTHOR/FSM: (0): Can we start IPCP?
```

```
*Oct 23 07:32:16.933: Vi2 AAA/AUTHOR/FSM (284378021): Port='Virtual-Access2'
list='' service=NET
*Oct 23 07:32:16.933: AAA/AUTHOR/FSM: Vi2 (284378021) user='asier@barcelona.com'
*Oct 23 07:32:16.933: Vi2 AAA/AUTHOR/FSM (284378021): send AV service=ppp
*Oct 23 07:32:16.933: Vi2 AAA/AUTHOR/FSM (284378021): send AV protocol=ip
*Oct 23 07:32:16.933: Vi2 AAA/AUTHOR/FSM (284378021): found list "default"
*Oct 23 07:32:16.933: Vi2 AAA/AUTHOR/FSM (284378021): Method=radius (radius)
*Oct 23 07:32:16.933: Vi2 AAA/AUTHOR (284378021): Post authorization status = PASS_REPL
*Oct 23 07:32:16.933: Vi2 AAA/AUTHOR/FSM: We can start IPCP
*Oct 23 07:32:16.933: Vi2 IPCP: O CONFREQ [Closed] id 1 len 10
*Oct 23 07:32:16.933: Vi2 IPCP: Address 0.0.0.0 (0x030600000000)
*Oct 23 07:32:16.957: Vi2 IPCP: I CONFREQ [REQsent] id 1 len 34
*Oct 23 07:32:16.957: Vi2 IPCP: Address 0.0.0.0 (0x030600000000)
*Oct 23 07:32:16.957: Vi2 IPCP: PrimaryDNS 0.0.0.0 (0x810600000000)
*Oct 23 07:32:16.957: Vi2 IPCP: PrimaryWINS 0.0.0.0 (0x820600000000)
*Oct 23 07:32:16.957: Vi2 IPCP: SecondaryDNS 0.0.0.0 (0x830600000000)
*Oct 23 07:32:16.957: Vi2 IPCP: SecondaryWINS 0.0.0.0 (0x840600000000)
*Oct 23 07:32:16.961: Vi2 AAA/AUTHOR/IPCP: Start. Her address 0.0.0.0,
we want 0.0.0.0
*Oct 23 07:32:16.961: Vi2 AAA/AUTHOR/IPCP: Processing AV service=ppp
*Oct 23 07:32:16.961: Vi2 AAA/AUTHOR/IPCP: Processing AV addr=27.0.0.1
*Oct 23 07:32:16.961: Vi2 AAA/AUTHOR/IPCP: Authorization succeeded
*Oct 23 07:32:16.961: Vi2 AAA/AUTHOR/IPCP: Done. Her address 0.0.0.0,
we want 27.0.0.1
*Oct 23 07:32:16.961: Vi2 IPCP: O CONFREQ [REQsent] id 1 len 28
*Oct 23 07:32:16.961: Vi2 IPCP: PrimaryDNS 0.0.0.0 (0x810600000000)
*Oct 23 07:32:16.961: Vi2 IPCP: PrimaryWINS 0.0.0.0 (0x820600000000)
*Oct 23 07:32:16.961: Vi2 IPCP: SecondaryDNS 0.0.0.0 (0x830600000000)
*Oct 23 07:32:16.961: Vi2 IPCP: SecondaryWINS 0.0.0.0 (0x840600000000)
*Oct 23 07:32:16.965: Vi2 IPCP: I CONFACK [REQsent] id 1 len 10
*Oct 23 07:32:16.965: Vi2 IPCP: Address 0.0.0.0 (0x030600000000)
*Oct 23 07:32:16.981: Vi2 IPCP: I CONFREQ [ACKrcvd] id 2 len 10
*Oct 23 07:32:16.981: Vi2 IPCP: Address 0.0.0.0 (0x030600000000)
*Oct 23 07:32:16.981: Vi2 AAA/AUTHOR/IPCP: Start. Her address 0.0.0.0,
we want 27.0.0.1
*Oct 23 07:32:16.981: Vi2 AAA/AUTHOR/IPCP: Processing AV service=ppp
*Oct 23 07:32:16.981: Vi2 AAA/AUTHOR/IPCP: Processing AV addr=27.0.0.1
*Oct 23 07:32:16.981: Vi2 AAA/AUTHOR/IPCP: Authorization succeeded
*Oct 23 07:32:16.981: Vi2 AAA/AUTHOR/IPCP: Done. Her address 0.0.0.0,
we want 27.0.0.1
*Oct 23 07:32:16.981: Vi2 IPCP: O CONFNAK [ACKrcvd] id 2 len 10
*Oct 23 07:32:16.981: Vi2 IPCP: Address 27.0.0.1 (0x03061B000001)
*Oct 23 07:32:17.001: Vi2 IPCP: I CONFREQ [ACKrcvd] id 3 len 10
*Oct 23 07:32:17.001: Vi2 IPCP: Address 27.0.0.1 (0x03061B000001)
*Oct 23 07:32:17.001: Vi2 AAA/AUTHOR/IPCP: Start. Her address 27.0.0.1,
we want 27.0.0.1
*Oct 23 07:32:17.001: Vi2 AAA/AUTHOR/IPCP: Processing AV service=ppp
*Oct 23 07:32:17.001: Vi2 AAA/AUTHOR/IPCP: Processing AV addr=27.0.0.1
*Oct 23 07:32:17.001: Vi2 AAA/AUTHOR/IPCP: Authorization succeeded
*Oct 23 07:32:17.001: Vi2 AAA/AUTHOR/IPCP: Done. Her address 27.0.0.1,
we want 27.0.0.1
*Oct 23 07:32:17.001: Vi2 IPCP: O CONFACK [ACKrcvd] id 3 len 10
*Oct 23 07:32:17.001: Vi2 IPCP: Address 27.0.0.1 (0x03061B000001)
*Oct 23 07:32:17.001: Vi2 IPCP: State is Open
*Oct 23 07:32:17.005: Vi2 IPCP: Install route to 27.0.0.1
*Oct 23 07:32:17.933: %LINEPROTO-5-UPDOWN: Line protocol on Interface Virtual-Access2,
changed state to up
```

## 関連情報

- [ロングリーチイーサネット \(LRE\) とデジタル加入者線 \(xDSL\) サポートページ](#)
- [Cisco 800 シリーズ ルータ ネットワークシナリオ](#)

- [Cisco 800 シリーズ ルータ高機能ルータ設定](#)
- [Cisco 800 シリーズ ルータ トラブルシューティング](#)
- [ユニバーサル ゲートウェイ/アクセス サーバ サポートページ](#)
- [ダイヤルとアクセス サポートページ](#)
- [テクニカル サポートとドキュメント - Cisco Systems](#)