

了解转发地址的选择在OSPF的

目录

[简介](#)

[先决条件](#)

[要求](#)

[使用的组件](#)

[验证](#)

[相关的思科支持社区讨论](#)

简介

本文描述用于转发地址的选择的概念外部LSA的(林克状态广告)由ASBR (自治系统边界路由器)在OSPF (首先开放最短路径)域。

先决条件

要求

本文档的读者应掌握以下这些主题的相关知识：

- 基本IP路由。
- OSPF 路由协议概念和术语。


使用的组件

本文档不限于特定的软件和硬件版本。

本文档中的信息都是基于特定实验室环境中的设备编写的。本文档中使用的所有设备最初均采用原始(默认)配置。如果您使用的是真实网络，请确保您已经了解所有命令的潜在影响。

验证

跟随的镜像将使用作为拓扑示例本文的其余。

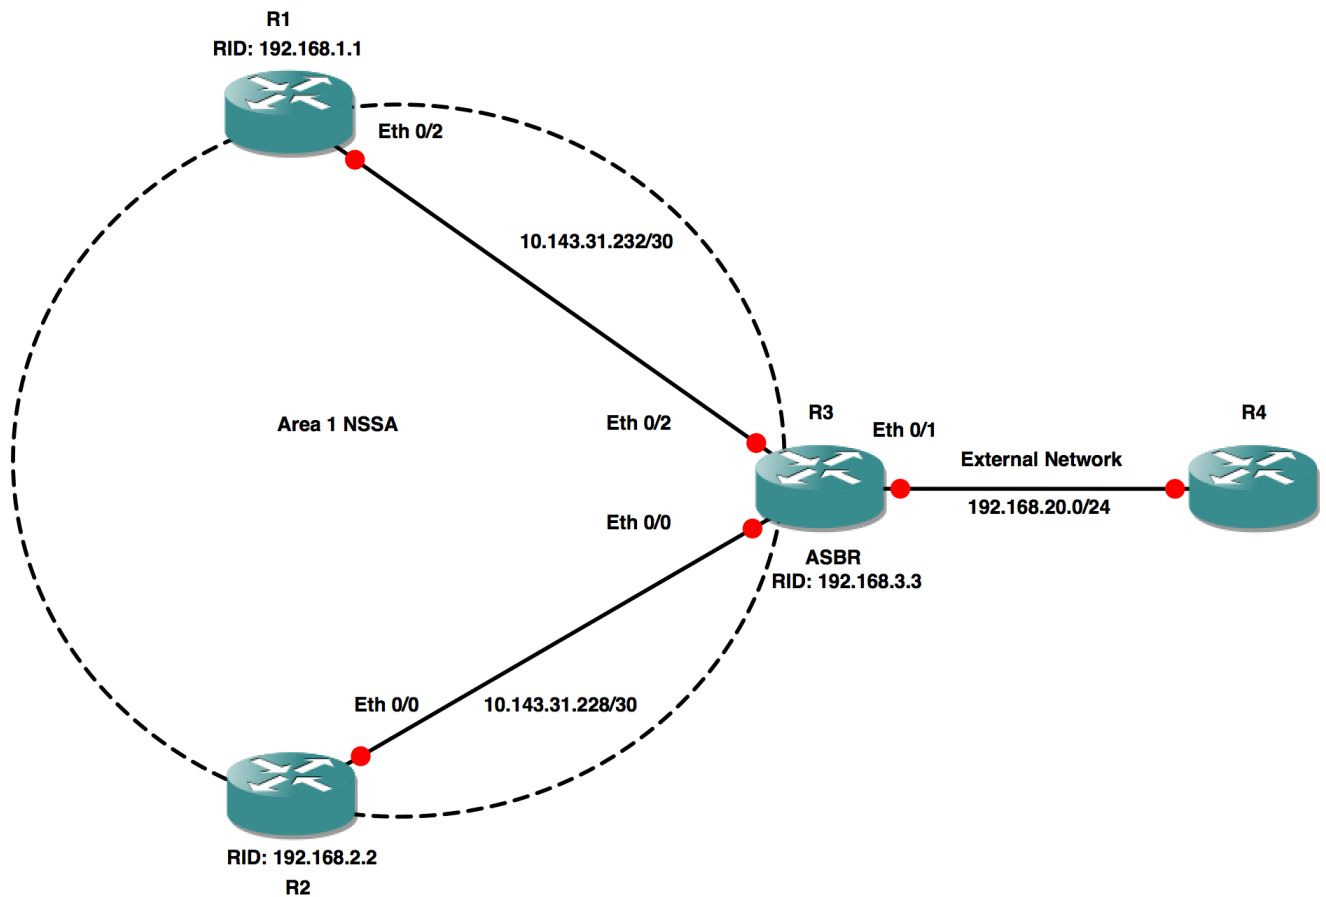

R3重新分配网络192.168.20.0/24到OSPF NSSA (非末节区域)使用route-map。您能使用再分布路由所有方法到OSPF域。

R3的相关configuration :

```

router ospf 1
router-id 192.168.3.3
area 1 nssa
redistribute connected metric-type 1 subnets route-map CONN
network 10.143.31.0 0.0.0.255 area 1
route-map CONN, permit, sequence 10
Match clauses:
interface Ethernet0/1
Set clauses:
Policy routing matches: 0 packets, 0 bytes interface Ethernet0/1
ip address 192.168.20.1 255.255.255.0

```

OSPF

R1#sh ip ospf neighbor

Neighbor ID	Pri	State	Dead Time	Address	Interface
192.168.3.3	0	FULL/ -	00:00:38	10.143.31.234	Ethernet0/2

R2#sh ip ospf neighbor

Neighbor ID	Pri	State	Dead Time	Address	Interface
192.168.3.3	0	FULL/ -	00:00:36	10.143.31.230	Ethernet0/0

R3#sh ip ospf neighbor

Neighbor ID	Pri	State	Dead Time	Address	Interface
192.168.1.1	0	FULL/ -	00:00:34	10.143.31.233	Ethernet0/2
192.168.2.2	0	FULL/ -	00:00:30	10.143.31.229	Ethernet0/0

如果查看外部路由"192.168.20.0"的量度在R1和R2的，您发现看到与量度30在R1和在R2的一量度40。有差异，即使他们在一个相同的方式连接对R3。

```
R1#sh ip route 192.168.20.0
Routing entry for 192.168.20.0/24
  Known via "ospf 1", distance 110, metric 30, type NSSA extern 1
  Last update from 10.143.31.234 on Ethernet0/2, 00:00:31 ago
  Routing Descriptor Blocks:
  * 10.143.31.234, from 192.168.3.3, 00:00:31 ago, via Ethernet0/2
    Route metric is 30, traffic share count is 1
```

```
R2#sh ip route 192.168.20.0
Routing entry for 192.168.20.0/24
  Known via "ospf 1", distance 110, metric 40, type NSSA extern 1
  Last update from 10.143.31.230 on Ethernet0/0, 00:00:26 ago
  Routing Descriptor Blocks:
  * 10.143.31.230, from 192.168.3.3, 00:00:26 ago, via Ethernet0/0
    Route metric is 40, traffic share count is 1
```

此前缀的LSA信息在R1和R2：

```
R1#sh ip ospf database nssa-external

      OSPF Router with ID (192.168.1.1) (Process ID 1)

      Type-7 AS External Link States (Area 1)

Routing Bit Set on this LSA in topology Base with MTID 0
LS age: 334
Options: (No TOS-capability, Type 7/5 translation, DC, Upward)
LS Type: AS External Link
Link State ID: 192.168.20.0 (External Network Number )
Advertising Router: 192.168.3.3
LS Seq Number: 80000003
Checksum: 0xA0E3
Length: 36
Network Mask: /24
  Metric Type: 1 (Comparable directly to link state metric)
  MTID: 0
  Metric: 20
  Forward Address: 10.143.31.234
  External Route Tag: 0
```

```
R2#sh ip ospf database nssa-external

      OSPF Router with ID (192.168.2.2) (Process ID 1)

      Type-7 AS External Link States (Area 1)

Routing Bit Set on this LSA in topology Base with MTID 0
LS age: 352
Options: (No TOS-capability, Type 7/5 translation, DC, Upward)
LS Type: AS External Link
Link State ID: 192.168.20.0 (External Network Number )
Advertising Router: 192.168.3.3
LS Seq Number: 80000003
Checksum: 0xA0E3
Length: 36
Network Mask: /24
  Metric Type: 1 (Comparable directly to link state metric)
```

```
MTID: 0
Metric: 20
Forward Address: 10.143.31.234
External Route Tag: 0
```

您能看到Type-7 LSA转发地址是同样在R1和R2。并且此转发地址属于建立接口R3和R1之间。此转发地址为R1直接地连接，但是对于R2通过R3是可及的。这意味着转发地址是一额外跳次离开为R2。

万一，如果R3选择链路的IP地址R3和R2之间的，因为转发地址相似的情况在R1然后将被看到。

使用以下规则，转发地址在ASBR选择：

1. 如果有在区域配置的环回那么环回的IP地址选择作为转发地址。
2. 如果第一个情况那么没有符合得第一个接口的IP地址在OSPF接口列表的选择作为转发地址。您能看到通过使用“show ip ospf interface的OSPF接口列表简化”命令。在附加对OSPF的上面的接口将是最后一个接口。

```
R3#sh ip ospf interface brief
Interface    PID    Area          IP Address/Mask    Cost    State Nbrs F/C
Et0/2       1      1             10.143.31.234/30  10      P2P   1/1
Et0/0       1      1             10.143.31.230/30  10      P2P   1/1
```

Et0/2显示在“show ip ospf interface顶部简化”，并且这是原因为什么其IP地址选择作为转发地址。

更改Et0/0的配置对默认配置的将做它从OSPF分开。添加配置再将附加它回到OSPF。在此Et0/0将是列出的在“show ip ospf interface顶部后请简化”输出。

```
R3#sh ip ospf interface brief
Interface    PID    Area          IP Address/Mask    Cost    State Nbrs F/C
Et0/2       1      1             10.143.31.234/30  10      P2P   1/1
Et0/0       1      1             10.143.31.230/30  10      P2P   1/1R3#sh ip ospf interface
brief
Interface    PID    Area          IP Address/Mask    Cost    State Nbrs F/C
Et0/0       1      1             10.143.31.230/30  10      P2P   1/1
Et0/2       1      1             10.143.31.234/30  10      P2P   1/1
```

此更改将导致转发地址的重新计算对在Et0/0配置的那的IP地址。

```
R1#sh ip ospf database nssa-external

      OSPF Router with ID (192.168.1.1) (Process ID 1)

      Type-7 AS External Link States (Area 1)

Routing Bit Set on this LSA in topology Base with MTID 0
LS age: 284
Options: (No TOS-capability, Type 7/5 translation, DC, Upward)
LS Type: AS External Link
Link State ID: 192.168.20.0 (External Network Number )
Advertising Router: 192.168.3.3
LS Seq Number: 80000004
Checksum: 0x6621
Length: 36
Network Mask: /24
  Metric Type: 1 (Comparable directly to link state metric)
  MTID: 0
  Metric: 20
```

```
Forward Address: 10.143.31.230
External Route Tag: 0
```

```
R2#sh ip ospf database nssa-external
```

```
OSPF Router with ID (192.168.2.2) (Process ID 1)
```

```
Type-7 AS External Link States (Area 1)
```

```
Routing Bit Set on this LSA in topology Base with MTID 0
LS age: 303
Options: (No TOS-capability, Type 7/5 translation, DC, Upward)
LS Type: AS External Link
Link State ID: 192.168.20.0 (External Network Number )
Advertising Router: 192.168.3.3
LS Seq Number: 80000004
Checksum: 0x6621
Length: 36
Network Mask: /24
Metric Type: 1 (Comparable directly to link state metric)
MTID: 0
Metric: 20
Forward Address: 10.143.31.230
External Route Tag: 0
```

“show ip route”输出当前显示到达的量度在R1的外部路由是40和在R2是30。这是更加早期的输出的反向。

```
R1#sh ip route 192.168.20.0
```

```
Routing entry for 192.168.20.0/24
```

```
Known via "ospf 1", distance 110, metric 40, type NSSA extern 1
Last update from 10.143.31.234 on Ethernet0/2, 00:06:14 ago
Routing Descriptor Blocks:
* 10.143.31.234, from 192.168.3.3, 00:06:14 ago, via Ethernet0/2
Route metric is 40, traffic share count is 1
```

```
R2#sh ip route 192.168.20.0
```

```
Routing entry for 192.168.20.0/24
```

```
Known via "ospf 1", distance 110, metric 30, type NSSA extern 1
Last update from 10.143.31.230 on Ethernet0/0, 00:06:29 ago
Routing Descriptor Blocks:
* 10.143.31.230, from 192.168.3.3, 00:06:29 ago, via Ethernet0/0
Route metric is 30, traffic share count is 1
```

此更改可以是无法预测的，并且导致网络收敛，因此有环回IP地址作为转发地址是可行的。

```
R1#sh ip route 192.168.20.0
```

```
Routing entry for 192.168.20.0/24
```

```
Known via "ospf 1", distance 110, metric 40, type NSSA extern 1
Last update from 10.143.31.234 on Ethernet0/2, 00:06:14 ago
Routing Descriptor Blocks:
* 10.143.31.234, from 192.168.3.3, 00:06:14 ago, via Ethernet0/2
Route metric is 40, traffic share count is 1
```

```
R2#sh ip route 192.168.20.0
```

```
Routing entry for 192.168.20.0/24
```

```
Known via "ospf 1", distance 110, metric 30, type NSSA extern 1
Last update from 10.143.31.230 on Ethernet0/0, 00:06:29 ago
Routing Descriptor Blocks:
* 10.143.31.230, from 192.168.3.3, 00:06:29 ago, via Ethernet0/0
Route metric is 30, traffic share count is 1
```

这也导致在R1和R2的相等的量度：

```
R1#sh ip ospf database nssa-external
```

```
OSPF Router with ID (192.168.1.1) (Process ID 1)
```

```
Type-7 AS External Link States (Area 1)
```

```
Routing Bit Set on this LSA in topology Base with MTID 0
LS age: 1
Options: (No TOS-capability, Type 7/5 translation, DC, Upward)
LS Type: AS External Link
Link State ID: 192.168.20.0 (External Network Number )
Advertising Router: 192.168.3.3
LS Seq Number: 80000005
Checksum: 0x872F
Length: 36
Network Mask: /24
Metric Type: 1 (Comparable directly to link state metric)
MTID: 0
Metric: 20
Forward Address: 192.168.3.3
External Route Tag: 0
```

```
R1#sh ip route 192.168.20.0
```

```
Routing entry for 192.168.20.0/24
```

```
Known via "ospf 1", distance 110, metric 31, type NSSA extern 1
```

```
Last update from 10.143.31.234 on Ethernet0/2, 00:01:27 ago
```

```
Routing Descriptor Blocks:
```

```
* 10.143.31.234, from 192.168.3.3, 00:01:27 ago, via Ethernet0/2
```

```
Route metric is 31, traffic share count is 1
```

```
R2#sh ip ospf database nssa-external
```

```
OSPF Router with ID (192.168.2.2) (Process ID 1)
```

```
Type-7 AS External Link States (Area 1)
```

```
Routing Bit Set on this LSA in topology Base with MTID 0
LS age: 6
Options: (No TOS-capability, Type 7/5 translation, DC, Upward)
LS Type: AS External Link
Link State ID: 192.168.20.0 (External Network Number )
Advertising Router: 192.168.3.3
LS Seq Number: 80000005
Checksum: 0x872F
Length: 36
Network Mask: /24
Metric Type: 1 (Comparable directly to link state metric)
MTID: 0
Metric: 20
Forward Address: 192.168.3.3
External Route Tag: 0
```

```
R2#sh ip route 192.168.20.0
```

```
Routing entry for 192.168.20.0/24
```

```
Known via "ospf 1", distance 110, metric 31, type NSSA extern 1
```

```
Last update from 10.143.31.230 on Ethernet0/0, 00:01:57 ago
```

```
Routing Descriptor Blocks:
```

```
* 10.143.31.230, from 192.168.3.3, 00:01:57 ago, via Ethernet0/0
```

```
Route metric is 31, traffic share count is 1
```

注意：关于外部LSA的更多信息非零转发地址的参考的[与OSPF转发地址有关的常见路由问题](#)

