



Cisco TrustSec Configuration Guide, Cisco IOS XE Release 3S

Americas Headquarters

Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
<http://www.cisco.com>
Tel: 408 526-4000
800 553-NETS (6387)
Fax: 408 527-0883

THE SPECIFICATIONS AND INFORMATION REGARDING THE PRODUCTS IN THIS MANUAL ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL STATEMENTS, INFORMATION, AND RECOMMENDATIONS IN THIS MANUAL ARE BELIEVED TO BE ACCURATE BUT ARE PRESENTED WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED. USERS MUST TAKE FULL RESPONSIBILITY FOR THEIR APPLICATION OF ANY PRODUCTS.

THE SOFTWARE LICENSE AND LIMITED WARRANTY FOR THE ACCOMPANYING PRODUCT ARE SET FORTH IN THE INFORMATION PACKET THAT SHIPPED WITH THE PRODUCT AND ARE INCORPORATED HEREIN BY THIS REFERENCE. IF YOU ARE UNABLE TO LOCATE THE SOFTWARE LICENSE OR LIMITED WARRANTY, CONTACT YOUR CISCO REPRESENTATIVE FOR A COPY.

The Cisco implementation of TCP header compression is an adaptation of a program developed by the University of California, Berkeley (UCB) as part of UCB's public domain version of the UNIX operating system. All rights reserved. Copyright © 1981, Regents of the University of California.

NOTWITHSTANDING ANY OTHER WARRANTY HEREIN, ALL DOCUMENT FILES AND SOFTWARE OF THESE SUPPLIERS ARE PROVIDED "AS IS" WITH ALL FAULTS. CISCO AND THE ABOVE-NAMED SUPPLIERS DISCLAIM ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, THOSE OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE.

IN NO EVENT SHALL CISCO OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THIS MANUAL, EVEN IF CISCO OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: <http://www.cisco.com/go/trademarks>. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)

© 2018 Cisco Systems, Inc. All rights reserved.



CONTENTS

CHAPTER 1

Cisco TrustSec SGT Exchange Protocol IPv4 1

- Finding Feature Information 1
- Prerequisites for Cisco TrustSec SGT Exchange Protocol IPv4 2
- Restrictions for Cisco TrustSec SGT Exchange Protocol IPv4 2
- Information About Cisco TrustSec SGT Exchange Protocol IPv4 2
 - Security Group Tagging 2
 - Using CTS-SXP for SGT Propagation Across Legacy Access Networks 3
 - VRF-Aware CTS-SXP 4
 - Security Group Access Zone-Based Policy Firewall 4
- How to Configure the Cisco TrustSec SGT Exchange Protocol IPv4 5
 - Enabling CTS-SXP 5
 - Configuring a CTS-SXP Peer Connection 6
 - Configuring the Default CTS-SXP Password 8
 - Configuring the Default CTS-SXP Source IP Address 9
 - Configuring the CTS-SXP Reconciliation Period 9
 - Configuring the CTS-SXP Retry Period 10
 - Creating Syslogs to Capture IP-to-SGT Mapping Changes 11
 - Configuring a Class Map for a Security Group Access Zone-Based Policy Firewall 12
 - Creating a Policy Map for a Security Group Access Zone-Based Policy Firewall 15
- Configuration Examples for Cisco TrustSec SGT Exchange Protocol IPv4 18
 - Example: Enabling and Configuring a CTS-SXP Peer Connection 18
 - Example: Configuring a Security Group Access Zone-Based Policy Firewall 19
- Additional References for TrustSec SGT Handling: L2 SGT Imposition and Forwarding 20
- Feature Information for Cisco TrustSec SGT Exchange Protocol IPv4 21

CHAPTER 2

TrustSec SGT Handling: L2 SGT Imposition and Forwarding 23

- Finding Feature Information 23
- Prerequisites for TrustSec SGT Handling: L2 SGT Imposition and Forwarding 24

Information about TrustSec SGT Handling: L2 SGT Imposition and Forwarding	24
Security Groups and SGTs	24
How to Configure TrustSec SGT Handling: L2 SGT Imposition and Forwarding	25
Manually Enabling TrustSec SGT Handling: L2 SGT Imposition and Forwarding on an Interface	25
Disabling CTS SGT Propagation on an Interface	27
Additional References for TrustSec SGT Handling: L2 SGT Imposition and Forwarding	28
Feature Information for TrustSec SGT Handling: L2 SGT Imposition and Forwarding	29

CHAPTER 3

Cisco TrustSec with SXPv4 31

Finding Feature Information	31
Information About Cisco TrustSec with SXPv4	32
Overview of Cisco TrustSec with SXPv4	32
SXP Node ID	33
Keepalive and Hold-Time Negotiation with SXPv4	33
SGT Inline Tagging	36
SGT Inline Tagging for IPv6 Traffic	37
How to Configure Cisco TrustSec with SXPv4	37
Configuring the Hold-Time for the SXPv4 Protocol on a Network Device	37
Configuring the Hold-Time for the SXPv4 Protocol for Each Connection	38
Configuring the Node ID of a Network Device	40
Configuring SGT Inline Tagging	40
Configuration Examples for Cisco TrustSec with SXPv4	42
Example: Configuring Cisco TrustSec with SXPv4	42
Verifying Cisco TrustSec with SXPv4	42
Example: Configuring SGT Inline Tagging	43
Additional References for Cisco TrustSec with SXPv4	44
Feature Information for Cisco TrustSec with SXPv4	45

CHAPTER 4

Enabling Bidirectional SXP Support 47

Finding Feature Information	47
Prerequisites for Bidirectional SXP Support	47
Restrictions for Bidirectional SXP Support	48
Information About Bidirectional SXP Support	49
Bidirectional SXP Support Overview	49

How to Enable Bidirectional SXP Support	50
Configuring Bidirectional SXP Support	50
Verifying Bidirectional SXP Support Configuration	52
Configuration Examples for Bidirectional SXP Support	54
Example: Configuring Bidirectional SXP Support	54
Additional References for Bidirectional SXP Support	54
Feature Information for Bidirectional SXP Support	55

CHAPTER 5

Cisco TrustSec Interface-to-SGT Mapping 57

Finding Feature Information	57
Information About Cisco TrustSec Interface-to-SGT Mapping	57
Interface-to-SGT Mapping	57
Binding Source Priorities	58
How to Configure Cisco TrustSec Interface-to-SGT Mapping	58
Configuring Layer 3 Interface-to-SGT Mapping	58
Verifying Layer 3 Interface-to-SGT Mapping	59
Configuration Examples for Cisco TrustSec Interface-to-SGT Mapping	60
Example: Configuring Layer 3 Interface-to-SGT Mapping	60
Additional References for Cisco TrustSec Interface-to-SGT Mapping	60
Feature Information for Cisco TrustSec Interface-to-SGT Mapping	61

CHAPTER 6

Cisco TrustSec Subnet to SGT Mapping 63

Finding Feature Information	63
Restrictions for Cisco TrustSec Subnet to SGT Mapping	63
Information About Cisco TrustSec Subnet to SGT Mapping	64
How to Configure Cisco TrustSec Subnet to SGT Mapping	64
Configuring Subnet to SGT Mapping	64
Cisco TrustSec Subnet to SGT Mapping: Examples	66
Additional References	67
Feature Information for Cisco TrustSec Subnet to SGT Mapping	68

CHAPTER 7

Flexible NetFlow Export of Cisco TrustSec Fields 71

Finding Feature Information	71
Restrictions for Flexible NetFlow Export of Cisco TrustSec Fields	71
Information About Flexible NetFlow Export of Cisco TrustSec Fields	72

Cisco TrustSec Fields in Flexible NetFlow	72
How to Configure Flexible NetFlow Export of Cisco TrustSec Fields	73
Configuring Cisco TrustSec Fields as Key Fields in the Flow Record	73
Configuring Cisco TrustSec Fields as Non-Key Fields in the Flow Record	75
Configuring a Flow Exporter	77
Configuring a Flow Monitor	78
Applying a Flow Monitor on an Interface	80
Verifying Flexible NetFlow Export of Cisco TrustSec Fields	81
Configuration Examples for Flexible NetFlow Export of Cisco TrustSec Fields	83
Example: Configuring Cisco TrustSec Fields as Key Fields in the Flow Record	83
Example: Configuring Cisco TrustSec Fields as Non-Key Fields in the Flow Record	84
Example: Configuring a Flow Exporter	84
Example: Configuring a Flow Monitor	84
Example: Applying a Flow Monitor on an Interface	84
Additional References for Flexible NetFlow Export of Cisco TrustSec Fields	85
Feature Information for Flexible NetFlow Export of Cisco TrustSec Fields	86

CHAPTER 8

Cisco TrustSec SGT Caching	87
Finding Feature Information	87
Restrictions for Cisco TrustSec SGT Caching	87
Information About Cisco TrustSec SGT Caching	88
Identifying and Reapplying SGT Using SGT Caching	88
SGT Caching for IPv6 Traffic	90
How to Configure Cisco TrustSec SGT Caching	90
Configuring SGT Caching Globally	90
Configuring SGT Caching on an Interface	91
Verifying Cisco TrustSec SGT Caching	92
Verifying IP-to-SGT Bindings	95
Configuration Examples for Cisco TrustSec SGT Caching	96
Example: Configuring SGT Caching Globally	96
Example: Configuring SGT Caching for an Interface	96
Example: Disabling SGT Caching on an Interface	96
Additional References for Cisco TrustSec SGT Caching	97
Feature Information for Cisco TrustSec SGT Caching	98



CHAPTER

Cisco TrustSec SGT Exchange Protocol IPv4

Cisco TrustSec (CTS) builds secure networks by establishing domains of trusted network devices. Each device in the domain is authenticated by its peers. Communication on the links between devices in the domain is secured with a combination of encryption, message integrity check, and data-path replay protection mechanisms.

The Security Group Tag (SGT) Exchange Protocol (SXP) is one of several protocols that supports CTS and is referred to in this document as CTS-SXP. CTS-SXP is a control protocol for propagating IP-to-SGT binding information across network devices that do not have the capability to tag packets. CTS-SXP passes IP to SGT bindings from authentication points to upstream devices in the network. This process allows security services on switches, routers, or firewalls to learn identity information from access devices.

- [Finding Feature Information, page 1](#)
- [Prerequisites for Cisco TrustSec SGT Exchange Protocol IPv4, page 2](#)
- [Restrictions for Cisco TrustSec SGT Exchange Protocol IPv4, page 2](#)
- [Information About Cisco TrustSec SGT Exchange Protocol IPv4, page 2](#)
- [How to Configure the Cisco TrustSec SGT Exchange Protocol IPv4, page 5](#)
- [Configuration Examples for Cisco TrustSec SGT Exchange Protocol IPv4, page 18](#)
- [Additional References for TrustSec SGT Handling: L2 SGT Imposition and Forwarding, page 20](#)
- [Feature Information for Cisco TrustSec SGT Exchange Protocol IPv4, page 21](#)

Finding Feature Information

Your software release may not support all the features documented in this module. For the latest caveats and feature information, see [Bug Search Tool](#) and the release notes for your platform and software release. To find information about the features documented in this module, and to see a list of the releases in which each feature is supported, see the feature information table.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Prerequisites for Cisco TrustSec SGT Exchange Protocol IPv4

The CTS-SXP network needs to be established before implementing SXP. The CTS-SXP network has the following prerequisites:

- To use the Cisco TrustSec functionality on your existing router, ensure that you have purchased a Cisco TrustSec security license. If the router is being ordered and needs the Cisco TrustSec functionality, ensure that this license is pre-installed on your router before it is shipped to you.
- CTS-SXP software runs on all network devices
- Connectivity exists between all network devices
- The Cisco Identity Services Engine 1.0 is required for authentication. The Secure Access Control Server (ACS) Express Appliance server can also be used for authentication, however not all ACS features are supported by CTS. ACS 5.1 operates with a CTS-SXP license
- Configure the **retry open timer** command to a different value on different routers.

Restrictions for Cisco TrustSec SGT Exchange Protocol IPv4

- The Cisco TrustSec Support for IOS feature is supported on the Cisco Integrated Services Router Generation 2 (ISR G2) only.
- CTS-SXP is supported only on physical interfaces, not on logical interfaces.
- CTS-SXP does not support IPv6.
- If the default password is configured on a router, the connection on that router should configure the password to use the default password. If the default password is not configured, the connection on that router should configure to not use the password configuration. The configuration of the password option should be consistent across the deployment network.

Information About Cisco TrustSec SGT Exchange Protocol IPv4

Security Group Tagging


CTS-SXP uses the device and user credentials acquired during authentication for classifying the packets by security groups (SGs) as they enter the network. This packet classification is maintained by tagging packets on ingress to the CTS-SXP network so that they can be properly identified for the purpose of applying security and other policy criteria along the data path. The Security Group Tag (SGT) allows the network to enforce the access control policy by enabling the endpoint device to act upon the SGT to filter traffic.

Using CTS-SXP for SGT Propagation Across Legacy Access Networks

Tagging packets with SGTs requires hardware support. There may be devices in the network that can participate in CTS authentication, but lack the hardware capability to tag packets with SGTs. However, if CTS-SXP is used, then these devices can pass IP-to-SGT mappings to a CTS peer device that has CTS-capable hardware.

CTS-SXP typically operates between ingress access layer devices at the CTS domain edge and distribution layer devices within the CTS domain. The access layer device performs CTS authentication of external source devices to determine the appropriate SGTs for ingress packets. The access layer device learns the IP addresses of the source devices using IP device tracking and (optionally) DHCP snooping, then uses CTS-SXP to pass the IP addresses of the source devices along with their SGTs to the distribution switches. Distribution switches with CTS-capable hardware can use this IP-to-SGT mapping information to tag packets appropriately and to enforce Security Group Access Control List (SGACL) policies as shown in the figure below. An SGACL associates an SGT with a policy. The policy is enforced when SGT-tagged traffic egresses the CTS domain.

Figure 1: How CTS-SXP Propagates SGT Information

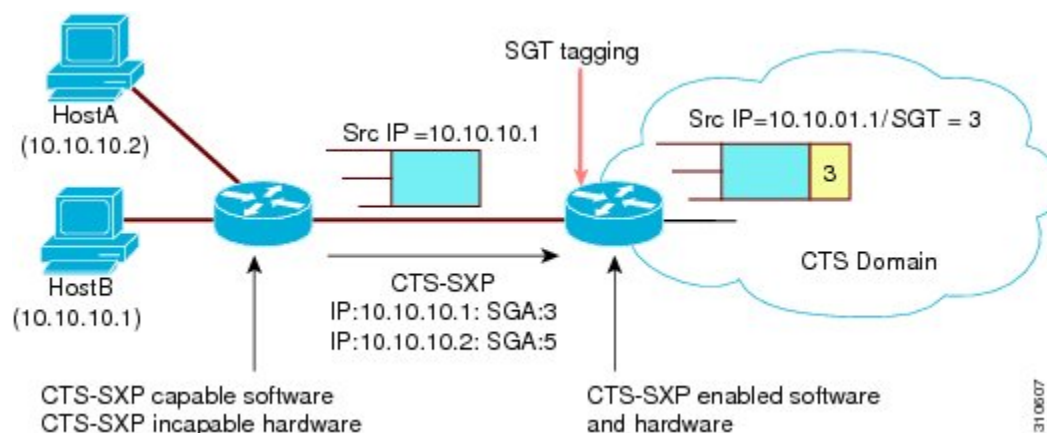

You must manually configure a CTS-SXP connection between a peer without CTS hardware support and a peer with CTS hardware support. The following tasks are required when configuring the CTS-SXP connection:

- If CTS-SXP data integrity and authentication are required, the same CTS-SXP password can be configured on both peer devices. The CTS-SXP password can be configured either explicitly for each peer connection or globally for the device. Although a CTS-SXP password is not required it is recommended.
- Each peer on the CTS-SXP connection must be configured as either a CTS-SXP speaker or CTS-SXP listener. The speaker device distributes the IP-to-SGT mapping information to the listener device.
- A source IP address can be specified to use for each peer relationship or a default source IP address can be configured for peer connections where a specific source IP address is not configured. If no source IP address is specified, then the device uses the interface IP address of the connection to the peer.

CTS-SXP allows multiple hops. That is, if the peer of a device lacking CTS hardware support also lacks CTS hardware support, the second peer can have a CTS-SXP connection to a third peer, continuing the propagation of the IP-to-SGT mapping information until a hardware-capable peer is reached. A device can be configured as a CTS-SXP listener for one CTS-SXP connection as a CTS-SXP speaker for another CTS-SXP connection.

A CTS device maintains connectivity with its CTS-SXP peers by using the TCP keepalive mechanism. To establish or restore a peer connection, the device repeatedly attempts the connection setup by using the

configured retry period until the connection is successful or until the connection is removed from the configuration.

VRF-Aware CTS-SXP

The CTS-SXP implementation of Virtual Routing and Forwarding (VRF) binds a CTS-SXP connection with a specific VRF. It is assumed that the network topology is correctly configured for Layer 2 or Layer 3 VPNs, and that all VRFs are configured before enabling CTS-SXP.

CTS-SXP VRF support can be summarized as follows:

- Only one CTS-SXP connection can be bound to one VRF.
- Different VRFs may have overlapping CTS-SXP peer or source IP addresses.
- IP-to-SGT mappings learned (added or deleted) in one VRF can be updated only in the same VRF domain. The CTS-SXP connection cannot update a mapping bound to a different VRF. If no SXP connection exists for a VRF, IP-SGT mappings for that VRF won't be updated by SXP.
- CTS-SXP does not support the establishment of connections with a source IPv6 address. However, multiple address families per VRF are supported where one CTS-SXP connection in a VRF domain can forward both IPv4 and IPv6 IP-to-SGT mappings.
- CTS-SXP has no limitation on the number of connections and number of IP-to-SGT mappings per VRF.


Security Group Access Zone-Based Policy Firewall

CTS-SXP extends the deployment of network devices to additional places on the network by using the Security Group Access (SGA) Zone-Based Policy firewalls (ZBPFs). CTS-SXP is used for Identity distribution through inline devices where the identity information is learned from a primary communication path that exists across networks as shown in the figure below.

The Security Group Tag (SGT) is used by the SGA ZBPF to apply enforcement policy. IP-to-SGT mapping information is learned through CTS-SXP. When a packet arrives, source and destination IP addresses in the

packet are used to derive source and destination tags. The Identity firewall applies a policy to the received IP packets based on the configured policy where the SGT is one of the attributes.

Figure 2: CTS-SXP SGA ZBPF Distribution Path Across Networks

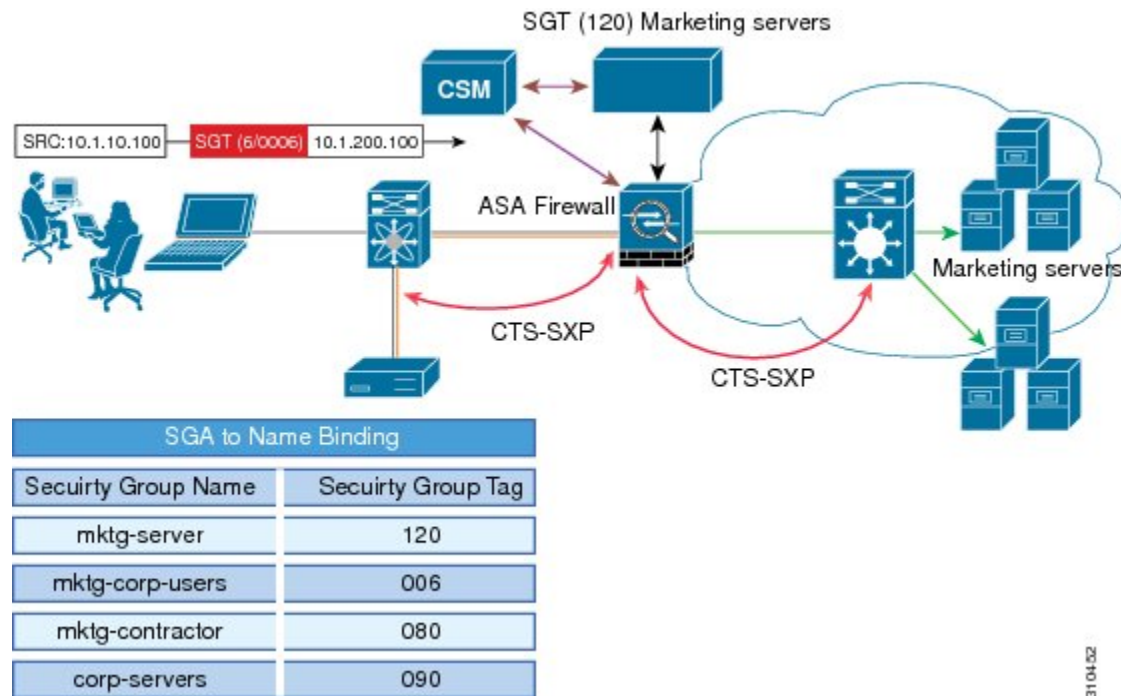

How to Configure the Cisco TrustSec SGT Exchange Protocol IPv4

Enabling CTS-SXP

SUMMARY STEPS

1. enable
2. configure terminal
3. cts sxp enable

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable	Enables privileged EXEC mode.

	Command or Action	Purpose
	Example: Device> enable	<ul style="list-style-type: none"> Enter your password if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	cts sxp enable Example: Device(config)# cts sxp enable	Enables a CTS-SXP connection to any peer connection that is configured. Note Ensure that peer connections are configured. If peer connections are not configured, then CTS-SXP connections cannot be established with them.

Configuring a CTS-SXP Peer Connection

The CTS-SXP peer connection must be configured on both devices. One device is the speaker and the other is the listener. When using password protection, make sure to use the same password on both ends.



Note

If a default CTS-SXP source IP address is not configured and you do not configure a CTS-SXP source address in the connection, the Cisco TrustSec software derives the CTS-SXP source IP address from existing local IP addresses. The CTS-SXP source IP address might be different for each TCP connection initiated from the router.

SUMMARY STEPS

1. enable
2. configure terminal
3. cts sxp connection peer *ipv4-address* {source | password} {default | none} mode {local | peer} [[listener | speaker] [vrf *vrf-name*]]
4. exit
5. show cts sxp {connections | sgt-map} [brief | vrf *vrf-name*]

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable	Enables privileged EXEC mode.

	Command or Action	Purpose
	Example: <pre>Device> enable</pre>	<ul style="list-style-type: none"> Enter your password if prompted.
Step 2	configure terminal Example: <pre>Device# configure terminal</pre>	Enters global configuration mode.
Step 3	cts sxp connection peer <i>ipv4-address</i> {source password} {default none} mode {local peer} [[listener speaker] [vrf <i>vrf-name</i>]] Example: <pre>Device(config)# cts sxp connection peer 10.20.2.2 password default mode local speaker</pre>	<p>Configures the CTS-SXP peer address connection.</p> <p>The source keyword specifies the IPv4 address of the source device. If no address is specified, the connection uses the default source address, if configured, or the address of the port.</p> <p>The password keyword specifies the password that CTS-SXP uses for the connection using the following options:</p> <ul style="list-style-type: none"> default—Use the default CTS-SXP password you configured using the cts sxp default password command. none—A password is not used. <p>The mode keyword specifies the role of the remote peer device:</p> <ul style="list-style-type: none"> local—The specified mode refers to the local device. peer—The specified mode refers to the peer device. listener—Specifies that the device is the listener in the connection. speaker—Specifies that the device is the speaker in the connection. This is the default. <p>The optional vrf keyword specifies the VRF to the peer. The default is the default VRF.</p>
Step 4	exit Example: <pre>Device# exit</pre>	Exits global configuration mode and returns to privileged EXEC mode.
Step 5	show cts sxp {connections sgt-map} [brief vrf <i>vrf-name</i>] Example: <pre>Device# show cts sxp connections</pre>	(Optional) Displays CTS-SXP status and connections.

Configuring the Default CTS-SXP Password

SUMMARY STEPS

1. `enable`
2. `configure terminal`
3. `cts sxp default password [0 | 6 | 7] password`
4. `exit`

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	cts sxp default password [0 6 7] password Example: Device(config)# cts sxp default password Cisco123	Configures the CTS-SXP default password. You can enter either a clear text password (using the 0 or no option) or an encrypted password (using the 6 or 7 option). The maximum password length is 32 characters. Note By default, CTS-SXP uses no password when setting up connections.
Step 4	exit Example: Device# exit	Exits global configuration mode and returns to privileged EXEC mode.

Configuring the Default CTS-SXP Source IP Address

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **cts sxp default source-ip *src-ip-addr***
4. **exit**

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. • Enter your password if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	cts sxp default source-ip <i>src-ip-addr</i> Example: Device(config)# cts sxp default source-ip 10.20.2.2	Configures the CTS-SXP default source IP address that is used for all new TCP connections where a source IP address is not specified. Note Existing TCP connections are not affected when the default CTS-SXP source IP address is configured.
Step 4	exit Example: Device# exit	Exits global configuration mode and returns to privileged EXEC mode.

Configuring the CTS-SXP Reconciliation Period

After a peer terminates a CTS-SXP connection, an internal hold-down timer starts. If the peer reconnects before the internal hold-down timer expires, the CTS-SXP reconciliation period timer starts. While the CTS-SXP reconciliation period timer is active, the CTS software retains the SGT mapping entries learned from the previous connection and removes invalid entries. The default value is 120 seconds (2 minutes). Setting the CTS-SXP reconciliation period to 0 seconds disables the timer and causes all entries from the previous connection to be removed.

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **cts sxp reconciliation period** *seconds*
4. **exit**

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	cts sxp reconciliation period <i>seconds</i> Example: Device(config)# cts sxp reconciliation period 150	Sets the CTS-SXP reconciliation timer, in seconds. The range is from 0 to 64000. The default is 120.
Step 4	exit Example: Device# exit	Exits global configuration mode and enters privileged EXEC mode.

Configuring the CTS-SXP Retry Period

The CTS-SXP retry period determines how often the CTS software retries a CTS-SXP connection. If a CTS-SXP connection is not established successfully, then the CTS software makes a new attempt to set up the connection after the CTS-SXP retry period timer expires. The default value is 2 minutes. Setting the CTS-SXP retry period to 0 seconds disables the timer and retries are not attempted.

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **cts sxp retry period** *seconds*
4. **exit**

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	cts sxp retry period <i>seconds</i> Example: Device(config)# cts sxp retry period 160	Sets the CTS-SXP retry timer, in seconds. The range is from 0 to 64000. The default is 120.
Step 4	exit Example: Device# exit	Exits global configuration mode and returns to privileged EXEC mode.

Creating Syslogs to Capture IP-to-SGT Mapping Changes**SUMMARY STEPS**

1. **enable**
2. **configure terminal**
3. **cts sxp log binding-changes**
4. **exit**

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	cts sxp log binding-changes Example: Device(config)# cts sxp log binding-changes	Enables logging for IP-to-SGT binding changes causing CTS-SXP syslogs (sev 5 syslog) to be generated whenever a change to IP-to-SGT binding occurs (add, delete, change). These changes are learned and propagated on the CTS-SXP connection. Note This logging function is disabled by default.
Step 4	exit Example: Device# exit	Exits global configuration mode and returns to privileged EXEC mode.

Configuring a Class Map for a Security Group Access Zone-Based Policy Firewall

Perform this task to configure a class map for classifying Security Group Access (SGA) zone-based policy firewall network traffic.

**Note**

You must perform at least one match step.

The zone-based firewall policy uses the Security Group Tag ID for filtering. In a zone-based firewall policy, only the first packet that creates a session matches the policy. Subsequent packets in this flow do not match the filters in the configured policy, but instead match the session directly. The statistics related to subsequent packets are shown as part of the inspect action.

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **object-group security** *name*
4. **security-group tag-id** *sgt-id*
5. **group-object** *name*
6. **description** *text*
7. **exit**
8. **class-map type inspect** [**match-any** | **match-all**] *class-map-name*
9. **match group-object security** *source name*
10. **match group-object security** *destination name*
11. **end**
12. **show object-group** [*name*]

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	object-group security <i>name</i> Example: Device(config)# object-group security myobject1a	Creates an object group to identify traffic coming from a specific user or endpoint and enters object-group identity mode.
Step 4	security-group tag-id <i>sgt-id</i> Example: Device(config-object-group)# security-group tag-id 120	Specifies the membership of a security group by using the SGT ID number. This number can be from 1 to 65535. Multiple security groups can be specified using this command.
Step 5	group-object <i>name</i> Example: Device(config-object-group)# group-object admin	(Optional) Specifies a nested reference to a type of user group. Multiple nested user groups can be specified using this command.

	Command or Action	Purpose
Step 6	description <i>text</i> Example: <pre>Device(config-object-group)# description my sgtinfo</pre>	(Optional) Defines information about the security group.
Step 7	exit Example: <pre>Device(config-object-group)# exit</pre>	Exits object-group identity mode and enters global configuration mode.
Step 8	class-map type inspect [match-any match-all] <i>class-map-name</i> Example: <pre>Device(config)# class-map type inspect match-any myclass1</pre>	Creates a Layer 3 or Layer 4 inspect type class map and enters class-map configuration mode.
Step 9	match group-object security source <i>name</i> Example: <pre>Device(config-cmap)# match group-object security source myobject1</pre>	Matches traffic from a user in the security group.
Step 10	match group-object security destination <i>name</i> Example: <pre>Device(config-cmap)# match group-object security destination myobject1</pre>	Matches traffic for a user in the security group.
Step 11	end Example: <pre>Device(config-cmap)# end</pre>	Exits class-map configuration mode and enters privileged EXEC mode.
Step 12	show object-group [<i>name</i>] Example: <pre>Device# show object-group admin</pre>	(Optional) Displays the content of all user groups. Optionally, use the <i>name</i> argument to show information for a single group.

Creating a Policy Map for a Security Group Access Zone-Based Policy Firewall

Perform this task to create a policy map for a Security Group Access (SGA) zone-based policy firewall that is attached to zone pairs. This task also helps to configure Identity Firewall (IDFW) to work with Security Group Tag (SGT) Exchange Protocol (XP) or L2-tagged traffic on the interfaces that belong to the security zones.

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **policy-map type inspect** *policy-map-name*
4. **class type inspect** *class-name*
5. **inspect**
6. **exit**
7. **zone-pair security** *zone-pair-name* **source** *source-zone* **destination** *destination-zone*
8. **service-policy type inspect** *policy-map-name*
9. **end**
10. **interface** *type number*
11. **zone-member security** *zone-name*
12. **cts manual**
13. **no propagate sgt**
14. **policy static sgt** *tag* [*trusted*]
15. **exit**
16. **show policy-map type inspect zone-pair session**

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. • Enter your password if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	policy-map type inspect <i>policy-map-name</i>	Creates a Layer 3 or Layer 4 inspect type policy map.

	Command or Action	Purpose
	Example: <pre>Device(config)# policy-map type inspect z1z2-policy</pre>	<ul style="list-style-type: none"> Enters policy map configuration mode.
Step 4	class type inspect <i>class-name</i> Example: <pre>Device(config-pmap)# class type inspect cmap-1</pre>	Specifies the traffic (class) on which an action is to be performed and enters policy-map class configuration mode.
Step 5	inspect Example: <pre>Device(config-pmap-c)# inspect</pre>	Enables packet inspection.
Step 6	exit Example: <pre>Device(config-pmap-c)# exit</pre>	Exits policy-map class configuration mode and enters global configuration mode.
Step 7	zone-pair security <i>zone-pair-name</i> source <i>source-zone</i> destination <i>destination-zone</i> Example: <pre>Device(config)# zone-pair security z1z2 source z1 destination z2</pre>	Creates a zone pair and enters security zone configuration mode. Note To apply a policy, you must configure a zone pair.
Step 8	service-policy type inspect <i>policy-map-name</i> Example: <pre>Device(config-sec-zone)# service-policy type inspect z1z2-policy2</pre>	Attaches a firewall policy map to the destination zone pair. Note If a policy is not configured between a pair of zones, traffic is dropped by default.
Step 9	end Example: <pre>Device(config-sec-zone)# end</pre>	Exits security zone configuration mode and enters global configuration mode.
Step 10	interface <i>type number</i> Example: <pre>Device(config)# interface GigabitEthernet 0/1/1</pre>	Configures an interface and enters interface configuration mode.

	Command or Action	Purpose
Step 11	zone-member security <i>zone-name</i> Example: <pre>Device(config-if)# zone-member security Inside</pre>	Assigns an interface to a specified security zone. Note When you make an interface a member of a security zone, all traffic in and out of that interface (except traffic bound for the router or initiated by the router) is dropped by default. To let traffic through the interface, you must make the zone part of a zone pair to which you should apply a policy. If the policy permits traffic, traffic can flow through that interface.
Step 12	cts manual Example: <pre>Device(config-if)# cts manual</pre>	Enables the interface for Cisco TrustSec Security (CTS) SGT authorization and forwarding, and enters CTS manual interface configuration mode.
Step 13	no propagate sgt Example: <pre>Device(config-if-cts-manual)# no propagate sgt</pre>	Disables SGT propagation at Layer 2 on CTS interfaces.
Step 14	policy static sgt tag [trusted] Example: <pre>Device(config-if-cts-manual)# policy static sgt 100 trusted</pre>	Configures a static authorization policy for a CTS security group with a tagged packet that defines the trustworthiness of the SGT.
Step 15	exit Example: <pre>Device(config-if)# exit</pre>	Exits security zone configuration mode and enters privileged EXEC mode.
Step 16	show policy-map type inspect zone-pair session Example: <pre>Device# show policy-map type inspect zone-pair session</pre>	(Optional) Displays the Cisco IOS stateful packet inspection sessions created because of the policy-map application on the specified zone pair. Note The information displayed under the class-map field is the traffic rate (bits per second) of the traffic that belongs to the connection-initiating traffic only. Unless the connection setup rate is significantly high and is sustained for multiple intervals over which the rate is computed, no significant data is shown for the connection.

Example:

The following sample output of the **show policy-map type inspect zone-pair session** command displays the information about the Cisco IOS stateful packet inspection sessions created because of the policy-map application on the specified zone pair:

```
Device# show policy-map type inspect zone-pair session

Zone-pair: in-out
Service-policy inspect : test

Class-map: test (match-any)
  Match: group-object security source sgt
  Inspect
    Established Sessions
      Session 113EF68C (192.2.2.1:8)=>(198.51.100.252:153) icmp SIS_OPEN
      Created 00:00:02, Last heard 00:00:02
      Bytes sent (initiator:responder) [360:360]

Class-map: class-default (match-any)
  Match: any
  Drop (default action)
    310 packets, 37380 bytes
```

Configuration Examples for Cisco TrustSec SGT Exchange Protocol IPv4

Example: Enabling and Configuring a CTS-SXP Peer Connection

The following example shows how to enable CTS-SXP and configure the CTS-SXP peer connection on Device_A, a speaker, for connection to Device_B, a listener:

```
Device# configure terminal
Device_A(config)# cts sxp enable
Device_A(config)# cts sxp default password Cisco123
Device_A(config)# cts sxp default source-ip 10.10.1.1
Device_A(config)# cts sxp connection peer 10.20.2.2 password default mode local speaker
```

The following example shows how to configure the CTS-SXP peer connection on Device_B, a listener, for connection to Device_A, a speaker:

```
Device# configure terminal
Device_B(config)# cts sxp enable
Device_B(config)# cts sxp default password Cisco123
Device_B(config)# cts sxp default source-ip 10.20.2.2
Device_B(config)# cts sxp connection peer 10.10.1.1 password default mode local listener
```

The following sample output for **show cts sxp connections** command displays CTS-SXP connections:

```
Device_B# show cts sxp connections

SXP                : Enabled
Default Password   : Set
Default Source IP  : 10.10.1.1
Connection retry open period: 10 secs
Reconcile period: 120 secs
Retry open timer is not running
-----
Peer IP            : 10.20.2.2
```



```

Source IP          : 10.10.1.1
Conn status       : On
Connection mode    : SXP Listener
Connection inst#   : 1
TCP conn fd       : 1
TCP conn password: default SXP password
Duration since last state change: 0:00:21:25 (dd:hr:mm:sec)
Total num of SXP Connections = 1

```

Example: Configuring a Security Group Access Zone-Based Policy Firewall

The following example shows the configuration of a class map and policy map for an SGA zone-based policy firewall.

```

Device(config)# object-group security myobject1
Device(config-object-group)# security-group tag-id 1
Device(config-object-group)# exit
Device(config)# object-group security myobject2
Device(config-object-group)# security-group tag-id 2
Device(config-object-group)# exit
Device(config)# object-group security myobject3
Device(config-object-group)# security-group tag-id 3
Device(config-object-group)# exit
Device(config)# object-group security myobject4
Device(config-object-group)# security-group tag-id 4
Device(config-object-group)# exit

Device(config)# class-map type inspect match-any myclass1
Device(config-cmap)# match group-object security source myobject1
Device(config-cmap)# exit
Device(config)# class-map type inspect match-any myclass2
Device(config-cmap)# match group-object security source myobject2
Device(config-cmap)# exit
Device(config)# class-map type inspect match-any myclass3
Device(config-cmap)# match group-object security source myobject3
Device(config-cmap)# exit
Device(config)# class-map type inspect match-any myclass4
Device(config-cmap)# match group-object security source myobject4
Device(config-cmap)# exit

Device(config)# policy-map type inspect InsideOutside
Device(config-pmap)# class type inspect myclass1
Device(config-pmap-c)# pass
Device(config-pmap-c)# exit
Device(config-pmap)# class type inspect myclass2
Device(config-pmap-c)# drop log
Device(config-pmap-c)# exit

Device(config)# policy-map type inspect OutsideInside
Device(config-pmap)# class type inspect myclass3
Device(config-pmap-c)# pass
Device(config-pmap-c)# exit
Device(config-pmap)# class type inspect myclass4
Device(config-pmap-c)# drop
Device(config-pmap-c)# exit

Device(config)# zone-pair security Inside
Device(config-sec-zone)# description Firewall Inside Zone
Device(config-sec-zone)# exit

Device(config)# zone-pair security Outside
Device(config-sec-zone)# description Firewall Outside Zone
Device(config-sec-zone)# exit

Device(config)# zone-pair security InsideOutside source Inside destination Outside
Device(config-sec-zone)# description Firewall ZonePair Inside Outside
Device(config-sec-zone)# service-policy type inspect InsideOutside
Device(config-sec-zone)# exit

```

```

Device(config)# zone-pair security OutsideInside source Outside destination Inside
Device(config-sec-zone)# description Firewall ZonePair Outside Inside
Device(config-sec-zone)# service-policy type inspect OutsideInside
Device(config-sec-zone)# exit

Device(config)# interface Gigabit 0/1/1
Device(config-if)# zone-member security Inside
Device(config-if)# exit

```

Additional References for TrustSec SGT Handling: L2 SGT Imposition and Forwarding

Related Documents

Related Topic	Document Title
Cisco IOS commands	Cisco IOS Master Command List, All Releases
Security commands	Cisco IOS Security Command Reference: Commands A to C
	Cisco IOS Security Command Reference: Commands D to L
	Cisco IOS Security Command Reference: Commands M to R
	Cisco IOS Security Command Reference: Commands S to Z
Cisco TrustSec switches	Cisco TrustSec Switch Configuration Guide

MIBs

MIB	MIBs Link
CISCO-TRUSTSEC-SXP-MIB	To locate and download MIBs for selected platforms, Cisco software releases, and feature sets, use Cisco MIB Locator found at the following URL: http://www.cisco.com/go/mibs

Technical Assistance

Description	Link
The Cisco Support and Documentation website provides online resources to download documentation, software, and tools. Use these resources to install and configure the software and to troubleshoot and resolve technical issues with Cisco products and technologies. Access to most tools on the Cisco Support and Documentation website requires a Cisco.com user ID and password.	http://www.cisco.com/cisco/web/support/index.html

Feature Information for Cisco TrustSec SGT Exchange Protocol IPv4

The following table provides release information about the feature or features described in this module. This table lists only the software release that introduced support for a given feature in a given software release train. Unless noted otherwise, subsequent releases of that software release train also support that feature.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Table 1: Feature Information for Cisco TrustSec SGT Exchange Protocol IPv4

Feature Name	Releases	Feature Information
Cisco TrustSec SGT Exchange Protocol IPv4	Cisco IOS XE 3.4S Cisco IOS XE 3.10S	<p>The Security Group Tag (SGT) Exchange Protocol (SXP) is one of several protocols that supports CTS and is referred to in this document as CTS-SXP. CTS-SXP is a control protocol for propagating IP-to-SGT binding information across network devices that do not have the capability to tag packets. CTS-SXP passes IP-to-SGT bindings from authentication points to upstream devices in the network. This allows security services on switches, routers, or firewalls to learn identity information from access devices.</p> <p>This feature was introduced in Cisco IOS XE Release 3.4S.</p> <p>The following commands were introduced or modified: cts sxp enable, cts sxp connection peer, show cts sxp, cts sxp default source-ip, cts sxp reconciliation period, cts sxp retry period, cts sxp log binding-changes.</p>
TrustSec SG Firewall Enforcement IPv4	Cisco IOS XE 3.5S Cisco IOS XE 3.10S	<p>This feature helps CTS-SXP extend the deployment of network devices through Security Group Access (SGA) Zone-Based Policy firewalls (ZBPFs).</p> <p>The following commands were introduced or modified: group-object, match group-object security, object-group security, policy static sgt, and security-group.</p>



TrustSec SGT Handling: L2 SGT Imposition and Forwarding

First Published: July 25, 2011

Cisco TrustSec (CTS) builds secure networks by establishing domains of trusted network devices. Each device in the domain is authenticated by its peers. Communication on the links between devices in the domain is secured with a combination of encryption, message integrity check, and data-path replay protection mechanisms.

The TrustSec SGT Handling: L2 SGT Imposition and Forwarding feature allows the interfaces in a router to be manually enabled for CTS so that the router can insert the Security Group Tag (SGT) in the packet to be carried throughout the network in the CTS header.

- [Finding Feature Information, page 23](#)
- [Prerequisites for TrustSec SGT Handling: L2 SGT Imposition and Forwarding , page 24](#)
- [Information about TrustSec SGT Handling: L2 SGT Imposition and Forwarding, page 24](#)
- [How to Configure TrustSec SGT Handling: L2 SGT Imposition and Forwarding, page 25](#)
- [Additional References for TrustSec SGT Handling: L2 SGT Imposition and Forwarding, page 28](#)
- [Feature Information for TrustSec SGT Handling: L2 SGT Imposition and Forwarding, page 29](#)

Finding Feature Information

Your software release may not support all the features documented in this module. For the latest caveats and feature information, see [Bug Search Tool](#) and the release notes for your platform and software release. To find information about the features documented in this module, and to see a list of the releases in which each feature is supported, see the feature information table.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Prerequisites for TrustSec SGT Handling: L2 SGT Imposition and Forwarding

The CTS network needs to be established with the following prerequisites before implementing the TrustSec SGT Handling: L2 SGT Imposition and Forwarding feature:

- Connectivity exists between all network devices
- Cisco Secure Access Control System (ACS) 5.1 operates with a CTS-SXP license
- Directory, DHCP, DNS, certificate authority, and NTP servers function within the network
- Configure the **retry open timer** command to a different value on different routers.

Information about TrustSec SGT Handling: L2 SGT Imposition and Forwarding

Security Groups and SGTs

A security group is a grouping of users, endpoint devices, and resources that share access control policies. Security groups are defined by the administrator in the ACS. As new users and devices are added to the Cisco TrustSec (CTS) domain, the authentication server assigns these new entities to appropriate security groups. CTS assigns to each security group a unique 16-bit security group number whose scope is global within a CTS domain. The number of security groups in the router is limited to the number of authenticated network entities. Security group numbers do not need to be manually configured.

Once a device is authenticated, CTS tags any packet that originates from that device with an SGT that contains the security group number of the device. The packet carries this SGT throughout the network within the CTS header. The SGT is a single label that determines the privileges of the source within the entire CTS domain. The SGT is identified as the source because it contains the security group of the source. The destination device is assigned a destination group tag (DGT).

**Note**

The CTS packet tag does not contain the security group number of the destination device.

How to Configure TrustSec SGT Handling: L2 SGT Imposition and Forwarding

Manually Enabling TrustSec SGT Handling: L2 SGT Imposition and Forwarding on an Interface

Perform the following steps to manually enable an interface on the device for Cisco TrustSec (CTS) so that the device can add Security Group Tag (SGT) in the packet to be propagated throughout the network and to implement a static authorization policy.

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **interface {GigabitEthernet *port* | Vlan *number*}**
4. **cts manual**
5. **policy static sgt *tag* [trusted]**
6. **end**
7. **show cts interface [GigabitEthernet *port* | Vlan *number* | **brief** | **summary**]**

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. • Enter your password if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	interface {GigabitEthernet <i>port</i> Vlan <i>number</i>} Example: Device(config)# interface gigabitethernet 0	Enters the interface on which CTS SGT authorization and forwarding is enabled
Step 4	cts manual Example: Device(config-if)# cts manual	Enables the interface for CTS SGT authorization and forwarding, and enters CTS manual interface configuration mode.

	Command or Action	Purpose
		Note To enable the cts manual command on a subinterface, you must increase the IP MTU size to accommodate the additional bytes for the Dot1Q tag. This is applicable only for releases earlier than Cisco IOS XE Release 3.17.
Step 5	policy static sgt tag [trusted] Example: Device(config-if-cts-manual)# policy static sgt 100 trusted	Configures a static authorization policy for a CTS security group with a tagged packet that defines the trustworthiness of the SGT.
Step 6	end Example: Device(config-if-cts-manual)# end	Exits CTS manual interface configuration mode and enters privileged EXEC mode.
Step 7	show cts interface [GigabitEthernet <i>port</i> Vlan <i>number</i> brief summary] Example: Device# show cts interface brief	Displays CTS configuration statistics for the interface.

Example:

The following is sample output for the **show cts interface brief** command.

Cisco ASR 1000 Series Aggregation Services Routers and Cisco Cloud Services Router 1000V Series

Device# **show cts interface brief**

```
Global Dot1x feature is Disabled
Interface GigabitEthernet0/1/0:
  CTS is enabled, mode:      MANUAL
  IFC state:                 OPEN
  Interface Active for 00:00:40.386
  Authentication Status:    NOT APPLICABLE
  Peer identity:             "unknown"
  Peer's advertised capabilities: ""
  Authorization Status:     NOT APPLICABLE
  SAP Status:                NOT APPLICABLE
  Propagate SGT:             Enabled
  Cache Info:
    Cache applied to link : NONE
```

Cisco 4400 Series Integrated Services Routers

Device# **show cts interface brief**

```
Interface GigabitEthernet0/1/0
  CTS is enabled, mode:      MANUAL
  Propagate SGT:             Enabled
  Static Ingress SGT Policy:
    Peer SGT:                 100
    Peer SGT assignment:     Trusted
```


Disabling CTS SGT Propagation on an Interface

Follow these steps to disable CTS SGT Propagation on an interface in an instance when a peer device is not capable of receiving an SGT.

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **interface** {GigabitEthernetport | Vlan number}
4. **cts manual**
5. **no propagate sgt**
6. **end**
7. **show cts interface** [GigabitEthernetport | Vlan number | brief | summary]

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. • Enter your password if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	interface {GigabitEthernetport Vlan number} Example: Device(config)# interface gigabitethernet 0	Enters the interface on which CTS SGT authorization and forwarding is enabled
Step 4	cts manual Example: Device(config-if)# cts manual	Enables the interface for CTS SGT authorization and forwarding. CTS manual interface configuration mode is entered where CTS parameters can be configured.
Step 5	no propagate sgt Example: Device(config-if-cts-manual)# no propagate sgt	Disables CTS SGT propagation on an interface in situations where a peer device is not capable of receiving an SGT. Note CTS SGT propagation is enabled by default. The propagate sgt command can be used if CTS SGT propagation needs to be turned on again for a peer device. Once the no propagate sgt command is entered, the SGT tag is not added in the L2 header.

	Command or Action	Purpose
Step 6	end Example: Device(config-if-cts-manual)# end	Exits CTS manual interface configuration mode and enters privileged EXEC mode.
Step 7	show cts interface [GigabitEthernetport Vlan number brief summary] Example: Device# show cts interface brief Global Dot1x feature is Disabled Interface GigabitEthernet0: CTS is enabled, mode: MANUAL IFC state: OPEN Authentication Status: NOT APPLICABLE Peer identity: "unknown" Peer's advertised capabilities: "" Authorization Status: NOT APPLICABLE SAP Status: NOT APPLICABLE Propagate SGT: Disabled Cache Info: Cache applied to link : NONE	Displays CTS configuration statistics to verify that CTS SGT propagation was disabled on interface.

Additional References for TrustSec SGT Handling: L2 SGT Imposition and Forwarding

Related Documents

Related Topic	Document Title
Cisco IOS commands	Cisco IOS Master Command List, All Releases
Security commands	Cisco IOS Security Command Reference: Commands A to C
	Cisco IOS Security Command Reference: Commands D to L
	Cisco IOS Security Command Reference: Commands M to R
	Cisco IOS Security Command Reference: Commands S to Z
Cisco TrustSec switches	Cisco TrustSec Switch Configuration Guide

MIBs

MIB	MIBs Link
CISCO-TRUSTSEC-SXP-MIB	To locate and download MIBs for selected platforms, Cisco software releases, and feature sets, use Cisco MIB Locator found at the following URL: http://www.cisco.com/go/mibs

Technical Assistance

Description	Link
The Cisco Support and Documentation website provides online resources to download documentation, software, and tools. Use these resources to install and configure the software and to troubleshoot and resolve technical issues with Cisco products and technologies. Access to most tools on the Cisco Support and Documentation website requires a Cisco.com user ID and password.	http://www.cisco.com/cisco/web/support/index.html

Feature Information for TrustSec SGT Handling: L2 SGT Imposition and Forwarding

The following table provides release information about the feature or features described in this module. This table lists only the software release that introduced support for a given feature in a given software release train. Unless noted otherwise, subsequent releases of that software release train also support that feature.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Table 2: Feature Information for TrustSec SGT Handling: L2 SGT Imposition and Forwarding

Feature Name	Releases	Feature Information
TrustSec SGT Handling: L2 SGT Imposition and Forwarding	Cisco IOS XE 3.4S Cisco IOS XE 3.10S	<p>This feature allows the interfaces in a router to be manually enabled for CTS so that the router can insert the Security Group Tag (SGT) in the packet to be carried throughout the network in the CTS header.</p> <p>In Cisco IOS XE Release 3.10S, this feature is supported on the following platforms:</p> <ul style="list-style-type: none"> • Cisco CSR 1000V Router • Cisco ISR 4400 Router <p>The following commands were introduced or modified: cts manual, policy static sgt, propagate sgt, show cts interface.</p>



Cisco TrustSec with SXPv4

Cisco TrustSec (CTS) builds secure networks by establishing domains of trusted network devices. Each device in the domain is authenticated by its peers. Communication on the links between devices in the domain is secured with a combination of encryption, message integrity check, and data-path replay protection mechanisms.

The Security Group Tag (SGT) Exchange Protocol (SXP) is one of several protocols that supports CTS. CTS SXP version 4 (SXPv4) enhances the functionality of SXP by adding a loop detection mechanism to prevent stale binding in the network. In addition, Cisco TrustSec with SXPv4 supports SGT inline tagging which allows propagation of SGT embedded in clear-text (unencrypted) Ethernet packets.

- [Finding Feature Information, page 31](#)
- [Information About Cisco TrustSec with SXPv4, page 32](#)
- [How to Configure Cisco TrustSec with SXPv4, page 37](#)
- [Configuration Examples for Cisco TrustSec with SXPv4, page 42](#)
- [Additional References for Cisco TrustSec with SXPv4, page 44](#)
- [Feature Information for Cisco TrustSec with SXPv4, page 45](#)

Finding Feature Information

Your software release may not support all the features documented in this module. For the latest caveats and feature information, see [Bug Search Tool](#) and the release notes for your platform and software release. To find information about the features documented in this module, and to see a list of the releases in which each feature is supported, see the feature information table.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Information About Cisco TrustSec with SXPv4


Overview of Cisco TrustSec with SXPv4

Cisco TrustSec (CTS) Security Group Tag (SGT) Exchange Protocol (SXP) (CTS-SXP) is a control protocol which propagates IP address to Security Group Tag (SGT) binding information across network devices. SGT is maintained by tagging packets on ingress to the CTS-SXP network so that they can be properly identified for the purpose of applying security and other policy criteria along the data path. The Security Group Tag (SGT) allows the network to enforce the access control policy by enabling the endpoint device to act upon the SGT to filter traffic.

SXP connections can be enabled such that the binding forwarded by one switch for an SXP connection can be received from another SXP connection, resulting in SXP connection loops. SXP loop topology might, however, result in stale binding in the network. SXPv4's built-in loop detection and prevention mechanism addresses the stale binding issue whenever there is a loop between SXP nodes.

Loop prevention is achieved by adding SXP propagation path information when propagating (adding/deleting) bindings. Propagation path information keeps track of the network devices (via their node IDs) that the binding travels in an ordered manner. All nodes that participate in the network with looped SXP connections must run SXPv4 to function correctly. Loop detection is a mandatory capability in SXPv4.

Figure 3: SXPv4 Loop Detection

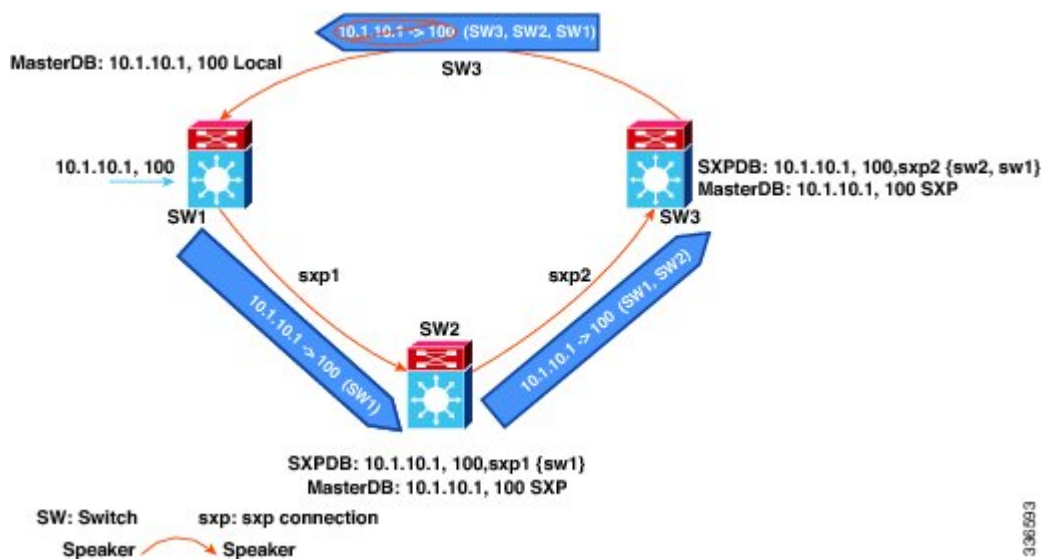

In the figure above there are three network devices: SW1, SW2, and SW3. There are also three SXP connections: SXP1, SXP2 and SXP3, together which create an SXP connection loop. A binding (10.1.10.1, 100) is learned at SW1 through local authentication. The binding is exported by SW1 to SW2 together with the path information (that is, SW1, from where the binding is forwarded).

Upon receiving the binding, SW2 exports it to SW3, again prepending the path information (SW2, SW1). Similarly, SW3 forwards the binding to SW1 with path information SW3, SW2, SW1. When SW1 receives the binding, the path information is checked. If its own path attribute is in the binding update received, then a propagation loop is detected. This binding is dropped and not stored in the SXP binding database.

If the binding is removed from SW1, (for example, if a user logs off), a binding deletion event is sent. The deletion event goes through the same path as above. When it reaches SW1, no action will be taken as no such binding exists in the SW1 binding database.

Loop detection is done when a binding is received by an SXP but before it is added to the binding database.

SXP Node ID

An SXP node ID is used to identify the individual devices within the network. The node ID is a four-octet integer that can be configured by the user. If it is not configured by the user, SXP picks a node ID itself using the highest IPv4 address in the default VRF domain, in the same manner that EIGRP generates its node ID. The node ID has to be unique in the network that SXP connections traverse to enable SXP loop detection.

The SXP loop detection mechanism drops binding propagation packets based on finding its own node ID in the peer sequence attribute. Changing a node ID in a loop detection-running SXP network could break SXP loop detection functionality and therefore needs to be handled carefully.

The bindings that are associated with the original node ID have to be deleted in all SXP nodes before the new node ID is configured. This can be done by disabling the SXP feature on the network device where you desire to change the node ID.

**Note**

Disabling the SXP feature brings down all SXP connections on the device.

Before you change the node ID, wait until the SXP bindings that are propagated with the particular node ID in the path attribute are deleted.

**Note**

A syslog is generated when you change the node ID.

Keepalive and Hold-Time Negotiation with SXPv4

SXP uses a TCP-based, keepalive mechanism to determine if a connection is live. SXPv4 adds an optional negotiated keepalive mechanism within the protocol in order to provide more predictable and timely detection of connection loss.

SXP connections are asymmetric with almost all of the protocol messages (except for open/open_resp and error messages) being sent from an SXP speaker to an SXP listener. The SXP listener can keep a potentially large volume of state per connection, which includes all the binding information learned on a connection. Therefore, it is only meaningful to have a keepalive mechanism that allows a listener to detect the loss of connection with a speaker.


The mechanism is based on two timers:

- **Hold timer:** Used by a listener for detection of elapsing time without successive keepalive and/or update messages from a speaker.
- **Keepalive timer:** Used by a speaker to trigger the dispatch of keepalive messages during intervals when no other information is exported via update messages.

The hold-time for the keepalive mechanism may be negotiated during the open/open_resp exchange at connection setup. The following issues are important during the negotiation:

- A listener may have desirable range for the hold-time period locally configured or have a default of 90 to 180 seconds. A value of 0xFFFF.0xFFFF indicates that the keepalive mechanism is not used.
- A speaker may have a minimum acceptable hold-time period locally configured or have a default of 120 seconds. This is the shortest period of time a speaker is willing to send keepalive messages for keeping the connection alive. Any shorter hold-time period would require a faster keepalive rate than the rate the speaker is ready to support.
- A value of 0xFFFF implies that the keepalive mechanism is not used.
- The negotiation succeeds when the speaker's minimum acceptable hold-time falls below or within the desirable hold-time range of the listener. If one end turns off the keepalive mechanism, the other end should also turn it off to make the negotiation successful.
- The negotiation fails when the speaker's minimum acceptable hold-time is greater than the upper bound of the listener's hold-time range.
- The selected hold-time period of a successful negotiation is the maximum of the speaker's minimum acceptable hold-time and the lower bound of the listener's hold-time range.
- The speaker calculates the keepalive time to one-third of the selected hold-time by default unless a different keepalive time is locally configured.

Figure 4: Hold-time Negotiation Process

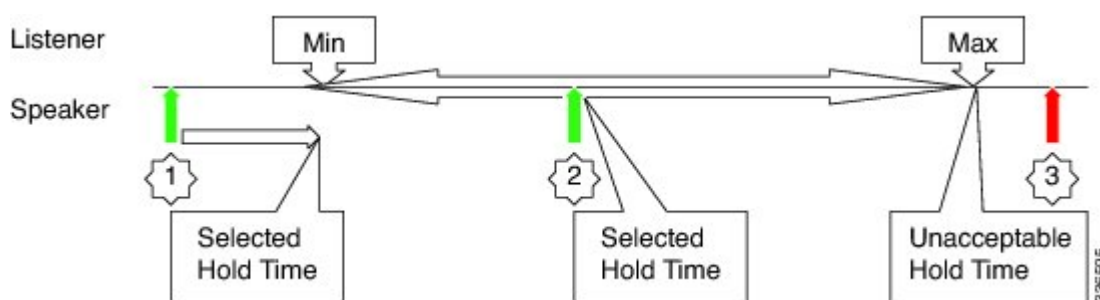

The figure above illustrates the hold-time negotiation process. More detail on the listener's and speaker's roles is given below.

Connection Initiated by Listener

- A listener may include a hold-time attribute in the open message with minimum and maximum values set to its configured range of the hold-time period. A hold-time attribute with just a minimum value set to 0xFFFF0 would indicate to the speaker that the keepalive mechanism is not used.
- When a speaker receives an open message, it will react as follows:
 - If the hold-time attribute is not present or if it contains a minimum value that is set to 0xFFFF0, the speaker will set its keepalive time to 0xFFFF0 to indicate that the keepalive mechanism is disabled.
 - If the received hold-time attribute contains a valid range, the speaker must include a hold-time attribute in its open_resp message with a minimum value set as follows:

- 0xFFFF0 if the speaker does not support the keepalive mechanism or if the mechanism is supported but disabled due to a local configuration, which sets the keepalive time to 0xFFFF0.
 - If the speaker's minimum acceptable hold-time value is greater than the upper bound of the offered range, the speaker must send an open error message with the subcode set to "Unacceptable hold-time" and terminate the connection. Otherwise the speaker will set the selected hold-time to the maximum of its minimum acceptable hold-time value and the lower bound of the offered hold-time range.
 - The speaker will calculate a new value for its keepalive time as one-third of that selected hold-time.
 - The speaker will set the minimum hold-time value of the hold-time attribute to the selected hold-time.
- When the listener receives the open_resp message from the speaker, it will look for hold-time attribute:
 - If the hold-time attribute is present and contains a minimum hold-time value of 0xFFFF0, the speaker will set its hold-time value to 0xFFFF0 to indicate that the keepalive mechanism is not used.
 - If the minimum hold-time value is within the range offered by the listener, the listener will set its hold-time period to the selected value it has received in the open_resp message.
 - If the minimum hold-time value is outside the offered range, the listener will send an open error message with subcode set to "Unacceptable hold-time" and terminate the connection.

Connection Initiated by Speaker

- A speaker may include a hold-time attribute in the open message with minimum value set to its minimum acceptable hold-time period. A hold-time attribute with just a minimum value of 0xFFFF0 would indicate to the listener that the keepalive mechanism is not used.
- When a listener receives an open message, it will react as follows:
 - If the hold-time attribute is not present or if it contains a minimum value that is set to 0xFFFF0, the listener will set its hold-time to 0xFFFF0 to indicate that keepalive mechanism is disabled.
 - If the received hold-time attribute contains a valid value, the speaker must include hold-time attribute in its open_resp message with a minimum value set as follows:
 - 0xFFFF0 if the listener does not support the keepalive mechanism or if the mechanism is supported but disabled due to a local configuration, which sets the keepalive time to 0xFFFF0.
 - If the received hold-time value is greater than the upper bound of the listener's configured hold-time range, the speaker must send an open error message with subcode set to "Unacceptable hold-time" and terminate the connection.
 - If the received hold-time value falls within the listener's configured hold-time range, the listener will make it the selected hold-time.
 - If the received hold-time value is less than the lower bound of the listener's configured hold-time range, the listener will set the selected hold-time to the lower bound of its hold-time range.
 - The listener will set the minimum hold-time value of the hold-time attribute to the selected hold-time.

- When the speaker receives the open_resp message from the listener, it will look for the hold-time attribute:
 - If the hold-time attribute is present and contains a minimum hold-time value of 0xFFFF0. The speaker will set its hold-time value to 0xFFFF0 to indicate that the keepalive mechanism is not used.
 - If the received hold-time value is greater or equal to the speaker's minimum acceptable hold-time, the speaker will calculate a new value for its keepalive time as one-third of the received hold-time.
 - If the received hold-time value is lower than the minimum acceptable, the speaker must send an open error message with subcode set to “Unacceptable hold-time” and terminate the connection.

SGT Inline Tagging

Each security group in a CTS domain is assigned a unique 16 bit tag called the “Security Group Tag” (SGT). The SGT is a single label indicating the privileges of the source within the entire network. It is in turn propagated between network hops allowing any intermediary devices (switches, routers) to enforce policies based on the identity tag.

CTS-capable devices have built-in hardware capabilities that can send and receive packets with SGT embedded in the MAC (L2) layer. This feature is called “L2-SGT Imposition.” It allows Ethernet interfaces on the device to be enabled for L2-SGT imposition so that device can insert an SGT in the packet to be carried to its next hop Ethernet neighbor. SGT-over-Ethernet is a method of hop-by-hop propagation of SGT embedded in clear-text (unencrypted) Ethernet packets. Inline identity propagation is scalable, provides near line-rate performance and avoids control plane overhead.

The Cisco TrustSec with SXPv4 feature supports CTS Meta Data (CMD) based L2-SGT. When a packet enters a CTS enabled interface, the IP-SGT mapping database (with dynamic entries built by SXP and/or static entries built by configuration commands) is analyzed to learn the SGT corresponding to the source IP address of the packet, which is then inserted into the packet and carried throughout the network within the CTS header.

As the tag represents the group of the source, the tag is also referred to as the Source Group Tag (SGT). At the egress edge of the network, the group assigned to the packet's destination becomes known. At this point, the access control can be applied. With CTS, access control policies are defined between the security groups and are referred to as Security Group Access Control Lists (SGACL). From the view of any given packet, it is simply being sourced from a security group and destined for another security group.

On a Cisco ASR 1000 series router, the SGT tag received in a packet from a trusted interface will be propagated to the network on the other side and will also be used for Identity Firewall (IDFW) classification. When IPsec support is added, the received SGT tag will be shared with IPsec for SGT tagging.

A network device at the ingress of CTS cloud needs to determine the SGT of the packet entering the CTS cloud so that it can tag the packet with that SGT when it forwards it into the CTS cloud. The SGT of a packet can be determined with these methods:

- SGT field on CTS header: If a packet is coming from a trusted peer device, it is assumed that the CTS header carries the correct SGT field. This situation applies to a network that is not the first network device in the CTS cloud for the packet.
- SGT lookup based on Source IP Address: In some cases, the administrator may manually configure a policy to decide the SGT of a packet based upon the source IP address. An IP address to SGT table can also be populated by the SXP protocol.

SGT Inline Tagging for IPv6 Traffic

The following are the considerations for SGT inline tagging for IPv6 traffic:

- **Global Unicast IPv6 packet:** SGT is propagated and received in the CTS CMD header on IPv6 packet at L2/L3/L4.
- **Multicast IPv6 Address:** SGT is propagated and received in the L2 CTS CMD header on IPv6 packet for unicast source IPv6 address.
- **IPsec and GRE Header:** Allows propagation of SGT tags in the CMD header added with the IPsec and GRE header.

Restrictions for SGT Inline Tagging IPv6 Traffic

- SGT inline tagging for Tunneling of IPv6 packet over V4 transport & IPv4 packet over V6 transport is not supported.
- IPv6 IPsec inline SGT tagging is not supported on ISR4K based platforms.
- SGT propagation fails over IPv6 IPsec tunnel.

How to Configure Cisco TrustSec with SXPv4

Configuring the Hold-Time for the SXPv4 Protocol on a Network Device

Hold-time can be configured globally on a network device, which applies to all SXP connections configured on the device.

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **cts sxp listener hold-time *minimum-period maximum-period***
4. **cts sxp speaker hold-time *minimum-period***

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. • Enter your password if prompted.

	Command or Action	Purpose
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	cts sxp listener hold-time <i>minimum-period</i> <i>maximum-period</i> Example: Device(config)# cts sxp listener hold-time 750 1500	Configures a minimum and maximum acceptable hold-time period in seconds for the listener device. The valid range is from 1 to 65534. The default hold-time range for a listener is 90 to 180 seconds. Note The <i>maximum-period</i> value must be greater than or equal to the <i>minimum-period</i> value.
Step 4	cts sxp speaker hold-time <i>minimum-period</i> Example: Device(config)# cts sxp speaker hold-time 950	Configures a minimum acceptable hold-time period in seconds for the speaker device. The valid range is 1 to 65534. The default hold-time for a speaker is 120 seconds.

Configuring the Hold-Time for the SXPv4 Protocol for Each Connection

The peer connection must be configured on both devices. One device is the speaker and the other is the listener. When using password protection, make sure to use the same password on both ends.

SUMMARY STEPS

1. enable
2. configure terminal
3. cts sxp connection peer *ipv4-address* {source | password} {default | none} mode {local | peer} [[listener | speaker] [hold-time *minimum-period* *maximum-period*] [vrf *vrf-name*]]
4. exit
5. show cts sxp {connections | sgt-map} [brief | vrf *vrf-name*]

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Router> enable	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.

	Command or Action	Purpose
Step 2	configure terminal Example: <pre>Router# configure terminal</pre>	Enters global configuration mode.
Step 3	cts sxp connection peer <i>ipv4-address</i> {source password} {default none} mode {local peer} [[listener speaker] [hold-time <i>minimum-period</i> <i>maximum-period</i>] [vrf <i>vrf-name</i>]] Example: <pre>Device(config)# cts sxp connection peer 10.20.2.2 password default mode local speaker</pre>	<p>Configures the CTS-SXP peer address connection.</p> <p>The source keyword specifies the IPv4 address of the source device. If no address is specified, the connection uses the default source address, if configured, or the address of the port.</p> <p>The password keyword specifies the password that CTS-SXP uses for the connection using the following options:</p> <ul style="list-style-type: none"> • default—Use the default CTS-SXP password you configured using the cts sxp default password command. • none—A password is not used. <p>The mode keyword specifies the role of the remote peer device:</p> <ul style="list-style-type: none"> • local—The specified mode refers to the local device. • peer—The specified mode refers to the peer device. • listener—Specifies that the device is the listener in the connection. • speaker—Specifies that the device is the speaker in the connection. This is the default. <p>The hold-time keyword allows you to specify the length of the hold-time period for the speaker or listener device.</p> <p>Note A hold-time <i>maximum-period</i> value is required only when you use the following keywords: peer speaker and local listener. In other instances, only a hold-time <i>minimum-period</i> value is required.</p> <p>The optional vrf keyword specifies the VRF to the peer. The default is the default VRF.</p>
Step 4	exit Example: <pre>Device(config)# exit</pre>	Exits global configuration mode.
Step 5	show cts sxp {connections sgt-map} [brief vrf <i>vrf-name</i>] Example: <pre>Device# show cts sxp connections</pre>	(Optional) Displays CTS-SXP status and connections.

Configuring the Node ID of a Network Device

SUMMARY STEPS

1. `enable`
2. `configure terminal`
3. `cts sxp node-id {sxp-node-id | interface interface-type | ipv4-address}`

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. • Enter your password if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	cts sxp node-id {sxp-node-id interface interface-type ipv4-address} Example: Device(config)# cts sxp node-id 172.16.1.3	Configures the node ID of a network device.

Configuring SGT Inline Tagging

SUMMARY STEPS

1. `enable`
2. `configure terminal`
3. `interface {gigabitethernet port | vlan number}`
4. `cts manual`
5. `propagate sgt`
6. `policy static sgt tag [trusted]`
7. `end`
8. `show cts interface brief`

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	interface {gigabitethernet port vlan number} Example: Device(config)# interface gigabitethernet 0	Enters the interface on which CTS SGT authorization and forwarding is enabled.
Step 4	cts manual Example: Device(config-if)# cts manual	Enables the interface for CTS SGT authorization and forwarding. Enters CTS manual interface configuration mode.
Step 5	propagate sgt Example: Device(config-if-cts-manual)# propagate sgt	Enables CTS SGT propagation on an interface. Use this command in situations where the peer device is not capable of receiving SGT over Ethernet packets (that is, when a peer device does not support Cisco Ethertype CMD 0x8909 frame format).
Step 6	policy static sgt tag [trusted] Example: Device(config-if-cts-manual)# policy static sgt 77	Configures a static SGT ingress policy on the interface and defines the trustworthiness of an SGT received on the interface. Note The trusted keyword indicates that the interface is trustworthy for CTS. The SGT value received in the Ethernet packet on this interface is trusted and will be used by the device for any SG-aware policy enforcement or for purpose of egress-tagging.
Step 7	end Example: Device(config-if-cts-manual)# end	Exits CTS manual interface configuration mode and enters privileged EXEC mode.
Step 8	show cts interface brief Example: Device# show cts interface brief	Displays CTS configuration statistics for the interface.

	Command or Action	Purpose
	<pre>Interface GigabitEthernet0/0 CTS is enabled, mode: MANUAL Propagate SGT: Enabled Peer SGT assignment: Trusted Interface GigabitEthernet0/1 CTS is enabled, mode: MANUAL Propagate SGT: Disabled Peer SGT assignment: Untrusted Interface GigabitEthernet0/3 CTS is disabled.</pre>	

Configuration Examples for Cisco TrustSec with SXPv4

Example: Configuring Cisco TrustSec with SXPv4

Configuring the Hold-Time for the SXPv4 Protocol on a Network Device

```
Device(config)# cts sxp speaker hold-time 950
```

Configuring the Hold-Time for the SXPv4 Protocol for Each Connection

```
Device(config)# cts sxp connection peer 10.20.2.2 password default mode local speaker
hold-time 500
```

Configuring the Node ID of a Network Device

```
Device(config)# cts sxp node-id 172.16.1.3
```

Verifying Cisco TrustSec with SXPv4

Display the SXP connections on a device

```
Device# show cts sxp connection

SXP                : Enabled
Highest Version Supported: 4
Default Password   : Set
Default Source IP: Not Set
Connection retry open period: 120 secs
Reconcile period: 120 secs
Retry open timer is not running
-----
Peer IP            : 2.2.2.1
Source IP          : 2.2.2.2
Conn status        : On
Conn version       : 4
Conn capability    : IPv4-IPv6-Subnet
```



```

Conn hold time      : 0 seconds
Local mode          : SXP Listener
Connection inst#    : 1
TCP conn fd         : 1
TCP conn password: default SXP password
Duration since last state change: 32:00:41:31 (dd:hr:mm:sec)

```

```
Total num of SXP Connections = 1
```

Displaying the current CST-SGT map database

In SXPv4, an SXP node ID is shown:

```

Device# show cts sxp sgt-map

SXP Node ID(generated):0x02020202(2.2.2.2)
IP-SGT Mappings as follows:
IPv4,SGT: <2.2.2.0/29 , 29>
source   : SXP;
Peer IP  : 2.2.2.1;
Ins Num  : 1;
Status   : Active;
Seq Num  : 3
Peer Seq: 0B0B0B02,
IPv4,SGT: <12.12.133.1 , 12>
source   : SXP;
Peer IP  : 2.2.2.1;
Ins Num  : 1;
Status   : Active;
Seq Num  : 5
Peer Seq: 0B0B0B02,
Total number of IP-SGT Mappings: 2

```

Displaying the platform specific CTS Information

When CTS processes the packets in data-plane, its type (v4/v6) is not known. Hence the combined traffic counters is shown.

```

Device# show platform hardware qfp active feature cts datapath stats

Tagged Packets rcv: 1055      xmt: 1048      Def tag: 0
          Unknown SGT: 109677   Unknown DGT: 0
Invalid tags (drop): 34      Bad format (drop): 0
No xmt buffer: 0
IPSec SGT tagged packets received: 0
IPSec Invalid SGT tagged packets received: 0
GRE SGT tagged packets received: 0
GRE Invalid SGT tagged packets received: 0
GRE invalid next protocol 0
LISP SGT tagged packets received: 0
LISP Invalid SGT tagged packets received: 0
VXLAN SGT tagged packets received: 0
VXLAN Invalid SGT tagged packets: 0

```

Example: Configuring SGT Inline Tagging

This example shows how to enable an interface on the device for L2-SGT tagging or imposition and defines whether the interface is trusted for CTS:

```

Device# configure terminal
Device(config)# interface gigabitethernet 0
Device(config-if)# cts manual

```

```
Device(config-if-cts-manual)# propagate sgt
Device(config-if-cts-manual)# policy static sgt 77 trusted
```

Additional References for Cisco TrustSec with SXPv4

Related Documents

Related Topic	Document Title
Cisco IOS commands	Cisco IOS Master Command List, All Releases
Security commands	<ul style="list-style-type: none"> • Cisco IOS Security Command Reference Commands A to C • Cisco IOS Security Command Reference Commands D to L • Cisco IOS Security Command Reference Commands M to R • Cisco IOS Security Command Reference Commands S to Z

MIBs

MIB	MIBs Link
CISCO-TRUSTSEC-SXP-MIB	<p>To locate and download MIBs for selected platforms, Cisco IOS releases, and feature sets, use Cisco MIB Locator found at the following URL:</p> <p>http://www.cisco.com/go/mibs</p>

Technical Assistance

Description	Link
<p>The Cisco Support website provides extensive online resources, including documentation and tools for troubleshooting and resolving technical issues with Cisco products and technologies.</p> <p>To receive security and technical information about your products, you can subscribe to various services, such as the Product Alert Tool (accessed from Field Notices), the Cisco Technical Services Newsletter, and Really Simple Syndication (RSS) Feeds.</p> <p>Access to most tools on the Cisco Support website requires a Cisco.com user ID and password.</p>	<p>http://www.cisco.com/support</p>

Feature Information for Cisco TrustSec with SXPv4

The following table provides release information about the feature or features described in this module. This table lists only the software release that introduced support for a given feature in a given software release train. Unless noted otherwise, subsequent releases of that software release train also support that feature.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Table 3: Feature Information for Cisco TrustSec with SXPv4

Feature Name	Releases	Feature Information
Cisco TrustSec with SXPv4	Cisco IOS XE Release 3.9S	<p>CTS SXP version 4 (SXPv4) enhances the functionality of SXP by adding a loop detection and prevention mechanism to prevent stale binding in the network. In addition, Cisco TrustSec with SXPv4 supports SGT inline tagging, which allows propagation of SGT embedded in clear-text (unencrypted) Ethernet packets.</p> <p>In Cisco IOS XE Release 3.9S, this feature was introduced on Cisco ASR 1000 Series Aggregation Services Routers.</p> <p>The following commands were introduced:</p> <p>cts sxp listener hold-time, cts sxp node-id, cts sxp speaker hold-time.</p>
IPv6 enablement - Inline Tagging	Cisco IOS XE Fuji 16.8.1	The support for IPv6 is introduced.



Enabling Bidirectional SXP Support

The Bidirectional SXP Support feature enhances the functionality of Cisco TrustSec with SXP version 4 by adding support for Security Group Tag (SGT) Exchange Protocol (SXP) bindings that can be propagated in both directions between a speaker and a listener over a single connection.

- [Finding Feature Information, page 47](#)
- [Prerequisites for Bidirectional SXP Support, page 47](#)
- [Restrictions for Bidirectional SXP Support, page 48](#)
- [Information About Bidirectional SXP Support, page 49](#)
- [How to Enable Bidirectional SXP Support, page 50](#)
- [Configuration Examples for Bidirectional SXP Support, page 54](#)
- [Additional References for Bidirectional SXP Support, page 54](#)
- [Feature Information for Bidirectional SXP Support, page 55](#)

Finding Feature Information

Your software release may not support all the features documented in this module. For the latest caveats and feature information, see [Bug Search Tool](#) and the release notes for your platform and software release. To find information about the features documented in this module, and to see a list of the releases in which each feature is supported, see the feature information table.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Prerequisites for Bidirectional SXP Support

- Ensure that Cisco TrustSec is configured on the device. For more information, see the “Cisco TrustSec Support for IOS” chapter in the *Cisco TrustSec Configuration Guide*.
- To use the Cisco TrustSec functionality on your existing device, ensure that you have purchased one of the following security licenses:

- IP Base License
- LAN Base License



Note The LAN Base License is available from Cisco IOS XE Everest 16.5.1.

- IP Services License

- Connectivity must exist in all network devices.
- Cisco TrustSec SXP software must run on all network devices.

Restrictions for Bidirectional SXP Support

- The peers at each end of the connection must be configured as a bidirectional connection using the **both** keyword. It is a wrong configuration to have one end configured as a bidirectional connection using the **both** keyword and the other end configured as a speaker or listener (unidirectional connection).
- The Bidirectional SXP Support feature only supports the scalability numbers for SXP connections and IP-SGT bindings provided in the following table.

Table 4: Scalability Numbers for SXP Connections and IP-SGT Bindings

Platform	Unidirectional SXP Connections (Speaker only/Listener only)	Bidirectional SXP Connections	SXP Database IP-SGT Bindings
			<p>Note If the number of connections are increased, ensure that the number of bindings configured per box are reduced. The number of connections should not exceed the connections documented in this table.</p> <p>Note The Role-Based IP-SGT database limit is 200K across all platforms.</p>
CSR 1000v	900	450	135K

Platform	Unidirectional SXP Connections (Speaker only/Listener only)	Bidirectional SXP Connections	SXP Database IP-SGT Bindings
			Note If the number of connections are increased, ensure that the number of bindings configured per box are reduced. The number of connections should not exceed the connections documented in this table. The Role-Based IP-SGT database limit is 200K across all platforms.
ISR 4400	1800	900	135K
ASR 1000	1800	900	180K

Information About Bidirectional SXP Support

Bidirectional SXP Support Overview

Cisco TrustSec builds secure networks by establishing domains of trusted network devices. Each device in the domain is authenticated by its peers. The peer that produces data is the speaker and the corresponding peer is the listener.

With the support for bidirectional Security Group Tag (SGT) Exchange Protocol (SXP) configuration, a peer can act as both a speaker and a listener and propagate SXP bindings in both directions using a single connection.

The bidirectional SXP configuration is managed with one pair of IP addresses. On either end, only the listener initiates the SXP connection and the speaker accepts the incoming connection.

Figure 5: Bidirectional SXP Connection



In addition, SXP version 4 (SXPv4) continues to support the loop detection mechanism (to prevent stale binding in the network).

How to Enable Bidirectional SXP Support

Configuring Bidirectional SXP Support

SUMMARY STEPS

1. `enable`
2. `configure terminal`
3. `cts sxp enable`
4. `cts sxp default password`
5. `cts sxp default source-ip`
6. `cts sxp connection peer ipv4-address {source | password} {default | none} mode {local | peer} both [vrf vrf-name]`
7. `cts sxp speaker hold-time minimum-period`
8. `cts sxp listener hold-time minimum-period maximum-period`
9. `exit`

DETAILED STEPS

	Command or Action	Purpose
Step 1	<code>enable</code> Example: Device> <code>enable</code>	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.

	Command or Action	Purpose
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	cts sxp enable Example: Device(config)# cts sxp enable	Enables the Cisco TrustSec Security Group Tag (SGT) Exchange Protocol version 4 (SXPv4) on a network device.
Step 4	cts sxp default password Example: Device(config)# cts sxp default password Cisco123	(Optional) Specifies the Cisco TrustSec SGT SXP default password.
Step 5	cts sxp default source-ip Example: Device(config)# cts sxp default source-ip 10.20.2.2	(Optional) Configures the Cisco TrustSec SGT SXP source IPv4 address.
Step 6	cts sxp connection peer <i>ipv4-address</i> {source password} {default none} mode {local peer} both [<i>vrf vrf-name</i>] Example: Device(config)# cts sxp connection peer 10.20.2.2 password default mode local both	<p>Configures the Cisco TrustSec SXP peer address connection for a bidirectional SXP configuration. The both keyword configures the bidirectional SXP configuration.</p> <p>The source keyword specifies the IPv4 address of the source device. If no address is specified, the connection uses the default source address, if configured, or the address of the port.</p> <p>The password keyword specifies the password that Cisco TrustSec SXP uses for the connection using the following options:</p> <ul style="list-style-type: none"> • default—Use the default Cisco TrustSec SXP password you configured using the cts sxp default password command. • none—A password is not used. <p>The mode keyword specifies the role of the remote peer device:</p> <ul style="list-style-type: none"> • local—The specified mode refers to the local device. • peer—The specified mode refers to the peer device. • both—Specifies that the device is both the speaker and the listener in the bidirectional SXP connection. <p>The optional vrf keyword specifies the VRF to the peer. The default is the default VRF.</p>

	Command or Action	Purpose
Step 7	cts sxp speaker hold-time <i>minimum-period</i> Example: Device(config)# cts sxp speaker hold-time 950	(Optional) Configures the global hold time (in seconds) of a speaker network device for Cisco TrustSec SGT SXPv4. The valid range is from 1 to 65534. The default is 120.
Step 8	cts sxp listener hold-time <i>minimum-period</i> <i>maximum-period</i> Example: Device(config)# cts sxp listener hold-time 750 1500	(Optional) Configures the global hold time (in seconds) of a listener network device for Cisco TrustSec SGT SXPv4. The valid range is from 1 to 65534. The default is 90 to 180. Note The <i>maximum-period</i> value must be greater than or equal to the <i>minimum-period</i> value.
Step 9	exit Example: Device(config)# exit	Exits global configuration mode.

Verifying Bidirectional SXP Support Configuration

SUMMARY STEPS

1. **enable**
2. **show cts sxp {connections | sgt-map} [brief | vrf vrf-name]**

DETAILED STEPS

- | | |
|---------------|--|
| Step 1 | enable
Enables privileged EXEC mode.

<ul style="list-style-type: none"> • Enter your password if prompted.
Example:

Device> enable |
| Step 2 | show cts sxp {connections sgt-map} [brief vrf vrf-name]
Displays Cisco TrustSec Exchange Protocol (SXP) status and connections. |

Example:

```
Device# show cts sxp connections
```

```
SXP : Enabled
Highest Version Supported: 4
Default Password : Set
Default Source IP: Not Set
Connection retry open period: 120 secs
Reconcile period: 120 secs
Retry open timer is running
-----
Peer IP : 2.0.0.2
Source IP : 1.0.0.2
Conn status : On (Speaker) :: On (Listener)
Conn version : 4
Local mode : Both
Connection inst# : 1
TCP conn fd : 1(Speaker) 3(Listener)
TCP conn password: default SXP password
Duration since last state change: 1:03:38:03 (dd:hr:mm:sec) :: 0:00:00:46 (dd:hr:mm:sec)
```

```
Device# show cts sxp connection brief
```

```
SXP : Enabled
Highest Version Supported: 4
Default Password : Set
Default Source IP: Not Set
Connection retry open period: 120 secs
Reconcile period: 120 secs
Retry open timer is running
-----
Peer_IP Source_IP Conn Status Duration
-----
2.0.0.2 1.0.0.2 On(Speaker)::On(Listener) 0:00:37:17 (dd:hr:mm:sec)::0:00:37:19 (dd:hr:mm:sec)
```

The following table describes the various scenarios for the connection status output.

Table 5: Connection Status Output Scenarios

Node1	Node2	Node1 CLI Output for Connection Status	Node2 CLI Output for Connection Status
Both	Both	On (Speaker) On (Listener)	On (Speaker) On (Listener)
Speaker	Listener	On	On
Listener	Speaker	On	On

Configuration Examples for Bidirectional SXP Support

Example: Configuring Bidirectional SXP Support

The following example shows how to enable bidirectional CTS-SXP and configure the SXP peer connection on Device_A to connect to Device_B:

```
Device_A> enable
Device_A# configure terminal
Device_A(config)# cts sxp enable
Device_A(config)# cts sxp default password Cisco123
Device_A(config)# cts sxp default source-ip 10.10.1.1
Device_A(config)# cts sxp connection peer 10.20.2.2 password default mode local both
Device_A(config)# exit
```

The following example shows how to configure the bidirectional CTS-SXP peer connection on Device_B to connect to Device_A:

```
Device_B> enable
Device_B# configure terminal
Device_B(config)# cts sxp enable
Device_B(config)# cts sxp default password Password123
Device_B(config)# cts sxp default source-ip 10.20.2.2
Device_B(config)# cts sxp connection peer 10.10.1.1 password default mode local both
Device_B(config)# exit
```

Additional References for Bidirectional SXP Support

Related Documents

Related Topic	Document Title
Cisco IOS commands	Cisco IOS Master Command List, All Releases
Security commands	<ul style="list-style-type: none"> • Cisco IOS Security Command Reference: Commands A to C • Cisco IOS Security Command Reference: Commands D to L • Cisco IOS Security Command Reference: Commands M to R • Cisco IOS Security Command Reference: Commands S to Z
Cisco TrustSec configuration	“Cisco TrustSec Support for IOS” chapter in the <i>Cisco TrustSec Configuration Guide</i>

Technical Assistance

Description	Link
<p>The Cisco Support website provides extensive online resources, including documentation and tools for troubleshooting and resolving technical issues with Cisco products and technologies.</p> <p>To receive security and technical information about your products, you can subscribe to various services, such as the Product Alert Tool (accessed from Field Notices), the Cisco Technical Services Newsletter, and Really Simple Syndication (RSS) Feeds.</p> <p>Access to most tools on the Cisco Support website requires a Cisco.com user ID and password.</p>	http://www.cisco.com/support

Feature Information for Bidirectional SXP Support

The following table provides release information about the feature or features described in this module. This table lists only the software release that introduced support for a given feature in a given software release train. Unless noted otherwise, subsequent releases of that software release train also support that feature.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Table 6: Feature Information for Bidirectional SXP Support

Feature Name	Releases	Feature Information
Bidirectional SXP Support	Cisco IOS XE 3.11S	<p>The Bidirectional SXP Support feature enhances the functionality of Cisco TrustSec with SXP version 4 by adding support for Security Group Tag (SGT) Exchange Protocol (SXP) bindings that can be propagated in both directions between a speaker and a listener over a single connection.</p> <p>The following command was introduced or modified: cts sxp connection peer.</p>



CHAPTER

5

Cisco TrustSec Interface-to-SGT Mapping

The Cisco TrustSec Interface-to-SGT Mapping feature binds all traffic on a Layer 3 ingress interface to a security group tag (SGT). Once this mapping is implemented, Cisco TrustSec can use the SGT to segregate traffic from various logical Layer 3 ingress interfaces.

- [Finding Feature Information, page 57](#)
- [Information About Cisco TrustSec Interface-to-SGT Mapping, page 57](#)
- [How to Configure Cisco TrustSec Interface-to-SGT Mapping, page 58](#)
- [Configuration Examples for Cisco TrustSec Interface-to-SGT Mapping, page 60](#)
- [Additional References for Cisco TrustSec Interface-to-SGT Mapping, page 60](#)
- [Feature Information for Cisco TrustSec Interface-to-SGT Mapping, page 61](#)

Finding Feature Information

Your software release may not support all the features documented in this module. For the latest caveats and feature information, see [Bug Search Tool](#) and the release notes for your platform and software release. To find information about the features documented in this module, and to see a list of the releases in which each feature is supported, see the feature information table.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Information About Cisco TrustSec Interface-to-SGT Mapping

Interface-to-SGT Mapping

The mapping between interfaces and security group tags (SGTs) is used to map SGTs to traffic of any of the following logical Layer 3 ingress interfaces, regardless of the underlying physical interface:

- Layer 3 (routed) Ethernet interfaces
- Layer 3 (routed) Ethernet 802.1Q subinterfaces

- Tunnel interfaces

The configured SGT tag is assigned to all traffic on the Layer 3 ingress interface and can be used for inline tagging and policy enforcement.

Binding Source Priorities

Cisco TrustSec resolves conflicts among IP address to security group tag (IP-SGT) binding sources with a strict priority scheme. The current priority enforcement order, from lowest to highest, is as follows:

- 1 CLI—Bindings configured using the **cts role-based sgt-map sgt** command.
- 2 L3IF—Bindings added due to FIB forwarding entries that have paths through one or more interfaces with consistent Layer 3 Interface to SGT (L3IF-SGT) mapping or identity port mapping on routed ports.
- 3 SXP—Bindings learned from SGT Exchange Protocol (SXP) peers.
- 4 INTERNAL—Bindings between locally configured IP addresses and the devices own SGT.

How to Configure Cisco TrustSec Interface-to-SGT Mapping

Configuring Layer 3 Interface-to-SGT Mapping

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **interface** *type slot/port*
4. **cts role-based sgt-map sgt** *sgt-number*
5. **end**

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.

	Command or Action	Purpose
Step 3	interface <i>type slot/port</i> Example: Device(config)# interface gigabitEthernet 0/0	Configures an interface and enters interface configuration mode.
Step 4	cts role-based sgt-map sgt sgt-number Example: Device(config-if)# cts role-based sgt-map sgt 77	An SGT is imposed on ingress traffic to the specified interface. <ul style="list-style-type: none"> • <i>sgt-number</i>—Specifies the security group tag (SGT) number. Valid values are from 2 to 65519.
Step 5	end Example: Device(config-if)# end	Exits interface configuration mode and returns to privileged EXEC mode.

Verifying Layer 3 Interface-to-SGT Mapping

SUMMARY STEPS

1. **enable**
2. **show cts role-based sgt-map all**

DETAILED STEPS

Step 1

enable

Enables privileged EXEC mode.

- Enter your password if prompted.

Example:

```
Device> enable
```

Step 2

show cts role-based sgt-map all

Displays the security group tag (SGT) mapping for the ingress traffic on the Layer 3 interface.

Example:

The following sample output from the **show cts role-based sgt-map all** command shows that once the Cisco TrustSec Interface-to-SGT Mapping feature is implemented, the traffic on the ingress interface is tagged appropriately with Layer

3 interface (L3IF). The output displays the priority scheme of the IP address to security group tag (IP-SGT) binding sources (for more information about the IP-SGT binding source priorities, see the “Binding Source Priorities” section).

```
Device# show cts role-based sgt-map all

IP Address          SGT      Source
=====
192.0.2.1           4        INTERNAL
192.0.2.5/24        3        L3IF
192.0.2.10/8        3        L3IF
192.0.2.20          5        CLI
198.51.100.1        4        INTERNAL
IP-SGT Active Bindings Summary
=====
Total number of CLI      bindings = 1
Total number of L3IF     bindings = 2
Total number of INTERNAL bindings = 2
Total number of active   bindings = 5
```

Configuration Examples for Cisco TrustSec Interface-to-SGT Mapping

Example: Configuring Layer 3 Interface-to-SGT Mapping

The following example shows the security group tag (SGT) mapping configuration for the Layer 3 ingress interface:

```
Device> enable
Device# configure terminal
Device(config)# interface gigabitEthernet 0/0
Device(config-if)# cts role-based sgt-map sgt 77
Device(config-if)# end
```

Additional References for Cisco TrustSec Interface-to-SGT Mapping

Related Documents

Related Topic	Document Title
Cisco IOS commands	Cisco IOS Master Command List, All Releases

Related Topic	Document Title
Security commands	<ul style="list-style-type: none"> • Cisco IOS Security Command Reference Commands A to C • Cisco IOS Security Command Reference Commands D to L • Cisco IOS Security Command Reference Commands M to R • Cisco IOS Security Command Reference Commands S to Z
Cisco TrustSec and SXP configuration	Cisco TrustSec Switch Configuration Guide

Technical Assistance

Description	Link
<p>The Cisco Support website provides extensive online resources, including documentation and tools for troubleshooting and resolving technical issues with Cisco products and technologies.</p> <p>To receive security and technical information about your products, you can subscribe to various services, such as the Product Alert Tool (accessed from Field Notices), the Cisco Technical Services Newsletter, and Really Simple Syndication (RSS) Feeds.</p> <p>Access to most tools on the Cisco Support website requires a Cisco.com user ID and password.</p>	http://www.cisco.com/cisco/web/support/index.html

Feature Information for Cisco TrustSec Interface-to-SGT Mapping

The following table provides release information about the feature or features described in this module. This table lists only the software release that introduced support for a given feature in a given software release train. Unless noted otherwise, subsequent releases of that software release train also support that feature.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Table 7: Feature Information for Cisco TrustSec Interface-to-SGT Mapping

Feature Name	Releases	Feature Information
Cisco TrustSec Interface-to-SGT Mapping	Cisco IOS XE Release 3.12S	<p>The Cisco TrustSec Interface-to-SGT Mapping feature binds all traffic on a Layer 3 ingress interface to a security group tag (SGT). Once this mapping is implemented, Cisco TrustSec can use the SGT to segregate traffic from various logical Layer 3 ingress interfaces.</p> <p>In Cisco IOS XE Release 3.12S, support was added for the Cisco ASR 1000 Series Routers.</p> <p>The following command was introduced or modified: cts role-based sgt-map sgt.</p>



Cisco TrustSec Subnet to SGT Mapping

Subnet to security group tag (SGT) mapping binds an SGT to all host addresses of a specified subnet. Once this mapping is implemented, Cisco TrustSec imposes the SGT on any incoming packet that has a source IP address which belongs to the specified subnet.

- [Finding Feature Information, page 63](#)
- [Restrictions for Cisco TrustSec Subnet to SGT Mapping, page 63](#)
- [Information About Cisco TrustSec Subnet to SGT Mapping, page 64](#)
- [How to Configure Cisco TrustSec Subnet to SGT Mapping, page 64](#)
- [Cisco TrustSec Subnet to SGT Mapping: Examples, page 66](#)
- [Additional References, page 67](#)
- [Feature Information for Cisco TrustSec Subnet to SGT Mapping, page 68](#)

Finding Feature Information

Your software release may not support all the features documented in this module. For the latest caveats and feature information, see [Bug Search Tool](#) and the release notes for your platform and software release. To find information about the features documented in this module, and to see a list of the releases in which each feature is supported, see the feature information table.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Restrictions for Cisco TrustSec Subnet to SGT Mapping

- An IPv4 subnetwork with a /31 prefix cannot be expanded.
- Subnet host addresses cannot be bound to SGTs when the **cts sxp mapping network-map** command *bindings* argument is less than the total number of subnet hosts in the specified subnets or when the number of bindings is 0.

- IPv6 expansions and propagation only occurs when SXP speaker and listener are running SXPv3, or more recent versions.

Information About Cisco TrustSec Subnet to SGT Mapping

In IPv4 networks, SXPv3, and more recent versions, can receive and parse subnet network address/prefix strings from SXPv3 peers. Earlier SXP versions convert the subnet prefix into its set of host bindings before exporting them to an SXP listener peer.

For example, the IPv4 subnet 198.1.1.0/29 is expanded as follows (only 3 bits for host addresses):

- Host addresses 198.1.1.1 to 198.1.1.7 are tagged and propagated to SXP peer.
- Network and broadcast addresses 198.1.1.0 and 198.1.1.8 are not tagged and not propagated.



Note

To limit the number of subnet bindings SXPv3 can export, use the **cts sxp mapping network-map** global configuration command.

Subnet bindings are static, which means that active hosts are not learned. They can be used locally for SGT imposition and SGACL enforcement. Packets tagged by subnet to SGT mapping can be propagated on Layer 2 or Layer 3 TrustSec links.



Note

For IPv6 networks, SXPv3 cannot export subnet bindings to SXPv2 or SXPv1 peers.

How to Configure Cisco TrustSec Subnet to SGT Mapping

Configuring Subnet to SGT Mapping

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **cts sxp mapping network-map *bindings***
4. **cts role-based sgt-map *ipv4-address* *sgt number***
5. **cts role-based sgt-map *ipv6-address::prefix* *sgt number***
6. **exit**
7. **show running-config | include *search-string***
8. **show cts sxp connections**
9. **show cts sxp sgt-map**
10. **copy running-config startup-config**

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. <ul style="list-style-type: none"> Enter your password if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	cts sxp mapping network-map bindings Example: Device(config)# cts sxp mapping network-map 10000	Configures the subnet to SGT mapping host count constraint. The <i>bindings</i> argument specifies the maximum number of subnet IP hosts from 0 to 65,535 that can be bound to SGTs and exported to the SXP listener. The default is 0 (no expansions performed).
Step 4	cts role-based sgt-map ipv4-address sgt number Example: Device(config)# cts role-based sgt-map 10.10.10.10/29 sgt 1234	(IPv4) Specifies an IPv4 subnet in CIDR notation. The number of bindings specified in step 3 should match or exceed the number of host addresses in the subnet (excluding network and broadcast addresses). The sgt number keyword pair specifies the SGT number that is to be bound to every host address in the specified subnet. <ul style="list-style-type: none"> <i>ipv4-address</i>—Specifies the IPv4 network address in dotted decimal notation. <i>prefix</i>—(0 to 30). Specifies the number of bits in the network address. <i>sgt number</i> (0-65,535). Specifies the SGT number.
Step 5	cts role-based sgt-map ipv6-address::prefix sgt number Example: Device(config)# cts role-based sgt-map 2020::/64 sgt 1234	(IPv6) Specifies an IPv6 subnet in hexadecimal notation. The number of bindings specified in step 3 should match or exceed the number of host addresses in the subnet (excluding network and broadcast addresses). The sgt number keyword pair specifies the SGT number that is to be bound to every host address in the specified subnet. <ul style="list-style-type: none"> <i>ipv6-address</i>—Specifies the IPv4 network address in dotted decimal notation. <i>prefix</i>—(0 to 30). Specifies the number of bits in the network address. <i>sgt number</i>—(0-65,535). Specifies the SGT number.
Step 6	exit Example: Device(config)# exit	Exits global configuration mode.

	Command or Action	Purpose
Step 7	show running-config include search-string Example: Device# show running-config include sgt 1234 Device# show running-config include network-map	Verifies that the cts role-based sgt-map and the cts sxp mapping network-map commands are in the running configuration.
Step 8	show cts sxp connections Example: Device# show cts sxp connections	Displays the SXP speaker and listener connections with their operational status.
Step 9	show cts sxp sgt-map Example: Device# show cts sxp sgt-map	Displays the IP to SGT bindings exported to the SXP listeners.
Step 10	copy running-config startup-config Example: Device# copy running-config startup-config	Copies the running configuration to the startup configuration.

Cisco TrustSec Subnet to SGT Mapping: Examples

The following example shows how to configure IPv4 Subnet to SGT Mapping between two devices running SXPv3 (Device 1 and Device 2):

Configure SXP speaker/listener peering between Device 1 (10.1.1.1) and Device 2 (10.2.2.2).

```
Device1# configure terminal
Device1(config)# cts sxp enable
Device1(config)# cts sxp default source-ip 10.1.1.1
Device1(config)# cts sxp default password 1syzygy1
Device1(config)# cts sxp connection peer 10.2.2.2 password default mode local speaker
Configure Device 2 as SXP listener of Device 1.
```

```
Device2(config)# cts sxp enable
Device2(config)# cts sxp default source-ip 10.2.2.2
Device2(config)# cts sxp default password 1syzygy1
Device2(config)# cts sxp connection peer 10.1.1.1 password default mode local listener
```

On Device 2, verify that the SXP connection is operating:

```
Device2# show cts sxp connections brief | include 10.1.1.1

10.1.1.1          10.2.2.2          On          3:22:23:18 (dd:hr:mm:sec)
```

Configure the subnetworks to be expanded on Device 1.

```
Device1(config)# cts sxp mapping network-map 10000
Device1(config)# cts role-based sgt-map 10.10.10.0/30 sgt 101
Device1(config)# cts role-based sgt-map 10.11.11.0/29 sgt 11111
Device1(config)# cts role-based sgt-map 172.168.1.0/28 sgt 65000
```


On Device 2, verify the subnet to SGT expansion from Device 1. There should be two expansions for the 10.10.10.0/30 subnetwork, six expansions for the 10.11.11.0/29 subnetwork, and 14 expansions for the 172.168.1.0/28 subnetwork.

```
Device2# show cts sxp sgt-map brief | include 101|11111|65000
```

```
IPv4,SGT: <10.10.10.1 , 101>
IPv4,SGT: <10.10.10.2 , 101>
IPv4,SGT: <10.11.11.1 , 11111>
IPv4,SGT: <10.11.11.2 , 11111>
IPv4,SGT: <10.11.11.3 , 11111>
IPv4,SGT: <10.11.11.4 , 11111>
IPv4,SGT: <10.11.11.5 , 11111>
IPv4,SGT: <10.11.11.6 , 11111>
IPv4,SGT: <172.168.1.1 , 65000>
IPv4,SGT: <172.168.1.2 , 65000>
IPv4,SGT: <172.168.1.3 , 65000>
IPv4,SGT: <172.168.1.4 , 65000>
IPv4,SGT: <172.168.1.5 , 65000>
IPv4,SGT: <172.168.1.6 , 65000>
IPv4,SGT: <172.168.1.7 , 65000>
IPv4,SGT: <172.168.1.8 , 65000>
IPv4,SGT: <172.168.1.9 , 65000>
IPv4,SGT: <172.168.1.10 , 65000>
IPv4,SGT: <172.168.1.11 , 65000>
IPv4,SGT: <172.168.1.12 , 65000>
IPv4,SGT: <172.168.1.13 , 65000>
IPv4,SGT: <172.168.1.14 , 65000>
```

Verify the expansion count on Device 1:

```
Device1# show cts sxp sgt-map
```

```
IP-SGT Mappings expanded:22
There are no IP-SGT Mappings
```

Save the configurations on Device 1 and Device 2 and exit global configuration mode.

```
Device1(config)# copy running-config startup-config
Device1(config)# exit
```

```
Device2(config)# copy running-config startup-config
Device2(config)# exit
```

Additional References

Related Documents

Related Topic	Document Title
Cisco IOS commands	Cisco IOS Master Commands List, All Releases
Security commands	<ul style="list-style-type: none"> • Cisco IOS Security Command Reference Commands A to C • Cisco IOS Security Command Reference Commands D to L • Cisco IOS Security Command Reference Commands M to R • Cisco IOS Security Command Reference Commands S to Z

Related Topic	Document Title
Cisco TrustSec and SXP configuration	Cisco TrustSec Switch Configuration Guide
IPsec configuration	Configuring Security for VPNs with IPsec
IKEv2 configuration	Configuring Internet Key Exchange Version 2 (IKEv2) and FlexVPN Site-to-Site
Cisco Secure Access Control Server	Configuration Guide for the Cisco Secure ACS

Technical Assistance

Description	Link
The Cisco Support and Documentation website provides online resources to download documentation, software, and tools. Use these resources to install and configure the software and to troubleshoot and resolve technical issues with Cisco products and technologies. Access to most tools on the Cisco Support and Documentation website requires a Cisco.com user ID and password.	http://www.cisco.com/cisco/web/support/index.html

Feature Information for Cisco TrustSec Subnet to SGT Mapping

The following table provides release information about the feature or features described in this module. This table lists only the software release that introduced support for a given feature in a given software release train. Unless noted otherwise, subsequent releases of that software release train also support that feature.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Table 8: Feature Information for Cisco TrustSec Subnet to SGT Mapping

Feature Name	Releases	Feature Information
Cisco TrustSec Subnet to SGT Mapping	Cisco IOS XE Release 3.12S	<p>Subnet to security group tag (SGT) mapping binds an SGT to all host addresses of a specified subnet. Once this mapping is implemented, Cisco TrustSec imposes the SGT on any incoming packet that has a source IP address which belongs to the specified subnet.</p> <p>The following command was introduced: cts sxp mapping network-map.</p> <p>In Cisco IOS XE Release 3.12S, support was added for the Cisco ASR 1000 Series Routers.</p>



Flexible NetFlow Export of Cisco TrustSec Fields

The Flexible NetFlow Export of Cisco TrustSec Fields feature supports the Cisco TrustSec fields in the Flexible NetFlow (FNF) flow record and helps to monitor, troubleshoot, and identify non-standard behavior for Cisco TrustSec deployments.

This module describes the interaction between Cisco TrustSec and FNF and how to configure and export Cisco TrustSec fields in the NetFlow Version 9 flow records.

- [Finding Feature Information, page 71](#)
- [Restrictions for Flexible NetFlow Export of Cisco TrustSec Fields, page 71](#)
- [Information About Flexible NetFlow Export of Cisco TrustSec Fields, page 72](#)
- [How to Configure Flexible NetFlow Export of Cisco TrustSec Fields, page 73](#)
- [Configuration Examples for Flexible NetFlow Export of Cisco TrustSec Fields, page 83](#)
- [Additional References for Flexible NetFlow Export of Cisco TrustSec Fields, page 85](#)
- [Feature Information for Flexible NetFlow Export of Cisco TrustSec Fields, page 86](#)

Finding Feature Information

Your software release may not support all the features documented in this module. For the latest caveats and feature information, see [Bug Search Tool](#) and the release notes for your platform and software release. To find information about the features documented in this module, and to see a list of the releases in which each feature is supported, see the feature information table.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Restrictions for Flexible NetFlow Export of Cisco TrustSec Fields

- The security group tag (SGT) value exported in Flexible NetFlow (FNF) records is zero in the following scenarios:
 - The packet is received with an SGT value of zero from a trusted interface.

- The packet is received without an SGT.
- The SGT is not found during the IP-SGT lookup.
- For Cisco CSR100V, ISR 4400, and ASR 1000 platforms, Cisco TrustSec fields are supported only in IPv4 FNF records. The source security group tag (SGT) and destination security group tag (DGT) values are zero in the IPv6 FNF records for these platforms.

Information About Flexible NetFlow Export of Cisco TrustSec Fields

Cisco TrustSec Fields in Flexible NetFlow

The Cisco TrustSec fields, source security group tag (SGT) and destination security group tag (DGT), in the Flexible NetFlow (FNF) flow records help administrators correlate the flow with identity information. It enables network engineers to gain a detailed understanding of the customer use of the network and application resources. This information can then be used to efficiently plan and allocate access and application resources and to detect and resolve potential security and policy violations.

The Cisco TrustSec fields are supported for ingress and egress FNF and for unicast and multicast traffic.

The following table presents Netflow v9 enterprise specific field types for Cisco TrustSec that are used in the FNF templates for the Cisco TrustSec source and destination source group tags.

ID	Description
CTS_SRC_GROUP_TAG	Cisco Trusted Security Source Group Tag
CTS_DST_GROUP_TAG	Cisco Trusted Security Destination Group Tag

The Cisco TrustSec fields are configured in addition to the existing match fields under the FNF flow record. The following configurations are used to add the Cisco TrustSec flow objects to the FNF flow record as key or non-key fields and to configure the source and destination security group tags for the packet.

- The **match flow cts {source | destination} group-tag** command is configured under the flow record to specify the Cisco TrustSec fields as key fields. The key fields differentiate flows, with each flow having a unique set of values for the key fields. A flow record requires at least one key field before it can be used in a flow monitor.
- The **collect flow cts {source | destination} group-tag** command is configured under flow record to specify the Cisco TrustSec fields as non-key fields. The values in non-key fields are added to flows to provide additional information about the traffic in the flows.

The flow record is then configured under flow monitor and the flow monitor is applied to the interface. To export the FNF data, a flow exporter needs to be configured and then added under the flow monitor.

How to Configure Flexible NetFlow Export of Cisco TrustSec Fields

Configuring Cisco TrustSec Fields as Key Fields in the Flow Record

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **flow record** *record-name*
4. **match** {ipv4 | ipv6} protocol
5. **match** {ipv4 | ipv6} source address
6. **match** {ipv4 | ipv6} destination address
7. **match transport source-port**
8. **match transport destination-port**
9. **match flow direction**
10. **match flow cts source group-tag**
11. **match flow cts destination group-tag**
12. **end**

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. • Enter your password if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	flow record <i>record-name</i> Example: Device(config)# flow record cts-record-ipv4	Creates a new Flexible NetFlow (FNF) flow record, or modifies an existing FNF flow record, and enters Flexible NetFlow flow record configuration mode.

	Command or Action	Purpose
Step 4	match {ipv4 ipv6} protocol Example: <pre>Device(config-flow-record)# match ipv4 protocol</pre>	(Optional) Configures the IPv4 protocol or IPv6 protocol as a key field for a flow record. Note For Cisco CSR100V, ISR 4400, and ASR 1000 platforms, Cisco TrustSec fields are supported only in IPv4 FNF records.
Step 5	match {ipv4 ipv6} source address Example: <pre>Device(config-flow-record)# match ipv4 source address</pre>	(Optional) Configures the IPv4 or IPv6 source address as a key field for a flow record. Note For Cisco CSR100V, ISR 4400, and ASR 1000 platforms, Cisco TrustSec fields are supported only in IPv4 FNF records.
Step 6	match {ipv4 ipv6} destination address Example: <pre>Device(config-flow-record)# match ipv4 destination address</pre>	(Optional) Configures the IPv4 or IPv6 destination address as a key field for a flow record. Note For Cisco CSR100V, ISR 4400, and ASR 1000 platforms, Cisco TrustSec fields are supported only in IPv4 FNF records.
Step 7	match transport source-port Example: <pre>Device(config-flow-record)# match transport source-port</pre>	(Optional) Configures the transport source port as a key field for a flow record.
Step 8	match transport destination-port Example: <pre>Device(config-flow-record)# match transport destination-port</pre>	(Optional) Configures the transport destination port as a key field for a flow record.
Step 9	match flow direction Example: <pre>Device(config-flow-record)# match flow direction</pre>	(Optional) Configures the direction in which the flow is monitored as a key field.
Step 10	match flow cts source group-tag Example: <pre>Device(config-flow-record)# match flow cts source group-tag</pre>	Configures the Cisco TrustSec source security group tag (SGT) in the FNF flow record as key fields.

	Command or Action	Purpose
Step 11	match flow cts destination group-tag Example: <pre>Device(config-flow-record)# match flow cts destination group-tag</pre>	Configures the Cisco TrustSec destination security group tag (DGT) in the FNF flow record as key fields.
Step 12	end Example: <pre>Device(config-flow-record)# end</pre>	Exits Flexible NetFlow flow record configuration mode and returns to privileged EXEC mode.

Configuring Cisco TrustSec Fields as Non-Key Fields in the Flow Record

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **flow record** *record-name*
4. **match** {ipv4 | ipv6} protocol
5. **match** {ipv4 | ipv6} source address
6. **match** {ipv4 | ipv6} destination address
7. **match transport source-port**
8. **match transport destination-port**
9. **collect flow direction**
10. **collect flow cts source group-tag**
11. **collect flow cts destination group-tag**
12. **collect counter packets**
13. **end**

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: <pre>Device> enable</pre>	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.

	Command or Action	Purpose
Step 2	configure terminal Example: <pre>Device# configure terminal</pre>	Enters global configuration mode.
Step 3	flow record <i>record-name</i> Example: <pre>Device(config)# flow record cts-record-ipv4</pre>	Creates a new Flexible NetFlow (FNF) flow record, or modifies an existing FNF flow record, and enters Flexible NetFlow flow record configuration mode.
Step 4	match {ipv4 ipv6} protocol Example: <pre>Device(config-flow-record)# match ipv4 protocol</pre>	(Optional) Configures the IPv4 protocol or IPv6 protocol as a key field for a flow record. Note For Cisco CSR100V, ISR 4400, and ASR 1000 platforms, Cisco TrustSec fields are supported only in IPv4 FNF records.
Step 5	match {ipv4 ipv6} source address Example: <pre>Device(config-flow-record)# match ipv4 source address</pre>	(Optional) Configures the IPv4 or IPv6 source address as a key field for a flow record. Note For Cisco CSR100V, ISR 4400, and ASR 1000 platforms, Cisco TrustSec fields are supported only in IPv4 FNF records.
Step 6	match {ipv4 ipv6} destination address Example: <pre>Device(config-flow-record)# match ipv4 destination address</pre>	(Optional) Configures the IPv4 or IPv6 destination address as a key field for a flow record. Note For Cisco CSR100V, ISR 4400, and ASR 1000 platforms, Cisco TrustSec fields are supported only in IPv4 FNF records.
Step 7	match transport source-port Example: <pre>Device(config-flow-record)# match transport source-port</pre>	(Optional) Configures the transport source port as a key field for a flow record.
Step 8	match transport destination-port Example: <pre>Device(config-flow-record)# match transport destination-port</pre>	(Optional) Configures the transport destination port as a key field for a flow record.
Step 9	collect flow direction Example: <pre>Device(config-flow-record)# collect flow direction</pre>	(Optional) Configures the flow direction as a non-key field and enables the collection of the direction in which the flow was monitored.

	Command or Action	Purpose
Step 10	collect flow cts source group-tag Example: <pre>Device(config-flow-record)# collect flow cts source group-tag</pre>	Configures the Cisco TrustSec source security group tag (SGT) in the FNF flow record as non-key fields.
Step 11	collect flow cts destination group-tag Example: <pre>Device(config-flow-record)# collect flow cts destination group-tag</pre>	Configures the Cisco TrustSec destination security group tag (DGT) in the FNF flow record as non-key fields.
Step 12	collect counter packets Example: <pre>Device(config-flow-record)# collect counter packets</pre>	(Optional) Configures the number of packets seen in a flow as a non-key field and enables collecting the total number of packets from the flow.
Step 13	end Example: <pre>Device(config-flow-record)# end</pre>	Exits Flexible NetFlow flow record configuration mode and returns to privileged EXEC mode.

Configuring a Flow Exporter

Each flow exporter supports only one destination. If you want to export the data to multiple destinations, you must configure multiple flow exporters and assign them to the flow monitor.

Before You Begin

Ensure that you create a flow record. For more information see the “Configuring Cisco TrustSec Fields as Non-Key Fields in the Flow Record” section and the “Configuring Cisco TrustSec Fields as Non-Key Fields in the Flow Record” section.

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **flow exporter** *exporter-name*
4. **destination** {*ip-address* | *hostname*} [**vrf** *vrf-name*]
5. **end**

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	flow exporter <i>exporter-name</i> Example: Device(config)# flow exporter EXPORTER-1	Creates a flow exporter or modifies an existing flow exporter, and enters Flexible NetFlow flow exporter configuration mode.
Step 4	destination { <i>ip-address</i> <i>hostname</i> } [vrf <i>vrf-name</i>] Example: Device(config-flow-exporter)# destination 172.16.10.2	Specifies the IP address or hostname of the destination system for the exporter.
Step 5	end Example: Device(config-flow-exporter)# end	Exits Flexible NetFlow flow exporter configuration mode and returns to privileged EXEC mode.

Configuring a Flow Monitor

Before You Begin

To add a flow exporter to the flow monitor for data export, ensure that you create the flow exporter. For more information see the “Configuring a Flow Exporter” section.

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **flow monitor** *monitor-name*
4. **record** *record-name*
5. **exporter** *exporter-name*
6. **end**

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	flow monitor <i>monitor-name</i> Example: Device(config)# flow monitor FLOW-MONITOR-1	Creates a flow monitor or modifies an existing flow monitor, and enters Flexible NetFlow flow monitor configuration mode.
Step 4	record <i>record-name</i> Example: Device(config-flow-monitor)# record FLOW-RECORD-1	Specifies the record for the flow monitor.
Step 5	exporter <i>exporter-name</i> Example: Device(config-flow-monitor)# exporter EXPORTER-1	Specifies the exporter for the flow monitor.
Step 6	end Example: Device(config-flow-monitor)# end	Exits Flexible NetFlow flow monitor configuration mode and returns to privileged EXEC mode.

Applying a Flow Monitor on an Interface

To activate a flow monitor, the flow monitor must be applied to at least one interface.

Before You Begin

Ensure that you create a flow monitor. For more information see the “Configuring a Flow Monitor” section.

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **interface** *type number*
4. **{ip | ipv6} flow monitor** *monitor-name* **{input | output}**
5. **end**

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. • Enter your password if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	interface <i>type number</i> Example: Device(config)# interface ethernet 0/0	Specifies an interface and enters interface configuration mode.
Step 4	{ip ipv6} flow monitor <i>monitor-name</i> {input output} Example: Device (config-if)# ip flow monitor FLOW-MONITOR-1 input	Activates a flow monitor that was created previously by assigning it to the interface to analyze traffic.
Step 5	end Example: Device(config-if)# end	Exits interface configuration mode and returns to privileged EXEC mode.

Verifying Flexible NetFlow Export of Cisco TrustSec Fields

SUMMARY STEPS

1. **enable**
2. **show flow record** *record-name*
3. **show flow exporter** *exporter-name*
4. **show flow monitor** *monitor-name*
5. **show flow monitor** *monitor-name* **cache**
6. **show flow interface** *type number*

DETAILED STEPS

Step 1

enable

Enables privileged EXEC mode.

- Enter your password if prompted.

Example:

```
Device> enable
```

Step 2

show flow record *record-name*

Displays the details of the specified Flexible NetFlow (FNF) flow record.

Example:

```
Device> show flow record cts-recordipv4

flow record cts-recordipv4:
  Description:      User defined
  No. of users:     1
  Total field space: 30 bytes
  Fields:
    match ipv4 protocol
    match ipv4 source address
    match ipv4 destination address
    match transport source-port
    match transport destination-port
    match interface input
    match interface output
    match flow direction
    match flow cts source group-tag
    match flow cts destination group-tag
    collect counter packets
```

Step 3

show flow exporter *exporter-name*

Displays the current status of the specified FNF flow exporter.

Example:

```
Device> show flow exporter EXPORTER-1
```

```
Flow Exporter EXPORTER-1:
  Description:      User defined
  Export protocol:  NetFlow Version 9
  Transport Configuration:
    Destination IP address: 100.100.100.1
    Source IP address:    3.3.3.2
    Transport Protocol:   UDP
    Destination Port:     2055
    Source Port:          65252
    DSCP:                 0x0
    TTL:                  255
    Output Features:      Used
```

Step 4 `show flow monitor monitor-name`

Displays the status and statistics of the specified FNF flow monitor.

Example:

```
Device> show flow monitor FLOW-MONITOR-1
```

```
Flow Monitor FLOW-MONITOR-1:
  Description:      User defined
  Flow Record:      cts-recordipv4
  Flow Exporter:    EXPORTER-1
  Cache:
    Type:            normal (Platform cache)
    Status:           allocated
    Size:             200000 entries
    Inactive Timeout: 60 secs
    Active Timeout:   1800 secs
    Update Timeout:   1800 secs
    Synchronized Timeout: 600 secs
    Trans end aging:  off
```

Step 5 `show flow monitor monitor-name cache`

Displays the contents of the specified FNF flow monitor cache.

Example:

```
Device> show flow monitor FLOW-MONITOR-1 cache
```

```
Cache type:           Normal
Cache size:           4096
Current entries:      2
High Watermark:       2

Flows added:          6
Flows aged:           4
  - Active timeout     (1800 secs)  0
  - Inactive timeout   (15 secs)    4
  - Event aged         0
  - Watermark aged     0
  - Emergency aged     0

IPV4 SOURCE ADDRESS:  10.1.0.1
IPV4 DESTINATION ADDRESS: 172.16.2.0
TRNS SOURCE PORT:     58817
TRNS DESTINATION PORT: 23
```



```

FLOW DIRECTION:                Input
IP PROTOCOL:                   6
SOURCE GROUP TAG:              100
DESTINATION GROUP TAG:         200
counter packets:               10

IPv4 SOURCE ADDRESS:           172.16.2.0
IPv4 DESTINATION ADDRESS:      10.1.0.1
TRNS SOURCE PORT:              23
TRNS DESTINATION PORT:         58817
FLOW DIRECTION:               Output
IP PROTOCOL:                   6
SOURCE GROUP TAG:              200
DESTINATION GROUP TAG:         100
counter packets:               8

```

Step 6 *show flow interface type number*

Displays the details of the FNF flow monitor applied on the specified interface. If a flow monitor is not applied on the interface, then the output is empty.

Example:

```
Device> show flow interface GigabitEthernet0/0/3
```

```

Interface GigabitEthernet0/0/3
  FNF: monitor:      FLOW-MONITOR-1
        direction:   Input
        traffic(ip):  on
  FNF: monitor:      FLOW-MONITOR-1
        direction:   Output
        traffic(ip):  on

```

Configuration Examples for Flexible NetFlow Export of Cisco TrustSec Fields

Example: Configuring Cisco TrustSec Fields as Key Fields in the Flow Record

The following example shows how to configure the Cisco TrustSec flow objects as key fields in an IPv4 Flexible NetFlow flow record:

```

Device> enable
Device# configure terminal
Device(config)# flow record cts-record-ipv4
Device(config-flow-record)# match ipv4 protocol
Device(config-flow-record)# match ipv4 source address
Device(config-flow-record)# match ipv4 destination address
Device(config-flow-record)# match transport source-port
Device(config-flow-record)# match transport destination-port
Device(config-flow-record)# match flow direction
Device(config-flow-record)# match flow cts source group-tag
Device(config-flow-record)# match flow cts destination group-tag
Device(config-flow-record)# end

```

Example: Configuring Cisco TrustSec Fields as Non-Key Fields in the Flow Record

The following example shows how to configure the Cisco TrustSec flow objects as non-key fields in an IPv4 Flexible NetFlow flow record:

```
Device> enable
Device# configure terminal
Device(config)# flow record cts-record-ipv4
Device(config-flow-record)# match ipv4 protocol
Device(config-flow-record)# match ipv4 source address
Device(config-flow-record)# match ipv4 destination address
Device(config-flow-record)# match transport source-port
Device(config-flow-record)# match transport destination-port
Device(config-flow-record)# collect flow direction
Device(config-flow-record)# collect flow cts source group-tag
Device(config-flow-record)# collect flow cts destination group-tag
Device(config-flow-record)# collect counter packets
Device(config-flow-record)# end
```

Example: Configuring a Flow Exporter

```
Device> enable
Device# configure terminal
Device(config)# flow exporter EXPORTER-1
Device(config-flow-exporter)# destination 172.16.10.2
Device(config-flow-exporter)# end
```

Example: Configuring a Flow Monitor

```
Device> enable
Device# configure terminal
Device(config)# flow monitor FLOW-MONITOR-1
Device(config-flow-monitor)# record FLOW-RECORD-1
Device(config-flow-monitor)# exporter EXPORTER-1
Device(config-flow-monitor)# end
```

Example: Applying a Flow Monitor on an Interface

The following example shows how to activate an IPv4 flow monitor by applying it to an interface to analyze traffic. To activate an IPv6 flow monitor, replace the **ip** keyword with the **ipv6** keyword.

```
Device> enable
Device# configure terminal
Device(config)# interface ethernet 0/0
Device(config-if)# ip flow monitor FLOW-MONITOR-1 input
Device(config-if)# end
```

Additional References for Flexible NetFlow Export of Cisco TrustSec Fields

Related Documents

Related Topic	Document Title
Cisco IOS commands	Cisco IOS Master Command List, All Releases
Security commands	<ul style="list-style-type: none">• Cisco IOS Security Command Reference: Commands A to C• Cisco IOS Security Command Reference: Commands D to L• Cisco IOS Security Command Reference: Commands M to R• Cisco IOS Security Command Reference: Commands S to Z
Data export in Flexible NetFlow	“Flexible NetFlow Output Features on Data Export” chapter in the <i>Flexible Netflow Configuration Guide</i> publication
Flexible NetFlow flow records and flow monitors	“Customizing Flexible NetFlow Flow Records and Flow Monitors” chapter in the <i>Flexible Netflow Configuration Guide</i> publication

Technical Assistance

Description	Link
<p>The Cisco Support website provides extensive online resources, including documentation and tools for troubleshooting and resolving technical issues with Cisco products and technologies.</p> <p>To receive security and technical information about your products, you can subscribe to various services, such as the Product Alert Tool (accessed from Field Notices), the Cisco Technical Services Newsletter, and Really Simple Syndication (RSS) Feeds.</p> <p>Access to most tools on the Cisco Support website requires a Cisco.com user ID and password.</p>	http://www.cisco.com/cisco/web/support/index.html

Feature Information for Flexible NetFlow Export of Cisco TrustSec Fields

The following table provides release information about the feature or features described in this module. This table lists only the software release that introduced support for a given feature in a given software release train. Unless noted otherwise, subsequent releases of that software release train also support that feature.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Table 9: Feature Information for Flexible NetFlow Export of Cisco TrustSec Fields

Feature Name	Releases	Feature Information
Flexible NetFlow Export of Cisco TrustSec Fields	Cisco IOS XE 3.13S	<p>The Flexible NetFlow Export of Cisco TrustSec Fields feature supports the Cisco TrustSec fields in the Flexible NetFlow (FNF) flow record and helps to monitor, troubleshoot, and identify non-standard behavior for Cisco TrustSec deployments.</p> <p>The following commands were introduced by this feature: match flow cts {source destination} group-tag and collect flow cts {source destination} group-tag.</p>



Cisco TrustSec SGT Caching

The Cisco TrustSec SGT Caching feature enhances the ability of Cisco TrustSec to make Security Group Tag (SGT) transportability flexible. This feature identifies the IP-SGT binding and caches the corresponding SGT so that network packets are forwarded through all network services for normal deep packet inspection processing and at the service egress point the packets are re-tagged with the appropriate SGT.

- [Finding Feature Information, page 87](#)
- [Restrictions for Cisco TrustSec SGT Caching, page 87](#)
- [Information About Cisco TrustSec SGT Caching, page 88](#)
- [How to Configure Cisco TrustSec SGT Caching, page 90](#)
- [Configuration Examples for Cisco TrustSec SGT Caching, page 96](#)
- [Additional References for Cisco TrustSec SGT Caching, page 97](#)
- [Feature Information for Cisco TrustSec SGT Caching, page 98](#)

Finding Feature Information

Your software release may not support all the features documented in this module. For the latest caveats and feature information, see [Bug Search Tool](#) and the release notes for your platform and software release. To find information about the features documented in this module, and to see a list of the releases in which each feature is supported, see the feature information table.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Restrictions for Cisco TrustSec SGT Caching

The global Security Group Tag (SGT) caching configuration and the interface-specific ingress configuration are mutually exclusive. In the following scenarios, a warning message is displayed if you attempt to configure SGT caching both globally and on an interface:

- If an interface has ingress SGT caching enabled using the **cts role-based sgt-cache ingress** command in interface configuration mode, and a global configuration is attempted using the **cts role-based sgt-caching** command, a warning message is displayed as shown in this example:

```
Device> enable
Device# configure terminal
Device(config)# interface gigabitEthernet0/0
Device(config-if)# cts role-based sgt-cache ingress
Device(config-if)# exit
Device(config)# cts role-based sgt-caching
```

There is at least one interface that has ingress sgt caching configured. Please remove all interface ingress sgt caching configuration(s) before attempting global enable.

- If global configuration is enabled using the **cts role-based sgt-caching** command, and an interface configuration is attempted using the **cts role-based sgt-cache ingress** command in interface configuration mode, a warning message is displayed as shown in this example:

```
Device> enable
Device# configure terminal
Device(config)# cts role-based sgt-caching
Device(config)# interface gigabitEthernet0/0
Device(config-if)# cts role-based sgt-cache ingress
```

Note that ingress sgt caching is already active on this interface due to global sgt-caching enable.

- SGT Caching for Tunneling of IPv6 packet over V4 transport & IPv4 packet over V6 transport is not supported.
- High availability and syncing of IPv6 SGACL policies on the routing platforms are not supported for IPv6-SGT caching.
- IPv6 IPsec SGT Caching is not supported on ISR4K based platforms.
- SGT propagation fails over IPv6 IPsec tunnel.
- SGT caching is not performed for the link-local IPv6 source address.

A link-local address is a network address that is valid only for communications within the network segment (link) or the broadcast domain that the host is connected to. Link-local addresses are not guaranteed to be unique beyond a single network segment. Therefore, routers do not forward packets with link-local addresses. Because they are not unique, SGT tags for the packets with source as link-local IPv6 address are not assigned.

Information About Cisco TrustSec SGT Caching


Identifying and Reapplying SGT Using SGT Caching

Cisco TrustSec uses Security Group Tag (SGT) caching to ensure that traffic tagged with SGT can also pass through services that are not aware of SGTs. Examples of services that cannot propagate SGTs are WAN acceleration or optimization, intrusion prevention systems (IPS), and upstream firewalls.

In one-arm mode, a packet tagged with SGT enters a device (where the tags are cached), and is redirected to a service. After that service is completed, the packet either returns to the device, or is redirected to another device as shown in the figure. In such a scenario:

- 1 The Cisco TrustSec SGT Caching feature enables the device to identify the IP-SGT binding information from the incoming packet and caches this information.
- 2 The device redirects the packet to the service or services that cannot propagate SGTs.
- 3 After the completion of the service, the packet returns to the device.
- 4 The appropriate SGT is reapplied to the packet at the service egress point.
- 5 Role-based enforcements are applied to the packet that has returned to the device from the service or services.
- 6 The packet with SGTs is forwarded to other Cisco TrustSec-capable devices downstream.


Figure 6: SGT Caching in One-Arm Mode

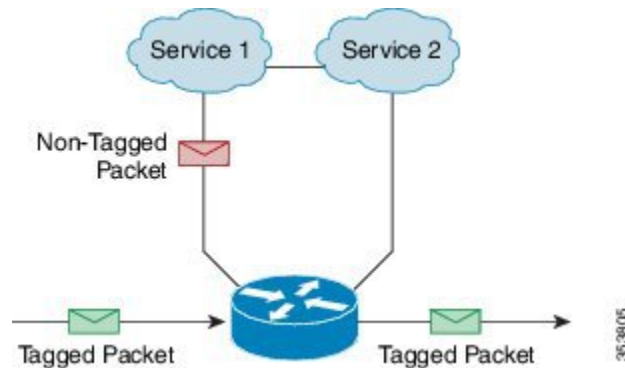

In certain instances, some services are deployed in a bump-in-the-wire topology. In such a scenario:

- 1 The packets that go through a service or services do not come back to the device.
- 2 Single-hop SGT Exchange Protocol (SXP) is used to identify and export the identified IP-SGT bindings.
- 3 The upstream device in the network identifies the IP-SGT bindings through SXP and reapplies the appropriate tags or uses them for SGT-based enforcement. During egress caching, the original pre-Network Address Translation (NAT) source IP address is cached as part of the identified IP-SGT binding information.
- 4 IP-SGT bindings that do not receive traffic for 300 seconds are removed from the cache.

Figure 7: SGT Caching in Bump-in-the-wire Topology

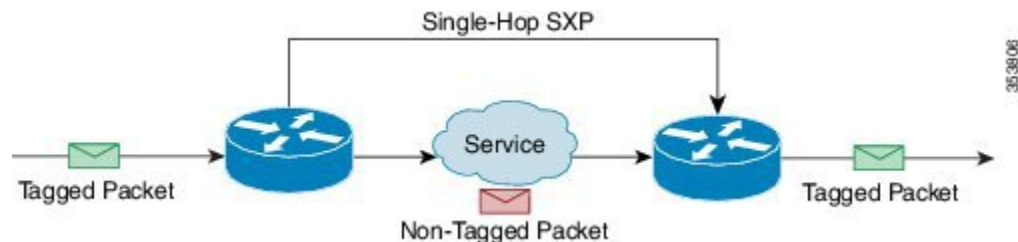

SGT Caching for IPv6 Traffic

The following are the considerations for SGT caching for IPv6 traffic:

- **Global unicast IPv6 packet:** Ingress and egress caching is done for the source IPv6 address on the packet.
- **Multicast IPv6 address:** Ingress and egress caching is done for the unicast source IPv6 address on the packet.
- **Export of cached IPv6-SGT binding via SXP:** The IPv6-SGT binding from data plane is sent to control plane Role Based Manager (RBM). The bindings learnt in control plane can then be exported using SXP.

How to Configure Cisco TrustSec SGT Caching

Configuring SGT Caching Globally

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **cts role-based sgt-caching**
4. **end**

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. • Enter your password if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	cts role-based sgt-caching Example: Device(config)# cts role-based sgt-caching	Enables SGT caching in ingress direction for all interfaces.

	Command or Action	Purpose
Step 4	end Example: Device (config)# end	Exits global configuration mode and returns to privileged EXEC mode.

Configuring SGT Caching on an Interface

When an interface is configured to be on a Virtual Routing and Forwarding (VRF) network, the IP-SGT bindings identified on that interface are added under the specific VRF. (To view the bindings identified on a corresponding VRF, use the **show cts role-based sgt-map vrf vrf-name all** command.)

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **interface type slot/port**
4. **cts role-based sgt-cache [ingress | egress]**
5. **end**

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	interface type slot/port Example: Device (config)# interface gigabitEthernet 0/1/0	Configures an interface and enters interface configuration mode.

	Command or Action	Purpose
Step 4	cts role-based sgt-cache [ingress egress] Example: <pre>Device(config-if)# cts role-based sgt-cache ingress</pre>	Configures SGT caching on a specific interface. <ul style="list-style-type: none"> • ingress—Enables SGT caching for traffic entering the specific interface (inbound traffic). • egress—Enables SGT caching for traffic exiting the specific interface (outbound traffic).
Step 5	end Example: <pre>Device(config-if)# end</pre>	Exits interface configuration mode and returns to privileged EXEC mode.

Verifying Cisco TrustSec SGT Caching

SUMMARY STEPS

1. **enable**
2. **show cts**
3. **show cts interface**
4. **show cts interface brief**
5. **show cts role-based sgt-map all ipv4**
6. **show cts role-based sgt-map vrf**
7. **show platform hardware qfp active feature cts datapath cache-data**

DETAILED STEPS

-
- Step 1** **enable**
- Enables privileged EXEC mode. Enter your password if prompted.
- Example:**
- ```
Device> enable
```
- Step 2**      **show cts**
- Displays Cisco TrustSec connections and the status of global SGT caching.
- Example:**
- ```
Device# show cts
```

```

Global Dot1x feature: Disabled
CTS device identity: ""
CTS caching support: disabled
CTS sgt-caching global: Enabled
Number of CTS interfaces in DOT1X mode: 0,    MANUAL mode: 0
Number of CTS interfaces in LAYER3 TrustSec mode: 0
Number of CTS interfaces in corresponding IFC state
  INIT          state: 0
  AUTHENTICATING state: 0
  AUTHORIZING    state: 0
  SAP_NEGOTIATING state: 0
  OPEN           state: 0
  HELD           state: 0
  DISCONNECTING  state: 0
  INVALID        state: 0
CTS events statistics:
  authentication success: 0
  authentication reject : 0
  authentication failure: 0
  authentication logoff  : 0
  authentication no resp: 0
  authorization success  : 0
  authorization failure  : 0
  sap success            : 0
  sap failure            : 0
  port auth failure      : 0

```

Step 3 **show cts interface**

Displays Cisco TrustSec configuration statistics for an interface and SGT caching information with mode details (ingress or egress).

Example:

```

Device# show cts interface GigabitEthernet0/1

Interface GigabitEthernet0/1
  CTS sgt-caching Ingress: Enabled
  CTS sgt-caching Egress : Disabled
  CTS is enabled, mode:    MANUAL
  Propagate SGT:          Enabled
  Static Ingress SGT Policy:
    Peer SGT:              200
    Peer SGT assignment:   Trusted

  L2-SGT Statistics
    Pkts In                  : 16298041
    Pkts (policy SGT assigned) : 0
    Pkts Out                 : 5
    Pkts Drop (malformed packet): 0
    Pkts Drop (invalid SGT)   : 0

```

Step 4 **show cts interface brief**

Displays SGT caching information with mode details (ingress or egress) for all interfaces.

Example:

```

Device# show cts interface brief

Interface GigabitEthernet0/0
  CTS sgt-caching Ingress: Enabled
  CTS sgt-caching Egress : Disabled
  CTS is disabled

```

```

Interface GigabitEthernet0/1
  CTS sgt-caching Ingress: Enabled
  CTS sgt-caching Egress : Disabled
  CTS is enabled, mode:      MANUAL
  Propagate SGT:           Enabled
  Static Ingress SGT Policy:
    Peer SGT:               200
    Peer SGT assignment:    Trusted

Interface GigabitEthernet0/2
  CTS sgt-caching Ingress: Enabled
  CTS sgt-caching Egress : Disabled
  CTS is enabled, mode:      MANUAL
  Propagate SGT:           Enabled
  Static Ingress SGT Policy:
    Peer SGT:               0
    Peer SGT assignment:    Untrusted

Interface GigabitEthernet0/3
  CTS sgt-caching Ingress: Enabled
  CTS sgt-caching Egress : Disabled
  CTS is disabled

Interface Backplane-GigabitEthernet0/4
  CTS sgt-caching Ingress: Enabled
  CTS sgt-caching Egress : Disabled
  CTS is disabled

Interface RG-AR-IF-INPUT1
  CTS sgt-caching Ingress: Enabled
  CTS sgt-caching Egress : Disabled
  CTS is disabled

```

Step 5 **show cts role-based sgt-map all ipv4**
 Displays all the SGT-IPv4 bindings.

Example:

Device# **show cts role-based sgt-map all ipv4**

Active IPv4-SGT Bindings Information

IP Address	SGT	Source
192.0.2.1	50	CACHED
192.0.2.2	50	CACHED
192.0.2.3	50	CACHED
192.0.2.4	50	CACHED
192.0.2.5	3900	INTERNAL
192.0.2.6	3900	INTERNAL
192.0.2.7	3900	INTERNAL

IP-SGT Active Bindings Summary

```

=====
Total number of CACHED bindings = 20
Total number of INTERNAL bindings = 3
Total number of active bindings = 23

```

Step 6 **show cts role-based sgt-map vrf**
 Displays all the SGT-IP bindings for the specific Virtual Routing and Forwarding (VRF) interface.

Example:

```
Device# show cts role-based sgt-map vrf

%IPv6 protocol is not enabled in VRF RED
Active IPv4-SGT Bindings Information
```

IP Address	SGT	Source
192.0.2.1	50	CACHED
192.0.2.2	2007	CACHED
192.0.2.3	50	CACHED
192.0.2.4	50	CACHED

Step 7 **show platform hardware qfp active feature cts datapath cache-data**

Displays SGT caching information for a platform, such as per-interface SGT caching configuration, global SGT caching configuration, timeout configuration, and IP-SGT bindings identified through SGT caching.

Example:

```
Device# show platform hardware qfp active feature cts datapath cache-data
```

```
Sgt-caching is Active
Total number of bindings = 1
```

IP Address	SGT	Interface	Age (hh:mm:ss)	Exptime (sec)	Mode	VRFID
192.0.2.1	505	GigabitEthernet0/1/0	00:00:14	118	In	0

Verifying IP-to-SGT Bindings

Displays the IP-to-SGT bindings learnt in the data-plane. This command also lists the information such as IP, SGT, age of the session, time to expiry, and VRF_ID:

```
Router#show platform hardware qfp active feature cts datapath cache-data ipv4
Sgt-caching is Active
Total number of bindings = 5
```

IP Address	SGT	Interface	Age (hh:mm:ss)	Exptime (sec)	Mode	VRFID
10.104.33.37	4	GigabitEthernet3	05:42:27	293	In	0
1.1.1.4	4	GigabitEthernet3	00:44:27	128	In	0
4.4.4.1	4	GigabitEthernet3	02:55:48	298	In	0
1.1.1.2	4	GigabitEthernet3	19:57:42	208	In	0
10.104.33.79	4	GigabitEthernet3	00:09:08	298	In	0

```
Router#show platform hardware qfp active feature cts datapath cache-data ipv6
Sgt-caching is Active
Total number of bindings = 5
```

IP Address	SGT	Interface	Age (hh:mm:ss)	Exptime (sec)	Mode	VRFID
------------	-----	-----------	-------------------	------------------	------	-------

```
=====
100::1      4      GigabitEthernet3      05:42:27  293      In      0
200::2      4      GigabitEthernet3      00:44:27  128      In      0
300::3      4      GigabitEthernet3      02:55:48  298      In      0
400::4      4      GigabitEthernet3      19:57:42  208      In      0
500::5      4      GigabitEthernet3      00:09:08  298      In      0

Router#show platform hardware qfp active feature cts datapath cache-data
Sgt-caching is Active
Total number of bindings = 10
=====
IP Address      SGT      Interface      Age      Exptime Mode VRFID
(hh:mm:ss)      (sec)
=====
100::1          4      GigabitEthernet3      05:42:27  293      In      0
200::2          4      GigabitEthernet3      00:44:27  128      In      0
300::3          4      GigabitEthernet3      02:55:48  298      In      0
10.104.33.37    4      GigabitEthernet3      05:42:27  293      In      0
1.1.1.4         4      GigabitEthernet3      00:44:27  128      In      0
4.4.4.1         4      GigabitEthernet3      02:55:48  298      In      0
1.1.1.2         4      GigabitEthernet3      19:57:42  208      In      0
10.104.33.79   4      GigabitEthernet3      00:09:08  298      In      0
400::4          4      GigabitEthernet3      19:57:42  208      In      0
500::5          4      GigabitEthernet3      00:09:08  298      In      0
=====
```

Configuration Examples for Cisco TrustSec SGT Caching

Example: Configuring SGT Caching Globally

```
Device> enable
Device# configure terminal
Device(config)# cts role-based sgt-caching
Device(config)# end
```

Example: Configuring SGT Caching for an Interface

```
Device> enable
Device# configure terminal
Device(config)# interface gigabitEthernet 0/1/0
Device(config-if)# cts role-based sgt-cache ingress
Device(config-if)# end
```

Example: Disabling SGT Caching on an Interface

The following example shows how to disable SGT caching on an interface and displays the status of SGT caching on the interface when caching is enabled globally, but disabled on the interface.

```
Device> enable
Device# configure terminal
Device(config)# cts role-based sgt-caching
Device(config)# interface gigabitEthernet 0/1
Device(config-if)# no cts role-based sgt-cache ingress
Device(config-if)# end
Device# show cts interface GigabitEthernet0/1
```

```

Interface GigabitEthernet0/1
  CTS sgt-caching Ingress: Disabled
  CTS sgt-caching Egress : Disabled
  CTS is enabled, mode:      MANUAL
  Propagate SGT:           Enabled
  Static Ingress SGT Policy:
    Peer SGT:               200
    Peer SGT assignment:    Trusted

  L2-SGT Statistics
    Pkts In                  : 200890684
    Pkts (policy SGT assigned) : 0
    Pkts Out                 : 14
    Pkts Drop (malformed packet): 0
    Pkts Drop (invalid SGT)   : 0

```

Additional References for Cisco TrustSec SGT Caching

Related Documents

Related Topic	Document Title
Cisco IOS commands	Cisco IOS Master Command List, All Releases
Cisco IOS Security commands	<ul style="list-style-type: none"> • Cisco IOS Security Command Reference: Commands A to C • Cisco IOS Security Command Reference: Commands D to L • Cisco IOS Security Command Reference: Commands M to R • Cisco IOS Security Command Reference: Commands S to Z
Cisco TrustSec configuration	"Cisco TrustSec Support for IOS" chapter in the <i>Cisco TrustSec Configuration Guide</i>
Cisco TrustSec overview	Overview of TrustSec
Cisco TrustSec solution	Cisco TrustSec Security Solution

Technical Assistance

Description	Link
<p>The Cisco Support website provides extensive online resources, including documentation and tools for troubleshooting and resolving technical issues with Cisco products and technologies.</p> <p>To receive security and technical information about your products, you can subscribe to various services, such as the Product Alert Tool (accessed from Field Notices), the Cisco Technical Services Newsletter, and Really Simple Syndication (RSS) Feeds.</p> <p>Access to most tools on the Cisco Support website requires a Cisco.com user ID and password.</p>	<p>http://www.cisco.com/cisco/web/support/index.html</p>

Feature Information for Cisco TrustSec SGT Caching

The following table provides release information about the feature or features described in this module. This table lists only the software release that introduced support for a given feature in a given software release train. Unless noted otherwise, subsequent releases of that software release train also support that feature.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Table 10: Feature Information for Cisco TrustSec SGT Caching

Feature Name	Releases	Feature Information
Cisco TrustSec SGT Caching	Cisco IOS XE Release 3.15S	<p>The Cisco TrustSec SGT Caching feature enhances the ability of Cisco TrustSec to make Security Group Tag (SGT) transportability flexible. This feature identifies the IP-SGT binding and caches the corresponding SGT so that network packets are forwarded through all network services for normal deep packet inspection processing and at the service egress point the packets are re-tagged with the appropriate SGT.</p> <p>In Cisco IOS XE Release 3.15S, support was added for Cisco ASR 1000 Series Aggregation Services Routers, Cisco Cloud Services Router 1000V Series (Cisco CSR 1000V Series), and Cisco Integrated Services Router Generation 3 (Cisco ISR G3).</p> <p>The following commands were introduced or modified: cts role-based sgt-caching, cts role-based sgt-cache [ingress egress].</p>
IPv6 enablement - SGT Caching	Cisco IOS XE Fuji 16.8.1	The support for IPv6 is introduced.

