



Configuring DHCP Services for Accounting and Security

Cisco IOS software supports several capabilities that enhance DHCP security, reliability, and accounting in Public Wireless LANs (PWLANS). This functionality can also be used in other network implementations. This module describes the concepts and tasks needed to configure DHCP services for accounting and security.

Module History

This module was first published on May 2, 2005, and last updated on February 27, 2006.

Finding Feature Information in This Module

Your Cisco IOS software release may not support all features. To find information about feature support and configuration, use the [“Feature Information for DHCP Services for Accounting and Security”](#) section on [page 18](#)

Contents

- [Prerequisites for Configuring DHCP Services for Accounting and Security, page 1](#)
- [Information About DHCP Services for Accounting and Security, page 2](#)
- [How to Configure DHCP Services for Accounting and Security, page 3](#)
- [Configuration Examples for DHCP Services for Accounting and Security, page 13](#)
- [Additional References, page 17](#)
- [Feature Information for DHCP Services for Accounting and Security, page 18](#)

Prerequisites for Configuring DHCP Services for Accounting and Security

Before you configure DHCP services for accounting and security, you should understand the concepts documented in the [“DHCP Overview”](#) module.

Corporate Headquarters:
Cisco Systems, Inc., 170 West Tasman Drive, San Jose, CA 95134-1706 USA

Copyright © 2006 Cisco Systems, Inc. All rights reserved.

Information About DHCP Services for Accounting and Security

Before you configure DHCP services for accounting and security, you should understand the following concepts:

- [DHCP Operation in Public Wireless LANs, page 2](#)
- [Security Vulnerabilities in Public Wireless LANs, page 2](#)
- [DHCP Services for Security and Accounting Overview, page 2](#)
- [DHCP Lease Limit per ATM RBE Unnumbered Interface, page 3](#)

DHCP Operation in Public Wireless LANs

The configuration of DHCP in a public wireless LAN (PWLAN) simplifies the configuration of wireless clients and reduces the overhead necessary to maintain the network. DHCP clients are leased IP addresses by the DHCP server and then authenticated by the Service Selection Gateway (SSG), which allows the clients to access network services. The DHCP server and client exchange DHCP messages for IP address assignments. When a DHCP server assigns an IP address to a client, a DHCP binding is created. The IP address is leased to the client until the client explicitly releases the IP address and disconnects from the network. If the client disconnects without releasing the address, the server terminates the lease after the lease time is over. In either case, the DHCP server removes the binding and the IP address is returned to the pool.

Security Vulnerabilities in Public Wireless LANs

As more people start using PWLANs, security becomes an important concern. Most implementations of PWLANs rely on DHCP for users to obtain an IP address while in a hot spot (such as a coffee shop, airport terminal, hotel, and so on) and use this IP address provided by the DHCP server throughout their session.

IP spoofing is a common technique used by hackers to spoof IP addresses. For example, customer A obtains an IP address from DHCP and has already been authenticated to use the PWLAN, but a hacker spoofs the IP address of customer A and uses this IP address to send and receive traffic. Customer A will still be billed for the service even though he or she is not using the service.

Address Resolution Protocol (ARP) table entries are dynamic by design. Request and reply ARP packets are sent and received by all the networking devices in a network. In a DHCP network, the DHCP server stores the leased IP address to the MAC address or the client-identifier of the client in the DHCP binding. But as ARP entries are learned dynamically, an unauthorized client can spoof the IP address given by the DHCP server and start using that IP address. The MAC address of this unauthorized client will replace the MAC address of the authorized client in the ARP table allowing the unauthorized client to freely use the spoofed IP address.

DHCP Services for Security and Accounting Overview

DHCP security and accounting features have been designed and implemented to address the security concerns in PWLANs but also can be used in other network implementations.

DHCP accounting provides authentication, authorization, and accounting (AAA) and Remote Authentication Dial-In User Service (RADIUS) support for DHCP. The AAA and RADIUS support improves security by sending secure START and STOP accounting messages. The configuration of

DHCP accounting adds a layer of security that allows DHCP lease assignment and termination to be triggered for the appropriate RADIUS START and STOP accounting records so that the session state is properly maintained by upstream devices, such as an SSG. This additional security can help to prevent unauthorized clients or hackers from gaining illegal entry to the network by spoofing authorized DHCP leases.

Three other features have been designed and implemented to address the security concerns in PWLANs. The first feature secures ARP table entries to DHCP leases in the DHCP database. The secure ARP functionality prevents IP spoofing by synchronizing the database of the DHCP server with the ARP table to avoid address hijacking. Secure ARP adds an entry to the ARP table for a client when an address is allocated that can be deleted by the DHCP server only when a binding expires.

The second feature is DHCP authorized ARP. This functionality provides a complete solution by addressing the need for DHCP to explicitly know when a user logs out. Before the introduction of DHCP authorized ARP, there was no mechanism to inform the DHCP server if a user had left the system ungracefully, which could result in excessive billing for a customer that had logged out but the system had not detected the log out. To prevent this problem, DHCP authorized ARP sends periodic ARP messages on a per-minute basis to determine if a user is still logged in. Only authorized users can respond to the ARP request. ARP responses from unauthorized users are blocked at the DHCP server providing an extra level of security.

In addition, DHCP authorized ARP disables dynamic ARP learning on an interface. The address mapping can be installed only by the authorized component specified by the **arp authorized** interface configuration command. DHCP is the only authorized component currently allowed to install ARP entries.

The third feature is ARP Auto-logoff, which adds finer control for probing when authorized users log out. The **arp probe interval** command specifies when to start a probe (the timeout), how frequent a peer is probed (the interval), and the maximum number of retries (the count).

DHCP Lease Limit per ATM RBE Unnumbered Interface

This feature allows an Internet service provider (ISP) to globally limit the number of leases available to clients per household or connection. This lease limit can be configured on ATM routed bridge encapsulation (RBE) or serial unnumbered interfaces.

How to Configure DHCP Services for Accounting and Security

This section contains the following tasks:

- [Configuring AAA and RADIUS for DHCP Accounting, page 3](#) (required)
- [Configuring DHCP Accounting, page 7](#) (required)
- [Verifying DHCP Accounting, page 8](#) (optional)
- [Securing ARP Table Entries to DHCP Leases, page 9](#) (required)
- [Configuring DHCP Authorized ARP, page 10](#) (required)
- [Configuring a DHCP Lease Limit, page 12](#) (required)

Configuring AAA and RADIUS for DHCP Accounting

Perform this task to configure AAA and RADIUS for DHCP accounting.

RADIUS provides the accounting capability for the transmission of secure START and STOP messages. AAA and RADIUS are enabled prior to the configuration of DHCP accounting but can also be enabled to secure an insecure DHCP network. The configuration steps in this section are required for configuring DHCP accounting in a new or existing network.

RADIUS Accounting Attributes

DHCP accounting introduces the attributes shown in [Table 1](#). These attributes are processed directly by the RADIUS server when DHCP accounting is enabled. These attributes can be monitored in the output of the **debug radius** command. The output will show the status of the DHCP leases and specific configuration details about the client. The **accounting** keyword can be used with the **debug radius** command to filter the output and display only DHCP accounting messages.

Table 1 RADIUS Accounting Attributes

Attribute	Description
Calling-Station-ID	The output from this attribute displays the MAC address of the client.
Framed-IP-Address	The output from this attribute displays the IP address that is leased to the client.
Acct-Terminate-Cause	The output from this attribute displays the message “session-timeout” if a client does not explicitly disconnect.

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **aaa new-model**
4. **aaa group server radius** *group-name*
5. **server** *ip-address* **auth-port** *port-number* **acct-port** *port-number*
6. **exit**
7. **aaa accounting** {**system** | **network** | **exec** | **connection** | **commands** *level*} {**default** | *list-name*} {**start-stop** | **stop-only** | **none**} [**broadcast**] **group** *group-name*
8. **aaa session-id** {**common** | **unique**}
9. **ip radius source-interface** *type-number* [**vrf** *vrf-name*]
10. **radius-server host** {*hostname* | *ip-address*} [**auth-port** *port-number*] [**acct-port** *port-number*]
11. **radius-server retransmit** *number-of-retries*

DETAILED STEPS

	Command or Action	Purpose
Step 1	<p>enable</p> <p>Example: Router> enable</p>	<p>Enables privileged EXEC mode.</p> <ul style="list-style-type: none"> Enter your password if prompted.
Step 2	<p>configure terminal</p> <p>Example: Router# configure terminal</p>	<p>Enters global configuration mode.</p>
Step 3	<p>aaa new-model</p> <p>Example: Router(config)# aaa new-model</p>	<p>Enables the AAA access control model.</p> <ul style="list-style-type: none"> DHCP accounting functions only in the access control model. <p>Note TACACS and extended TACACS commands are not available after this command is configured and are not supported by DHCP accounting.</p>
Step 4	<p>aaa group server radius <i>group-name</i></p> <p>Example: Router(config)# aaa group server radius RGROUP-1</p>	<p>Creates a server group for AAA or TACACS+ services and enters server group configuration mode.</p> <ul style="list-style-type: none"> The server group is created in this step so that accounting services can be applied.
Step 5	<p>server <i>ip-address</i> auth-port <i>port-number</i> acct-port <i>port-number</i></p> <p>Example: Router(config-sg-radius)# server 10.0.0.1 auth-port 1645 acct-port 1646</p>	<p>Specifies the servers that are members of the server group that was created in Step 4.</p> <ul style="list-style-type: none"> You must open port numbers for authorization and accounting. 1645 is the default port number for authorization, and 1646 is the default port number for accounting. The range of port numbers that can be specified is from 0 to 65535. The values entered for the auth-port <i>port-number</i> and acct-port <i>port-number</i> keywords and arguments must match the port numbers that will be configured in Step 10.
Step 6	<p>exit</p> <p>Example: Router(config-sg-radius)# exit</p>	<p>Exits server group configuration mode and enters global configuration mode.</p>

	Command or Action	Purpose
Step 7	<pre>aaa accounting {system network exec connection commands level} {default list-name} {start-stop stop-only none} [broadcast] group group-name</pre> <p>Example: Router(config)# aaa accounting network RADIUS-GROUP1 start-stop group RGROUP-1</p>	<p>Configures RADIUS accounting for the specified server group.</p> <ul style="list-style-type: none"> The RADIUS accounting server is specified in the first <i>list-name</i> argument (RADIUS-GROUP1), and the target server group is specified in the second <i>group-name</i> argument (RGROUP-1). This command enables start and stop accounting for DHCP accounting. The start-stop keyword enables the transmission of both START and STOP accounting messages. The stop-only keyword will enable the generation and verification of STOP accounting messages only.
Step 8	<pre>aaa session-id {common unique}</pre> <p>Example: Router(config)# aaa session-id common</p>	<p>Specifies whether the same session ID will be used for each AAA accounting service type within a call or whether a different session ID will be assigned to each accounting service type.</p>
Step 9	<pre>ip radius source-interface type-number [vrf vrf-name]</pre> <p>Example: Router(config)# ip radius source-interface Ethernet 0</p>	<p>Forces RADIUS to use the IP address of the specified interface for all outgoing RADIUS packets.</p>
Step 10	<pre>radius-server host {hostname ip-address} [auth-port port-number] [acct-port port-number]</pre> <p>Example: Router(config)# radius-server host 10.1.1.1 auth-port 1645 acct-port 1646</p>	<p>Specifies the radius server host.</p> <ul style="list-style-type: none"> The values entered for the auth-port port-number and acct-port port-number keywords and arguments must match the port numbers that were configured in Step 5.
Step 11	<pre>radius-server retransmit number-of-retries</pre> <p>Example: Router(config)# radius-server retransmit 3</p>	<p>Specifies the number of times that Cisco IOS software will look for RADIUS server hosts.</p>

Troubleshooting Tips

To monitor and troubleshoot the configuration of RADIUS accounting, use the following command:

Command	Purpose
<pre>debug radius accounting</pre> <p>Example: Router# debug radius accounting</p>	<p>The debug radius command is used to display RADIUS events on the console of the router. These events provide information about RADIUS processes. DHCP accounting information can be filtered with the accounting keyword. START and STOP accounting message information will also be displayed.</p>

Configuring DHCP Accounting

Perform this task to configure DHCP accounting.

DHCP Accounting

DHCP accounting is enabled with the **accounting** DHCP pool configuration command. This command configures DHCP to operate with AAA and RADIUS to enable secure START and STOP accounting messages. This configuration adds a layer of security that allows DHCP lease assignment and termination to be triggered for the appropriate RADIUS START and STOP accounting records so that the session state is properly maintained by upstream devices, such as the SSG.

DHCP accounting is configured on a per-client or per-lease basis. Separate DHCP accounting processes can be configured on a per-pool basis.

Prerequisites

You must configure an SSG for client authentication. AAA and RADIUS must be enabled before DHCP accounting will operate.

Restrictions

The following restrictions apply to DHCP accounting:

- DHCP accounting can be configured only for DHCP network pools in which bindings are created automatically and destroyed upon lease termination or when the client sends a DHCPRELEASE message.
- DHCP bindings are destroyed when the **clear ip dhcp binding** or **no service dhcp** commands are entered, which also triggers an accounting STOP message. You should exercise caution when entering these commands if a pool is configured with DHCP accounting, as these commands will clear active leases.

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **ip dhcp pool** *pool-name*
4. **accounting** *method-list-name*

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Router> enable	Enables privileged EXEC mode. <ul style="list-style-type: none">Enter your password if prompted.
Step 2	configure terminal Example: Router# configure terminal	Enters global configuration mode.
Step 3	ip dhcp pool pool-name Example: Router(config)# ip dhcp pool WIRELESS-POOL	Configures a DHCP address pool and enters DHCP pool configuration mode.
Step 4	accounting method-list-name Example: Router(dhcp-config)# accounting RADIUS-GROUP1	Enables DHCP accounting if the specified server group is configured to run RADIUS accounting. <ul style="list-style-type: none">The example configures DHCP accounting START and STOP messages to be sent if RADIUS-GROUP1 is configured as a start-stop group. STOP messages will only be sent if RADIUS-GROUP1 is configured as a stop-only group. See Step 7 in the Configuring AAA and RADIUS for DHCP Accounting configuration task table for more details.

Verifying DHCP Accounting

Perform this task to verify the DHCP accounting configuration.

The **debug radius**, **debug ip dhcp server events**, **debug aaa accounting**, **debug aaa id** commands do not need to be issued together or in the same session as there are differences in the information that is provided. These commands, however, can be used to display DHCP accounting start and stop events, AAA accounting messages, and information about AAA and DHCP hosts and clients. See the “[RADIUS Accounting Attributes](#)” section of this document for a list of AAA attributes that have been introduced by DHCP accounting. The **show running-config | begin dhcp** command can be used to display the local DHCP configuration including the configuration of DHCP accounting.

SUMMARY STEPS

- enable**
- debug radius accounting**
- debug ip dhcp server events**
- debug aaa accounting**
- debug aaa id**
- show running-config | begin dhcp**

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Router> enable	Enables higher privilege levels, such as privileged EXEC mode. <ul style="list-style-type: none"> Enter your password if prompted.
Step 2	debug radius accounting Example: Router# debug radius accounting	Displays RADIUS events on the console of the router. <ul style="list-style-type: none"> These events provide information about RADIUS processes. DHCP accounting information can be filtered with the accounting keyword. START and STOP accounting messages will be displayed in the output.
Step 3	debug ip dhcp server events Example: Router# debug ip dhcp server events	Displays DHCP IP address assignments, DHCP lease expirations, and DHCP database changes.
Step 4	debug aaa accounting Example: Router# debug aaa accounting	Displays AAA accounting events. <ul style="list-style-type: none"> START and STOP accounting messages will be displayed in the output.
Step 5	debug aaa id Example: Router# debug aaa id	Displays AAA events as they relate to unique AAA session IDs.
Step 6	show running-config Example: Router# show running-config begin dhcp	The show running-config command is used to display the local configuration of the router. The sample output is filtered with the begin keyword to start displaying output at the DHCP section of the running configuration.

Securing ARP Table Entries to DHCP Leases

Perform this task to secure ARP table entries to DHCP leases in the DHCP database.

When the **update arp** command is used, ARP table entries and their corresponding DHCP leases are secured automatically for all new leases and DHCP bindings. However, existing active leases are not secured. These leases are still insecure until they are renewed. When the lease is renewed, it is treated as a new lease and will be secured automatically. If this command is disabled on the DHCP server, all existing secured ARP table entries will automatically change to dynamic ARP entries.

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **ip dhcp pool** *pool-name*
4. **update arp**

DETAILED STEPS

	Command or Action	Purpose
Step 1	<code>enable</code> Example: <code>Router> enable</code>	Enables privileged EXEC mode. <ul style="list-style-type: none"> Enter your password if prompted.
Step 2	<code>configure terminal</code> Example: <code>Router# configure terminal</code>	Enters global configuration mode.
Step 3	<code>ip dhcp pool pool-name</code> Example: <code>Router(config)# ip dhcp pool WIRELESS-POOL</code>	Configures a DHCP address pool and enters DHCP pool configuration mode.
Step 4	<code>update arp</code> Example: <code>Router(dhcp-config)# update arp</code>	Secures insecure ARP table entries to the corresponding DHCP leases. <ul style="list-style-type: none"> Existing active DHCP leases will not be secured until they are renewed. Using the no update arp command will change secured ARP table entries back to dynamic ARP table entries.

Configuring DHCP Authorized ARP

Perform this task to configure DHCP authorized ARP, which disables dynamic ARP learning on an interface.

ARP Probing Behavior

DHCP authorized ARP has a limitation in supporting accurate one-minute billing. DHCP authorized ARP probes for authorized users once or twice, 30 seconds apart. In a busy network the possibility of missing reply packets increases, which can cause a premature log off. If you need a more accurate and finer control for probing of the authorized user, configure the **arp probe interval** command. This command specifies when to start a probe, the interval between unsuccessful probes, and the maximum number of retries before triggering an automatic log off.

Restrictions

If both static and authorized ARP are installing the same ARP entry, static configuration overrides authorized ARP. You can install a static ARP entry by using the **arp** global configuration command. You can only remove a nondynamic ARP entry by the same method in which it was installed.

The ARP timeout period should not be set to less than 30 seconds. The feature is designed to send out an ARP message every 30 seconds, beginning 90 seconds before the ARP timeout period specified by the **arp timeout** command. This behavior allows probing for the client at least three times before giving up on the client. If the ARP timeout is set to 60 seconds, an ARP message is sent twice, and if it is set to 30 seconds, an ARP message is sent once. An ARP timeout period set to less than 30 seconds can yield unpredictable results.

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **interface** *type number*
4. **ip address** *ip-address mask*
5. **arp authorized**
6. **arp timeout** *seconds*
7. **arp probe interval** *seconds count number*
8. **end**
9. **show arp**

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Router> enable	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.
Step 2	configure terminal Example: Router# configure terminal	Enters global configuration mode.
Step 3	interface <i>type number</i> Example: Router(config)# interface ethernet 1	Configures an interface type and enters interface configuration mode.
Step 4	ip address <i>ip-address mask</i> Example: Router(config-if)# ip address 168.71.6.23 255.255.255.0	Sets a primary IP address for an interface.
Step 5	arp authorized Example: Router(config-if)# arp authorized	Disables dynamic ARP learning on an interface. <ul style="list-style-type: none"> • The IP address to MAC address mapping can only be installed by the authorized subsystem.
Step 6	arp timeout <i>seconds</i> Example: Router(config-if)# arp timeout 60	Configures how long an entry remains in the ARP cache. <ul style="list-style-type: none"> • Do not set the timeout period to less than 30 seconds as discussed in the “Restrictions” section.

	Command or Action	Purpose
Step 7	<pre>arp probe interval seconds count number</pre> <p>Example: Router(config-if)# arp probe interval 5 count 30</p>	<p>(Optional) Specifies an interval, in seconds, and number of probe retries.</p> <p>The arguments are as follows:</p> <ul style="list-style-type: none"> <i>seconds</i>—Interval, in seconds, after which the next probe will be sent to see if a peer is present. The range is from 1 to 10. <i>count-number</i>—Number of probe retries. If there is no reply after the count has been reached, the peer has logged off. The range is from 1 to 60. <p>Note You must use the no form of the command to stop the probing process.</p>
Step 8	<pre>end</pre> <p>Example: Router(config-if)# end</p>	Exits the configuration mode and returns to privileged EXEC mode.
Step 9	<pre>show arp</pre> <p>Example: Router# show arp</p>	(Optional) Displays the entries in the ARP table.

Configuring a DHCP Lease Limit

Perform this task to limit the number of DHCP leases allowed on ATM RBE unnumbered interfaces or serial unnumbered interfaces.

DHCP Lease Limit per ATM RBE Unnumbered Interface Feature Design

This feature allows an ISP to globally limit the number of leases available to clients per household or connection.

If this feature is enabled on a Cisco IOS DHCP relay agent connected to clients through unnumbered interfaces, the relay agent keeps information about the DHCP leases offered to the clients per subinterface. When a DHCPACK message is forwarded to the client, the relay agent increments the number of leases offered to clients on that subinterface. If a new DHCP client tries to obtain an IP address and the number of leases has already reached the configured lease limit, DHCP messages from the client will be dropped and will not be forwarded to the DHCP server.

If this feature is enabled on the Cisco IOS DHCP server directly connected to clients through unnumbered interfaces, the server allocates addresses and increments the number of leases per subinterface. If a new client tries to obtain an IP address, the server will not offer an IP address if the number of leases on the subinterface has already reached the configured lease limit.

Restrictions for the DHCP Lease Limit

This feature is not supported on numbered interfaces. The lease limit can be applied only to ATM with RBE unnumbered interfaces or serial unnumbered interfaces.

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **ip dhcp limit lease per interface** *lease-limit*

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Router> enable	Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted.
Step 2	configure terminal Example: Router# configure terminal	Enters global configuration mode.
Step 3	ip dhcp limit lease per interface <i>lease-limit</i> Example: Router(config)# ip dhcp limit lease per interface 2	Limits the number of leases offered to DHCP clients behind an ATM RBE unnumbered or serial unnumbered interface.

Troubleshooting Tips

You can use the **debug ip dhcp server packet** and **debug ip server events** commands to troubleshoot the DHCP lease limit.

Configuration Examples for DHCP Services for Accounting and Security

This section provides the following configuration examples:

- [AAA and RADIUS for DHCP Accounting: Example, page 13](#)
- [DHCP Accounting: Example, page 14](#)
- [Verifying DHCP Accounting: Example, page 14](#)
- [DHCP Authorized ARP: Example, page 15](#)
- [DHCP Lease Limit: Example, page 16](#)

AAA and RADIUS for DHCP Accounting: Example

The following example shows how to configure AAA and RADIUS for DHCP accounting:

```
aaa new-model
aaa group server radius RGROUP-1
server 10.1.1.1 auth-port 1645 acct-port 1646
```

```

exit
aaa accounting network RADIUS-GROUP1 start-stop group RGROUP-1
aaa session-id common
ip radius source-interface Ethernet0
radius-server host 10.1.1.1 auth-port 1645 acct-port 1646
radius-server retransmit 3
exit

```

DHCP Accounting: Example

DHCP accounting is configured on a per-client or per-lease basis. Separate DHCP accounting processes can be configured on a per-pool basis. The following example shows how to configure DHCP accounting START and STOP messages to be sent if RADIUS-GROUP1 is configured as a start-stop group.

```

ip dhcp pool WIRELESS-POOL
 accounting RADIUS-GROUP1
exit

```

Verifying DHCP Accounting: Example

DHCP accounting is enabled after both RADIUS and AAA for DHCP are configured. DHCP START and STOP accounting generation information can be monitored with the **debug radius accounting** and **debug ip dhcp server events** commands. See the “[RADIUS Accounting Attributes](#)” section on page 4 of this document for a list of AAA attributes that have been introduced by DHCP accounting.

The following is sample output from the **debug radius accounting** command. The output shows the DHCP lease session ID, the MAC address, and the IP address of the client interface.

```

00:00:53: RADIUS: Pick NAS IP for uid=2 tableid=0 cfg_addr=10.0.18.3 best_addr=0.0.0.0
00:00:53: RADIUS(00000002): sending
00:00:53: RADIUS(00000002): Send to unknown id 21645/1 10.1.1.1 :1646, Accounting-Request,
len 76
00:00:53: RADIUS: authenticator C6 FE EA B2 1F 9A 85 A2 - 9A 5B 09 B5 36 B5 B9 27
00:00:53: RADIUS: Acct-Session-Id [44] 10 "00000002"
00:00:53: RADIUS: Framed-IP-Address [8] 6 10.0.0.10
00:00:53: RADIUS: Calling-Station-Id [31] 16 "00000c59df76"
00:00:53: RADIUS: Acct-Status-Type [40] 6 Start [1]
00:00:53: RADIUS: Service-Type [6] 6 Framed [2]
00:00:53: RADIUS: NAS-IP-Address [4] 6 10.0.18.3
00:00:53: RADIUS: Acct-Delay-Time [41] 6 0

```

The following is sample output from the **debug ip dhcp server events** command. The output was generated on a DHCP server and shows an exchange of DHCP messages between the client and server to negotiate a DHCP lease. The acknowledgment that confirms to the DHCP server that the client has accepted the assigned IP address triggers the accounting START message. It is shown in the last line of the following output:

```

00:45:50:DHCPD:DHCPDISCOVER received from client
0063.6973.636f.2d30.3030.312e.3432.6339.2e65.6337.352d.4574.31 on
interface Ethernet0.

00:45:52:DHCPD:assigned IP address 10.10.10.16 to client
0063.6973.636f.2d30.3030.312e.3432.6339.2e65.6337.352d.4574.31.

00:45:52:DHCPD:Sending DHCPPOFFER to client
0063.6973.636f.2d30.3030.312e.3432.6339.2e65.6337.352d.4574.31(10.10.10.16)

00:45:52:DHCPD:broadcasting BOOTREPLY to client 0001.42c9.ec75.

```

```

00:45:52:DHCPD:DHCPREQUEST received from client
0063.6973.636f.2d30.3030.312e.3432.6339.2e65.6337.352d.4574.31.

00:45:52:DHCPD:Sending DHCPACK to client
0063.6973.636f.2d30.3030.312e.3432.6339.2e65.6337.352d.4574.31
(10.10.10.16) .

00:45:52:DHCPD:broadcasting BOOTREPLY to client 0001.42c9.ec75.

00:45:52:DHCPD:triggered Acct Start for 0001.42c9.ec75 (10.10.10.16) .

```

The following is sample output from the **debug ip dhcp server events** command. The output was generated on a DHCP server and shows the receipt of an explicit release message from the DHCP client. The DHCP server triggers an accounting STOP message and then returns the IP address to the DHCP pool. Information about the accounting STOP message is shown in the third line of the following output:

```

00:46:26:DHCPD:DHCPRELEASE message received from client
0063.6973.636f.2d30.3030.312e.3432.6339.2e65.6337.352d.4574.31 (10.10.10.16)

00:46:26:DHCPD:triggered Acct Stop for (10.10.10.16) .

00:46:26:DHCPD:returned 10.10.10.16 to address pool WIRELESS-POOL.


```

DHCP Authorized ARP: Example

Router 1 is the DHCP server that assigns IP addresses to the routers that are seeking IP addresses, and Router 2 is the DHCP client configured to obtain its IP address through the DHCP server. Because the **update arp** DHCP pool configuration command is configured on Router 1, it will install a secure ARP entry in its ARP table. The **arp authorized** command stops any dynamic ARP on that interface. Router 1 will send periodic ARPs to Router 2 to make sure that the client is still active. Router 2 responds with an ARP reply. Unauthorized clients cannot respond to these periodic ARPs. The unauthorized ARP responses are blocked at the DHCP server. The timer for the entry is refreshed on Router 1 upon receiving the response from the authorized client.

See [Figure 1](#) for an example topology.

Figure 1 Example Topology for DHCP Authorized ARP

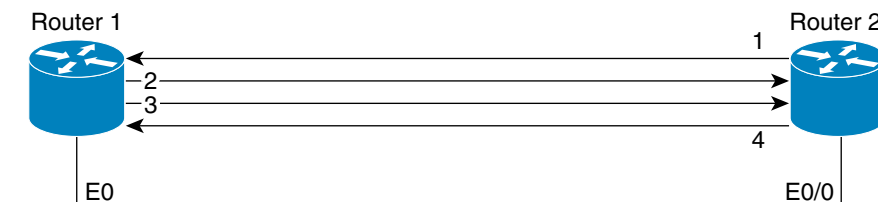

1. Send request for IP address.
2. Assign IP address and install secure ARP entry for it in Router 1.
3. Send periodic ARPs to make sure Router 2 is still active.
4. Reply to periodic ARPs.

103063

Router 1 (DHCP Server)

```

ip dhcp pool name1
network 10.0.0.0 255.255.255.0
lease 0 0 20
update arp

```

```

!
interface Ethernet0
 ip address 10.0.0.1 255.255.255.0
 half-duplex
 arp authorized
 arp timeout 60
 ! optional command to adjust the periodic ARP probes sent to the peer
 arp probe interval 5 count 15

```

Router 2 (DHCP Client)

```

interface Ethernet0/0
 ip address dhcp
 half-duplex

```

Verifying DHCP Authorized ARP: Example

The following is sample output for the **show arp** command on Router 1:

```

Router1# show arp

```

Protocol	Address	Age (min)	Hardware Addr	Type	Interface
Internet	10.0.0.3	0	0004.dd0c.ffcb	ARPA	Ethernet01
Internet	10.0.0.1	-	0004.dd0c.ff86	ARPA	Ethernet0

The following is the output for the **show arp** command on Router 2:

```

Router2# show arp

```

Protocol	Address	Age (min)	Hardware Addr	Type	Interface
Internet	10.0.0.3	-	0004.dd0c.ffcb	ARPA	Ethernet0/02
Internet	10.0.0.1	0	0004.dd0c.ff86	ARPA	Ethernet0/0

DHCP Lease Limit: Example

In the following example, if more than three clients try to obtain an IP address from interface ATM4/0.1, the DHCPDISCOVER packets will not be forwarded to the DHCP server. If the DHCP server resides on the same router, DHCP will not reply to more than three clients.

```

ip dhcp limit lease per interface 3
!
interface loopback0
 ip address 10.1.1.129 255.255.255.192
!
interface ATM4/0.1
 no ip address
!
interface ATM4/0.1 point-to-point
 ip helper-address 172.16.1.2
 ip unnumbered loopback0
 atm route-bridged ip
 pvc 88/800
 encapsulation aal5snap

```

Additional References

The following sections provide references related to configuring DHCP services for accounting and security.

Related Documents

Related Topic	Document Title
ARP commands DHCP commands	<i>Cisco IOS IP Command Reference, Volume 1 of 4: Addressing Services</i> , Release 12.4 T
DHCP conceptual information	“DHCP Overview” module
DHCP server configuration	“Configuring the Cisco IOS DHCP Server” module
DHCP ODAP configuration	“Configuring the DHCP Server On-Demand Address Pool Manager” module
DHCP client configuration	“Configuring the Cisco IOS DHCP Client” module
DHCP relay agent configuration	“Configuring the Cisco IOS DHCP Relay Agent” module
DHCP enhancements for edge-session management	“Configuring DHCP Enhancements for Edge-Session Management” module
AAA and RADIUS configuration tasks	<i>Cisco IOS Security Configuration Guide</i> , Release 12.4
AAA and RADIUS commands: complete command syntax, command mode, defaults, usage guidelines, and examples	<i>Cisco IOS Security Command Reference</i> , Release 12.4 T

Standards

Standards	Title
No new or modified standards are supported by this functionality.	—

MIBs

MIBs	MIBs Link
No new or modified MIBs are supported by this feature, and support for existing MIBs has not been modified by this feature.	To obtain lists of supported MIBs by platform and Cisco IOS release, and to download MIB modules, go to the Cisco MIB website on Cisco.com at the following URL: http://www.cisco.com/public/sw-center/netmgmt/cmtk/mibs.shtml

RFCs

RFCs	Title
No new or modified RFCs are supported by this feature, and support for existing RFCs has not been modified by this feature.	—

Technical Assistance

Description	Link
The Cisco Technical Support & Documentation website contains thousands of pages of searchable technical content, including links to products, technologies, solutions, technical tips, and tools. Registered Cisco.com users can log in from this page to access even more content.	http://www.cisco.com/techsupport

Feature Information for DHCP Services for Accounting and Security

Table 2 lists the features in this module and provides links to specific configuration information. Only features that were introduced or modified in Cisco IOS Releases 12.2(1) or later appear in the table.

Not all commands may be available in your Cisco IOS software release. For details on when support for specific commands was introduced, see the command reference documents.

For information on a feature in this technology that is not documented here, see the “[DHCP Features Roadmap](#)”.

Cisco IOS software images are specific to a Cisco IOS software release, a feature set, and a platform. Use Cisco Feature Navigator to find information about platform support and Cisco IOS software image support. Access Cisco Feature Navigator at <http://www.cisco.com/go/fn>. You must have an account on Cisco.com. If you do not have an account or have forgotten your username or password, click **Cancel** at the login dialog box and follow the instructions that appear.

Note

Table 2 lists only the Cisco IOS software release that introduced support for a given feature in a given Cisco IOS software release train. Unless noted otherwise, subsequent releases of that Cisco IOS software release train also support that feature.

Table 2 Feature Information for DHCP Services for Accounting and Security

Feature Name	Releases	Feature Configuration Information
ARP Auto-logoff	12.3(14)T	<p>The ARP Auto-logoff feature enhances DHCP authorized ARP by providing finer control and probing of authorized clients to detect a log off.</p> <p>The following sections provide information about this feature:</p> <ul style="list-style-type: none"> • DHCP Services for Security and Accounting Overview • Configuring DHCP Authorized ARP • DHCP Authorized ARP: Example <p>The following command was introduced by this feature: arp probe interval.</p>
DHCP Authorized ARP	12.3(4)T	<p>DHCP authorized ARP enhances the DHCP and ARP components of the Cisco IOS software to limit the leasing of IP addresses to mobile users to authorized users. This feature enhances security in PWLANs by blocking ARP responses from unauthorized users at the DHCP server.</p> <p>The following sections provide information about this feature:</p> <ul style="list-style-type: none"> • DHCP Services for Security and Accounting Overview • Configuring DHCP Authorized ARP • DHCP Authorized ARP: Example <p>The following command was introduced by this feature: arp authorized.</p>
DHCP Lease Limit per ATM RBE Unnumbered Interface	12.3(2)T 12.2(28)SB	<p>This feature limits the number of DHCP leases per subinterface offered to DHCP clients connected from an ATM RBE unnumbered interface or serial unnumbered interface of the DHCP server or DHCP relay agent.</p> <p>The following section provides information about this feature:</p> <ul style="list-style-type: none"> • Configuring a DHCP Lease Limit <p>The following command was introduced by this feature: ip dhcp limit lease per interface.</p>

Table 2 Feature Information for DHCP Services for Accounting and Security

Feature Name	Releases	Feature Configuration Information
DHCP Accounting	12.2(15)T 12.2(28)SB 12.2(33)SRB	DHCP accounting introduces AAA and RADIUS support for DHCP configuration. The following sections provide information about this feature: <ul style="list-style-type: none"> • DHCP Services for Security and Accounting Overview • Configuring DHCP Accounting The following command was introduced by this feature: accounting.
DHCP Secured IP Address Assignment	12.2(15)T 12.2(28)SB	DHCP secure IP address assignment provides the capability to secure ARP table entries to DHCP leases in the DHCP database. This feature secures and synchronizes the MAC address of the client to the DHCP binding, preventing unauthorized clients or hackers from spoofing the DHCP server and taking over a DHCP lease of an authorized client. The following sections provide information about this feature: <ul style="list-style-type: none"> • DHCP Services for Security and Accounting Overview • Securing ARP Table Entries to DHCP Leases The following command was introduced by this feature: update arp. The following command was modified by this feature: show ip dhcp server statistics.

CCVP, the Cisco logo, and Welcome to the Human Network are trademarks of Cisco Systems, Inc.; Changing the Way We Work, Live, Play, and Learn is a service mark of Cisco Systems, Inc.; and Access Registrar, Aironet, Catalyst, CCDA, CCDP, CCIE, CCIP, CCNA, CCNP, CCSP, Cisco, the Cisco Certified Internetwork Expert logo, Cisco IOS, Cisco Press, Cisco Systems, Cisco Systems Capital, the Cisco Systems logo, Cisco Unity, Enterprise/Solver, EtherChannel, EtherFast, EtherSwitch, Fast Step, Follow Me Browsing, FormShare, GigaDrive, HomeLink, Internet Quotient, IOS, iPhone, IP/TV, iQ Expertise, the iQ logo, iQ Net Readiness Scorecard, iQuick Study, LightStream, Linksys, MeetingPlace, MGX, Networkers, Networking Academy, Network Registrar, PIX, ProConnect, ScriptShare, SMARTnet, StackWise, The Fastest Way to Increase Your Internet Quotient, and TransPath are registered trademarks of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries.

All other trademarks mentioned in this document or Website are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (0711R)

Any Internet Protocol (IP) addresses used in this document are not intended to be actual addresses. Any examples, command display output, and figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses in illustrative content is unintentional and coincidental.

Copyright © 2006 Cisco Systems, Inc. All rights reserved.
This module first published May 2, 2005. Last updated February 27, 2006.