

# Cisco TelePresence ISDN Link


## Product Overview

The Cisco TelePresence<sup>®</sup> ISDN Link is a compact appliance for in-room ISDN and external network connectivity supporting Cisco TelePresence EX, MX, SX, and C Series endpoints (Figure 1). It provides direct connectivity to ISDN or external networks (V.35) for individual telepresence endpoints without the need for additional gateways or other infrastructure (Figure 2). The ISDN Link helps ensure that ISDN can be used as the primary, backup, or external connectivity for a high-quality and reliable telepresence experience.

**Figure 1.** Cisco TelePresence ISDN Link



**Figure 2.** ISDN Link in a Telepresence Network Configuration

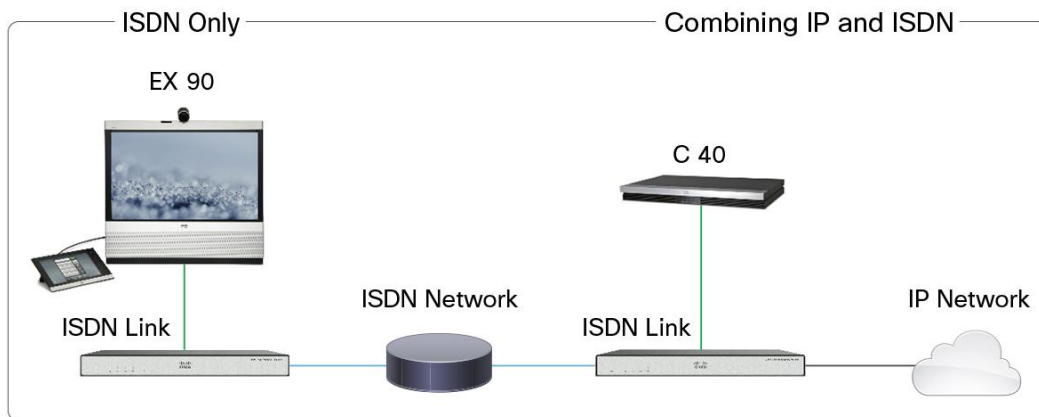

## Features and Benefits

The Cisco TelePresence ISDN Link design and performance features include:

- Smooth connectivity for IP-to-ISDN or IP-to-V.35 networks
- Support for up to 4 Basic Rate Interface (BRI) or 1 Primary Rate Interface (PRI) ISDN ports and external networks (cable standards V.35, RS530, RS449, and RS366)
- Easy setup and configuration directly through the endpoint's web interface (for endpoints with advanced support)
- ISDN connectivity for one endpoint, eliminating the need to buy an additional gateway

## Product Specifications

Table 1 lists the specifications for Cisco TelePresence ISDN Link.

**Table 1.** Product Specifications

<b>Endpoints Supported</b>	C20, C40, C60, C90, SX 20, SX 80, MX200 (G1 and G2), MX300 (G1 and G2), EX60, and EX90
<b>Bandwidth</b>	4 BRI up to 512 kbps; 1 PRI up to 1920 kbps; external networks up to 1920 kbps
<b>Video Standards</b>	H.261, H.263, H.263++, and H.264, depending upon codec support
<b>Audio Standards</b>	AAC-LD, G.711, G.722, G.722.1, G.729 G.728 point to point: C40, C60, and EX90 G.728 point to point and MultiSite: C90, SX20, MX200 G2, and MX300 G3
<b>Dual Stream</b>	H.239
<b>Maximum Concurrent Calls</b>	3 without encryption, 2 with encryption enabled
<b>Network Interfaces</b>	Four ISDN BRI (RJ-45) S/T interfaces; one E1/T1 (RJ-45) for ISDN PRI; two LAN/Ethernet (RJ-45) 10-/100-/1000-Mb (LAN); and one external network (V.35, RS530, RS449, and RS366)
<b>System Management</b>	Total management with Secure Shell (SSH) Protocol or serial port, or through advanced configuration on endpoint
<b>Power</b>	Auto-sensing power supply; 100-240 VAC; 50-60 Hz; 15 watts maximum
<b>Operating Temperature and Humidity</b>	32 to 95°F (0 to 35°C) ambient temperature; 10 to 90% relative humidity (RH)
<b>Network Management</b>	Storage and transport temperature
<b>Dimensions (H x W x D)</b>	1.18 x 11.02 x 6.69 in. (28 x 3 x 17 cm)

## Warranty Information

Find warranty information on Cisco.com at the [Product Warranties](#) page.

## Ordering Information

Table 2 gives ordering information for the Cisco TelePresence ISDN Link.

**Table 2.** Ordering Information

Product Name	Part Number	Compliance Model Number
ISDN Link	CTS-ISDNLINK-K9	TTC5-11
ISDN Link power supply spare part	PSU-12VDC-15W=	

## Cisco Services

Cisco® Services make networks, applications, and the people who use them work better together.

Today, the network is a strategic platform in a world that demands better integration among people, information, and ideas. The network works better when services, together with products, create solutions aligned with business needs and opportunities.

The unique Cisco Lifecycle approach to services defines the requisite activities at each phase of the network lifecycle to help ensure service excellence. With a collaborative delivery methodology that joins the forces of Cisco, our skilled network of partners, and our customers, we achieve the best results.

---

## Cisco Capital

### Financing to Help You Achieve Your Objectives

Cisco Capital can help you acquire the technology you need to achieve your objectives and stay competitive. We can help you reduce CapEx. Accelerate your growth. Optimize your investment dollars and ROI. Cisco Capital financing gives you flexibility in acquiring hardware, software, services, and complementary third-party equipment. And there's just one predictable payment. Cisco Capital is available in more than 100 countries. [Learn more.](#)

### For More Information

For more information about the Cisco TelePresence ISDN Link, visit

<http://www.cisco.com/en/US/products/ps12504/index.html> or contact your local Cisco account representative.



---

Americas Headquarters  
Cisco Systems, Inc.  
San Jose, CA

Asia Pacific Headquarters  
Cisco Systems (USA) Pte. Ltd.  
Singapore

Europe Headquarters  
Cisco Systems International BV Amsterdam,  
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at [www.cisco.com/go/offices](http://www.cisco.com/go/offices).

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: [www.cisco.com/go/trademarks](http://www.cisco.com/go/trademarks). Third party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)