

Table of Contents

<u>DLSw for Multidrop SDLC with PU 2.1 and PU 2.0</u>	1
<u>Document ID: 9103</u>	1
<u>Introduction</u>	1
<u>Prerequisites</u>	1
<u>Requirements</u>	1
<u>Components Used</u>	1
<u>Conventions</u>	1
<u>Configure</u>	1
<u>Network Diagram</u>	2
<u>Configurations</u>	2
<u>Verify</u>	3
<u>Troubleshoot</u>	3
<u>Related Information</u>	3

DLSw for Multidrop SDLC with PU 2.1 and PU 2.0

Document ID: 9103

Introduction

Prerequisites

Requirements

Components Used

Conventions

Configure

Network Diagram

Configurations

Verify

Troubleshoot

Related Information

Introduction

This document provides a sample configuration for Data Link Switching (DLSw) Synchronous Data Link Control (SDLC) Physical Unit (PU) 2.1 and PU 2.0 multidrop.

Prerequisites

Requirements

There are no specific prerequisites for this document.

Components Used

This document is not restricted to specific software and hardware versions.

- Cisco IOS® Software Release 11.0

The information in this document was created from the devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. If your network is live, make sure that you understand the potential impact of any command.

Conventions

For more information on document conventions, refer to the Cisco Technical Tips Conventions.


Configure

In this section, you are presented with the information to configure the features described in this document.

Note: To find additional information on the commands used in this document, use the Command Lookup Tool (registered customers only).

Network Diagram

This document uses the network setup shown in this diagram:

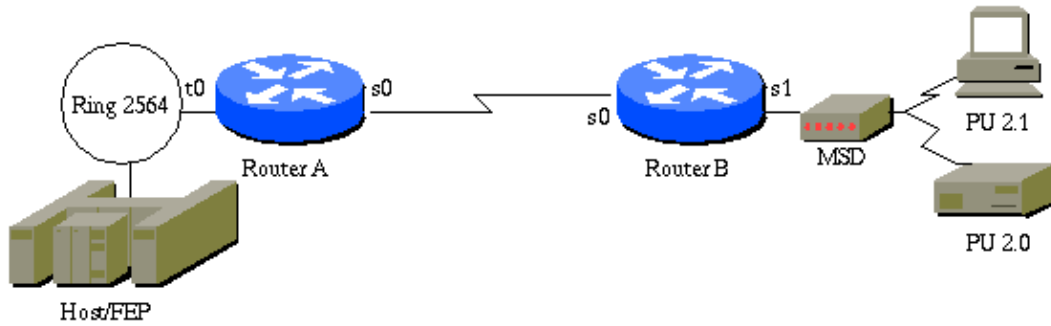

Configurations

This document uses the configurations shown here:

- RouterA
- RouterB

```
RouterA
hostname RouterA
source-bridge ring-group 100
dlsw local-peer peer-id 1.1.1.11
dlsw remote-peer 0 tcp 1.1.1.12

interface TokenRing0
no ip address
ring-speed 16
source-bridge 2564 1 100
source-bridge spanning

interface Serial0
ip address 1.1.1.11 255.0.0.0
```

```
RouterB
hostname RouterB
dlsw local-peer peer-id 1.1.1.12
dlsw remote-peer 0 tcp 1.1.1.11

interface Serial0
ip address 1.1.1.12 255.0.0.0

interface Serial1
mtu 4400
no ip address
encapsulation sdhc
no keepalive
clockrate 19200
sdhc role primary
sdhc vmac 4000.1234.5600
sdhc N1 27200
sdhc address C1
sdhc xid C1 05DCCCC1
```

```
sdhc partner 4001.3745.1088 C1
sdhc address C2 xid-poll
sdhc partner 4001.3745.1088 C2
sdhc dlsw C1 C2
```

Note:

- You must use the **sdhc role primary** command for multidrop.
- In the **sdhc address C2 xid-poll** command, **xid-poll** indicates that this PU is a 2.1 device.
- The **sdhc vmac 4000.1234.5600** command specifies the MAC address that represents the SDLC devices as if they are on a Token Ring (Logical Link Control [LLC]) network. The SDLC address of each PU is inserted into the last two bytes of the virtual MAC address.
- The **sdhc partner 4001.3745.1088 C1** command specifies the Host Token Ring MAC address, in this case, the Front End Processor (FEP).
- The **sdhc xid C1 05DCCCC1** command generates the Exchange Identification (XID) Format 0 Type 2 (F0 T2) for PU 2.0 devices.
- The **sdhc dlsw C1 C2** command binds these PUs to the DLSw+ feature.

Verify

There is currently no verification procedure available for this configuration.

Troubleshoot

This section provides information you can use to troubleshoot your configuration.

The **sdhc test serial <slot/port> <sdhc pooling address>** command, for example **sdhc test serial 1 C1**, can be used to determine whether the controller has been configured with the correct SDLC polling address and troubleshoot an incorrect configuration.

These debugs can be used to see what traffic is passed between the controller and the router for the purposes of troubleshooting:

- **debug sdhc events**
- **debug sdhc packets**

Related Information

- [Troubleshooting DLSw](#)
- [DLSw and DLSw+ Technical Support](#)
- [Technical Support – Cisco Systems](#)

All contents are Copyright © 1992–2004 Cisco Systems, Inc. All rights reserved. Important Notices and Privacy Statement.

Updated: Nov 02, 2004

Document ID: 9103
