



IEEE 802.1ah on Provider Backbone Bridges

Last Updated: October 2, 2011

The IEEE 802.1ah on Provider Backbone Bridges feature enables MAC-in-MAC tunneling on Ethernet virtual circuits (EVCs).

- [Finding Feature Information, page 1](#)
- [Prerequisites for IEEE 802.1ah on Provider Backbone Bridges, page 1](#)
- [Restrictions for IEEE 802.1ah on Provider Backbone Bridges, page 2](#)
- [Information About IEEE 802.1ah on Provider Backbone Bridges, page 2](#)
- [How to Configure MAC-in-MAC on Provider Backbone Bridges, page 7](#)
- [Configuration Examples for MAC-in-MAC on Provider Backbone Bridges, page 20](#)
- [Additional References, page 23](#)
- [Feature Information for IEEE 802.1ah on Provider Backbone Bridges, page 24](#)

Finding Feature Information

Your software release may not support all the features documented in this module. For the latest feature information and caveats, see the release notes for your platform and software release. To find information about the features documented in this module, and to see a list of the releases in which each feature is supported, see the Feature Information Table at the end of this document.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Prerequisites for IEEE 802.1ah on Provider Backbone Bridges

- The router configuration must include an ES40 line card, because the Institute of Electrical and Electronic Engineers (IEEE) 802.1ah standard is supported on ES40 line cards only.
- IEEE 802.1ah is supported on EVC architecture only.



Americas Headquarters:
Cisco Systems, Inc., 170 West Tasman Drive, San Jose, CA 95134-1706 USA

Restrictions for IEEE 802.1ah on Provider Backbone Bridges

- The following features are not supported:
 - Connectivity Fault Management (CFM) over 802.1ah
 - Internet Group Multicast Protocol (IGMP) snooping or any multicast protocol on the customer-bridge (c-bridge) domain
 - Standalone customer-facing backbone edge bridge (I-BEB)
 - Standalone backbone core bridge-facing backbone edge bridge (B-BEB)
- The following limits apply to this feature:
 - Maximum number of MAC tunnels is 4094.
 - Maximum number of service instances under MAC tunnels is 16,384.
 - Maximum number of Ethernet Flow Points (EFP) is 32,768.
 - Maximum number of EFPs on a single interface is 8000.
 - 802.1ah on the port channel is supported for one member link per port channel only.

Information About IEEE 802.1ah on Provider Backbone Bridges

- [MAC-in-MAC, page 2](#)
- [Backbone Edge Bridges, page 3](#)
- [IB-Bridges, page 3](#)
- [IEEE 802.1ah for L2 Bridging Networks, page 4](#)
- [IEEE 802.1ah for Ethernet Over MPLS, page 6](#)
- [IEEE 802.1ah for Virtual Private LAN Services, page 6](#)

MAC-in-MAC


The IEEE 802.1ah on Provider Backbone Bridges feature encapsulates the end users traffic inside the service providers MAC header, enabling the backbone edge bridge (BEB) to support large numbers of service instances. This functionality is also known as MAC-in-MAC or MAC Tunneling Protocol (MTP). It also allows service providers to hide the identity of their equipment vendors by using user-specified MAC address as the tunnel source address. It also separates the user MAC address space from the provider MAC address space which means that only the edge bridges are aware of the customer MAC addresses, and that only the core bridges are aware of the provider addresses.

The figure below shows a typical 802.1ah PBB network and the table below describes the PBB network components.

Table 1 IEEE 802.1ah PBB Components

| Component | Description |
|-----------|----------------------|
| BCB | Backbone core bridge |

| Component | Description |
|-----------|----------------------|
| BEB | Backbone edge bridge |
| CE | Customer equipment |
| PB | Provider bridge |
| PEB | Provider edge bridge |

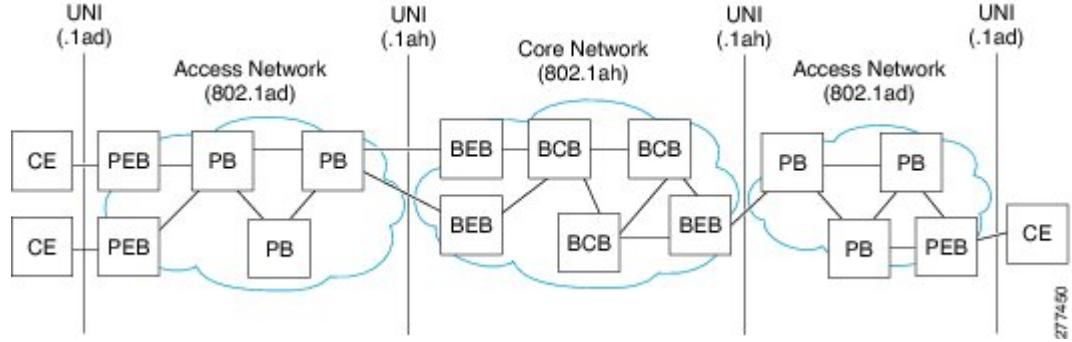

Backbone Edge Bridges

BEBs can contain either an I-Component or a B-Component. The I-Component maps Service VLAN identifiers (S-VIDs) to service instance identifiers (I-SIDs) and adds a PBB header without a B-Tag. The B-Component maps I-SIDs to backbone VLANs (B-VIDs) and adds a PBB header with a B-Tag. The IEEE 802.1ah standard specifies the following three types of BEBs:

- The B-Bridge (B-BEB) contains the B-Component of the MAC-in-MAC bridge. It validates the I-SIDs and maps the frames onto the backbone VLAN (B-VLAN). It also switches traffic based on the B-VLANS within the core bridge.
- The I-Bridge (I-BEB) contains the I-Component of the MAC-in-MAC bridge. It performs B-MAC encapsulation and inserts the I-SIDs based on the S-tags, C-tags, or S-tag/C-tag pairs.
- The IB-Bridge (IB-BEB) contains one or more I-Components and a single B-Component interconnected via a LAN segment.



Note

The Cisco 7600 series routers are designed to work as IB-Bridges.

IB-Bridges

The IB-Bridge contains both the I-Component and the B-Component. The bridge selects the B-MAC and inserts the I-SID based on the provider VLAN tag (S-tag), the customer VLAN tag (C-tag), or both the S-tag and the C-tag. It validates the I-SIDs and it transmits and receives frames on the B-VLAN.

The IB-Bridge has two types of interfaces:

- Port-based interface: On port-based interfaces all S-tagged frames received from a customer are mapped to an I-SID and the S-tags are preserved.

- S-tagged interface: S-tagged interfaces support one-to-one mapping of an S-VLAN to an I-SID to provide S-VLAN translation capabilities. They also support many-to-one mapping of S-VLANs to an I-SID to provide S-VLAN bundling capability.

The IEEE 802.1ah on Provider Backbone Bridges feature supports all services mandated by the IEEE 802.1ah standard and extends the services to provide additional functionality as follows:


- S-Tagged Service:
 - In multiplexed environments each S-tag maps to an I-SID and may be retained or removed.
 - In bundled environments multiple S-tags map to the same I-SID and the S-tags must be retained.
- C-Tagged Service:
 - In multiplexed environments each C-tag maps to an I-SID and may be retained or removed.
 - In bundled environments multiple C-tags map to the same I-SID and the C-tags must be retained.
- S/C-Tagged Service:
 - In multiplexed environments each S-tag/C-tag pair maps to an I-SID. The S-tag or the S-tag/C-tag pair may be retained or removed.
 - In bundled environments multiple S-tag/C-tags pairs map to the same I-SID and the S-tag/C-tag pair must be retained.
- Port-based Service
 - Any frame whether untagged or double tagged is mapped to the same I-SID and all tags are retained.

IEEE 802.1ah for L2 Bridging Networks

When IEEE 802.1ah is configured on PBBs in an L2 bridging network the packets on the ingress EFP are tunneled to the appropriate MAC tunnel using the bridging identifier in the I-Component (specified using the **bridge-domain c-mac** command). If multiple EFPs use the same I-SID then the C-MAC bridge domain also performs the switching between the EFPs.

The figure below shows a typical L2 bridging network configuration.

Figure 1 IEEE 802.1ah L2 Bridging Network

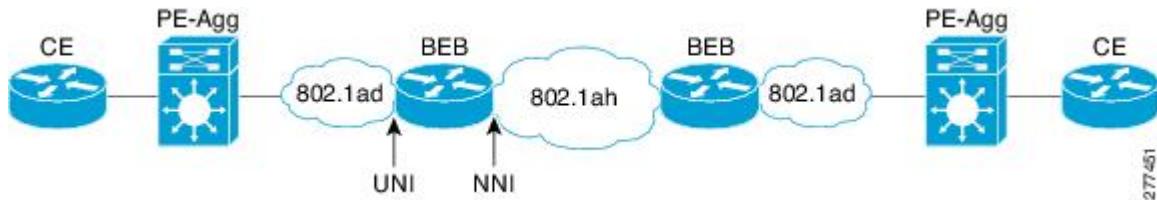

The table below describes the components of the L2 bridging network.

Table 2 L2 Bridging Network Components

| Component Name | Description |
|----------------|---|
| 802.1ad | IEEE 802.1ad (provider bridges) network |
| 802.1ah | IEEE 802.1ah (provider backbone bridge) network |


| Component Name | Description |
|----------------|---|
| BEB | Backbone edge bridge |
| CE | Customer equipment |
| NNI | Network-to-network interface (egress EFP) |
| PE-Agg | Provider edge aggregation device |
| UNI | User-Network Interface (ingress EFP) |

- Unknown Unicast and Customer Multicast Traffic, page 5

Unknown Unicast and Customer Multicast Traffic

The figure below shows an L2 network where all the BEBs are connected to each other through a single Backbone VLAN (B-VLAN). In this scenario any unknown unicast traffic from BEB1 is forwarded to BEB2 through to BEB5 because they all share the same B-VLAN.

Figure 2 **BEB B-VLAN Network**

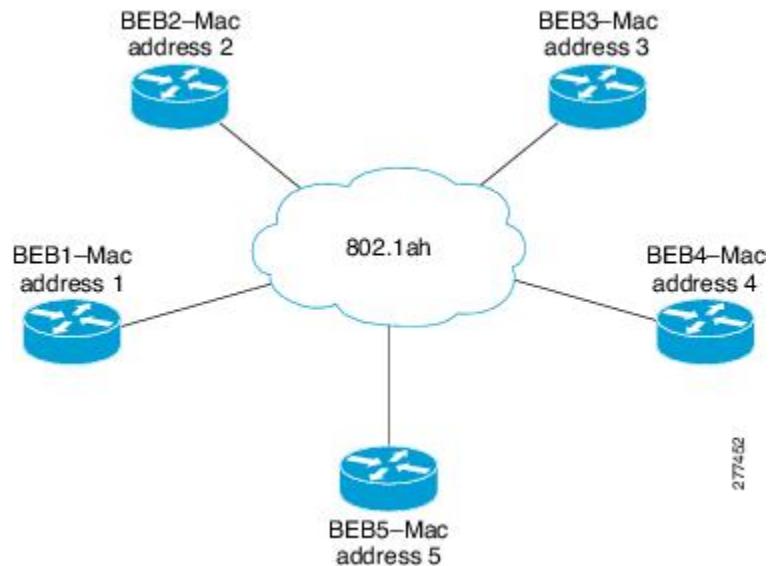

In order to reduce network traffic you can configure a BEB to send traffic to specific BEBs on the B-VLAN. For example, if BEB1 needs to send traffic to BEB3 and BEB4 only, you can use the **mac tunnel address destination map** command to map the customer destination address (C-DA) to a multicast backbone destination address (B-DA). BEB3 and BEB4 are then registered to receive traffic for this B-DA.


All packets within the 802.1ah network must be sent to a specified MAC address. The address is a static entry in the MAC address tables in the backbone core bridges. If a default MAC tunnel address is not specified in the table, then all unknown unicast packets and customer multicast traffic are sent with the default B-DA, which is a combination of IEEE-assigned Organizational Unique Identifier (OUI) and the I-SID values.

IEEE 802.1ah for Ethernet Over MPLS

When IEEE 802.1ah is configured on Ethernet over Multiprotocol Label Switching (EoMPLS) networks, the Ethernet links are transported as pseudowires using MPLS label switched paths (LSPs) inside an MPLS tunnel. To configure MAC-in-MAC on EoMPLS networks you must specify ingress EFP configuration settings at the UNI, specify MAC-in-MAC settings, and specify switch virtual interface (SVI) configuration settings at the egress NNI. The SVI represents a VLAN of switch ports connected to the bridge via a single interface.

The figure below shows a typical EoMPLS network configuration.

Figure 3 IEEE 802.1ah EoMPLS Network

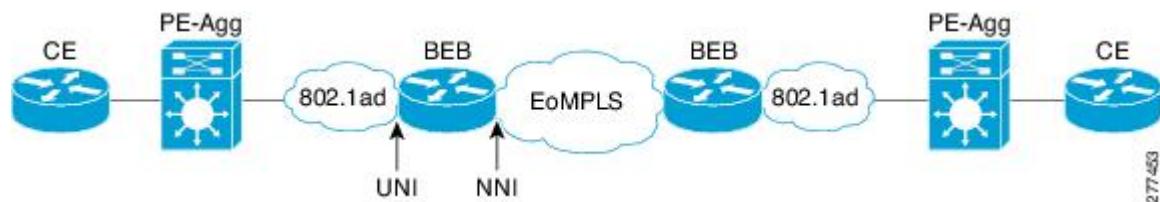

Note

In EoMPLS networks Cisco 7600 series routers use the bridge domain identifier (set using the **bridge-domain** command) as the B-tag identifier. Therefore it is not necessary to specify B-VLAN configuration for the MAC-in-MAC tunnel.


IEEE 802.1ah for Virtual Private LAN Services

When IEEE 802.1ah is configured on virtual private LAN service (VPLS) networks the 802.1ah packets are encapsulated in the VPLS pseudowire.

To configure MAC-in-MAC on VPLS networks you must specify the ingress EFP configuration settings at the UNI, specify the MAC-in-MAC settings, specify the virtual forwarding interface (VFI) settings, and specify the SVI configuration settings at the egress NNI. The SVI represents a VLAN of switch ports connected to the bridge via a single interface.

The figure below shows two 802.1ah networks connected by VPLS.

Figure 4 IEEE 802.1ah VPLS Network

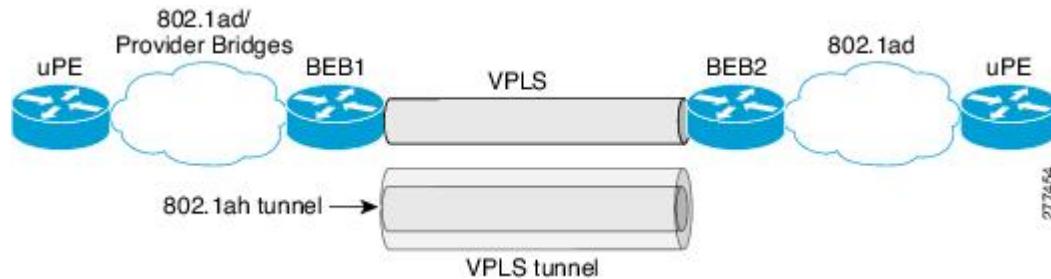

How to Configure MAC-in-MAC on Provider Backbone Bridges

- [Configuring MAC-in-MAC in an L2 Bridging Network, page 7](#)
- [Configuring MAC-in-MAC in an Ethernet over MPLS Network, page 11](#)
- [Configuring MAC-in-MAC in a VPLS Network, page 15](#)

Configuring MAC-in-MAC in an L2 Bridging Network

Perform this task to configure MAC-in-MAC in an L2 bridging network where the NNI has a switchport-based configuration.

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **interface gigabitethernet *slot / port***
4. **service instance *id* ethernet**
5. **encapsulation dot1q *vlan-id***
6. **bridge-domain *bridge-id* c-mac**
7. **exit**
8. **exit**
9. **ethernet mac-tunnel virtual *tunnel-id***
10. **description *description***
11. **bridge-domain *bridge-id***
12. **mac tunnel address destination default *mac-addr***
13. **service instance *id* ethernet**
14. **encapsulation dot1ah *isid* *isid***
15. **mac tunnel address destination map *c-mac-addr* *b-mac-addr***
16. **bridge-domain *bridge-id* c-mac**
17. **exit**
18. **exit**
19. **interface gigabitethernet *slot / port***
20. **switchport**
21. **switchport mode trunk**
22. **switchport trunk allowed vlan *vlan-id***
23. **end**
24. **show bridge-domain**
25. **show ethernet mac-tunnel engine slot *slot-number***
26. **show ethernet service instance**
27. **show ethernet service mac-tunnel**

DETAILED STEPS

| Command or Action | Purpose |
|---|--|
| Step 1 <code>enable</code> Example: <pre>Router> enable</pre> | Enables privileged EXEC mode. <ul style="list-style-type: none"> Enter your password if prompted. |
| Step 2 <code>configure terminal</code> Example: <pre>Router# configure terminal</pre> | Enters global configuration mode. |
| Step 3 <code>interface gigabitethernet slot / port</code> Example: <pre>Router(config)# interface gigabitethernet 6/1</pre> | Specifies the Gigabit Ethernet interface to configure as the customer instance port and enters interface configuration mode. |
| Step 4 <code>service instance id ethernet</code> Example: <pre>Router(config-if)# service instance 101 ethernet</pre> | Creates an L2 service instance on an interface and enters service instance configuration mode. |
| Step 5 <code>encapsulation dot1q vlan-id</code> Example: <pre>Router(config-if-srv)# encapsulation dot1q 13</pre> | Defines the matching criteria to be used in order to map ingress dot1q frames on an interface to the appropriate service instance. |
| Step 6 <code>bridge-domain bridge-id c-mac</code> Example: <pre>Router(config-if-srv)# bridge-domain 12 c-mac</pre> | Specifies the bridging identifier in the I-Component. |
| Step 7 <code>exit</code> Example: <pre>Router(config-if-srv)# exit</pre> | Exits service instance configuration mode. |

| Command or Action | Purpose |
|---|---|
| Step 8 <code>exit</code> | Exits service interface configuration mode. |
| Example: <pre>Router(config-if)# exit</pre> | |
| Step 9 <code>ethernet mac-tunnel virtual <i>tunnel-id</i></code> Example: <pre>Router(config)# ethernet mac-tunnel virtual 1</pre> | Configures a virtual MAC-in-MAC tunnel and enters MAC-in-MAC tunnel configuration mode. |
| Step 10 <code>description <i>description</i></code> Example: <pre>Router(config-tunnel-minm)# description MAC-Tunnel-1</pre> | (Optional) Describes the name and purpose of the MAC tunnel. |
| Step 11 <code>bridge-domain <i>bridge-id</i></code> Example: <pre>Router(config-tunnel-minm)# bridge-domain 100</pre> | Binds the MAC tunnel to the bridge domain instance. |
| Step 12 <code>mac tunnel address destination default <i>mac-addr</i></code> Example: <pre>Router(config-tunnel-minm)# mac tunnel address destination default 4444.1111.1111</pre> | Specifies a B-DA for a group of service instance IDs (I-SIDs). |
| Step 13 <code>service instance <i>id</i> ethernet</code> Example: <pre>Router(config-tunnel-minm)# service instance 10 ethernet</pre> | Defines an EFP that corresponds to a specific I-SID encapsulation and enters tunnel service configuration mode. |
| Step 14 <code>encapsulation dot1ah isid <i>isid</i></code> Example: <pre>Router(config-tunnel-srv)# encapsulation dot1ah isid 10000</pre> | Configures dot1ah encapsulation for the specified I-SID. |

| Command or Action | Purpose |
|---|--|
| Step 15 <code>mac tunnel address destination map c-mac-addr b-mac-addr</code> | Maps the service provider backbone bridge MAC address to a customer MAC address. |
| Example: <pre>Router(config-tunnel-srv)# mac tunnel address destination map 3333.1111.1111 5555.2222.2222</pre> | |
| Step 16 <code>bridge-domain bridge-id c-mac</code> | Configures the bridge domain as a customer domain. |
| Example: <pre>Router(config-tunnel-srv)# bridge-domain 30 c-mac</pre> | |
| Step 17 <code>exit</code> | Exits tunnel service configuration mode. |
| Example: <pre>Router(config-tunnel-srv)# exit</pre> | |
| Step 18 <code>exit</code> | Exits MAC-in-MAC tunnel configuration mode. |
| Example: <pre>Router(config-tunnel-minm)# exit</pre> | |
| Step 19 <code>interface gigabitethernet slot / port</code> | Specifies the Gigabit Ethernet interface to configure as the bridge instance port and enters interface configuration mode. |
| Example: <pre>Router(config)# interface gigabitethernet 6/2</pre> | |
| Step 20 <code>switchport</code> | Modifies the switching characteristics of the L2 switched interface. |
| Example: <pre>Router(config-if)# switchport</pre> | |
| Step 21 <code>switchport mode trunk</code> | Specifies a trunking VLAN L2 interface. |
| Example: <pre>Router(config-if)# switchport mode trunk</pre> | |

| Command or Action | Purpose |
|--|--|
| Step 22 switchport trunk allowed vlan <i>vlan-id</i> Example: Router(config-if)# switchport trunk allowed vlan 100 | Sets the list of allowed VLANs that transmit traffic from this interface in tagged format when in trunking mode. |
| Step 23 end Example: Router(config-if)# end | Exits interface configuration mode and enables user EXEC mode. |
| Step 24 show bridge-domain Example: Router> show bridge-domain | (Optional) Displays bridge-domain information. |
| Step 25 show ethernet mac-tunnel engine slot <i>slot-number</i> Example: Router> show ethernet mac-tunnel engine slot 2 | (Optional) Displays Ethernet MAC-in-MAC information. |
| Step 26 show ethernet service instance Example: Router> show ethernet service instance | (Optional) Displays Ethernet service instance information. |
| Step 27 show ethernet service mac-tunnel Example: Router> show ethernet service mac-tunnel | (Optional) Displays Ethernet service MAC-in-MAC information. |

Configuring MAC-in-MAC in an Ethernet over MPLS Network

Perform this task to configure MAC-in-MAC in an EoMPLS network.

SUMMARY STEPS

1. enable
2. configure terminal
3. interface gigabitethernet *slot / port*
4. service instance *id* ethernet
5. encapsulation dot1q *vlan-id*
6. bridge-domain *bridge-id* c-mac
7. exit
8. exit
9. ethernet mac-tunnel virtual *tunnel-id*
10. bridge-domain *bridge-id*
11. service instance *id* ethernet
12. encapsulation dot1ah isid *isid*
13. bridge-domain *bridge-id* c-mac
14. exit
15. exit
16. interface vlan *vlanid*
17. xconnect *ipaddress vc-id encapsulation mpls*
18. exit

DETAILED STEPS

| | Command or Action | Purpose |
|---------------|---|---|
| Step 1 | enable | Enables privileged EXEC mode. <ul style="list-style-type: none"> • Enter your password if prompted. Example: <pre>Router> enable</pre> |
| Step 2 | configure terminal | Enters global configuration mode. |
| Step 3 | interface gigabitethernet <i>slot / port</i> | Specifies the Gigabit Ethernet interface to configure as the customer instance port and enters interface configuration mode. |

| Command or Action | Purpose |
|--|--|
| Step 4 <code>service instance <i>id</i> ethernet</code> | Creates an L2 service instance on an interface and enters service instance configuration mode. |
| Example: <pre>Router(config-if)# service instance 101 ethernet</pre> | |
| Step 5 <code>encapsulation dot1q <i>vlan-id</i></code> | Defines the matching criteria to be used in order to map ingress dot1q frames on an interface to the appropriate service instance. |
| Example: <pre>Router(config-if-srv)# encapsulation dot1q 13</pre> | |
| Step 6 <code>bridge-domain <i>bridge-id</i> c-mac</code> | Specifies the bridging identifier in the I-Component. |
| Example: <pre>Router(config-if-srv)# bridge-domain 12 c-mac</pre> | |
| Step 7 <code>exit</code> | Exits service instance configuration mode. |
| Example: <pre>Router(config-if-srv)# exit</pre> | |
| Step 8 <code>exit</code> | Exits interface configuration mode. |
| Example: <pre>Router(config-if)# exit</pre> | |
| Step 9 <code>ethernet mac-tunnel virtual <i>tunnel-id</i></code> | Configures a virtual MAC-in-MAC tunnel and enters MAC-in-MAC tunnel configuration mode. |
| Example: <pre>Router(config)# ethernet mac-tunnel virtual 1</pre> | |
| Step 10 <code>bridge-domain <i>bridge-id</i></code> | Binds the MAC tunnel to the bridge domain instance. |
| Example: <pre>Router(config-tunnel-minm)# bridge-domain 100</pre> | |

| Command or Action | Purpose |
|--|---|
| Step 11 <code>service instance <i>id</i> ethernet</code> Example: <pre>Router(config-tunnel-minm)# service instance 10 ethernet</pre> | Defines an EFP that corresponds to a specific I-SID encapsulation and enters tunnel service configuration mode. |
| Step 12 <code>encapsulation dot1ah isid <i>isid</i></code> Example: <pre>Router(config-tunnel-srv)# encapsulation dot1ah isid 10000</pre> | Configures dot1ah encapsulation for the specified I-SID. |
| Step 13 <code>bridge-domain <i>bridge-id</i> c-mac</code> Example: <pre>Router(config-tunnel-srv)# bridge-domain 30 c-mac</pre> | Configures the bridge domain as a customer domain. |
| Step 14 <code>exit</code> Example: <pre>Router(config-tunnel-srv)# exit</pre> | Exits tunnel service configuration mode. |
| Step 15 <code>exit</code> Example: <pre>Router(config-tunnel-minm)# exit</pre> | Exits MAC-in-MAC tunnel configuration mode. |
| Step 16 <code>interface vlan <i>vlanid</i></code> Example: <pre>Router(config)# interface vlan 1000</pre> | Creates a dynamic SVI, and enters interface configuration mode. |
| Step 17 <code>xconnect <i>ipaddress vc-id</i> encapsulation mpls</code> Example: <pre>Router(config-if)# xconnect 10.243.245.11 100 encapsulation mpls</pre> | Binds the attachment circuit to the pseudowire, and configures an Any Transport over MPLS (AToM) static pseudowire. <ul style="list-style-type: none"> Specifies MPLS as the tunneling method to encapsulate the data in the pseudowire. |

| Command or Action | Purpose |
|---------------------|---------------------------------------|
| Step 18 exit | Returns to global configuration mode. |

Example:

```
Router(config-if)# exit
```

Configuring MAC-in-MAC in a VPLS Network

Perform this task to configure MAC-in-MAC in a VPLS network. The following configuration enables the router to work as an IB-Bridge.

**Note**

On Cisco 7600 series routers the bridge-domain identifier must be the same as the SVI identifier.

SUMMARY STEPS

1. enable
2. configure terminal
3. interface gigabitethernet *slot / port*
4. service instance *id* ethernet
5. encapsulation dot1q *vlan-id*
6. bridge-domain *bridge-id* c-mac
7. exit
8. exit
9. ethernet mac-tunnel virtual *tunnel-id*
10. bridge-domain *bridge-id*
11. service instance *id* ethernet
12. encapsulation dot1ah isid *isid*
13. bridge-domain *bridge-id* c-mac
14. exit
15. service instance *id* ethernet
16. encapsulation dot1ah isid *isid*
17. bridge-domain *bridge-id* c-mac
18. exit
19. exit
20. l2 vfi *vfi-name* manual
21. vpn id *vpn-id*
22. neighbor *ipaddress* *vcid* encapsulation mpls
23. neighbor *ipaddress* *vcid* encapsulation mpls
24. exit
25. interface vlan *vlanid*
26. xconnect *ipaddress* *vc-id* encapsulation mpls
27. exit

DETAILED STEPS

| | Command or Action | Purpose |
|--------|-------------------|---|
| Step 1 | enable | <p>Enables privileged EXEC mode.</p> <ul style="list-style-type: none"> • Enter your password if prompted. <p>Example:</p> <pre>Router> enable</pre> |

| Command or Action | Purpose |
|---|--|
| Step 2 <code>configure terminal</code> | Enters global configuration mode. |
| Example: <pre>Router# configure terminal</pre> | |
| Step 3 <code>interface gigabitethernet slot / port</code> Example: <pre>Router(config)# interface gigabitethernet 6/1</pre> | Specifies the Gigabit Ethernet interface to configure as the customer instance port and enters interface configuration mode. |
| Step 4 <code>service instance id ethernet</code> Example: <pre>Router(config-if)# service instance 101 ethernet</pre> | Creates an L2 service instance on an interface and enters service instance configuration mode. |
| Step 5 <code>encapsulation dot1q vlan-id</code> Example: <pre>Router(config-if-srv)# encapsulation dot1q 13</pre> | Defines the matching criteria to be used in order to map ingress dot1q frames on an interface to the appropriate service instance. |
| Step 6 <code>bridge-domain bridge-id c-mac</code> Example: <pre>Router(config-if-srv)# bridge-domain 12</pre> | Specifies the bridging identifier in the I-Component. |
| Step 7 <code>exit</code> Example: <pre>Router(config-if-srv)# exit</pre> | Exits service instance configuration mode. |
| Step 8 <code>exit</code> Example: <pre>Router(config-if)# exit</pre> | Exits interface configuration mode. |

| Command or Action | Purpose |
|--|---|
| Step 9 <code>ethernet mac-tunnel virtual <i>tunnel-id</i></code> | Configures a virtual MAC-in-MAC tunnel and enters MAC-in-MAC tunnel configuration mode. |
| Example: <pre>Router(config)# ethernet mac-tunnel virtual 1</pre> | |
| Step 10 <code>bridge-domain <i>bridge-id</i></code> | Binds the MAC tunnel to the bridge domain instance. |
| Example: <pre>Router(config-tunnel-minm)# bridge-domain 100</pre> | |
| Step 11 <code>service instance <i>id</i> ethernet</code> | Defines an EFP that corresponds to a specific I-SID encapsulation and enters tunnel service configuration mode. |
| Example: <pre>Router(config-tunnel-minm)# service instance 31 ethernet</pre> | |
| Step 12 <code>encapsulation dot1ah isid <i>isid</i></code> | Configures dot1ah encapsulation for the specified I-SID. |
| Example: <pre>Router(config-tunnel-srv)# encapsulation dot1ah isid 10000</pre> | |
| Step 13 <code>bridge-domain <i>bridge-id</i> c-mac</code> | Configures the bridge domain as a customer domain. |
| Example: <pre>Router(config-tunnel-srv)# bridge-domain 10 c-mac</pre> | |
| Step 14 <code>exit</code> | Exits tunnel service configuration mode. |
| Example: <pre>Router(config-tunnel-srv)# exit</pre> | |
| Step 15 <code>service instance <i>id</i> ethernet</code> | Defines an EFP that corresponds to a specific I-SID encapsulation and enters tunnel service configuration mode. |
| Example: <pre>Router(config-tunnel-minm)# service instance 41 ethernet</pre> | |

| Command or Action | Purpose |
|---|---|
| Step 16 encapsulation dot1ah isid <i>isid</i> | Configures dot1ah encapsulation for the specified I-SID. |
| Example: <pre>Router(config-tunnel-srv)# encapsulation dot1ah isid 20000</pre> | |
| Step 17 bridge-domain <i>bridge-id</i> c-mac | Configures the bridge domain as a customer domain. |
| Example: <pre>Router(config-tunnel-srv)# bridge-domain 20 c-mac</pre> | |
| Step 18 exit | Exits tunnel service configuration mode. |
| Example: <pre>Router(config-tunnel-srv)# exit</pre> | |
| Step 19 exit | Exits MAC-in-MAC tunnel configuration mode. |
| Example: <pre>Router(config-tunnel-minm)# exit</pre> | |
| Step 20 l2 vfi <i>vfi-name</i> manual | Configures a virtual forwarding instance and enters L2 VFI point-to-point configuration mode. |
| Example: <pre>Router(config)# l2 vfi myvfi manual</pre> | |
| Step 21 vpn id <i>vpn-id</i> | Sets a VPN ID on a VPN routing and forwarding (VRF) instance. |
| Example: <pre>Router(config-vfi)# vpn id 20</pre> | |
| Step 22 neighbor <i>ipaddress</i> <i>vcid</i> encapsulation mpls | Specifies the first router that forms a point-to-point Layer 2 VFI connection. |
| Example: <pre>Router(config-vfi)# neighbor 172.16.10.12 2000 encapsulation mpls</pre> | |

| Command or Action | Purpose |
|---|---|
| Step 23 <code>neighbor ipaddress vcid encapsulation mpls</code> | Specifies the second router that forms a point-to-point Layer 2 VFI connection. |
| Example: <pre>Router(config-vfi)# neighbor 172.16.200.120 2000 encapsulation mpls</pre> | |
| Step 24 <code>exit</code> | Exits L2 VFI point-to-point configuration mode. |
| Example: <pre>Router(config-vfi)# exit</pre> | |
| Step 25 <code>interface vlan vlanid</code> | Creates a dynamic SVI, and enters interface configuration mode. |
| Example: <pre>Router(config)# interface vlan 1000</pre> | |
| Step 26 <code>xconnect ipaddress vc-id encapsulation mpls</code> Example: <pre>Router(config-if)# xconnect 10.243.245.11 100 encapsulation mpls</pre> | Binds the attachment circuit to the pseudowire, and configures an AToM static pseudowire. <ul style="list-style-type: none"> Specifies MPLS as the tunneling method to encapsulate the data in the pseudowire. |
| Step 27 <code>exit</code> Example: <pre>Router(config-if)# exit</pre> | Returns to global configuration mode. |

Configuration Examples for MAC-in-MAC on Provider Backbone Bridges

- Example MAC-in-MAC Configuration for L2 Bridging Networks, page 20
- Example MAC-in-MAC Configuration for Ethernet over MPLS Networks, page 22
- Example MAC-in-MAC Configuration for VPLS Networks, page 22

Example MAC-in-MAC Configuration for L2 Bridging Networks

In the following example, the UNI configuration is performed on the GigabitEthernet 1/0, GigabitEthernet 2/0, and GigabitEthernet 3/0 interfaces. The MAC-in-MAC tunnel configuration includes commands to

**Note**

configure the default MAC tunnel destination address and the destination map. The NNI configuration is performed on the GigabitEthernet 1/2 interface, and shows the options for a switchport or External Interface (EI)-based NNI.

For switchport NNI configurations the VLAN ID is the same as the bridge domain ID configured under the MAC tunnel. For EI NNI configurations a service instance is configured under the NNI interface and the binding of the MAC tunnel to the service instance is done using the bridge domain.

UNI (Ingress) Configuration

```
interface gigabitethernet 1/0
  service instance 10 ethernet
    encapsulation dot1q 10
    bridge-domain 20 c-mac
  service instance 20 ethernet
    encapsulation dot1q 20
    bridge-domain 30 c-mac
interface gigabitethernet 2/0
  service instance 10 ethernet
    encapsulation dot1q 10
    bridge-domain 20 c-mac
  service instance 30 ethernet
    encapsulation dot1q 20
    bridge-domain 30 c-mac
interface gigabitethernet 3/0
  service instance 10 ethernet
    encapsulation dot1q 10
    bridge-domain 20 c-mac
```

MAC-in-MAC Tunnel Configuration

```
ethernet mac-tunnel virtual 1
  bridge-domain 100
  mac tunnel address destination default 4444.1111.1111
  service instance 10 ethernet
    encapsulation dot1ah isid 10000
    bridge-domain 20 c-mac
  service instance 20 ethernet
    encapsulation dot1ah isid 20000
    bridge-domain 30 c-mac
  mac tunnel address destination map 3333.1111.1111 5555.2222.2222
```

Switchport NNI (Egress) Configuration

```
interface gigabitethernet 1/2
  switchport
  switchport mode trunk
  switchport trunk allowed vlan 100
```

EI NNI (Egress) Configuration

```
interface gigabitethernet 1/2
  service instance 20 ethernet
    encapsulation dot1q
    bridge-domain 100
```

Example MAC-in-MAC Configuration for Ethernet over MPLS Networks

The following example shows how to configure a BEB where two 802.1ah networks are connected using MPLS:

UNI (Ingress) Configuration

```
interface gigabitethernet 1/1
  service instance 15 ethernet
    encapsulation dot1q 20
    bridge-domain 10 c-mac
```

MAC-in-MAC Tunnel Configuration

```
ethernet mac-tunnel virtual 1
  bridge-domain 1000
  service instance 500 ethernet
    encapsulation dot1ah isid 10000
    bridge-domain 10 c-mac
```

SVI Configuration

```
interface vlan 1000
  xconnect 10.243.245.11 100 encapsulation mpls
```

Example MAC-in-MAC Configuration for VPLS Networks

The following example shows how to configure a BEB where two 802.1ah networks are connected using VPLS. The 802.1ah packets are encapsulated in the VPLS pseudowire.

UNI (Ingress) Configuration

```
interface gigabitethernet 1/1
  service instance 21 ethernet
    encapsulation dot1q 20
    bridge-domain 10 c-mac
```

MAC-in-MAC Tunnel Configuration

```
ethernet mac-tunnel virtual 1
  bridge-domain 100
  service instance 31 ethernet
    encapsulation dot1ah isid 10000
    bridge-domain 10 c-mac
  service instance 41 ethernet
    encapsulation dot1ah isid 30000
    bridge-domain 20 c-mac
```

VFI Configuration

```
12 vfi myvfi manual
vpn id 20
  neighbor 172.16.10.12 2000 encapsulation mpls
  neighbor 172.16.200.120 2000 encapsulation mpls
vpn id vpn-id
```

SVI Configuration

```
interface vlan 100
  xconnect vfi vf100
```

Additional References

Related Documents

| Related Topic | Document Title |
|---|--|
| MAC-in-MAC commands: complete command syntax, command mode, command history, defaults, usage guidelines, and examples | Cisco IOS Carrier Ethernet Command Reference |
| Cisco IOS commands: master list of commands with complete command syntax, command mode, command history, defaults, usage guidelines, and examples | Cisco IOS Master Commands List, All Releases |

Standards

| Standard | Title |
|-----------------|--|
| IEEE 802.1ah | IEEE 802.1ah - Provider Backbone Bridges |

MIBs

| MIB | MIBs Link |
|------------|---|
| None | To locate and download MIBs for selected platforms, Cisco software releases, and feature sets, use Cisco MIB Locator found at the following URL: http://www.cisco.com/go/mibs |

RFCs

| RFC | Title |
|---|--------------|
| No new or modified RFCs are supported by this feature, and support for existing RFCs has not been modified by this feature. | -- |

Technical Assistance

| Description | Link |
|---|---|
| The Cisco Support and Documentation website provides online resources to download documentation, software, and tools. Use these resources to install and configure the software and to troubleshoot and resolve technical issues with Cisco products and technologies. Access to most tools on the Cisco Support and Documentation website requires a Cisco.com user ID and password. | http://www.cisco.com/cisco/web/support/index.html |

Feature Information for IEEE 802.1ah on Provider Backbone Bridges

The following table provides release information about the feature or features described in this module. This table lists only the software release that introduced support for a given feature in a given software release train. Unless noted otherwise, subsequent releases of that software release train also support that feature.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to www.cisco.com/go/cfn. An account on Cisco.com is not required.

Table 3 Feature Information for IEEE 802.1ah on Provider Backbone Bridges feature.

| Feature Name | Releases | Feature Information |
|---|-----------------|--|
| 802.1ah/EVC2.0 for 7600 (Infrastructure) | 12.2(33)SRE | <p>The IEEE 802.1ah on Provider Backbone Bridges feature enables MAC-in-MAC on EVCs.</p> <p>In Cisco IOS Release 12.2(33)SRE, this feature was introduced on the Cisco 7600 series routers.</p> <p>The following commands were introduced or modified: bridge-domain, clear bridge-domain mac table, description, encapsulation dot1ah isid, ethernet mac-tunnel virtual, mac tunnel address destination default, mac tunnel address destination map, service instance ethernet(mac-tunnel), show bridge-domain, show ethernet mac-tunnel engine slot, show ethernet service instance, show ethernet service mac-tunnel.</p> |

Cisco and the Cisco Logo are trademarks of Cisco Systems, Inc. and/or its affiliates in the U.S. and other countries. A listing of Cisco's trademarks can be found at www.cisco.com/go/trademarks. Third party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1005R)

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.

© 2011 Cisco Systems, Inc. All rights reserved.