

Table of Contents

<u>CallManager Directory Service Log Trace Level Selection</u>	1
<u>Document ID: 67902</u>	1
<u>Introduction</u>	1
<u>Prerequisites</u>	1
<u>Requirements</u>	1
<u>Components Used</u>	1
<u>Conventions</u>	1
<u>Set the Trace Level</u>	1
<u>Retrieve the Trace File</u>	3
<u>NetPro Discussion Forums – Featured Conversations</u>	3
<u>Related Information</u>	4

CallManager Directory Service Log Trace Level Selection

Document ID: 67902

Introduction

Prerequisites

Requirements

Components Used

Conventions

Set the Trace Level

Retrieve the Trace File

NetPro Discussion Forums – Featured Conversations

Related Information

Introduction

This document describes the procedure to set the trace level to Detailed for the Directory Service log in the Cisco CallManager environment.

Prerequisites

Requirements

Cisco recommends that you have knowledge of these topics:

- Cisco CallManager
- Directory Service

Components Used

The information in this document is based on Cisco CallManager version 4.1.x.

The information in this document was created from the devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. If your network is live, make sure that you understand the potential impact of any command.

Conventions

Refer to Cisco Technical Tips Conventions for more information on document conventions.

Set the Trace Level


Complete these steps in order to set the trace level for the Directory Service log to Detailed:

1. Choose **Start > Run**.
2. Enter **cmd** at the Open prompt for the Run window.
3. Enter **UMTrace** in the DOS window.

See arrow A in Figure 1.

The Cisco User Preferences Trace Settings window displays.

Figure 1 UMTrace

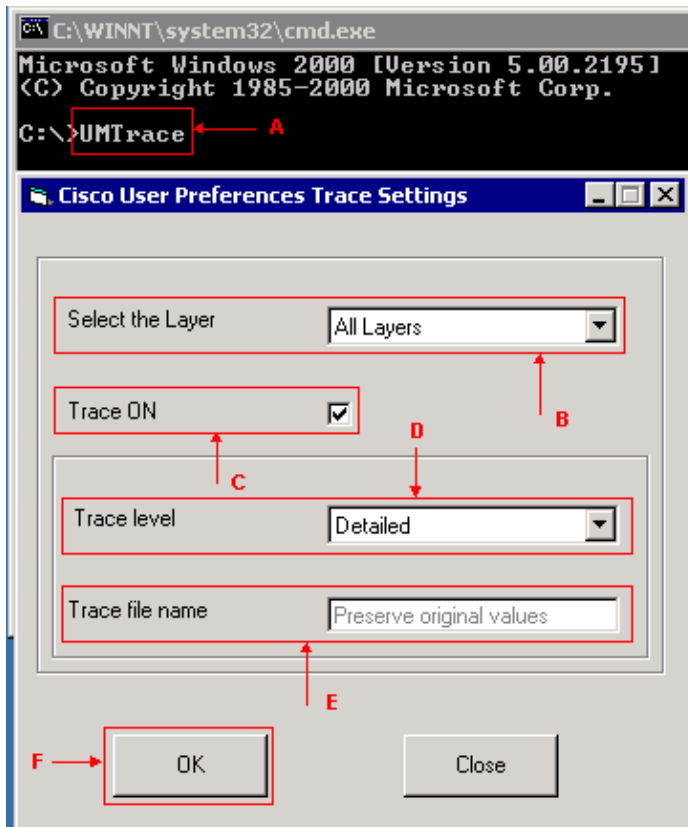

4. Choose **All Layers** from the Select the Layer drop-down menu.

See arrow B in Figure 1.

The available choices in this menu are:

- ◆ UMAccess
- ◆ UMAuthentication
- ◆ UMEncryption
- ◆ UMProvider
- ◆ UMX
- ◆ All Layers

5. Check the **Trace ON** check box.

See arrow C in Figure 1.

6. Choose **Detailed** from the Trace level drop-down menu.

See arrow D in Figure 1.

The available choices in this menu are:

- ◆ Error
- ◆ Special

- ◆ State Transition
- ◆ Significant
- ◆ Entry Exit
- ◆ Arbitrary
- ◆ Detailed

7. Leave the Trace file name as Preserve original values.

See arrow E in Figure 1.


8. Click **OK**.

See arrow F in Figure 1.

Retrieve the Trace File

You can find the log files in the C:\dcdsrvr\log folder. See arrow A in Figure 2:

Figure 2 Directory Log Files

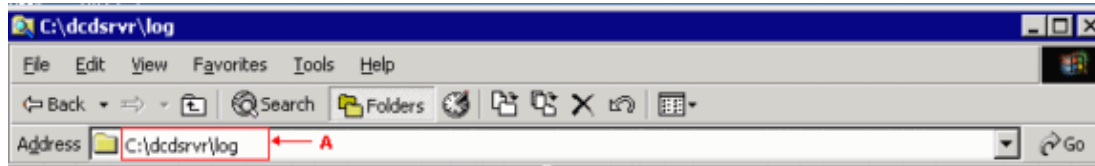

The trace file names for each of the layers are:

Note: yyyyyyyy represents the sequence number for the login decimal.

- UMAccess umaccessyyyyyyy.txt
- UMAuthentication umaauthenticationyyyyyyy.txt
- UMEncryption umencryptionyyyyyyy.txt
- UMProvider umprovideryyyyyyy.txt
- UMX umxyyyyyyyy.txt

NetPro Discussion Forums – Featured Conversations

Networking Professionals Connection is a forum for networking professionals to share questions, suggestions, and information about networking solutions, products, and technologies. The featured links are some of the most recent conversations available in this technology.

NetPro Discussion Forums – Featured Conversations for Voice
Service Providers: Voice over IP
Voice & Video: Voice over IP
Voice & Video: IP Telephony
Voice & Video: IP Phone Services for End Users
Voice & Video: Unified Communications
Voice & Video: IP Phone Services for Developers
Voice & Video: General

Related Information

- **Voice Technology Support**
 - **Voice and IP Communications Product Support**
 - **Recommended Reading: Troubleshooting Cisco IP Telephony**
 - **Technical Support & Documentation – Cisco Systems**
-

All contents are Copyright © 1992–2005 Cisco Systems, Inc. All rights reserved. Important Notices and Privacy Statement.

Updated: Oct 25, 2005

Document ID: 67902
