



# **Database Schema Handbook for Cisco Unified ICM/Contact Center Enterprise & Hosted**

8.0(1)

*August 2012*

**Americas Headquarters**  
Cisco Systems, Inc.  
170 West Tasman Drive  
San Jose, CA 95134-1706  
USA  
<http://www.cisco.com>  
Tel: 408 526-4000  
800 553-NETS (6387)  
Fax: 408 527-0833



THE SPECIFICATIONS AND INFORMATION REGARDING THE PRODUCTS IN THIS MANUAL ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL STATEMENTS, INFORMATION, AND RECOMMENDATIONS IN THIS MANUAL ARE BELIEVED TO BE ACCURATE BUT ARE PRESENTED WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED. USERS MUST TAKE FULL RESPONSIBILITY FOR THEIR APPLICATION OF ANY PRODUCTS.

THE SOFTWARE LICENSE AND LIMITED WARRANTY FOR THE ACCOMPANYING PRODUCT ARE SET FORTH IN THE INFORMATION PACKET THAT SHIPPED WITH THE PRODUCT AND ARE INCORPORATED HEREIN BY THIS REFERENCE. IF YOU ARE UNABLE TO LOCATE THE SOFTWARE LICENSE OR LIMITED WARRANTY, CONTACT YOUR CISCO REPRESENTATIVE FOR A COPY.

*The Cisco implementation of TCP header compression is an adaptation of a program developed by the University of California, Berkeley (UCB) as part of UCB's public domain version of the UNIX operating system. All rights reserved. Copyright 1981, Regents of the University of California.*

NOTWITHSTANDING ANY OTHER WARRANTY HEREIN, ALL DOCUMENT FILES AND SOFTWARE OF THESE SUPPLIERS ARE PROVIDED "AS IS" WITH ALL FAULTS. CISCO AND THE ABOVE-NAMED SUPPLIERS DISCLAIM ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, THOSE OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE.

IN NO EVENT SHALL CISCO OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THIS MANUAL, EVEN IF CISCO OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Cisco and the Cisco Logo are trademarks of Cisco Systems, Inc. and/or its affiliates in the U.S. and other countries. A listing of Cisco's trademarks can be found at <http://www.cisco.com/go/trademarks>. Third party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1005R)

Any Internet Protocol (IP) addresses used in this document are not intended to be actual addresses. Any examples, command display output, and figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses in illustrative content is unintentional and coincidental.

Copyright 2010 Cisco Systems, Inc. All rights reserved.

## Table of Contents

Preface .....	1
Purpose .....	1
Audience .....	1
Organization .....	1
Related Documentation .....	2
Product Naming Conventions.....	3
Conventions.....	3
Obtaining Documentation and Submitting a Service Request.....	4
Documentation Feedback.....	4
1. Introduction.....	7
The Unified ICM/Unified CCE Databases.....	7
General Concepts.....	8
Tables, Columns, and Rows.....	8
Table Relationships.....	8
Key Fields.....	9
Reserved Fields.....	10
Field Applicability.....	10
Data Types.....	10
Partitioning.....	11
Real-time and Historical Data.....	11
Call Detail Data.....	12
2. All Tables.....	13
All Tables in Alphabetical Order.....	13
Admin_Script_Schedule_Map Table.....	13
Agent Table.....	15
Agent_Attribute Table.....	18
Agent_Desk_Settings Table .....	18
Agent_Distribution Table .....	23
Agent_Event_Detail Table .....	24
Agent_Half_Hour Table .....	25
Agent_Interval Table.....	29
Agent_Logout Table.....	33
Agent_Real_Time Table .....	34
Agent_Skill_Group_Half_Hour Table .....	39
Agent_Skill_Group_Interval Table.....	51
Agent_Skill_Group_Logout Table .....	62
Agent_Skill_Group_Real_Time Table.....	63
Agent_State_Trace Table.....	64
Agent_Targeting_Rule Table.....	67
Agent_Targeting_Rule_Member Table.....	68
Agent_Targeting_Rule_Range Table.....	69
Agent_Team Table.....	70
Agent_Team_Member Table .....	71
Agent_Team_Supervisor Table.....	71
Announcement Table .....	72
Application_Event Table .....	73
Application_Gateway Table.....	75

Application_Gateway_Connection Table .....	76
Application_Gateway_Globals Table .....	78
Application_Gateway_Half_Hour Table .....	80
Application_Instance Table .....	81
Application_Path Table .....	82
Application_Path_Member Table .....	83
Application_Path_Real_Time Table .....	84
Assignment_Queue Table .....	85
Assignment_Queue_Member Table .....	86
Assignment_Queue_Attribute Table .....	86
Attribute Table .....	88
AWControl Table .....	89
Blended_Agent_Options Table .....	90
Bucket_Intervals Table .....	93
Business_Entity Table .....	94
Call_Type Table .....	95
Call_Type_Half_Hour Table .....	96
Call_Type_Interval Table .....	109
Call_Type_Map Table .....	121
Call_Type_Skill_Group_Half_Hour Table .....	122
Call_Type_Skill_Group_Interval Table .....	131
Call_Type_Real_Time Table .....	142
Campaign Table .....	155
Campaign_Half_Hour Table .....	163
Campaign_Query_Rule Table .....	164
Campaign_Query_Rule_Half_Hour Table .....	166
Campaign_Query_Rule_Interval Table .....	170
Campaign_Query_Rule_Real_Time Table .....	172
Campaign_Skill_Group Table .....	180
Campaign_Target_Sequence Table .....	182
Cfg_Mngr_App_Snapshot_State Table .....	183
Cfg_Mngr_Globals Table .....	185
Cfg_Mngr_User/Desktop_Snap Table .....	185
Cfg_Mngr_User_Menu Table .....	187
Cfg_Mngr_User_Settings Table .....	187
Cfg_Mngr_View Table .....	188
Class_Access_Xref Table .....	189
Class_List Table .....	190
Class_Security Table .....	190
ClassID_To_ObjectType Table .....	191
Configuration_Limit Table .....	192
Config_Message_Log Table .....	193
Controller_Time Table .....	193
Customer_Definition Table .....	194
Customer_Options Table .....	195
Default_Call_Type Table .....	195
Device_Target Table .....	196
Dialed_Number Table .....	197
Dialed_Number_Label Table .....	199
Dialed_Number_Map Table .....	200
Dial_Number_Plan Table .....	201

---

Dialer Table.....	202
Dialer_Detail Table.....	206
Dialer_Half_Hour Table.....	211
Dialer_Interval Table.....	214
Dialer_Port_Map Table.....	217
Dialer_Port_Real_Time Table.....	218
Dialer_Real_Time Table.....	219
Dialer_Skill_Group_Half_Hour Table.....	223
Dialer_Skill_Group_Real_Time Table.....	226
Enterprise_Route Table.....	228
Enterprise_Route_Member Table.....	229
Enterprise_Service Table.....	229
Enterprise_Service_Member Table.....	230
Enterprise_Skill_Group Table.....	231
Enterprise_Skill_Group_Member Table.....	232
Event Table.....	232
Expanded_Call_Variable Table.....	234
Feature_Control_Set Table.....	236
Galaxy_Agent_Call_Count Table.....	237
Galaxy_Agent_IGroup Table.....	238
Galaxy_Agent_Performance Table.....	240
Galaxy_Alarm Table.....	242
Galaxy_DNIS Table.....	243
Galaxy_Gate Table.....	245
Galaxy_Gate_Delayed_Call Table.....	248
Galaxy_Overflow Table.....	251
Galaxy_PBX Table.....	255
Galaxy_Single_Trunk Table.....	257
Galaxy_Transaction_Code Table.....	258
Galaxy_Trunk_Call_Count Table.....	259
Galaxy_Trunk_IGroup Table.....	260
Group_Security_Control Table.....	263
ICR_Globals Table.....	264
ICR_Instance Table.....	267
ICR_Locks Table.....	268
ICR_Node Table.....	269
ICR_View Table.....	270
Ids Table.....	271
Import_Log Table.....	272
Import_Rule Table.....	273
Import_Rule_Clause Table.....	277
Import_Rule_History Table.....	278
Import_Rule_Real_Time Table.....	279
Import_Schedule Table.....	281
Label Table.....	281
Logger_Admin Table .....	283
Logger_Meters Table.....	284
Logger_Type Table.....	285
Logical_Interface_Controller Table.....	286
Machine_Info.....	287
Master_Script Table.....	288

---

Media_Class Table.....	289
Media_Routing_Domain Table.....	290
Network_Event_Detail Table.....	293
Network_Target Table.....	294
Network_Trunk_Group Table.....	295
Network_Trunk_Group_Half_Hour Table.....	296
Network_Trunk_Group_Real_Time Table.....	298
Network_Vru Table.....	300
Network_Vru_Bank Table.....	301
Network_Vru_Script Table.....	302
Next_Available_Number Table.....	303
Object_Access_Xref Table.....	303
Object_List Table.....	304
Object_Security Table.....	305
Peripheral Table.....	306
Peripheral_Default_Route Table.....	310
Peripheral_Half_Hour Table.....	310
Peripheral_Interval Table.....	313
Peripheral_Monitor Table.....	315
Peripheral_Real_Time Table.....	316
Peripheral_Target Table.....	320
Persistent_Variable Table.....	321
Person Table.....	322
Physical_Controller_Half_Hour Table.....	323
Physical_Interface_Controller Table.....	324
Query_Rule Table.....	325
Query_Rule_Clause Table.....	327
Reason_Code Table .....	328
Recovery Table.....	329
Recurring_Schedule_Map Table.....	330
Region Table.....	332
Region_Info Table.....	332
Region_Member Table.....	333
Region_Prefix Table.....	333
Region_View Table.....	334
Region_View_Member Table.....	335
Rename Table.....	336
Route Table.....	336
Route_Call_Detail Table.....	338
Route_Call_Variable Table.....	343
Route_Five_Minute Table.....	344
Route_Half_Hour Table.....	347
Route_Real_Time Table.....	352
Routing_Client Table.....	357
Routing_Client_Five_Minute Table.....	359
Schedule Table.....	365
Schedule_Import Table.....	367
Schedule_Import_Real_Time Table.....	369
Schedule_Map Table.....	371
Schedule_Report Table.....	372
Schedule_Report_Input Table.....	373

---

Schedule_Source Table.....	374
Scheduled_Target Table.....	375
Scheduled_Target_Real_Time Table.....	376
Script Table.....	377
Script_Cross_Reference Table.....	378
Script_Data Table.....	379
Script_Five_Minute Table.....	380
Script_Print_Control Table.....	381
Script_Queue_Real_Time Table.....	381
Script_Real_Time Table.....	382
Script_Table Table.....	383
Script_Table_Column Table.....	384
Sec_Group Table.....	384
Sec_User Table.....	385
Service_Table.....	386
Service_Array Table.....	388
Service_Array_Member Table.....	389
Service_Five_Minute Table.....	390
Service_Half_Hour Table.....	394
Service_Interval Table.....	406
Service_Level_Threshold Table.....	414
Service_Member Table.....	415
Service_Real_Time Table.....	416
Shift Table.....	432
Skill_Group Table.....	432
Skill_Group_Five_Minute Table.....	436
Skill_Group_Half_Hour Table.....	439
Skill_Group_Interval Table.....	457
Skill_Group_Member Table.....	477
Skill_Group_Real_Time Table.....	477
Skill_Target Table.....	489
Termination_Call_Detail Table.....	490
Termination_Call_Variable Table.....	502
Translation_Route Table.....	503
Translation_Route_Half_Hour Table.....	504
Trunk Table.....	506
Trunk_Group Table.....	507
Trunk_Group_Five_Minute Table.....	508
Trunk_Group_Half_Hour Table.....	509
Trunk_Group_Real_Time Table.....	511
User_Formula Table.....	513
User_Formula_Equation Table.....	513
User_Group Table.....	514
User_Group_Member Table.....	516
User_Security_Control Table.....	516
User_Supervisor_Map Table.....	517
User_Variable Table.....	518
Version Table.....	519
View_Column Table.....	520
Vru_Currency Table.....	521
Vru_Defaults Table.....	522

Vru_Locale Table.....	524
Vru_Port_Map Table.....	524
<b>3. Tables by Group.....</b>	<b>527</b>
Overview.....	527
Blended Agent (Outbound Option).....	527
Device.....	529
Peripheral Detail.....	530
Trunk Group Detail.....	531
Enterprise.....	532
Galaxy.....	533
Media Routing.....	534
Route.....	535
Schedule.....	538
Script.....	539
Call Type Detail.....	541
Region Detail.....	541
Script Detail.....	542
Security.....	543
Skill Target .....	544
Agent Detail.....	546
Service Detail.....	546
Skill Group Detail.....	547
System.....	548
User Preferences.....	550
VRU Micro-Application.....	551
Tables Reserved for Future Use.....	551
<b>4. Field Values.....</b>	<b>553</b>
Access Levels.....	553
AgentState.....	553
Application Gateway: Fault Tolerance.....	554
Client Type.....	555
Customer Options Type .....	557
Days .....	558
Dialed Number Map: ANIWildCardType .....	559
Dialer Detail: CallResult.....	559
Dialer Detail: CallStatusZone.....	560
Dialer Detail: DialingMode.....	561
Event Fields.....	562
Galaxy Fields.....	562
ICR Locks Fields.....	565
LabelType Fields.....	565
Logical Interface Controller Fields.....	565
Network Vru Type.....	567
Port Status.....	568
Route Call Detail Fields.....	568
Object Types: Security.....	570
Object Types: User Variable.....	572
Peripheral Real Time Status Field.....	573
Reason Codes.....	575
Service Fields.....	576

---

Service Real Time: Service Mode Indicator Field.....	577
Target Types: Script Cross Reference and Scheduled Report Input.....	577
Termination Call Detail: Call Disposition and CallDispositionFlag Fields.....	579
Termination Call Detail: Peripheral Call Type.....	589
Trunk Type.....	591
<b>5. Database Rules.....</b>	<b>593</b>
Blended Agent Tables (Outbound Option) - Database Rules .....	593
Device Tables - Database Rules.....	595
Enterprise Tables - Database Rules .....	596
Galaxy Tables - Database Rules .....	596
Media Routing Tables - Database Rules .....	597
Route Tables - Database Rules .....	597
Schedule Tables - Database Rules .....	598
Script Tables - Database Rules .....	599
Security Tables - Database Rules .....	600
Skill Target Tables - Database Rules .....	600
System Tables - Database Rules .....	601
User Preferences Tables - Database Rules .....	602
VRU Micro-Applications Tables - Database Rules .....	603
<b>Database Field Name Index .....</b>	<b>605</b>

## List of Figures

Figure 1: Columns and Rows.....	8
Figure 2: Cross Reference.....	9
Figure 3: Blended Agent Tables.....	528
Figure 4: Device Tables.....	529
Figure 5: Peripheral Detail Tables.....	531
Figure 6: Trunk Detail Tables.....	531
Figure 7: Enterprise Tables.....	532
Figure 8: Galaxy Tables.....	533
Figure 9: Media Routing Tables.....	535
Figure 10: Route Tables.....	536
Figure 11: Route Detail Tables.....	537
Figure 12: Schedule Table.....	538
Figure 13: Script Tables.....	540
Figure 14: Call Type Tables.....	541
Figure 15: Region Detail Tables.....	542
Figure 16: Script Detail.....	542
Figure 17: Security Tables.....	543
Figure 18: Skill Target Tables.....	545
Figure 19: Agent Tables.....	546
Figure 20: Service Tables.....	547
Figure 21: Skill Group Tables.....	547
Figure 22: Skill Group Member Tables.....	548
Figure 23: System Tables.....	549
Figure 24: User Preferences Tables.....	550
Figure 25: VRU Micro-Application Tables.....	551



## Preface

---

### Purpose

This manual documents how data are organized in the databases for the Cisco Unified Intelligent Contact Management (Unified ICM)/Cisco Unified Contact Center Enterprise (Unified CCE) software. The databases contain tables. Each table defines a set of columns or fields. Each record or row in the database has one value for each column. This manual describes the tables and their columns.

### Audience

This manual is intended for Unified ICM/Unified CCE software system managers and supervisors. Understanding the database schema helps you to create your own monitoring screens and reports. It also helps you to understand how the Unified ICM/Unified CCE software works.

The Schema Help, which you can open from the Administration & Data Server, has the same information as this PDF manual.

You can navigate the PDF file using the Contents, the Index, and the links. To return to your previous location, simply click the green back-arrow button at the bottom of the page.

### Organization

The manual is divided into the following chapters:

Part/Chapter	Title	Description
Chapter 1	<a href="#">Introduction (page 7)</a>	Describes the types of data stored in the database and the relationships among those data.

**Related Documentation**

<b>Part/Chapter</b>	<b>Title</b>	<b>Description</b>
Chapter 2	<a href="#">All Tables (page 13)</a>	Fully documents each table. Provides field descriptions and indexes.
Chapter 3	<a href="#">Major Tables by Group (page 527)</a>	Explains major categories (groupings) of tables, arranged logically by their domains and interrelationships.
Chapter 4	<a href="#">Field Values (page 553)</a>	Explains the coded values used for specific fields within the database.
Chapter 5	<a href="#">Database Rules (page 593)</a>	Explains the dependencies and constraints that govern the relationships among tables.

There is also a complete interactive index with links to each field and table.

**Related Documentation**

Documentation for Cisco Unified ICM/Contact Center Enterprise & Hosted, as well as related documentation, is accessible from Cisco.com at: <http://www.cisco.com/web/psa/products/index.html>.

- Related documentation includes the documentation sets for Cisco CTI Object Server (CTI OS), Cisco Agent Desktop (CAD), Cisco Agent Desktop - Browser Edition (CAD-BE), Cisco Unified Contact Center Management Portal, Cisco Unified Customer Voice Portal (CVP), Cisco Unified IP IVR, and Cisco Support Tools.
- For documentation for these Cisco Unified Contact Center Products, go to <http://www.cisco.com/web/psa/products/index.html> ([www.cisco.com/web/psa/products/index.html](http://www.cisco.com/web/psa/products/index.html)), click **Voice and Unified Communications**, then click **Cisco Unified Contact Center Products** or **Cisco Unified Voice Self-Service Products**, then click the product/option you are interested in.
- For troubleshooting tips for these Cisco Unified Contact Center Products, go to <http://docwiki.cisco.com/wiki/Category:Troubleshooting>, then click the product/option you are interested in.
- Documentation for Cisco Unified Communications Manager is accessible from: <http://www.cisco.com/web/psa/products/index.html>.
- Technical Support documentation and tools are accessible from: <http://www.cisco.com/en/US/support/index.html>.
- The Product Alert tool is accessible from (login required): <http://www.cisco.com/cgi-bin/Support/FieldNoticeTool/field-notice>.
- For information on the Cisco software support methodology, refer to *Software Release and Support Methodology: ICM/IPCC* available at (login required): [http://www.cisco.com/en/US/partner/products/sw/custcosw/ps1844/prod\\_bulletins\\_list.html](http://www.cisco.com/en/US/partner/products/sw/custcosw/ps1844/prod_bulletins_list.html).

- For a detailed list of language localizations, refer to the *Cisco Unified ICM/Contact Center Product and System Localization Matrix* available at the bottom of the following page: [http://www.cisco.com/en/US/products/sw/custcosw/ps1001/prod\\_technical\\_reference\\_list.html](http://www.cisco.com/en/US/products/sw/custcosw/ps1001/prod_technical_reference_list.html).

## Product Naming Conventions

In this release, the product names defined in the table below have changed. The New Name (long version) is reserved for the first instance of that product name and in all headings. The New Name (short version) is used for subsequent instances of the product name.

**Note:** This document uses the naming conventions provided in each GUI, which means that in some cases the old product name is in use.

Old Product Name	New Name (long version)	New Name (short version)
Cisco IPCC Enterprise Edition	Cisco Unified Contact Center Enterprise	Unified CCE
Cisco System IPCC Enterprise Edition	Cisco Unified System Contact Center Enterprise	Unified SCCE
Cisco IPCC Hosted Edition	Cisco Unified Contact Center Hosted	Unified CCH
Cisco Intelligent Contact Management (ICM) Enterprise Edition	Cisco Unified Intelligent Contact Management Enterprise	Unified ICME
Cisco Intelligent Contact Management (ICM) Hosted Edition	Cisco Unified Intelligent Contact Management Hosted	Unified ICMH
Cisco CallManager/Cisco Unified CallManager	Cisco Unified Communications Manager	Unified CM

## Conventions

This manual uses the following conventions:

Convention	Description
<b>boldface</b> font	Boldface font is used to indicate commands, such as user entries, keys, buttons, and folder and submenu names. For example: <ul style="list-style-type: none"> <li>Choose <b>Edit &gt; Find</b>.</li> <li>Click <b>Finish</b>.</li> </ul>
<i>italic</i> font	Italic font is used to indicate the following: <ul style="list-style-type: none"> <li>To introduce a new term; for example: A <i>skill group</i> is a collection of agents who share similar skills.</li> </ul>

## Obtaining Documentation and Submitting a Service Request

Convention	Description
	<ul style="list-style-type: none"> <li>For emphasis; for example: <i>Do not</i> use the numerical naming convention.</li> <li>A syntax value that the user must replace; for example: IF (<i>condition, true-value, false-value</i>)</li> <li>A book title; for example: Refer to the <i>Cisco CRS Installation Guide</i>.</li> </ul>
<b>window font</b>	<p>Window font, such as Courier, is used for the following:</p> <ul style="list-style-type: none"> <li>Text as it appears in code or that the window displays; for example: &lt;html&gt;&lt;title&gt;<b>Cisco Systems, Inc.</b> &lt;/title&gt;&lt;/html&gt;</li> <li>Navigational text when selecting menu options; for example: <b>ICM Configuration Manager &gt; Tools &gt; Explorer Tools &gt; Agent Explorer</b></li> </ul>
< >	<p>Angle brackets are used to indicate the following:</p> <ul style="list-style-type: none"> <li>For arguments where the context does not allow italic, such as ASCII output.</li> <li>A character string that the user enters but that does not appear on the window such as a password.</li> </ul>

## Obtaining Documentation and Submitting a Service Request

For information on obtaining documentation, submitting a service request, and gathering additional information, see the monthly *What's New in Cisco Product Documentation*, which also lists all new and revised Cisco technical documentation, at:

<http://www.cisco.com/en/US/docs/general/whatsnew/whatsnew.html>

Subscribe to the *What's New in Cisco Product Documentation* as a Really Simple Syndication (RSS) feed and set content to be delivered directly to your desktop using a reader application. The RSS feeds are a free service and Cisco currently supports RSS version 2.0.

## Documentation Feedback

You can provide comments about this document by sending email to the following address:

[mailto:ccbu\\_docfeedback@cisco.com](mailto:ccbu_docfeedback@cisco.com)

We appreciate your comments.





# Chapter 1

## Introduction

---

### The Unified ICM/Unified CCE Databases

Unified ICM/Unified CCE software uses two---and in some cases, four---types of databases:

- The central database that is part of the Central Controller.
- The local database on each distributor Administration & Data Server.
- The Historical Data Server (HDS) database on a distributor Administration & Data Server.
- Optionally, the WebView database (usually installed on the Administration & Data Server that will be used for reporting).

Unified ICM/Unified CCE software uses information in the central database to determine how to route each call. This includes information about your telephone system configuration and routing scripts. The local database holds a copy of the configuration data and scripts from the central database.

The local database also contains tables of real-time information that describe activity at the call centers. (The Central Controller keeps the real-time information in memory but does not store it in the central database.) This information allows you to monitor current activity within the system.

Historical information describing past activity at the call centers and within the Unified ICM/Unified CCE system is stored in the central database. This information is also stored in a special HDS database on a distributor Administration & Data Server at each site. Either the central database or an HDS database serves as the historical database for an Administration & Data Server user. You can access historical information stored in the historical database to produce reports and screens.

## General Concepts

The WebView database is used to store and track saved reports, favorites, and scheduled report jobs. When you save a report definition, the template name, report items, and date and time range used to generate the report are stored in the WebView database. When you mark a report as a favorite, that user preference is stored with the report in the WebView database. When you schedule a report job, the report schedule with its parameters are stored in the WebView database.

## General Concepts

This section gives a brief overview of some relational database concepts and some details about how system software generates data.

### Tables, Columns, and Rows

A database contains tables of data. A table defines a series of columns or fields. The actual data is stored as rows or records within each table. Each row contains one value for each column of the table. For example, Figure 1 shows a table with five columns. It contains three rows of data.

*Figure 1: Columns and Rows*

Announcement Table

NetworkTargetID	AnnouncementType	EnterpriseName	Description	DbFlags
1	0	ann503	Bad data	0
2	0	ann504	Delays	0
3	0	ann505	After hours	1

The data in tables differ for each system, but the definition of tables and columns does not. This manual describes the columns of each table; it does not describe the actual data in table rows.

### Table Relationships


Related tables in a database share one or more common fields or columns. For example, both the Agent and Peripheral tables include the PeripheralID field. This defines a relationship: each row in the Agent table is related to the row in the Peripheral table that shares the same PeripheralID value.

Relationships between tables can be one-to-one or one-to-many. For example, because one peripheral can be associated with many agents, the relationship between the Peripheral and Agent tables is one-to-many. On the other hand, each peripheral has a single peripheral default route and each peripheral default route belongs to only one peripheral. Therefore, the relationship between the Peripheral and Peripheral Default Route tables is one-to-one.

Sometimes a single row might not be associated with any rows in a related table. For example, it is possible to define a peripheral with no associated agents. Normally, this would only be a temporary condition. In some cases, however, the condition might be permanent. For example, you can define a trunk group but not define the associated trunks.

Sometimes the natural relationship between two tables appears to be many-to-many. For example, each agent can be a member of many skill groups and each skill group can contain many agents. Therefore, the Agent and Skill Group tables appear to have a many-to-many relationship. However, in this case, a third table, called a cross-reference table, actually links the tables so the relationship is actually one-to-many. For example, Figure 2 shows how the Skill Group Member table acts as a cross-reference table for the Agent and Skill Group tables.

*Figure 2: Cross Reference*

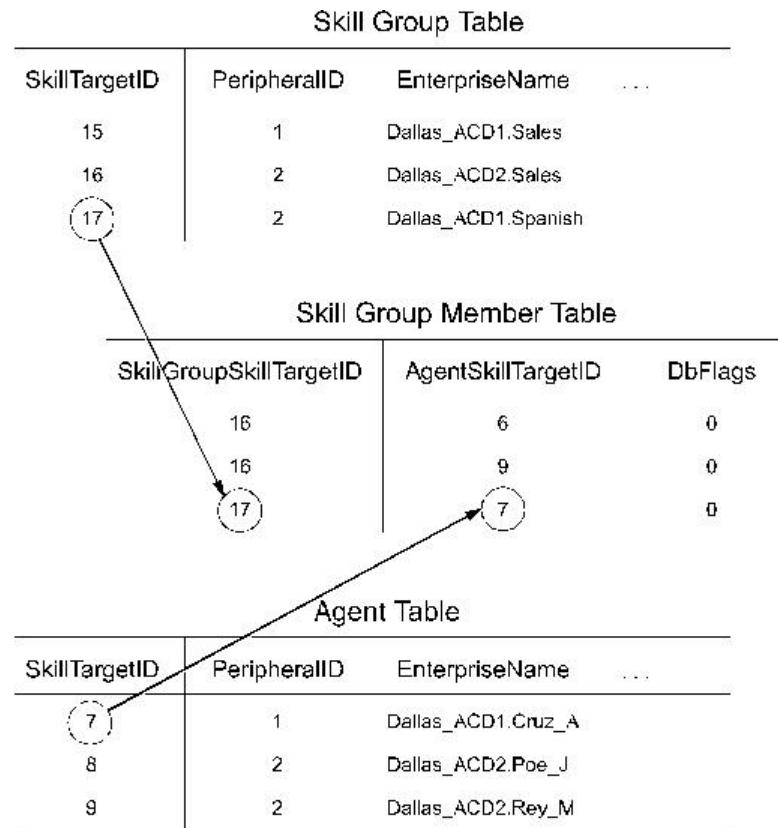

The Skill Group Member table contains one record for each member of each skill group. It has one-to-many relationships with both the Agent table and the Skill Group table. This avoids a direct many-to-many relationship between the Agent and Skill Group tables.

## Key Fields

One or more fields within a table can form a key. Keys are the fields used most commonly to locate specific records. Usually the fields that make up a key are defined as NOT NULL (meaning they cannot take the NULL value), but there are many exceptions.

Most tables have a primary key. For example, the PeripheralID field is the primary key for the Peripheral table.

An example of a foreign key is the PeripheralID field in the Agent table. You can use this key to find all agents associated with a specific peripheral.

**General Concepts**

The Agent table contains two alternate keys: the EnterpriseName field, and the combination of the PeripheralID and PeripheralNumber fields. A value for either of these keys uniquely identifies an agent.

The combination of FirstName and LastName is an inversion key for the Agent table. While this key value is not necessarily unique, it is a convenient way to locate specific agents. This table lists the types of keys and the codes used for them in the system database.

<b>Key Type</b>	<b>Code</b>	<b>Description</b>
Primary key	PK	Consists of one or more fields that have a unique value for each record in the table.
Alternate key	AK	A unique key that can be used instead of the primary key to locate a specific record.
Foreign key	FK	A primary key from one table that appears in a second table. A foreign key that establishes a one-to-one relationship is always unique. A foreign key that establishes a one-to-many relationship is not unique.
Inversion key	IE	A key that does not necessarily have a unique value, but can be used to locate a group of records within the table.

In the section [All Tables \(page 13\)](#), the codes from this table are used to identify key fields in each table. If a table has more than one key of the same type, then numbers are attached to the codes. For example, if a table has two alternate keys, then the fields that participate in the first are marked AK1 and the fields that participate in the second are marked AK2.

Each field is also marked as either NULL (meaning the NULL value is valid for the field) or NOT NULL (meaning the NULL value is not valid).

**Reserved Fields**

Some fields in the database are marked as reserved. This means that system software or the database manager might use the field, but it has no external meaning. You must not modify any field marked as reserved.

**Field Applicability**

Unless specifically indicated otherwise, table fields apply to both Unified ICM and Unified CCE.

**Data Types**

This table describes the data types used for fields in the Unified ICM/Unified CCE database.

<b>Unified ICM/Unified CCE Defined Data Type</b>	<b>MS SQL Server Data Type</b>	<b>Null Option Default</b>	<b>Description</b>

CHANGESTAMP	int	NOT NULL	Consists of one or more fields that have a unique value for each record in the table.
DBCHAR	char(1)	NOT NULL	Up to 1 character. The value 1 is the storage size.
DBDATETIME	datetime	datetime	A date and time accurate to the second. Stored as two four-byte integers (eight bytes total): days before or since January 1, 1900 and seconds since midnight.
DBFLT4	real	NULL	A four-byte floating-point value (7-digit precision).
DBFLT8	float	float	An eight-byte floating-point value (15-digit precision).
DBSMALLDATE	smalldatetime	smalldatetime	A date and time accurate to the minute. Stored as two unsigned two-byte integers (four bytes total): number of days since January 1, 1900 and minutes since midnight.
DBINT	int	NULL	A four-byte integer value between -2,147,483,648 and 2,147,483,647.
DBSMALLINT	smallint	NULL	A two-byte integer value between -32,768 and 32,767.
DESCRIPTION	varchar(255)	NULL	Up to 255 characters. The value 255 is the storage size.
DBTINYINT	tinyint	NOT NULL	A one-byte integer value between 0 and 255.
TELNO	char (10)	NULL	Up to 10 characters. The value 10 is the storage size.
VNAME32	varchar(32)	varchar(32)	Up to 32 characters. The value 32 is the storage size.
VTELNO10	varchar(10)	NULL	Up to 10 characters. The value 10 is the storage size.
VTELNO20	varchar(20)	NULL	Up to 20 characters. The value 20 is the storage size.
char(n)	char(n)	NULL	Up to n characters. The value n is the storage size.
varchar(n)	varchar(n)	NULL	Up to n characters. The value n is the storage size.
image	image	NULL	Up to 2,147,483,647 bytes of binary data. The storage size is determined by the length of the data.
datetime	datetime	NULL	A date and time accurate to the second. Stored as two four-byte integers (eight bytes total): days before or since January 1, 1900 and seconds since midnight.
smalldatetime	smalldatetime	NULL	A date and time accurate to the minute. Stored as two unsigned two-byte integers (four bytes total): number of days since January 1, 1900 and minutes since midnight.

## Partitioning

Customers who enable partitioning can refer to the *Administration Guide for Cisco Unified ICM/Contact Center Enterprise & Hosted* for information about security related to partitioning.

## Real-time and Historical Data

Unified ICM/Unified CCE software maintains real-time and historical status information about certain objects in the system such as service, skill groups, routes, and scripts.

**Real-time and Historical Data**

For example, the Route Real Time table contains real-time information about each route. The Route Five Minute and Route Half Hour tables contain historical information about each route. The Route Real Time table contains one row for each route. (It has a one-to-one relationship with the Route table.) The Route Half Hour table contains many rows for each route--Unified ICM/Unified CCE software adds an additional row for each route every half hour. (It has a one-to-many relationship with the Route table.)

The system software updates the real-time tables in the database every ten seconds. Real-time information includes information about what is happening right now (for example, CallsQNow and ExpectedDelay). It also includes summary information about what has happened during the last five minutes (for example, CallsIncomingTo5 and AvgTalkTimeTo5), since the last half-hour historical data (for example, CallsRoutedHalf and CallsAbandQHalf), and since midnight (for example, CallsOfferedToday and CallsHandledToday).

Unified ICM/Unified CCE software generates historical information on five- and 30-minute intervals, with the first interval beginning at midnight. For example, Unified ICM/Unified CCE software adds a new row for each Route to the Route Five Minute table every five minutes. Unified ICM/Unified CCE software adds a new row for each Route to the Route Half Hour table every 30 minutes. Some of the information for the historical tables is derived from accumulation fields in the real-time tables. For example, at the end of each five-minute interval, the value from the CallsOfferedTo5 field in the Route Real Time table is copied to the CallsOfferedTo5 field of the Route Five Minute table.


Each five- and 30-minute row contains a field for the date-time. The time stored in this field is the time at the start of the interval. For example, a Service Five Minute row for the interval from 10:00AM to 10:05AM contains the time 10:00AM. However, some fields within the table contain a snapshot of data from the end of the interval. For example, the CallsQNow field of the Service Five Minute table contains the number of calls queued at the end of the five-minute period. Therefore, the Service Five Minute row with the time of 10:00AM tells you the number of calls queued at 10:05AM. To find the number of calls queued at 10:00AM, look at the Service Five Minute record for 9:55AM.

## Call Detail Data

Each time Unified ICM/Unified CCE software processes a routing request, it generates a Route Call Detail row that contains information about the request and routing decision it made. Each row includes the day on which the request was handled and a key value generated by Unified ICM/Unified CCE software that is unique among all requests handled that day. These two values together comprise a unique identifier for the call.

When Unified ICM/Unified CCE software receives information that a call is completely done (that is, for example, it has been routed to a peripheral, handled by an agent, and disconnected), then a row about the call is written to the Termination Call Detail table. The Termination Call Detail row indicates the agent, skill group, and service that handled the call. It also contains information such as how long the caller was on hold, whether the call was transferred to another agent after the initial routing, and so forth.

If the call was sent to a translation route, the Termination Call Detail row contains the same day and router key values as the Route Call Detail row for the same call. You can use these fields to link the tables and find all the call detail information for a single call. This process is called cradle-to-grave call tracking.

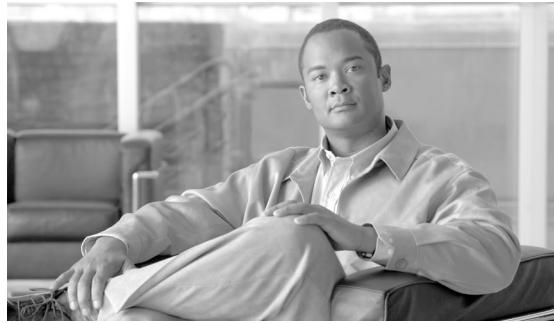

# Chapter 2

## All Tables

---

### All Tables in Alphabetical Order

This section lists all tables in alphabetical order. Unless specifically indicated, fields are applicable to both Unified ICM and Unified CCE. For information on major tables by group, click [here \(page 527\)](#).

#### Admin\_Script\_Schedule\_Map Table

This table is part of the [Script category \(page 539\)](#). For database rules, click [here. \(page 599\)](#)

Each row describes the schedule associated with an administrative script.

Use the Administrative Manager facility of the Script Editor to add, update, and delete Admin\_Script\_Schedule\_Map records.

**Table 1: Related Table for Admin\_Script\_Schedule\_Map**

[Master Script \(page 288\)](#)

(via MasterScriptID)

**Table 2: Indexes for Admin\_Script\_Schedule\_Map Table**

index_name	index_description	index_keys
XPKAdmin_Script_Schedule_Map	clustered, unique, primary key located on PRIMARY	MasterScriptID, SequenceNumber

**Admin\_Script\_Schedule\_Map Table****Fields in Admin\_Script\_Schedule\_Map Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
DayFlags	A bitmask specifying the days on which the script is executed.  To see values, click <a href="#">here (page 558)</a> .	DBINT	NOT NULL
DayOfMonth	Indicates to which day of month the schedule applies.  To see values, click <a href="#">here (page 558)</a> .	DBSMALLINT	NOT NULL
DayPosition	In conjunction with DayType, the position of a day within a month.  To see values, click <a href="#">here (page 558)</a> .	DBSMALLINT	NOT NULL
DayType	Indicates to which day the schedule applies.  To see values, click <a href="#">here (page 558)</a> .	DBSMALLINT	NOT NULL
Description	Additional information about the schedule.	DESCRIPTION	NULL
EndDay	The day of the month on which the schedule expires. The value is <b>0</b> if the schedule has no end date.	DBSMALLINT	NOT NULL
EndHour	The hour of the day at which the schedule expires. The value is <b>0</b> if the schedule has no end time.	DBSMALLINT	NOT NULL
EndMinute	The minute of the hour at which the schedule expires. The value is <b>0</b> if the schedule has no end time.	DBSMALLINT	NOT NULL
EndMonth	The month in which the schedule expires. The value is <b>0</b> if the schedule has no end date.	DBSMALLINT	NOT NULL
EndSecond	The second of the minute at which the schedule expires. The value is <b>0</b> if the schedule has no end time.	DBSMALLINT	NOT NULL
EndYear	The year in which the schedule expires. The value is <b>0</b> if the schedule has no end date.	DBINT	NOT NULL
MasterScriptID	The scheduled administrative script.	DBINT	PK, FK NOT NULL
MonthOfYear	Indicates to which month the schedule applies:  • <b>0</b> = Applies to every month  • <b>1-12</b> = Specifies the month of year	DBSMALLINT	NOT NULL
Recurrence	The granularity of the script frequency interval:	DBSMALLINT	NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	<ul style="list-style-type: none"> <li>• <b>0</b> = hours</li> <li>• <b>1</b> = minutes</li> <li>• <b>2</b> = seconds</li> </ul>		
RecurrenceFreq	Specifies how many recurrence intervals occur between successive executions.	DBINT	NOT NULL
SequenceNumber	Index for schedules associated with a specific master script.	DBINT	PK NOT NULL
StartDay	The day of the month on which the schedule goes into effect ( <b>1</b> through <b>31</b> ).	DBSMALLINT	NOT NULL
StartHour	The hour of the day at which the schedule goes into effect.	DBSMALLINT	NOT NULL
StartMinute	The minute of the hour at which the schedule goes into effect.	DBSMALLINT	NOT NULL
StartMonth	The month in which the schedule goes into effect ( <b>1</b> through <b>12</b> ).	DBSMALLINT	NOT NULL
StartSecond	The second of the minute at which the schedule goes into effect.	DBSMALLINT	NOT NULL
StartYear	The year in which the schedule goes into effect	DBINT	NOT NULL
Type	The type of schedule.	DBSMALLINT	NOT NULL

## Agent Table

This table is one of the Agent Detail tables in the [Skill Target category \(page 544\)](#). To see database rules for these tables, click [here \(page 600\)](#).

It contains one record for each agent (a person capable of answering calls). Each agent is associated with a specific peripheral (ACD) and can be a member of one or more skill groups.

Use Configuration Manager to add, update, and delete Agent records.

### Related Tables

- [Agent Desk Settings \(page 18\)](#) (via AgentDeskSettingsID)
- [Agent Event Detail \(page 24\)](#) (via SkillTargetID)
- [Agent Logout \(page 33\)](#) (via SkillTargetID)
- [Agent Real Time \(page 34\)](#) (via SkillTargetID)

**Agent Table**

- [Agent State Trace \(page 64\)](#) (via SkillTargetID)
- [Agent Team Member \(page 71\)](#) (via SkillTargetID)
- [Dialer Detail \(page 206\)](#) (via PeripheralNumber)
- [Galaxy Agent Performance \(page 240\)](#) (via SkillTargetID)
- [Peripheral \(page 306\)](#) (via PeripheralID)
- [Person \(page 322\)](#) (via PersonID)
- [Schedule \(page 365\)](#) (via ScheduleID)
- [Skill Group Member \(page 477\)](#) (via SkillTargetID)
- [Skill Target \(page 489\)](#) (via SkillTargetID)
- [Termination Call Detail \(page 490\)](#)(AgentSkillTargetID maps to Agent.SkillTargetID. SourceAgentSkillTargetID maps to Agent.SkillTargetID)

**Table 3: Indexes for Agent Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XAK1Agent_Map	nonclustered, unique, unique key located on PRIMARY	PeripheralID, PersonID
XAK2Agent	nonclustered, unique, unique key located on PRIMARY	PeripheralID, PeripheralNumber
XIE2Agent	nonclustered, unique, primary key located on PRIMARY	AgentDeskSettingsID
XIE3Agent	nonclustered, unique, primary key located on PRIMARY	ScheduleID
XIE4Agent	nonclustered, unique, primary key located on PRIMARY	EnterpriseName
XPKAgent	clustered, unique, primary key located on PRIMARY	SkillTargetID

**Fields in Agent Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
AgentDeskSettingsID	Identifies the agent desk settings associated with the agent.	DBINT	IE-2, FK NULL
AgentStateTrace	Indicates whether the software collects agent state trace data for the agent:  • Y = Yes  • N = No	DBCHAR	NOT NULL
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
ConfigParam	A string of parameters the software sends to the peripheral to initialize the agent.	varchar(255)	NULL
Deleted	Deleted Flag. Stored as a character: <ul style="list-style-type: none"><li>• <b>Y</b> = Yes</li><li>• <b>N</b> = No</li></ul>	DBCHAR	NOT NULL
Description	Additional information about the agent.	DESCRIPTION	NULL
EnterpriseName	An enterprise name for the agent that is unique within the enterprise. You might form the name by combining the agent's first and last name with the name of the peripheral.	VNAME32	IE-4 NOT NULL
PeripheralID	Foreign key from the Peripheral table.	DBSMALLINT	AK-1, AK-2, FK NOT NULL
PeripheralName	The name of the agent as known to the peripheral.	VNAME32	NULL
PeripheralNumber	The agent's login ID assigned at the switch.	varchar(32)	AK-2 NOT NULL
PersonID	Foreign key from the Person table.	DBINT	AK-1, FK NOT NULL
ScheduleID	Identifies an imported schedule associated with the agent.	DBINT	FK, IE-3 NULL
SkillTargetID	An identifier that is unique among all skill targets in the enterprise.	DBINT	PK, FK NOT NULL
SupervisorAgent	Indicates whether an agent is a supervisor. <ul style="list-style-type: none"><li>• <b>Y</b> = Yes, agent is a supervisor</li><li>• <b>N</b> = No, agent is not a supervisor</li></ul>	DBCHAR	NOT NULL
TemporaryAgent	Indicates whether the agent is a temporary agent created by the CallRouter: <ul style="list-style-type: none"><li>• <b>Y</b> = Yes, created by the CallRouter</li><li>• <b>N</b> = No, not created by the CallRouter</li></ul>	DBCHAR	NOT NULL
UserDeletable	Indicates if the record can be deleted by a user. Default is Y.	DBCHAR	NOT NULL

**Agent\_Attribute Table****Agent\_Attribute Table**

This table defines what attributes an agent actually has. It's parent, for change stamp purposes, is Agent.

**Note:** This table supports individual adds and deletes, as well as delete all.

**Fields in Agent\_Attribute Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
AttributeID	Foreign key to the Attribute table, and part of the primary key.	DBINT	PK2, NOT NULL
AttributeValue	Value of this attribute.	varchar(255)	YES
Description	Description	DESCRIPTION	YES
SkillTargetID	Foreign key to the Agent table, and part of the primary key.	DBINT	PK1, NOT NULL
UseDefault	Y or N. If Y, use the default value from the Attribute table. If N, use the value specified here.	DBCCHAR	NOT NULL

**Agent\_Desk\_Settings Table**

This table is part of the [Skill Target category \(page 544\)](#). To see database rules for these tables, click [here \(page 600\)](#).

Each row defines the features available to an enterprise agent and how the software handles certain state changes for the agent. Use Unified ICM Configuration Manager to add, update, and delete Agent\_Desk\_Settings records.

**Table 4: Related Tables for Agent\_Desk\_Settings**

<a href="#">Agent (page 15)</a> (via AgentDeskSettingsID)	<a href="#">Peripheral (page 306)</a> (via AgentDeskSettingsID)
--	--

**Table 5: Indexes for Admin\_Desk\_Settings Table**

index_name	index_description	index_keys
XAK1Agent_Desk_Settings	nonclustered, unique, unique key located on PRIMARY	EnterpriseName
XPKAgent_Desk_Settings	on PRIMARY	AgentDeskSettingsID

**Fields in Agent\_Desk\_Settings Table :**

Field Name:	Description:	Data Type:	Keys and Null Option:
AgentCanSelectGroup	Indicates whether the agent can select which groups they are logged in to.	DBCHAR	NOT NULL
AgentDeskSettingsID	A unique identifier for the agent desk settings.	DBINT	PK NOT NULL
AgentToAgentCallsAllowed	Indicates whether calls to other agents are allowed: <ul style="list-style-type: none"><li>• <b>Y</b> = Yes, calls to other agents are allowed.</li><li>• <b>N</b> = No, calls to other agents are not allowed.</li></ul>	DBCHAR	NOT NULL
AutoAnswerEnabled	Indicates whether calls to the agent are automatically answered: <ul style="list-style-type: none"><li>• <b>Y</b> = Yes, calls automatically answered.</li><li>• <b>N</b> = No, calls are not automatically answered.</li></ul>	DBCHAR	NOT NULL
AutoRecordOnEmergency	Specifies whether to automatically record or not record when an emergency call request started: <ul style="list-style-type: none"><li>• <b>0</b> = Do not automatically record</li><li>• <b>1</b> = Automatically record</li></ul>	DBINT	NULL
AvailAfterIncoming	Indicates whether to automatically consider the agent available after handling an incoming call: <ul style="list-style-type: none"><li>• <b>Y</b> = Yes, consider agent available.</li><li>• <b>N</b> = No, do not consider agent available.</li></ul>	DBCHAR	NOT NULL
AvailAfterOutgoing	Indicates whether to automatically consider the agent available after handling an outbound call: <ul style="list-style-type: none"><li>• <b>Y</b> = Yes, consider agent available.</li><li>• <b>N</b> = No, do not consider agent available.</li></ul>	DBCHAR	NOT NULL
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
DefaultDevicePortAddress	Optional value to override the default port address for the agent telephony device.	VNAME32	NULL
Description	Additional information about the desk settings.	DESCRIPTION	NULL

**Agent\_Desk\_Settings Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
EmergencyCallMethod	Indicates whether Unified CCE Enterprise will create a consultative call or a blind conference call for an emergency call request: <ul style="list-style-type: none"><li>• <b>0</b> = Consultative call</li><li>• <b>1</b> = Blind conference call</li></ul>	DBINT	NULL
EnterpriseName	An enterprise name for the agent desk settings that is unique within the enterprise.	VNAME32	AK-1 NOT NULL
IdleReasonRequired	Indicates whether the agent must enter a reason before entering the Idle state: <ul style="list-style-type: none"><li>• <b>Y</b> = Yes, agent must enter a reason.</li><li>• <b>N</b> = No, agent does not need to enter a reason.</li></ul>	DBCHAR	NOT NULL
LogoutNonActivityTime	Number of seconds on non-activity at the desktop after which the software automatically logs out the agent.	DBINT	NULL
LogoutReasonRequired	Indicates whether the agent must enter a reason before logging out: <ul style="list-style-type: none"><li>• <b>Y</b> = Yes, agent must enter a reason.</li><li>• <b>N</b> = No, agent does not need to enter a reason.</li></ul>	DBCHAR	NOT NULL
NonACDCallsAllowed	Indicates whether the agent can place or handle non-ACD calls: <ul style="list-style-type: none"><li>• <b>Y</b> = Yes, agent can place or handle non-ACD calls.</li><li>• <b>N</b> = No, agent cannot place or handle non-ACD calls.</li></ul>	DBCHAR	NOT NULL
OutboundAccessInternational	Indicates whether the agent can initiate international calls: <ul style="list-style-type: none"><li>• <b>Y</b> = Yes, agent can initiate calls.</li><li>• <b>N</b> = No, agent cannot initiate calls.</li></ul>	DBCHAR	NOT NULL
OutboundAccessOperatorAssisted	Indicates whether the agent can initiate operator assisted calls: <ul style="list-style-type: none"><li>• <b>Y</b> = Yes, agent can initiate calls.</li><li>• <b>N</b> = No, agent cannot initiate calls.</li></ul>	DBCHAR	NOT NULL
OutboundAccessPBX	Indicates whether the agent can initiate outbound PBX calls:	DBCHAR	NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	<ul style="list-style-type: none"> <li>• <b>Y</b> = Yes, agent can initiate calls.</li> <li>• <b>N</b> = No, agent cannot initiate calls.</li> </ul>		
OutboundAccessPrivateNet	<p>Indicates whether the agent can initiate calls through the private network:</p> <ul style="list-style-type: none"> <li>• <b>Y</b> = Yes, agent can initiate calls.</li> <li>• <b>N</b> = No, agent cannot initiate calls.</li> </ul>	DBCHAR	NOT NULL
OutboundAccessPublicNet	<p>Indicates whether the agent can initiate calls through the public network:</p> <ul style="list-style-type: none"> <li>• <b>Y</b> = Yes, agent can initiate calls.</li> <li>• <b>N</b> = No, agent cannot initiate calls.</li> </ul>	DBCHAR	NOT NULL
QualityRecordingRate	Indicates how frequently calls to the agent are recorded.	DBINT	NULL
RecordingMode	( <i>For future use.</i> ) Specifies whether the call requests are routed through the Cisco Communication Manager PIM. The <b>default</b> is <b>0</b> , which means that call requests do not get routed through the Cisco Communication Manager PIM.	DBINT	NULL
RemoteAgentType	<p>Determines how mobile agents who use this dial plan are handled. This field is not used until Release 7.2.</p> <p>Values are:</p> <p>0 = local agent, no remote access allowed. This is the default</p> <p>1 = use call by call mobile agent routing.</p> <p>2 = use nailed connection for mobile agent routing</p> <p>3 = agent chooses call by call or nailed connection at login.</p>	DBSMALLINT	NOT NULL
RemoteLoginWithoutDesktop	<p>Y or N.</p> <p>If Y, mobile agent is permitted to login without a desktop. This field is not used until Release 7.2.</p>	DBCHAR	NOT NULL
RingNoAnswerDialedNumberID	Provides the dialed number identifier for the new re-route destination in case of a ring-no-answer.	DBINT	NULL

**Agent\_Desk\_Settings Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
RingNoAnswerTime	Number of seconds a call may ring at the agent's station before being redirected.	DBINT	NULL
SilentMonitorAudibleIndication	Specifies whether an audio click will sound when silent monitoring is started:  • <b>1</b> = An audible click will sound.  • <b>0</b> = An audible click will not sound.	DBINT	NULL
SilentMonitorWarningMessage	Specifies whether a warning message box will appear on the agent's desktop when silent monitoring is started:  • <b>1</b> = A warning message box will appear.  • <b>0</b> = A warning message box will not appear.	DBINT	NULL
SupervisorAssistCallMethod	Indicates whether Unified CCE Enterprise will create a consultative call or a blind conference call for the supervisor assistance request:  • <b>0</b> = Consultative call  • <b>1</b> = Blind conference	DBINT	NULL
SupervisorCallsAllowed	Indicates whether the agent can initiate supervisor assisted calls:  • <b>Y</b> = Yes, agent can initiate calls.  • <b>N</b> = No, agent cannot initiate calls.	DBCHAR	NOT NULL
WorkModeTimer	Specifies the auto wrap-up time out. The <b>default</b> value is <b>0</b> (auto wrap-up is disabled).	DBINT	NULL
WrapupDataIncomingMode	Indicates whether the agent is allowed or required to enter wrap-up data after an inbound call:  • <b>0</b> = Required  • <b>1</b> = Optional  • <b>2</b> = Not allowed	DBINT	NOT NULL
WrapupDataOutgoingMode	Indicates whether the agent is allowed or required to enter wrap-up data after an outbound call:  • <b>0</b> = Required	DBINT	NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	<ul style="list-style-type: none"> <li>• 1 = Optional</li> <li>• 2= Not allowed</li> </ul>		

## Agent\_Distribution Table

This is one of the Peripheral Detail tables in the [Device \(page 529\)](#) category. For database rules, click [here \(page 595\)](#).

Each row indicates whether to send real-time and historical agent data from a specific peripheral to a specific Administration & Data Server.

Use Unified ICM Configuration Manager to add, update, and delete Agent\_Distribution records.

**Table 6: Related Table for Agent\_Distribution**

<a href="#">Peripheral (page 306)</a> (via PeripheralID)
--

**Table 7: Indexes for Admin\_Distribution Table**

index_name	index_description	index_keys
XAK1Agent_Distribution	nonclustered, unique, unique key located on PRIMARY	PeripheralID, DistributorSiteName
XPKAgent_Distribution	clustered, unique, primary key located on PRIMARY	AgentDistributionID

### Fields in Agent\_Distribution Table :

Field Name:	Description:	Data Type:	Keys and Null Option:
AgentDistributionID	A unique identifier for the agent distribution.	DBINT	PK NOT NULL
AgentHistoricalData	The flag that indicates to send Agent historical to HDS server filtered by peripheral. Default: Y	DBCHAR	NOT NULL
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
DistributorSiteName	The name of the Distributor site to which agent data is sent.	VNAME32	AK-1 NOT NULL
Enabled	Indicates whether to send agent data or not: <ul style="list-style-type: none"> <li>• Y = Yes, an agent can send data.</li> <li>• N = No, an agent cannot send data.</li> </ul>	DBCHAR	NOT NULL
PeripheralID	The peripheral from which agent data is sent.	DBSMALLINT	AK-1, FK NOT NULL

**Agent\_Event\_Detail Table****Agent\_Event\_Detail Table**

This table is one of the Agent Detail tables in the [Skill Target category \(page 544\)](#). To see database rules for these tables, click [here \(page 600\)](#).

This table can become very large. Running custom reporting queries against it while it is on the HDS can degrade performance. To optimize performance, extract the data from the HDS into your own custom database on a separate server (one that is not used for other Unified ICM/Unified CCE components). Use only DBDateTime (date and time of the record that was written to the HDS database) to perform the extraction. The table on the custom database can be indexed according to the custom reporting needs.

Displays agent LOGIN, LOGOUT, and NOT\_READY events.

**Table 8: Related Tables for Agent\_Event\_Detail**

<a href="#">Agent (page 15)</a> (via SkillTargetID)	<a href="#">Media Routing Domain (page 290)</a> (via MRDomainID)
---	--

**Table 9: Indexes for Agent\_Event\_Detail Table**

index_name	index_description	index_keys
XAK1Agent_Event_Detail	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XIEIAgent_Event_Detail	nonclustered, unique, primary key located on PRIMARY	DbDateTime
XPKAgent_Event_Detail	clustered, unique, primary key located on PRIMARY	DateTime, SkillTargetID, MRDomainID, TimeZone

**Fields in Agent\_Event\_Detail Table :**

Field Name:	Description:	Data Type:	Keys and Null Option:
DateTime	The date and time (in Central Controller local time) that the transition for the event occurred. For the NOT_READY event, the date and time (in Central Controller local time) that the transition for the event occurred or the interval boundary occurred.	DBDATETIME	PK NOT NULL
DbDateTime	The current date and time stamp when the records are written to the HDS database. The logger database has NULL for this column.	DBDATETIME	IE-1 NULL
Duration	Duration in seconds associated with the EVENT:  <b>LOGIN:</b> Typically set to zero  <b>LOGOUT:</b> Number of seconds the agent was logged into the Media Routing Domain.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	<p><b>NOT_READY:</b> Number of seconds the agent was in the NotReady State with respect to the Media Routing Domain, from the last state change or from the last interval boundary.</p> <p>For example:</p> <p><i>Time=12:10:00 Agent NotReady state transition</i></p> <p><i>Time=12:11:00 Agent Ready state transition, AgentEventDetail.Duration=60</i></p> <p><i>Time=12:25:00 Agent NotReady state transition</i></p> <p><i>Time=12:30:00 Interval boundary change, AgentEventDetail.Duration=300</i></p> <p><i>Time=13:00:00 Interval boundary change, AgentEventDetail.Duration=1800</i></p>		
Event	<p>Event transition that occurred. This value represents the event that is triggered and does not correlate with Agent State values.</p> <ul style="list-style-type: none"> <li>• <b>1 = LOGIN</b> Agent logged in to the Media Routing Domain,</li> <li>• <b>2 = LOGOUT</b> Agent logged out of the Media Routing Domain,</li> <li>• <b>3 = NOT_READY</b> Agent transitioned out of the NOT_READY state or Agent remained in the NOT_READY state during the interval boundary.</li> </ul>	DBINT	NOT NULL
LoginDateTime	Date/Time (in Central Controller local time) when the agent initially logged into the Media Routing Domain.	DBDATETIME	NOT NULL
MRDomainID	The ID of the Media Routing Domain with which the event is associated.	DBINT	PK NOT NULL
ReasonCode	The ReasonCode associated with the event. Click <a href="#">here (page 575)</a> .	DBINT	NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL
SkillTargetID	The SkillTargetID of the agent.	DBINT	PK NOT NULL
TimeZone	The time zone for the dates and time. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK NOT NULL

## Agent\_Half\_Hour Table

This table is in the [Skill Target category \(page 544\)](#). To see database rules for these tables, click [here \(page 600\)](#).

**Agent\_Half\_Hour Table**

Central database only.

Each row in the table is for an agent/MRD pair. For example, if the agent was logged into three (3) MRDs in a given half-hour, then the agent will have three (3) rows in the table for that same half-hour.

Related Tables for Agent\_Half\_Hour

- [Agent \(page 15\)](#)(via SkillTargetID)
- [Media Routing Domain \(page 290\)](#) (via MRDomainID)

**Table 10: Indexes for Agent\_Half\_Hour Table**

index_name	index_description	index_keys
XAKIAgentHalfHour	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XIE1Agent_Half_Hour	nonclustered, unique, primary key located on PRIMARY	DbDateTime
XPKAgent_Half_Hour	clustered, unique, primary key located on PRIMARY	DateTime, SkillTargetID, TimeZone, MRDomainID

**Note:** The Agent\_Interval Table will be populated with 30/15 minute reporting data, depending on the Historical Reporting Interval setting for the PG. The Agent\_Half\_Hour Table will not be populated with this data.

**Fields in Agent\_Half\_Hour Table :**

Field Name:	Description:	Data Type:	Keys and Null Option:
AvailableInMRDTimeToHalf	<p>The number of seconds in the half-hour interval that this agent was available with respect to this Media Routing Domain.</p> <p>An agent is Available, or eligible to be assigned a task in this MRD, if the agent meets all of these conditions:</p> <ul style="list-style-type: none"> <li>• The agent is in any state other than Not Ready state for this MRD.</li> <li>• The agent is not working on a non-interruptible task in another MRD. Only e-mail tasks are interruptible, meaning that system software can assign the agent another task while s/he is working on an e-mail.</li> <li>• Voice calls, single-session chat sessions, multi-session chat sessions, and Blended Collaboration chat sessions cannot be interrupted.</li> <li>• The agent has not reached the maximum task limit for this MRD.</li> </ul> <p>For Voice, single-session chat, e-mail and Blended Collaboration MRDs, the task limit is always one task.</p>	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	For the multi-session chat MRD, the task limit is customized through the Web Collaboration Option administration application.		
AvailTimeToHalf	Total time, in seconds, the agent was in the NOT ACTIVE state during the half- hour interval.	DBINT	NULL
DateTime	The Central Controller date and time at the start of the interval.	DBSMALLDATE	PK NOT NULL
DbDateTime	The current date and time stamp when the records are written to the HDS database. The logger database has NULL for this column.	DBDATETIME	IE-1 NULL
LoggedOnTimeToHalf	Total time, in seconds, the agent was logged into this Media Routing Domain during the half- hour interval.	DBINT	NULL
MRDomainID	Identifies the Media Routing Domain.	DBINT	PK, FK NOT NULL
NotReadyTimeToHalf	Total time, in seconds, the agent was in the Not Ready state (a state in which agents are logged on, but are neither involved in any call handling activity, nor available to handle a call) with respect to this Media Routing Domain during the half- hour interval.	DBINT	NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE Enterprise software to track the record.	DBFLT8	AK-1 NOT NULL
Reserved1	Reserved for future use.	DBINT	NULL
Reserved2	Reserved for future use.	DBINT	NULL
Reserved3	Reserved for future use.	DBINT	NULL
Reserved4	Reserved for future use.	DBINT	NULL
Reserved5	Reserved for future use.	DBFLT4	NULL
RoutableInMRDTimeToHalf	The number of seconds in the half-hour interval that this agent was routable with respect to this MRD.	DBINT	NULL
RouterCallsAbandQToHalf	Number of calls queued to the agent by the CallRouter that were abandoned during the half-hour interval.  This field is valid only if calls are routed directly to an agent, via either the Queue-to-Agent node or the Send-to-Agent node in the routing script.	DBINT	NULL

## Agent\_Half\_Hour Table

Field Name:	Description:	Data Type:	Keys and Null Option:
RouterCallsAbandToHalf	<p>The count of calls abandoned after they have been routed to an agent, during the half-hour interval.</p> <p>This field is valid only if calls are routed directly to an agent, via either the Queue-to-Agent node or the Send-to-Agent node in the routing script.</p> <p>This field is <b>applicable to Unified CCE</b>.</p>	DBINT	NULL
RouterCallsAnsweredToHalf	<p>The count of calls that are answered by the agent in this Skill Group in the half-hour interval.</p> <p>This field is valid only if calls are routed directly to an agent, via either the Queue-to-Agent node or the Send-to-Agent node in the routing script.</p> <p>This field is <b>applicable to Unified CCE</b>.</p>	DBINT	NULL
RouterCallsDequeuedToHalf	<p>This value is incremented when a call is dequeued from an agent to be routed to another agent in the half-hour interval.</p> <p>This field is valid only if calls are routed directly to an agent, via either the Queue-to-Agent node or the Send-to-Agent node in the routing script.</p>	DBINT	NULL
RouterCallsHandledToHalf	<p>The number of calls handled at this agent during the half-hour interval, reflecting the number of calls that were sent to this agent that have the Handled type of Call Disposition Flag value 1.</p> <p>For systems that use the Router Re-query feature, this is the count of re-query events for the call in the half-hour interval</p> <p>This field is valid only if calls are routed directly to an agent, via either the Queue-to-Agent node or the Send-to-Agent node in the routing script.</p> <p>This field is <b>applicable to Unified CCE</b>.</p>	DBINT	NULL
RouterErrorToHalf	<p>The number of calls that resulted in an error condition in the half-hour interval.</p> <p>This field is valid only if calls are routed directly to an agent, via either the Queue-to-Agent node or the Send-to-Agent node in the routing script.</p> <p>This field is <b>applicable to Unified CCE</b>.</p>	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
RouterCallsRedirectedToHalf	<p>For systems that use the Router Re-query feature, this is the count of re-query events for the call in the half-hour interval.</p> <p>For systems using RONA, this is the count of TCDs with call disposition of DBCDF_REDIRECTED – 5.</p> <p>If a system has both configurations, both events will increment this field..</p> <p>This field is valid only if calls are routed directly to an agent, via either the Queue-to-Agent node or the Send-to-Agent node in the routing script.</p> <p><b>This field is applicable to Unified CCE.</b></p>	DBINT	NULL
RouterCallsOfferedToHalf	<p>The count of calls routed or queued to the agent in the half-hour interval.</p> <p>This field is valid only if calls are routed directly to an agent, via either the Queue-to-Agent node or the Send-to-Agent node in the routing script.</p>	DBINT	NULL
RouterQueueCallsToHalf	Number of calls queued to the agent by the CallRouter during the half-hour interval.	DBINT	NULL
SkillTargetID	Identifies the agent.	DBINT	PK, FK NOT NULL
TalkOtherTimeToHalf	<p>Total time, in seconds, the agent spent talking on internal calls during the half- hour interval.</p> <p>Only defined for <b>voice</b> media.</p> <p>For <b>non-voice</b> media, this is set to zero.</p>	DBINT	NULL
TimeZone	The time zone for the date and time. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK NOT NULL

## Agent\_Interval Table

This table describes the Agent Details under the 15 Minute Reporting category.

**Agent\_Interval Table****Fields in Agent\_Interval Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
AvailTime	Total time, in seconds, the agent was in the NOT ACTIVE state during the reporting interval.	DBINT	YES
AvailableInMRDTime	The number of seconds in the reporting interval that this agent was available with respect to this Media Routing Domain.  An agent is Available, or eligible to be assigned a task in this MRD, if the agent meets all of these conditions: <ol style="list-style-type: none"> <li>1. The agent is in any state other than Not Ready state for this MRD</li> <li>2. The agent is not working on a non-interruptible task in another MRD</li> <li>3. Only e-mail tasks are interruptible, meaning that system software can assign the agent another task while s/he is working on an e-mail. Voice calls, single-session chat sessions, multi-session chat sessions, and Blended Collaboration chat sessions cannot be interrupted</li> <li>4. The agent has not reached the maximum task limit for this MRD. For Voice, single-session chat, e-mail and Blended Collaboration MRDs, the task limit is always one task. For the multi-session chat MRD, the task limit is customized through the Web Collaboration Option administration application</li> </ol>	DBINT	YES
DateTime	The Central Controller date and time at the start of the interval.	DBSMALLDATE	PK1, NOT NULL
DbDateTime	The current date and time stamp when the records are written to the HDS database. The logger database has NULL for this column.	DBDATETIME	IE1
Extension	The last extension the agent was logged into during this interval	varchar	NULL
LoggedOnTime	Total time, in seconds, the agent was logged into this Media Routing Domain during the reporting interval.	DBINT	YES
MRDomainID	Identifies the Media Routing Domain.	DBINT	PK4, NOT NULL
NotReadyTime	Total time, in seconds, the agent was in the Not Ready state (a state in which agents are logged on, but are neither involved in any call handling activity, nor available to handle a call) with respect to this Media Routing Domain during the reporting interval.	DBINT	YES
NonACDLineCallsInCount	Indicates how many non-ACD calls the agent answered on one of the non-ACD line. Only populated when Multi-line feature is enabled.	DBNIT	YES

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
NonACDLineCallsOutCount	Indicates how many non-ACD calls the agent initiated on one of the non-ACD line. Only populated when Multi-line feature is enabled.	DBNIT	YES
NonACDLineCallsInTime	Indicates how much time the agent spent on non-ACD calls that the agent answered on one the non-ACD line. This time includes the time from answered until the call ended. Only populated when Multi-line feature is enabled. Only applies to Unified CCE.	DBNIT	YES
NonACDLineCallsOutTime	Indicates how much time the agent spent on non-ACD calls that the agent initiated on one the non-ACD line. This time includes the time from when the call was initiated until the call ended whether or not the far end answered. Only populated when Multiline feature is enabled. Only applies to Unified CCE.	DBNIT	YES
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE Enterprise software to track the record.	DBFLT8	AK1, NOT NULL
ReportingHalfHour	The value indicates Half Hour boundary interval (0 - 47). Two 15 minute interval records will have a unique half hour boundary value.	DBINT	IE2, NULL
ReportingInterval	During the upgrade from 7.x to 8.0, this column value will be NULL and it is assumed to be 30 minute interval.	DBINT	IE3, NULL
Reserved1	Reserved for future use.	DBNIT	YES
Reserved2	Reserved for future use.	DBNIT	YES
Reserved3	Reserved for future use.	DBNIT	YES
Reserved4	Reserved for future use.	DBNIT	YES
Reserved5	Reserved for future use.	DBFLT4	YES
RoutableInMRDTime	The number of seconds in the reporting interval that this agent was routable with respect to this MRD.	DBINT	YES
RouterCallsAbandQ	Number of calls queued to the agent by the CallRouter that were abandoned during the reporting interval. This field is valid only if calls are routed directly to an agent, via either the Queue-to-Agent node or the Send-to-Agent node in the routing script.	DBINT	YES
RouterQueueCalls	Number of calls queued to the agent by the CallRouter during the reporting interval.	DBINT	YES

**Agent\_Interval Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
RouterCallsOffered	The count of calls routed or queued to the agent in the reporting interval. This field is valid only if calls are routed directly to an agent, via either the Queue-to-Agent node or the Send-to-Agent node in the routing script.	DBINT	YES
RouterCallsAband	The count of calls abandoned after they have been routed to an agent, during the reporting interval. This field is valid only if calls are routed directly to an agent, via either the Queue-to-Agent node or the Send-to-Agent node in the routing script. This field is applicable to Unified CCE.	DBINT	YES
RouterCallsDequeued	This value is incremented when a call is dequeued from an agent to be routed to another agent in the reporting interval. This field is valid only if calls are routed directly to an agent, via either the Queue-to-Agent node or the Send-to-Agent node in the routing script.	DBINT	YES
RouterCallsRedirected	For systems that use the Router Re-query feature, this is the count of re-query events for the call in the reporting interval. For systems using RONA, this is the count of TCDs with call disposition of DBCDF_REDIRECTED ¦ 5. If a system has both configurations, both events will increment this field. This field is valid only if calls are routed directly to an agent, via either the Queue-to-Agent node or the Send-to-Agent node in the routing script. This field is applicable to Unified CCE.	DBINT	YES
RouterCallsAnswered	The count of calls that are answered by the agent in this Skill Group in the reporting interval. This field is valid only if calls are routed directly to an agent, via either the Queue-to-Agent node or the Send-to-Agent node in the routing script. This field is applicable to Unified CCE.	DBNIT	YES
RouterCallsHandled	The number of calls handled at this agent during the reporting interval, reflecting the number of calls that were sent to this agent that have the Handled type of Call Disposition Flag value 1. For systems that use the Router Re-query feature, this is the count of re-query events for the call in the reporting interval. This field is valid only if calls are routed directly to an agent, via either the Queue-to-Agent node or the Send-to-Agent node in the routing script. This field is applicable to Unified CCE.	DBNIT	YES
RouterError	The number of calls that resulted in an error condition in the reporting interval. This field is valid only if calls are routed directly to an agent, via either the Queue-to-Agent node or the	DBNIT	YES
SkillTargetID	Identifies the agent.	DBINT	PK2, NOT NULL
TimeZone	The time zone for the date and time. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK3, NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
TalkOtherTime	Total time, in seconds, the agent spent talking on internal calls during the reporting interval. Only defined for voice media. For <b>non-voice</b> media, this is set to zero.	DBINT	YES

## Agent\_Logout Table

This table is one of the Agent Detail tables in the [Skill Target category \(page 544\)](#). To see database rules for these tables, click [here \(page 600\)](#).

Central database only. Each row provides statistics for an agent's session. A session begins when an agent first logs in to the system and ends when the agent logs outs.

**Table 11: Related tables for Agent\_Logout**

Agent (page 15) (via SkillTargetID)	Device Target (page 196) (via NetworkTargetID)
Media Routing Domain (page 290) (via MRDomainID)	

**Table 12: Indexes for Agent\_Logout Table**

index_name	index_description	index_keys
XAK1Agent_Logout	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XPKAgent_Logout	clustered, unique, primary key located on PRIMARY	LogoutDateTime, SkillTargetID, TimeZone, MRDomainID

### Fields in Agent\_Logout Table:

Field Name:	Description:	Data Type:	Keys and Null Option:
Extension	Extensiton the Agent was logged in	varchar (32)	NULL
LoginDuration	Number of seconds the agent was logged in.	DBINT	NULL
LogoutDateTime	Central Controller date and time when the agent logged out.	DBDATETIME	PK NOT NULL
MRDomainID	The identifier for the Media Routing Domain associated with the agent logout.	DBINT	PK NOT NULL
NetworkTargetID	The device target the agent was logged on to. This applies to Unified CCE agents only.	DBINT	NULL
PhoneType	The kind of phone being used: 0 = normal ACD/IPCC phone, or non voice task	DBSMALLINT	NULL

**Agent\_Real\_Time Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	1 = remote phone, call by call  2 = remote phone, nailed connection  All new agent logout data will have a NOT NULL value by default.  During upgrade/migration, the value for this column will be NULL.		
ReasonCode	Reason code returned by the peripheral for the agent logout. Click <a href="#">here (page 575)</a> .	DBINT	NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE Enterprise software to track the record.	DBFLT8	AK-1 NOT NULL
RemotePhoneNumber	For a mobile agent working remotely, the current phone number.	VARCHAR (32)	NULL
SkillTargetID	Identifies the agent.	DBINT	PK NOT NULL
TimeZone	The time zone for the dates and time. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK NOT NULL

**Agent\_Real\_Time Table**

This table is one of the Agent Detail tables in the [Skill Target category \(page 544\)](#). To see database rules for these tables, click [here \(page 600\)](#).

Local database only. Each row in the table is for an agent/MRD pair currently logged in. For example, if the agent was logged into three (3) MRDs, then the agent will have three (3) rows in the table.

**Table 13: Related tables for Agent\_Real\_Time**

Agent ( <a href="#">page 15</a> ) (via SkillTargetID)	Device Target ( <a href="#">page 196</a> ) (via NetworkTargetID)
Media Routing Domain ( <a href="#">page 290</a> ) (via MRDomainID)	Service ( <a href="#">page 386</a> ) (ServiceSkillTargetID maps to Service.SkillTargetID)
Skill Group ( <a href="#">page 432</a> ) (SkillGroupSkillTargetID maps to SkillGroup.SkillTargetID)	

**Table 14: Index - Agent\_Real\_Time Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XPKAgent_Real_Time	clustered, unique, primary key located on PRIMARY	SkillTargetID, MRDomainID

**Fields in Agent\_Real\_Time Table :**

Field Name:	Description:	Data Type:	Keys and Null Option:
AgentStatus	Reserved for future use.	DBINT	NULL
AgentState	The current real time state of the agent with respect to this MRD.  To see Agent State values, click <a href="#">here (page 553)</a> .	DBINT	NULL
AvailableInMRD	The agent's availability status with respect to the Media Routing Domain:  • <b>0</b> = Not Available  • <b>1</b> = ICM Available  • <b>2</b> = Application Available	DBINT	NULL
CallInProgress	The number of tasks associated with this Media Routing Domain on which this agent is currently working.	DBINT	NULL
CampaignID	The campaign ID for the campaign associated with this call. This field is populated when the call is answered by an agent.  This field is applicable to <b>Outbound Option only</b>	DBINT	NULL
CustomerAccountNumber	The account number of the caller with whom the agent is speaking. This field is populated when the call is answered by an agent.  This field is applicable to <b>Outbound Option only</b> .	varchar(32)	NULL
CustomerPhoneNumber	The phone number of the caller with whom the agent is speaking. This field is populated when the call is answered by an agent.  This field is applicable to <b>Outbound Option only</b> .	VTELNO20	NULL
DateTime	The Central Controller date and time at the start of the interval.	DBDATETIME	NOT NULL
DateTimeLastModeChange	The date and time of the agent's last <b>mode</b> change in this MRD.  An agent has a <b>mode</b> with respect to each Media Routing Domain the agent is logged in to. These <b>modes</b> are either <b>routable</b> or <b>not routable</b> .  If the <b>mode</b> is <b>routable</b> , the Unified ICM controls the agent and assigns tasks to the agent. When an agent is routable for an MRD, an application instance (for example: Cisco Unified E-Mail Interaction Manager (Unified EIM) or Cisco Unified Web Interaction Manager (Unified WIM)) will not allow the agent to work on a task unless Unified ICM assigns the task.	DBDATETIME	NULL

## Agent\_Real\_Time Table

Field Name:	Description:	Data Type:	Keys and Null Option:
	<p>If the <b>mode</b> is <b>not routable</b>, the application instance (for example: Unified EIM) controls the agent and assigns tasks to the agent. The software tracks the agent's task activity by monitoring Offer Task, Start Task, and other messages from the application that describe the task the agent is working on.</p> <p>For Unified EIM and Unified WIM, an agent's mode never changes. Each agent is either always routable or always not routable for the Unified EIM and Unified WIM MRDs.</p> <p>An agent's mode is always routable with respect to the voice MRD.</p>		
DateTimeLastStateChange	Date and time of the agent's last state change in this MRD.	DBDATETIME	NULL
DateTimeLogin	<p>Date and time the agent logged on to this MRD.</p> <p>Date and time of the agent's last state change in this MRD.</p>	DBDATETIME	NULL
DateTimeTaskLevelChange	<p>The date and time of the agent's last <i>task level</i> change in this MRD.</p> <p>Chat agents have a maximum number of open slots. The <i>task level</i> changes when the number of open slots changes as a result of the number of calls in progress changing (the number of open slots = the maximum number of tasks - calls in progress).</p> <p>This applies to all other agents as well, however, the <i>task level</i> is always 0 or 1.</p>	DBDATETIME	NULL
Destination	<p>Destination type of outbound call the agent is currently working on:</p> <ul style="list-style-type: none"> <li>• <b>0</b> = None</li> <li>• <b>1</b> = ACD</li> <li>• <b>2</b> = Direct</li> </ul>	DBINT	NULL
Direction	<p>Direction of call agent is currently working on:</p> <ul style="list-style-type: none"> <li>• <b>NULL</b>= None</li> <li>• <b>0</b> = None</li> <li>• <b>1</b> = In</li> </ul> <p>Non-voice voice tasks are always inbound and hence, Direction = 1.</p> <ul style="list-style-type: none"> <li>• <b>2</b> =Out</li> </ul>	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	• 3 = Other		
Extension	Extension the agent is currently working on.	varchar(32)	NULL
FutureUseInt1	Reserved for future use	DBINT	NULL
FutureUseInt2	Reserved for future use	DBINT	NULL
FutureUseInt3	Reserved for future use	DBINT	NULL
FutureUseInt4	Reserved for future use	DBINT	NULL
FutureUseInt5	Reserved for future use	DBINT	NULL
MaxTasks	The maximum number of tasks associated with this Media Routing Domain on which this agent can work simultaneously.	DBINT	NULL
MRDomainID	The identifier for the Media Routing Domain associated with this peripheral.	DBINT	PK, FK NOT NULL
NetworkTargetID	The device target the agent is logged on to. This applies for <b>Unified CCE</b> agents only.	DBINT	FK NULL
OnHold	Extension the agent is currently working on.	DBINT	NULL
PhoneType	The kind of phone being used:  0 = normal ACD/IPCC phone, or non voice task  1 = remote phone, call by call  2 = remote phone, nailed connection	DBSMALLINT	NOT NULL
QueryRuleID	The query rule belonging to the campaign identified by the CampaignID. This field is applicable to <b>Outbound Option</b> only.	DBINT	NULL
ReasonCode	Code received from the peripheral indicating the reason for the agent's last state change. Click <a href="#">here</a> (page 575).	DBINT	NULL
RemotePhoneNumber	For a mobile agent who is working remotely, the current phone number.	VARCHAR (32)	NULL
RequestedSupervisorAssist	Indicates whether the agent has requested supervisor assistance:  • 1= Yes, the agent requested assistance.	DBINT	NULL

## Agent\_Real\_Time Table

Field Name:	Description:	Data Type:	Keys and Null Option:
	<ul style="list-style-type: none"> <li>• 0= No, the agent did not request assistance.</li> </ul> <p>This field is applicable to <b>Unified CCE</b>.</p>		
Routable	<p>Indicates whether the agent is routable with respect to this Media Routing Domain:</p> <ul style="list-style-type: none"> <li>• 1 = the agent is routable.</li> <li>• 0 = the agent is not routable.</li> </ul> <p>An agent has a mode with respect to each Media Routing Domain the agent is logged in to. These modes are either <b>routable</b> or <b>not routable</b>.</p> <p>If the mode is routable, the Unified ICM controls the agent and assigns tasks to the agent. When an agent is routable for an MRD, an application instance (for example: Unified EIM or Unified WIM) will not allow the agent to work on a task unless Unified ICM assigns the task.</p> <p>If the mode is <b>not routable</b>, the application instance (for example: Unified EIM) controls the agent and assigns tasks to the agent. The system software tracks the agent's task activity by monitoring Offer Task, Start Task, and other messages from the application that describe the task the agent is working on.</p> <p>For <b>Unified EIM and Unified WIM</b>, an agent's mode never changes. Each agent is either always <b>routable</b> or always not routable for the Unified EIM and Unified WIM MRDs.</p> <p>An agent's mode is always <b>routable</b> with respect to the <b>voice MRD</b>.</p>	DBINT	NULL
RouterCallsQueueNow	Number of calls currently queued for the agent at the CallRouter.	DBINT	NULL
RouterLongestCallQ	The time when the longest call in queue was queued for the agent.	DBDATETIME	NULL
ServiceSkillTargetID	<p>Identifies the service for the call the agent is currently working on.</p> <p>If this agent is not working on a task in this MRD, this field is zero.</p> <p>If the agent is working on only one task in this MRD, this field is the ID of the service associated with that task.</p> <p>If the agent is working on more than one task in this MRD, and at least one of these tasks is ACTIVE, this field is the ID of the service associated with one of those active tasks.</p> <p>Otherwise, this field is the ID of the service associated with one of the tasks the agent is working on.</p>	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
SkillGroupSkillTargetID	<p>Identifies the skill group for the call the agent is currently working on.</p> <p>If this agent is not working on a task in this MRD, this field is zero.</p> <p>If the agent is working on only one task in this MRD, this field is the ID of the skill group associated with that task.</p> <p>If the agent is working on more than one task in this MRD, and at least one of these tasks is ACTIVE, this field is the ID of the skill group associated with one of those active tasks.</p> <p>Otherwise, this field is the ID of the skill group associated with one of the tasks the agent is working on.</p>	DBINT	NULL
SkillTargetID	Identifies the agent.	DBINT	PK, FK NOT NULL

## Agent\_Skill\_Group\_Half\_Hour Table

This table is in the [Skill Target category \(page 544\)](#). To see database rules for these tables, click [here \(page 600\)](#).

Central database only.

Each row provides half-hour statistics for a member of a skill group. If an individual agent is a member of multiple skill groups, multiple Agent Skill Group Half Hour rows are created for that agent each half-hour.

The software generates Agent\_Skill\_Group\_Half\_Hour records for each skill group member.

### Note:

- Because of rounding, the various time element data such as AgentOutCallsTimeToHalf, HoldTimeToHalf, LoggedOnTimeToHalf (and so on) in the Agent\_Skill\_Group\_Half\_Hour table may differ slightly from the comparable data in the Skill\_Group\_Half\_Hour table. The data in the latter are more exact.
- For blind conferences in Unified CCE with an IPCC System PG, this field is updated when the call that was blind conferenced to an IVR is subsequently answered by another agent. For this call scenario this field is not updated in **Unified CCE without an IPCC System PG**.

**Table 15: Related Table for Agent\_Skill\_Group\_Half\_Hour**

[Skill Group Member \(page 477\)](#) (SkillTargetID + SkillGroupSkillTargetID maps to Skill\_Group\_Member.AgentSkillTargetID + Skill\_Group\_Member.SkillGroupSkillTargetID)

**Agent\_Skill\_Group\_Half\_Hour Table****Table 16: Indexes for Agent\_Skill\_Group\_Half\_HourTable**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XAK1Agent_Skill_Group_Half_Hour	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XIE1Agent_Skill_Group_Half_Hour	nonclustered, located on PRIMARY	DbDateTime
XPKAgent_Skill_Group_Half_Hour	clustered, unique, primary key located on PRIMARY	DateTime, SkillTargetID, SkillGroupSkillTargetID, TimeZone

**Note:** The Agent\_Skill\_Group\_Interval Table will be populated with 30/15 minute reporting data, depending on the Historical Reporting Interval setting for the PG. The Agent\_Skill\_Group\_Half\_Hour Table will not be populated with this data.

**Fields in Agent\_Skill\_Group\_Half\_Hour Table :**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
AbandonHoldCallsToHalf	During the half-hour interval, the total number of ACD calls that were abandoned while being held at an agent position. This value is counted at the time the call disconnects, and the database is updated every half hour.	DBINT	NULL
AbandonHoldOutCallsToHalf	During the half-hour interval, the total number of Outgoing calls that were abandoned while on hold.	DBINT	NULL
AbandonRingCallsToHalf	During the half-hour interval, the total number of ACD calls that abandoned while ringing at an agent's position. The value is incremented at the time the call disconnects.	DBINT	NULL
AbandonRingTimeToHalf	During the half-hour interval, the total ring time associated with ACD calls that were abandoned while alerting an agent's position. RingTime occurs after any DelayTime and LocalQTime. The value is counted at the time the call disconnects, and the database is updated every half hour.	DBINT	NULL
AgentOutCallsOnHoldTimeToHalf	During the half-hour interval, the total number of seconds outbound ACD calls were placed on hold by an agent associated with this skill group. This value is updated in the database when after-call work associated with the call (if any) is completed.	DBINT	NULL
AgentOutCallsOnHoldToHalf	During the half-hour interval, the total number of outbound ACD calls an agent associated with this skill group ended and that were placed on hold at least once during the life of the call. The value is counted when the after-call work associated with the call (if any) is completed, and the database is updated every half hour.	DBINT	NULL
AgentOutCallsTalkTimeToHalf	Total talk time, in seconds, for outbound ACD calls handled by an agent associated with this skill group that ended during the half-hour interval. The value includes the time spent from the call being	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	initiated by the agent to the time the agent begins after call work for the call. The value is counted when the after-call-work time associated with the call (if any) is completed, and the database is updated every half hour.		
AgentOutCallsTimeToHalf	The total handle time, in seconds, for outbound ACD calls handled by an agent associated with this skill group that ended during the half-hour interval. Handle time includes WorkTime, TalkTime, and HoldTime. The AgentOutCallsTime value includes the time spent from the call being initiated by the agent to the time the agent completes after-call work time for the call. The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every half hour.	DBINT	NULL
AgentOutCallsToHalf	The total number of outbound ACD calls made by an agent associated with this skill group that ended during the half-hour interval. The value is counted when any after-call work time associated with the call is completed, and the database is updated every half hour.	DBINT	NULL
AgentTerminatedCallsToHalf	Not currently supported.	DBINT	NULL
AnswerWaitTimeToHalf	<p>The sum of the answer wait times of all tasks an agent associated with this skill group answered during the half-hour interval. It is counted at the time the call is answered, and the database is updated every half hour.</p> <p>It is the current half-hour interval total of:</p> <ul style="list-style-type: none"> <li>• In <b>Unified ICM</b>, the time in seconds from when the call first arrives at the ACD to when the agent answers the call.</li> </ul> <p>AnswerWaitTime is based on the following:</p> <ul style="list-style-type: none"> <li>– <b>DelayTime</b></li> <li>– <b>LocalQTime</b></li> <li>– <b>RingTime</b></li> </ul> <ul style="list-style-type: none"> <li>• In <b>Unified CCE</b>, the number of seconds calls spent between first being queued to the skillgroup through Select (LAA) or Queue to Skillgroup nodes to when they were answered by an agent.</li> </ul> <p>AnswerWaitTime is based on the following:</p> <ul style="list-style-type: none"> <li>– <b>DelayTime</b></li> <li>– <b>LocalQTime</b></li> </ul>	DBINT	NULL

## Agent\_Skill\_Group\_Half\_Hour Table

Field Name:	Description:	Data Type:	Keys and Null Option:
	<ul style="list-style-type: none"> <li>– <b>RingTime</b></li> <li>– <b>NetworkQTime</b></li> </ul>		
AutoOutCallsOnHoldTimeToHalf	<p>The total number of seconds that AutoOut (predictive) calls were placed on hold by an agent associated with this skill group during the half-hour interval. The value is counted when the after-call work associated with the call (if any) has completed, and the database is updated every half hour.</p>	DBINT	NULL
AutoOutCallsOnHoldToHalf	<p>During the half-hour interval, the total number of ended AutoOut (predictive) calls that an agent associated with this skill group have placed on hold at least once. The value is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every half hour.</p>	DBINT	NULL
AutoOutCallsTalkTimeToHalf	<p>Total talk time, in seconds, for AutoOut (predictive) calls handled by an agent associated with this skill group that ended during the half-hour interval. This value includes the time spent from the call being initiated to the time the agent begins after-call work for the call. It includes the HoldTime associated with the call.</p> <p>AutoOutCallsTalkTime is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every half hour.</p>	DBINT	NULL
AutoOutCallsTimeToHalf	<p>The total handle time, in seconds, for AutoOut (predictive) calls handled by an agent associated with this skill group that ended during the half-hour interval. Handle time includes WorkTime, TalkTime, and HoldTime. The AutoOutCallsTime value includes the time spent from the call being initiated to the time the agent completes after-call work time for the call. The value is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every half hour.</p>	DBINT	NULL
AutoOutCallsToHalf	<p>The total number of AutoOut (predictive) calls made by an agent associated with this skill group that ended during the half-hour interval. The value is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every half hour.</p>	DBINT	NULL
AvailTimeToHalf	<p>Total time in seconds an agent associated with this skill group was in the Not_Active state with respect to this skill group during the half-hour interval. AvailTime is included in the calculation of LoggedOnTime.</p>	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
BargeInCallsToHalf	<p>During the half-hour interval, the number of calls associated with an agent associated with the skill group barged in on either by the supervisor or by the agent</p> <p>This field is applicable for Unified CCE only.</p>	DBINT	NULL
BusyOtherTimeToHalf	<p>Number of seconds an agent spent in the BusyOther state with respect to this skill group during the half-hour interval. BusyOtherTime is included in the calculation of LoggedOnTime.</p>	DBINT	NULL
CallbackMessagesTimeToHalf	<p>Number of seconds the agent spent processing callback messages during the half-hour interval.</p> <p>This field applicable only to the <b>Aspect ACD</b>.</p>	DBINT	NULL
CallbackMessagesToHalf	<p>Number of callback messages processed by the agent during the half-hour interval.</p> <p>This field applicable only to the <b>Aspect ACD</b>.</p>	DBINT	NULL
CallsAnsweredToHalf	<p>Number of calls answered by an agent associated with this skill group during the half-hour interval. The count for CallsAnswered is counted at the time the call is answered, and the database is updated every half hour.</p>	DBINT	NULL
CallsHandledToHalf	<p>The number of inbound ACD calls that have been answered and have completed wrap-up by agents in the skill group during the half-hour interval.</p> <p>A handled call is:</p> <ul style="list-style-type: none"> <li>• An incoming <b>ACD</b> call that was answered by an agent, and then completed.</li> <li>• A <b>non-voice task</b> that the agent started working on then completed.</li> </ul> <p>A handled call/task is completed when the agent associated with the call/task finishes the wrap-up work associated with the call/task.</p> <p>This field is applicable for <b>Unified ICM/Unified CCE</b>.</p>	DBINT	NULL
ConferencedInCallsTimeToHalf	<p>During the half-hour interval, the number of seconds an agent associated with this skill group was involved in incoming conference calls. Conferenced in calls include both ACD and non-ACD. The value is counted when the agent drops off the call or the call becomes a simple two-party call, and the database is updated every half hour.</p>	DBINT	NULL

## Agent\_Skill\_Group\_Half\_Hour Table

Field Name:	Description:	Data Type:	Keys and Null Option:
ConferencedInCallsToHalf	During the half-hour interval, the number of incoming calls the agent was conferenced into. Incoming calls include ACD and non-ACD calls. The value is counted when the agent drops off the call or the call becomes a simple two-party call, and the database is updated every half hour.	DBINT	NULL
ConferencedOutCallsTimeToHalf	During the half-hour interval, the number of seconds that an agent spent on conference calls that the agent initiated. This includes time spent on both ACD and non-ACD conference calls initiated by the agent. The value is counted when the agent drops off the call or the call becomes a simple two-party call, and the database is updated every half hour.	DBINT	NULL
ConferencedOutCallsToHalf	During the half-hour interval, the number of conference calls the agent initiated. The conferenced out calls include ACD and non-ACD calls. The count of ConferencedOutCalls is counted when the agent drops off the call or the call becomes a simple two-party call, and the database is updated every half hour.	DBINT	NULL
ConsultativeCallsTimeToHalf	During the half-hour interval, the number of seconds agents spent handling consultative calls with at least one ACD call on hold. The value is counted when the after-call work time associated with the consultative call (if any) has completed, and the database is updated every half hour.	DBINT	NULL
ConsultativeCallsToHalf	The number of consultative calls, dealt with by an agent associated with this skill group, that ended in the half-hour interval. The count is counted when the after-call work time associated with the consultative call (if any) is completed, and the database is updated every half hour.	DBINT	NULL
DateTime	The date and time at the start of the half-hour interval.	DBSMALLDATE	PK NOT NULL
DbDateTime	The current date and time stamp when the records are written to the HDS database. The logger database has NULL for this column.	DBDATETIME	IE-1 NULL
EmergencyAssistsToHalf	During the half-hour interval, the number of emergency assist requests made either by the agent or by the supervisor.  This field is applicable for <b>Unified CCE</b> only.	DBINT	NULL
HandledCallsTalkTimeToHalf	Handle time includes the time spent from the call being answered by the agent to the time the agent completed after call work time for the call. The value for HandledCallsTime is updated in the database when the after-call work time associated with the call (if any) has completed.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	This field is applicable for <b>Unified ICM</b> , <b>Unified CCE</b> and <b>Outbound Option</b> .		
HandledCallsTimeToHalf	<p>The time in seconds an agent spent on calls that were handled within the half-hour interval.</p> <p>This field is applicable for <b>Unified ICM</b>, <b>Unified CCE</b> and <b>Outbound Option</b>.</p>	DBINT	NULL
HoldTimeToHalf	Number of seconds where <b>all calls</b> to the agent are on hold during the half-hour interval. HoldTime is counted only while the agent is doing no other call-related activity. HoldTime is included in the calculation of LoggedOnTime.	DBINT	NULL
IncomingCallsOnHoldTimeToHalf	Total number of seconds that inbound ACD calls that an agent associated with this skill group placed on hold that ended during the half-hour interval. The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every half hour.	DBINT	NULL
IncomingCallsOnHoldToHalf	The total number of inbound ACD calls that an agent associated with this skill group placed on hold at least once during the half-hour interval. The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every half hour.	DBINT	NULL
InterceptCallsToHalf	<p>During the half-hour interval, the number of calls intercepted either by the supervisor or by the agent.</p> <p>This field is applicable for <b>Unified CCE</b> only.</p>	DBINT	NULL
InternalCallsOnHoldTimeToHalf	During the half-hour interval, the total number of seconds spent on hold by internal calls an agent associated with this skill group ended. The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every half hour.	DBINT	NULL
InternalCallsOnHoldToHalf	During the half-hour interval, the total number of internal calls that an agent associated with this skill group ended in this half-hour that were ever placed on hold. The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every half hour.	DBINT	NULL
InternalCallsRcvdTimeToHalf	The total number of seconds spent on internal calls associated with this skill group that were received by an agent that ended in the half-hour interval. The value is counted when the after-call work	DBINT	NULL

## Agent\_Skill\_Group\_Half\_Hour Table

Field Name:	Description:	Data Type:	Keys and Null Option:
	time associated with the call (if any) is completed, and the database is updated every half hour.		
InternalCallsRcvdToHalf	Number of internal calls associated with this skill group that were received by an agent and that ended during the half-hour interval. The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every half hour.	DBINT	NULL
InternalCallsTimeToHalf	Total number of seconds an agent associated with this skill group spent on internal calls that ended during the half-hour interval. The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every half hour.	DBINT	NULL
InternalCallsToHalf	Number of internal calls an agent associated with this skill group ended during the half-hour interval. The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every half hour.	DBINT	NULL
InterruptedTimeToHalf	This field not currently supported.	DBINT	NULL
LoggedOnTimeToHalf	Total time, in seconds, an agent associated with this skill group was logged on during the half-hour interval.  This field is applicable for <b>Unified ICM/Unified CCE</b> and <b>Outbound Option</b> .	DBINT	NULL
MonitorCallsToHalf	The number of calls monitored either by the supervisor or by the agent.  This field is applicable for <b>Unified CCE</b> only.	DBINT	NULL
NetConfOutCallsTimeToHalf	During the half-hour interval, the number of seconds the agent spent on Network conference calls that they initiated.  This only includes time spent on Network conference calls initiated by the agent.  The value includes any HoldTime for the call. This database element uses ConferenceTime from the Termination_Call_Detail table.  The value is counted when the agent drops off the call or the call becomes a simple two-party call, and the database is updated every half hour.	DBINT	NULL

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
NetConferencedOutCallsToHalf	<p>During the half-hour interval, the number of Network conference calls the agent initiated.</p> <p>The count of NetConferencedOutCalls is counted when the agent drops off the call or the call becomes a simple two-party call, and the database is updated every half hour.</p>	DBINT	NULL
NetConsultativeCallsTimeToHalf	<p>During the half-hour interval, the number of seconds agents spent handling a Network consultative call with at least one call on hold.</p> <p>The value is counted when the after-call work time associated with the consultative call (if any) is completed, and the database is updated every half hour.</p>	DBINT	NULL
NetConsultativeCallsToHalf	<p>During the half-hour interval, the number of Network consultative calls completed by agents with at least one call on hold.</p> <p>The count is counted when the after-call work time associated with the consultative call (if any) is completed, and the database is updated every half hour.</p>	DBINT	NULL
NetTransferredOutCallsToHalf	Number of calls Network (Blind and Consultative) transferred out by the agent during the half-hour interval. The value is updated at the time the agent completes the transfer of the call.	DBINT	NULL
NotReadyTimeToHalf	Total seconds an agent was in the Not Ready state with respect to this skill group during the half-hour interval. NotReadyTime is included in the calculation of LoggedOnTime.	DBINT	NULL
PreviewCallsOnHoldTimeToHalf	During the half-hour interval, the total number of seconds spent on hold by outbound Preview calls that an agent associated with this skill group ended. The value is counted when the after-callwork time associated with the call (if any) has completed, and the database is updated every halfhour.	DBINT	NULL
PreviewCallsOnHoldToHalf	<p>The total number of ended outbound Preview callsthat an agent associated with this skill group have</p> <p>PreviewCallsOnHoldToHalfplaced on hold at least once during the half-hourinterval. The value is counted when the after-callwork time associated with the call (if any) hascompleted, and the database is updated every halfhour.</p>	DBINT	NULL
PreviewCallsTalkTimeToHalf	Total talk time, in seconds, for outbound Preview calls handled by an agent associated with this skill group that ended during the half-hour interval. This value includes the time spent from the call being initiated to the time the agent begins after-call work for the	DBINT	NULL

**Agent\_Skill\_Group\_Half\_Hour Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	call. It therefore includes the HoldTime associated with the call. PreviewCallsTalkTime is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every half hour.		
PreviewCallsTimeToHalf	Total handle time, in seconds, for Outbound Preview calls handled by an agent associated with this skill group that ended during the half-hour interval. Handle time includes WorkTime, TalkTime, and HoldTime. The PreviewCallsTime value includes the time spent from the call being initiated to the time the agent completes after-call work time for the call. The value is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every half hour.	DBINT	NULL
PreviewCallsToHalf	Total number of outbound Preview calls made by an agent associated with this skill group that ended during the half-hour interval. The value is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every half hour.	DBINT	NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL
RedirectNoAnsCallsTimeToHalf	During the half-hour interval, the number of seconds ACD calls to the skill group rang at an agent's terminal before being redirected on failure to answer. The value is counted at the time the call is diverted to another device, and the database is updated every half hour.	DBINT	NULL
RedirectNoAnsCallsToHalf	During the half-hour interval, the number of ACD calls to the skill group that rang at an agent's terminal and redirected on failure to answer. The value is counted at the time the call is diverted to another device, and the database is updated every half hour.	DBINT	NULL
ReserveCallsOnHoldTimeToHalf	The time the reservation call has been on hold during the half-hour interval.	DBINT	NULL
ReserveCallsOnHoldToHalf	The total number of reservation calls placed on hold at least once during the half-hour interval.	DBINT	NULL
ReserveCallsTalkTimeToHalf	This is the talk time for the reservation call. It should be either zero or a few seconds. This is counted using Call State.	DBINT	NULL
ReserveCallsTimeToHalf	This is the sum of the above two columns. This is counted using Call State.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
ReserveCallsToHalf	Number of reservation calls. This should always equal to the ReserveCallsOnHoldToHalf.	DBINT	NULL
Reserved1	Reserved for future use.	DBINT	NULL
Reserved2	Reserved for future use	DBINT	NULL
Reserved3	Reserved for future use.	DBINT	NULL
Reserved4	Reserved for future use.	DBINT	NULL
Reserved5	Reserved for future use.	DBFLT4	NULL
ReservedStateTimeToHalf	How long an agent is in Reserved state. This is counted using Agent State.	DBINT	NULL
ShortCallsToHalf	During the half-hour interval, the number of calls answered by an agent associated with this skill group where the duration of the calls falls short of the AnsweredShortCalls threshold. You might choose to factor these calls out of handle time statistics. Short calls are considered handled, not abandoned.	DBINT	NULL
SkillGroupSkillTargetID	Together with SkillTargetID identifies the skill group member.	DBINT	PK, FK NOT NULL
SkillTargetID	The SkillTargetID of the agent. Together with SkillGroupSkillTargetID identifies the skill group member.	DBINT	PK, FK NOT NULL
SupervAssistCallsTimeToHalf	Number of seconds an agent associated with this skill group spent on supervisor-assisted calls during the half-hour interval. The value is counted when the supervisor-assisted call completes, and the database is updated every half hour.  This field is applicable for <b>Unified CCE</b> only.	DBINT	NULL
SupervAssistCallsToHalf	Number of calls for which an agent received supervisor assistance during the half-hour interval. The value is counted when the supervisor-assisted call completes, and the database is updated every half hour.	DBINT	NULL
TalkAutoOutTimeToHalf	The number of seconds the agent spent talking on AutoOut (predictive) calls during the half-hour interval. TalkAutoOutTime is included in the calculation of LoggedOnTime.	DBINT	NULL

**Agent\_Skill\_Group\_Half\_Hour Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
TalkInTimeToHalf	Number of seconds an agent associated with this skill group spent talking on inbound ACD calls (neither internal nor outbound) during the half-hour interval. TalkInTime is included in the calculation of TalkTime and LoggedOnTime.	DBINT	NULL
TalkOtherTimeToHalf	Number of seconds that an agent in the skill group spent talking on other calls (neither inbound or outbound) during the half-hour interval.  Examples: agent-to-agent transfers and supervisor calls.  TalkOtherTime is included in the calculation of TalkTime and LoggedOnTime.	DBINT	NULL
TalkOutTimeToHalf	Number of seconds an agent associated with this skill group spent talking on external outbound or consultive transfer calls during the half-hour interval. TalkOutTime is included in the calculation of TalkTime and LoggedOnTime.	DBINT	NULL
TalkPreviewTimeToHalf	The number of seconds the agent spent talking on outbound Preview calls during the half-hour interval. TalkPreviewTime is included in the calculation of LoggedOnTime.	DBINT	NULL
TalkReserveTimeToHalf	This is how long an agent is in Talking state since the reservation call is connected to the agent. This is counted using Agent State.	DBINT	NULL
TimeZone	The time zone for the date and time. The value is the offset in minutes from GMT.	DBINT	PK NOT NULL
TransferredInCallsTimeToHalf	Number of seconds an agent associated with this skill group spent handling transferred in calls that ended during the half-hour interval. The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every half hour.	DBINT	NULL
TransferredInCallsToHalf	Number of calls transferred into the skill group during the half-hour interval. The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every half hour.	DBINT	NULL
TransferredOutCallsToHalf	Number of calls transferred out by the agent during the half-hour interval. The value is updated at the time the agent completes the transfer of the call.	DBINT	NULL
WhisperCallsToHalf	During the half-hour interval, the number of calls coached either by the supervisor or by the agent.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
WorkNotReadyTimeToHalf	Total time in seconds an agent associated with this skill group was in the Work Not Ready state during the half-hour interval. WorkNotReadyTime is included as in the calculation of LoggedOnTime.	DBINT	NULL
WorkReadyTimeToHalf	Total seconds an agent in the skill group was in the Work Ready state for tasks associated with this skill group that ended during the half-hour interval. WorkReadyTime is included in the calculation of LoggedOnTime.	DBINT	NULL

## Agent\_Skill\_Group\_Interval Table

This table describes the Agent Details under the 15 Minute Reporting category.

**Note:** For blind conferences in Unified CCE with an IPCC System PG, this field is updated when the call that was blind conferenced to an IVR is subsequently answered by another agent. For this call scenario this field is not updated in Unified CCE with an IPCC System PG.

### Fields in Agent\_Skill\_Group\_Interval Table:

Field Name:	Description:	Data Type:	Keys and Null Option:
AbandonHoldOutCalls	During the reporting interval, the total number of Outgoing calls that were abandoned while on hold.	DBINT	NULL
AbandonRingCalls	During the reporting interval, the total number of ACD calls that abandoned while ringing at an agent position. The value is incremented at the time the call disconnects.	DBINT	NULL
AbandonRingTime	During the reporting interval, the total ring time associated with ACD calls that were abandoned while alerting an agent's position. RingTime occurs after any DelayTime and LocalQTime. The value is counted at the time the call disconnects, and the database is updated every reporting.	DBINT	NULL
AbandonHoldCalls	During the reporting interval, the total number of ACD calls that were abandoned while being held at an agent position. This value is counted at the time the call disconnects, and the database is updated every reporting.	DBINT	NULL
AgentOutCallsTime	The total handle time, in seconds, for outbound ACD calls handled by an agent associated with this skill group that ended during the reporting interval. Handle time includes WorkTime, TalkTime, and HoldTime. The AgentOutCallsTime value includes the time spent from the call being initiated by the agent to the time the agent completes after-call work time	DBINT	NULL

**Agent\_Skill\_Group\_Interval Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	for the call. The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every reporting.		
AgentOutCallsTalkTime	Total talk time, in seconds, for outbound ACD calls handled by an agent associated with this skill group that ended during the reporting interval. The value includes the time spent from the call being initiated by the agent to the time the agent begins after call work for the call. This includes HoldTime associated with the call. The value is counted when the after-call-work time associated with the call (if any) is completed, and the database is updated every reporting.	DBINT	NULL
AgentOutCalls	The total number of outbound ACD calls made by an agent associated with this skill group that ended during the reporting interval. The value is counted when any after-call work time associated with the call is completed, and the database is updated every reporting.	DBINT	NULL
AgentOutCallsOnHold	During the reporting interval, the total number of outbound ACD calls an agent associated with this skill group ended and that were placed on hold at least once during the life of the call. The value is counted when the after-call work associated with the call (if any) is completed, and the database is updated every reporting.	DBINT	NULL
AgentOutCallsOnHoldTime	During the reporting interval, the total number of seconds outbound ACD calls were placed on hold by an agent associated with this skill group. This value updated in the database when after-call work associated with the call (if any) is completed.	DBINT	NULL
AgentTerminatedCalls	Not currently supported.	DBINT	NULL
AnswerWaitTime	<p>The sum of the answer wait times of all tasks an agent associated with this skill group answered during the reporting interval. It is counted at the time the call is answered, and the database is updated every reporting.</p> <p>It is the current reporting interval total of:</p> <ol style="list-style-type: none"> <li>1. In Unified ICM, the time in seconds from when the call first arrives at the ACD to when the agent answers the call.</li> </ol> <p>AnswerWaitTime is based on the following:</p> <ul style="list-style-type: none"> <li>– DelayTime</li> <li>– LocalQTime</li> <li>– RingTime</li> </ul>	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	<p>2. In Unified CCE, the number of seconds calls spent between first being queued to the skillgroup through Select (LAA) or Queue to Skillgroup nodes to when they were answered by an agent.</p> <p>AnswerWaitTime is based on the following:</p> <ul style="list-style-type: none"> <li>– DelayTime</li> <li>– LocalQTime</li> <li>– RingTime</li> <li>– NetworkQTime</li> </ul>		
AvailTime	Total time in seconds an agent associated with this skill group was in the Not_Active state with respect to this skill group during the reporting interval. AvailTime is included in the calculation of LoggedOnTime.	DBINT	NULL
AutoOutCalls	The total number of AutoOut (predictive) calls made by an agent associated with this skill group that ended during the reporting interval. The value is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every reporting.	DBINT	NULL
AutoOutCallsTime	The total handle time, in seconds, for AutoOut (predictive) calls handled by an agent associated with this skill group that ended during the reporting interval. Handle time includes WorkTime, TalkTime, and HoldTime. The AutoOutCallsTime value includes the time spent from the call being initiated to the time the agent completes after-call work time for the call. The value is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every reporting.	DBINT	NULL
AutoOutCallsTalkTime	Total talk time, in seconds, for AutoOut (predictive) calls handled by an agent associated with this skill group that ended during the reporting interval. This value includes the time spent from the call being initiated to the time the agent begins after-call work for the call. It includes the HoldTime associated with the call. AutoOutCallsTalkTime is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every reporting.	DBINT	NULL
AutoOutCallsOnHold	During the reporting interval, the total number of ended AutoOut (predictive) calls that an agent associated with this skill group have placed on hold at least once. The value is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every reporting.	DBINT	NULL
AutoOutCallsOnHoldTime	The total number of seconds that AutoOut (predictive) calls were placed on hold by an agent associated with this skill group during the reporting	DBINT	NULL

**Agent\_Skill\_Group\_Interval Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	interval. The value is counted when the after-call work associated with the call (if any) has completed, and the database is updated every reporting.		
BargeInCalls	During the reporting interval, the number of calls associated with an agent associated with the skill group barged in on either by the supervisor or by the agent. This field is applicable for Unified CCE only.	DBINT	NULL
BusyOtherTime	Number of seconds an agent spent in the BusyOther state with respect to this skill group during the reporting interval. BusyOtherTime is included in the calculation of LoggedOnTime.	DBINT	NULL
CallbackMessagesTime	Number of seconds the agent spent processing callback messages during the reporting interval. This field applicable only to the Aspect ACD.	DBINT	NULL
CallbackMessages	Number of callback messages processed by the agent during the reporting interval. This field applicable only to the Aspect ACD.	DBINT	NULL
CallsAnswered	Number of calls answered by an agent associated with this skill group during the reporting interval. The number of calls answered includes only handled calls and internal calls received, which are tracked in the CallsHandled and InternalCallsReceived fields, respectively. The count for CallsAnswered is counted at the time the call is answered, and the database is updated every reporting.	DBINT	NULL
CallsHandled	<p>The number of inbound ACD calls that have been answered and have completed wrap-up by agents in the skill group during the reporting interval.</p> <p>A handled call is:</p> <ol style="list-style-type: none"> <li>1. An incoming ACD call that was answered by an agent, and then completed.</li> <li>2. A call associated with Outbound Option that the agent answered, and then completed.</li> <li>3. A non-voice task that the agent started working on then completed.</li> <li>4. A handled call/task is completed when the agent associated with the call/task finishes the wrap-up work associated with the call/task. This field is applicable for Unified CCE, Unified ICM, and Outbound Option.</li> </ol>	DBINT	NULL
ConsultativeCalls	The number of consultative calls an agent associated with this skill group that ended in the reporting interval. The count is counted when the	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	after-call work time associated with the consultative call (if any) is completed, and the database is updated every reporting.		
ConsultativeCallsTime	During the reporting interval, the number of seconds agents spent handling consultative calls with at least one ACD call on hold. The value is counted when the after-call work time associated with the consultative call (if any) has completed, and the database is updated every reporting.	DBINT	NULL
ConsultOutCalls	The number of agent initiated consult calls for this interval that were external from the switch.	DBINT	NULL
ConsultOutCallsTime	The time the agent spent on consult outbound calls.	DBINT	NULL
ConferencedInCalls	During the reporting interval, the number of incoming calls the agent was conferenced into. Incoming calls include ACD and non-ACD calls. The value is counted when the agent drops off the call or the call becomes a simple two-party call, and the database is updated every reporting.	DBINT	NULL
ConferencedInCallsTime	During the reporting interval, the number of seconds that an agent spent on conference calls that the agent initiated. This includes time spent on both ACD and non-ACD conference calls initiated by the agent. The value is counted when the agent drops off the call or the call becomes a simple two-party call, and the database is updated every reporting.	DBINT	NULL
ConferencedOutCalls	During the reporting interval, the number of conference calls the agent initiated. The conferenced out calls include ACD and non-ACD calls. The count of ConferencedOutCalls is counted when the agent drops off the call or the call becomes a simple two-party call, and the database is updated every reporting.	DBINT	NULL
ConferencedOutCallsTime	During the reporting interval, the number of seconds that an agent spent on conference calls that the agent initiated. This includes time spent on both ACD and non-ACD conference calls initiated by the agent. The value is counted when the agent drops off the call or the call becomes a simple two-party call, and the database is updated every reporting.	DBINT	NULL
DateTime	The date and time at the start of the reporting interval.	DBSMALLDATE	PK1, NULL
DbDateTime	The current date and time stamp when the records are written to the HDS database. The logger database has NULL for this column.	DBDATETIME	IE1, NULL
EmergencyAssists	During the reporting interval, the number of emergency assist requests made either by the agent or by the supervisor. This field is applicable for Unified CCE only.	DBINT	NULL

**Agent\_Skill\_Group\_Interval Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
HandledCallsTalkTime	Handle time includes the time spent from the call being answered by the agent to the time the agent completed after call work time for the call. The value for HandledCallsTime is updated in the database when the after-call work time associated with the call (if any) has completed. This field is applicable for Unified ICM, Unified CCE and Outbound Option.	DBINT	NULL
HandledCallsTime	The time in seconds an agent spent on calls that were handled within the reporting interval. This field is applicable for Unified ICM, Unified CCE, and Outbound Option.	DBINT	NULL
HoldTime	Number of seconds where all calls to the agent are on hold during the reporting interval. HoldTime is counted only while the agent is doing no other call-related activity. HoldTime is included in the calculation of LoggedOnTime.	DBINT	NULL
IncomingCallsOnHoldTime	Total number of seconds that inbound ACD calls calls that an agent associated with this skill group placed on hold that ended during the reporting interval. The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every reporting.	DBINT	NULL
IncomingCallsOnHold	The total number of inbound ACD calls that an agent associated with this skill group placed on hold at least once during the reporting interval. The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every reporting.	DBINT	NULL
InternalCallsOnHoldTime	During the reporting interval, the total number of seconds spent on hold by internal calls an agent associated with this skill group ended. The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every reporting.	DBINT	NULL
InternalCallsOnHold	During the reporting interval, the total number of internal calls that an agent associated with this skill group ended in this reporting that were ever placed on hold. The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every reporting.	DBINT	NULL
InternalCallsRcvdTime	The total number of seconds spent on internal calls associated with this skill group that were received by an agent that ended in the reporting interval. The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every reporting.	DBINT	NULL
InternalCallsRcvd	Number of internal calls associated with this skill group that were received by an agent and that ended during the reporting interval. The value is	DBINT	NULL

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	counted when the after-call work time associated with the call (if any) is completed, and the database is updated every reporting.		
InternalCallsTime	Total number of seconds an agent associated with this skill group spent on internal calls that ended during the reporting interval. The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every reporting.	DBINT	NULL
InternalCalls	Number of internal calls an agent associated with this skill group ended during the reporting interval. The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every reporting.	DBINT	NULL
InterruptedTime	This field not currently supported.	DBINT	NULL
InterceptCalls	During the reporting interval, the number of calls intercepted either by the supervisor or by the agent. This field is applicable for Unified CCE only.	DBINT	NULL
LoggedOnTime	<p>Total time, in seconds, an agent associated with this skill group was logged on during the reporting interval.</p> <p>This value is based on the following:</p> <ol style="list-style-type: none"> <li>1. HoldTime</li> <li>2. TalkInTime</li> <li>3. TalkOutTime</li> <li>4. TalkOtherTime</li> <li>5. AvailTime</li> <li>6. NotReadyTime</li> <li>7. WorkReadyTime</li> <li>8. WorkNotReadyTime</li> <li>9. BusyOtherTime</li> <li>10. ReservedStateTime</li> <li>11. TalkAutoOutTime</li> <li>12. TalkPreviewTime</li> </ol>	DBINT	NULL

**Agent\_Skill\_Group\_Interval Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	13. TalkReservedTime  This field is applicable for Unified ICM, Unified CCE, and Outbound Option.		
MonitorCalls	The number of calls monitored either by the supervisor or by the agent. This field is applicable for Unified CCE only.	DBINT	NULL
NetConsultativeCalls	During the reporting interval, the number of Network consultative calls completed by agents with at least one call on hold. The count is counted when the after-call work time associated with the consultative call (if any) is completed, and the database is updated every reporting.	DBINT	NULL
NetConsultativeCallsTime	During the reporting interval, the number of seconds agents spent handling a Network consultative call with at least one call on hold. The value is counted when the after-call work time associated with the consultative call (if any) is completed, and the database is updated every reporting.	DBINT	NULL
NetConferencedOutCalls	During the reporting interval, the number of Network conference calls the agent initiated. The count of NetConferencedOutCalls is counted when the agent drops off the call or the call becomes a simple two-party call, and the database is updated every reporting.	DBINT	NULL
NetConfOutCallsTime	During the reporting interval, the number of seconds the agent spent on Network conference calls that they initiated. This only includes time spent on Network conference calls initiated by the agent. The value includes any HoldTime for the call. This database element uses ConferenceTime from the Termination_Call_Detail table. The value is counted when the agent drops off the call or the call becomes a simple two-party call, and the database is updated every reporting.	DBINT	NULL
NetTransferredOutCalls	Number of calls Network (Blind and Consultative) transferred out by the agent during the reporting interval. The value is updated at the time the agent completes the transfer of the call.	DBINT	NULL
NotReadyTime	Total seconds an agent was in the Not Ready state with respect to this skill group during the reporting interval. NotReadyTime is included in the calculation of LoggedOnTime.	DBINT	NULL
PreviewCalls	Total number of outbound Preview calls made by an agent associated with this skill group that ended during the reporting interval. The value is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every reporting.	DBINT	NULL
PreviewCallsTime	Total handle time, in seconds, for Outbound Preview calls handled by an agent associated with this skill group that ended during the reporting	DBINT	NULL

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	interval. Handle time includes WorkTime, TalkTime, and HoldTime. The PreviewCallsTime value includes the time spent from the call being initiated to the time the agent completes after-call work time for the call. The value is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every reporting.		
PreviewCallsTalkTime	Total talk time, in seconds, for outbound Preview calls handled by an agent associated with this skill group that ended during the reporting interval. This value includes the time spent from the call being initiated to the time the agent begins after-call work for the call. It therefore includes the HoldTime associated with the call. PreviewCallsTalkTime is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every reporting.	DBINT	NULL
PreviewCallsOnHold	The total number of ended outbound Preview calls that an agent associated with this skill group have placed on hold at least once during the reporting interval. The value is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every reporting.	DBINT	NULL
PreviewCallsOnHoldTime	The total number of seconds outbound Preview calls that were placed on hold by agents associated with this skill group during the reporting interval. The value is counted when the after-call work associated with the call (if any) has completed, and the database is updated every reporting.	DBINT	NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK1, NULL
ReportingHalfHour	The value indicates Half Hour boundary interval (0 - 47). Two 15 minute interval records will have a unique half hour boundary value.	DBINT	IE2, NULL
ReportingInterval	Contains the Reporting interval, in minutes, for Historical reporting.	DBINT	IE3, NULL
RedirectNoAnsCalls	During the reporting interval, the number of ACD calls to the skill group that rang at an agent's terminal and redirected on failure to answer. The value is counted at the time the call is diverted to another device, and the database is updated every reporting.	DBINT	NULL
RedirectNoAnsCallsTime	During the reporting interval, the number of seconds ACD calls to the skill group rang at an agent's terminal before being redirected on failure to answer. The value is counted at the time the call is diverted to another device, and the database is updated every reporting.	DBINT	NULL
ReservedStateTime	How long an agent is in Reserved state. This is counted using Agent State.	DBINT	NULL

**Agent\_Skill\_Group\_Interval Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
ReserveCalls	Number of reservation calls. This should always equal to the ReserveCallsOnHold.	DBINT	NULL
ReserveCallsTime	This is the sum of the above two columns. This is counted using Call State.	DBINT	NULL
ReserveCallsTalkTime	This is the talk time for the reservation call. It should be either zero or a few seconds. This is counted using Call State.	DBINT	NULL
ReserveCallsOnHold	The total number of reservation calls placed on hold at least once during the reporting interval.	DBINT	NULL
ReserveCallsOnHoldTime	The time the reservation call has been on hold during the reporting interval.	DBINT	NULL
Reserved1	Reserved for future use.	DBINT	NULL
Reserved2	Reserved for future use.	DBINT	NULL
Reserved3	Reserved for future use.	DBINT	NULL
Reserved4	Reserved for future use.	DBINT	NULL
Reserved5	Reserved for future use.	DBFLT4	NULL
SkillTargetID	The SkillTargetID of the agent. Together with SkillGroupSkillTargetID identifies the skill group member.	DBINT	PK2, NULL
SkillGroupSkillTargetID	Together with SkillTargetID identifies the skill group member.	DBINT	PK2, NULL
ShortCalls	During the reporting interval, the number of calls answered by an agent associated with this skill group where the duration of the calls falls short of the AnsweredShortCalls threshold. You might choose to factor these calls out of handle time statistics. Short calls are considered handled, not abandoned.	DBINT	NULL
SupervAssistCallsTime	Number of seconds an agent associated with this skill group spent on supervisor-assisted calls during the reporting interval. The value is counted when the supervisor-assisted call completes, and the database is updated every reporting. This field is applicable for Unified CCE only.	DBINT	NULL
SupervAssistCalls	Number of calls for which an agent received supervisor assistance during the reporting interval. The value is counted when the supervisor-assisted call completes, and the database is updated every reporting.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
TalkInTime	Number of seconds an agent associated with this skill group spent talking on inbound ACD calls (neither internal nor outbound) during the reporting interval. TalkInTime is included in the calculation of TalkTime and LoggedOnTime.	DBINT	NULL
TalkOtherTime	Number of seconds that an agent in the skill group spent talking on other calls (neither inbound or outbound) during the reporting interval. Examples: agent-to-agent transfers and supervisor calls. TalkOtherTime is included in the calculation of TalkTime and LoggedOnTime.	DBINT	NULL
TalkOutTime	Number of seconds an agent associated with this skill group spent talking on external outbound or consultive transfer calls during the reporting interval. TalkOutTime is included in the calculation of TalkTime and LoggedOnTime.	DBINT	NULL
TimeZone	The time zone for the date and time. The value is the offset in minutes from GMT.	DBINT	PK4, NULL
TransferredInCallsTime	Number of seconds an agent associated with this skill group spent handling transferred in calls that ended during the reporting interval. The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every reporting.	DBINT	NULL
TransferredInCalls	Number of calls transferred into the skill group during the reporting interval. The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every reporting.	DBINT	NULL
TransferredOutCalls	Number of calls transferred out by the agent during the reporting interval. The value is updated at the time the agent completes the transfer of the call.	DBINT	NULL
TalkAutoOutTime	The number of seconds the agent spent talking on AutoOut (predictive) calls during the reporting interval. TalkAutoOutTime is included in the calculation of LoggedOnTime.	DBINT	NULL
TalkPreviewTime	The number of seconds the agent spent talking on outbound Preview calls during the reporting interval. TalkPreviewTime is included in the calculation of LoggedOnTime.	DBINT	NULL
TalkReserveTime	This is how long an agent is in Talking state since the reservation call is connected to the agent. This is counted using Agent State.	DBINT	NULL

**Agent\_Skill\_Group\_Logout Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
WorkNotReadyTime	Total time in seconds an agent associated with this skill group was in the Work Not Ready state during the reporting interval. WorkNotReadyTime is included as in the calculation of LoggedOnTime.	DBINT	NULL
WorkReadyTime	Total seconds an agent in the skill group was in the Work Ready state for tasks associated with this skill group that ended during the reporting interval. WorkReadyTime is included in the calculation of LoggedOnTime.	DBINT	NULL
WhisperCalls	During the reporting interval, the number of calls coached either by the supervisor or by the agent.	DBINT	NULL

**Agent\_Skill\_Group\_Logout Table**

This table is in the [Skill Target category \(page 544\)](#). To see database rules for these tables, click [here \(page 600\)](#).

Each row provides information about a single login session for a member of a skill group. If an individual agent is a member of multiple skill groups, multiple Agent Skill Group Logout rows are created for that agent.

The software generates an Agent\_Skill\_Group\_Logout record for each skill group member.

**Table 17: Related Table for Agent\_Skill\_Group\_Logout**

Skill Group Member (page 477) (SkillTargetID + SkillGroupSkillTargetID maps to Skill_Group_Member.AgentSkillTargetID + Skill_Group_Member.SkillGroupSkillTargetID)
--

**Table 18: Indexes for Agent\_Skill\_Group\_Logout Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XAK1Agent_Skill_Group_Logout	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XPKAgent_Skill_Group_Logout	clustered, unique, primary key located on PRIMARY	LogoutDateTime, SkillTargetID, SkillGroupSkillTargetID, TimeZone

**Fields in Agent\_Skill\_Group\_Logout Table :**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
LoginDuration	Number of seconds the agent was logged in to the skill group.	DBINT	NULL
LogoutDateTime	Date and time when the agent logged out of the skill group.	DBDATETIME	PK NOT NULL
ReasonCode	Reason code returned by the peripheral for the agent logout. Click <a href="#">here (page 575)</a> .	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL
SkillGroupSkillTargetID	Together with SkillTargetID identifies the skill group member.	DBINT	PK, FK NOT NULL
SkillTargetID	The SkillTargetID of the agent. Together with SkillGroupSkillTargetID identifies the skill group member.	DBINT	PK, FK NOT NULL
TimeZone	The time zone for the dates and times. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK NOT NULL

## Agent\_Skill\_Group\_Real\_Time Table

This table is in the [Skill Target category \(page 544\)](#). To see database rules for these tables, click [here \(page 600\)](#).

Local database only.

Each row provides real-time statistics for a member of a skill group. If an individual agent is a member of multiple skill groups, multiple Agent Skill Group Real Time rows are created for that agent.

The software generates an Agent\_Skill\_Group\_Real\_Time record for each skill group member.

**Table 19: Related Table for Agent\_Skill\_Group\_Real\_Time**

Skill Group Member (page 477) (SkillTargetID + SkillGroupSkillTargetID maps to Skill_Group_Member.AgentSkillTargetID + Skill_Group_Member.SkillGroupSkillTargetID)
--

**Table 20: Index for Agent\_Skill\_Group\_Real\_Time Table**

index_name	index_description	index_keys
XPKAgent_Skill_Group_Real_Time	located on PRIMARY	SkillTargetID, SkillGroupSkillTargetID

### Fields in Agent\_Skill\_Group\_Real\_Time Table:

Field Name:	Description:	Data Type:	Keys and Null Option:
AgentState	The current real time state of the agent. To see the list of Agent States, click <a href="#">here (page 553)</a> .	DBINT	NULL
CallsInProgress	The number of tasks currently associated with this skill group.	DBINT	NULL
DateTime	The Central Controller date and time at the start of the interval.	DBDATETIME	NOT NULL
DateTimeLastStateChange	Date and time of the agent's last state change.	DBDATETIME	NULL

**Agent\_State\_Trace Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
DateTimeLogin	Date and time the agent logged into the skill group.	DBDATETIME	NULL
FutureUseInt1	Reserved for future use	DBINT	NULL
FutureUseInt2	Reserved for future use	DBINT	NULL
FutureUseInt3	Reserved for future use	DBINT	NULL
FutureUseInt4	Reserved for future use	DBINT	NULL
FutureUseInt5	Reserved for future use	DBINT	NULL
Priority	Agent's priority in the skill group.	DBINT	NULL
ReasonCode	Code received from the peripheral indicating the reason for the agent's last state change. Click <a href="#">here (page 575)</a> .	DBINT	NULL
SkillGroupSkillTargetID	Together with SkillTargetID identifies the skill group member.	DBINT	PK, FK NOT NULL
SkillTargetID	The SkillTargetID of the agent. Together with SkillGroupSkillTargetID identifies the skill group member.	DBINT	PK, FK NOT NULL

**Agent\_State\_Trace Table**

This table is one of the Agent Detail tables in the [Skill Target category \(page 544\)](#). To see database rules for these tables, click [here \(page 600\)](#).

Each row describes a change of state for an agent. By examining Agent State Trace rows you can trace all the state changes that have occurred for an agent.

The system software generates an Agent\_State\_Trace records for each agent for which tracing is enabled.

This table can become very large. Running custom reporting queries against it while it is on the HDS can degrade performance. To optimize performance, extract the data from the HDS into your own custom database on a separate server (one that is not used for other Unified ICM/Unified CCE components). Use only DBDateTime (date and time of the record that was written to the HDS database) to perform the extraction. The table on the custom database can be indexed according to the custom reporting needs.

Related tables for Agent\_State\_Trace

- [Agent \(page 15\)](#) (via SkillTargetID)
- [Media Routing Domain \(page 290\)](#) (via MRDomainID)

**Table 21: Indexes for Agent\_State\_Trace Table**

index_name	index_description	index_keys
XAK1Agent_State_Trace	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XPKAgent_State_Trace	clustered, unique, primary key located on PRIMARY	DateTime, SkillTargetID, TimeZone, MRDomainID

**Fields in Agent\_State\_Trace Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
AgentState	The new agent state. To see the list of Agent States, click <a href="#">here</a> (page 553).	DBINT	FK NULL
DateTime	The date and time at which the state change occurred.	DBDATETIME	PK NOT NULL
Direction	The direction for talking states.	DBINT	NULL
EventName	<p>A code indicating the event that has occurred.</p> <ul style="list-style-type: none"> <li>• <b>0</b> = LOGGED_OFF</li> <li>• <b>1</b> = LOGGED_ON</li> <li>• <b>2</b> = NOT_READY</li> <li>• <b>3</b> = READY</li> <li>• <b>4</b> = TALKING</li> <li>• <b>5</b> = WORK_NOT_READY</li> <li>• <b>6</b> = WORK_READY</li> <li>• <b>7</b> = BUSY_OTHER (not applicable)</li> <li>• <b>8</b> = RESERVED</li> <li>• <b>9</b> = CALL_INITIATED</li> <li>• <b>10</b> = CALL_HELD</li> <li>• <b>11</b> = CALL_RETRIEVED</li> <li>• <b>12</b> = CALL_TRANSFERRED</li> <li>• <b>13</b> = CALL_CONFERENCED</li> <li>• <b>14</b> = UNKNOWN</li> <li>• <b>15</b> = OFFER_TASK</li> </ul>	DBINT	NOT NULL

## Agent\_State\_Trace Table

Field Name:	Description:	Data Type:	Keys and Null Option:
	<ul style="list-style-type: none"> <li>• <b>16</b> = OFFER_APPLICATION_TASK</li> <li>• <b>17</b> = START_TASK</li> <li>• <b>18</b> = START_APPLICATION_TASK</li> <li>• <b>19</b> = PAUSE_TASK</li> <li>• <b>20</b> = RESUME_TASK</li> <li>• <b>21</b> = WRAPUP_TASK</li> <li>• <b>22</b> = END_TASK</li> <li>• <b>26</b> = MAKE_AGENT_READY</li> <li>• <b>27</b> = MAKE_AGENT_NOT_READY</li> <li>• <b>28</b> = TASK_INIT_REQ</li> <li>• <b>29</b> = TASK_INIT_IND</li> <li>• <b>30</b> = ROUTER_ASSIGNED_TASK</li> <li>• <b>31</b> = PRE_CALL_TIMEOUT</li> </ul>		
ICRCallKey	A unique number generated at the PG. Values are reused after about 250 million calls.	DBINT	NULL
MRDomainID	The date and time at which the state change occurred.	DBINT	PK, FK NOT NULL
PeripheralCallKey	Key assigned by the peripheral to the call associated with the event.	DBINT	NULL
ReasonCode	Code received from the peripheral indicating the reason for the state change. Click <a href="#">here (page 575)</a> .	DBINT	NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL
RouterCallKey, RouterCallKeyDay, RouterCallKeySequenceNumber	<p>These fields are not set for calls.</p> <p>For non-voice tasks, these three fields together identify the task (if any) that caused the agent's state to change.</p>	DBINT	NULL
SkillGroupSkillTargetID	Identifies the skill group the event is associated with.	DBINT	NULL
SkillTargetID	Identifies the agent.	DBINT	PK, FK NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
TimeZone	The time zone for the date and time. The value is the offset in minutes from GMT.	DBINT	PK NOT NULL

## Agent\_Targeting\_Rule Table

This table is in the [Device \(page 529\)](#) category. To see database rules for these tables, click [here](#) ([page 595](#)).

The table describes the basic rules for routing calls to agents

**Table 22: Related tables for Agent\_Targeting\_Rule**

<a href="#">Agent_Targeting Rule_Member (page 68)</a> (via AgentTargetingRuleID)	<a href="#">Agent_Targeting Rule_Range (page 69)</a> (via AgentTargetingRuleID)
<a href="#">Peripheral (page 306)</a> (via EnterpriseName)	

**Table 23: Indexes for Agent\_Targeting\_Rule Table**

index_name	index_description	index_keys
XAK1Agent_Targeting_Rule	nonclustered, unique, unique key located on PRIMARY	EnterpriseName
XPKAgent_Targeting_Rule	clustered, unique, primary key located on PRIMARY	AgentTargetingRuleID

### Fields in Agent\_Targeting\_Rule Table:

Field Name:	Description:	Data Type:	Keys and Null Option:
AgentTargetingRuleID	The ID for a specific Agent Targeting Rule.	DBINT	PK, NOT NULL
PeripheralID	The peripheral whose agents the Agent Targeting Rule applies to.  This is applicable only for an Unified CCE PG or a Generic PG used as a System IPCC PG or a Cisco Communication Manager PG.	DBINT	NOT NULL
RuleType	Defines the Agent Targeting Rule type to be used.  Agent Targeting Rule Types  • <b>Type 1 - Agent ID</b>  Each agent is identified by an ID which is in the PreCall and Connect messages. No label is needed, but the agent's extension is included as the label. (This rule is already in use for non-voice routing.)	DBINT	NOT NULL

## Agent\_Targeting\_Rule\_Member Table

Field Name:	Description:	Data Type:	Keys and Null Option:
	<p>This rule is implicit for System PG integrations (ARS, Unified CCE) when the requesting routing client is associated with the same peripheral on which the targeted agent resides.</p> <ul style="list-style-type: none"> <li><b>Type 2 - Simple Substitution Label</b></li> </ul> <p>An expression must be supplied which contains a series of exclamation points, such as 978497!!!!. The exclamation points are replaced with the agent's extension. If necessary, leading zeroes are supplied, or leading digits deleted, so that length of the extension matches the number of exclamation points.</p> <ul style="list-style-type: none"> <li><b>Type 3 - Translation Route</b></li> </ul> <p>A translation route is used to move the call. This is potentially a very powerful feature, as it allows pre-routing of calls directly to an agent without requiring DID to all agents. Translation routes require the generation of a second label, used to target the agent from the peripheral local routing client.</p> <p>The rule mechanism is applied recursively to generate this label. This means the CallRouter generates a label that allows the call to be translation routed to the PG. The CallRouter also generates a label for the PG to target the agent.</p> <p>If a rule is not found, or if the rule involves a translation route, Rule 1 is used.</p>		
TranslationRouteID	The TranslationRouteID must reference a Translation_Route entry where the LogicalInterfaceControllerID is the same as the PeripheralID.	DBINT	NULL for Agent Targeting Rule types 1 and 2. Required (NOT NULL) for Agent Targeting Rule type 3.
Expression	<p>Expression string for use if needed by an Agent Targeting Rule.</p> <p>Applicable for type 2 Agent Targeting Rules only.</p>	VARCHAR	NOT NULL
EnterpriseName	A logical name you enter to assist you in identifying the Agent Targeting Rule.	VNAME32	NOT NULL
Description	Use to note information about the Agent Targeting Rule.	DESCRIPTION	NOT NULL

## Agent\_Targeting\_Rule\_Member Table

This table is in the [Device \(page 529\)](#) category. To see database rules for these tables, click [here \(page 595\)](#).

The table describes the routing clients to which an Agent\_Targeting\_Rule applies.

**Table 24: Related tables for Agent\_Targeting\_Rule\_Member**

Agent_Targeting_Rule (page 67) (via AgentTargetingRuleID)	Routing_Client (page 357)(RoutingClientID)
---	--

**Table 25: Indexes for Agent\_Targeting\_Rule\_Member**

index_name	index_description	index_keys
XPKAgent_Targeting_Rule_Member	clustered, unique, primary key located on PRIMARY	AgentTargetingRuleID RoutingClientID

**Fields in Agent\_Targeting\_Rule\_Member Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
AgentTargetingRuleID	The ID of a specific Agent Targeting Rule.	DBINT	PK, NOT NULL
RoutingClientID	The ID of any routing client associated with the Agent Targeting Rule.	DBSMALLINT	PK, NOT NULL

## Agent\_Targeting\_Rule\_Range Table

This table is in the [Device \(page 529\)](#) category. To see database rules for these tables, click [here \(page 595\)](#).

The table holds the agent extension ranges for an Agent Targeting Rule.

**Note:** While the Low and the High Extensions must be the same length, not all extensions ranges for an Agent Targeting Rule need to be the same length.

**Table 26: Related table for Agent\_Targeting\_Rule\_Range**

Agent_Targeting_Rule (page 67) (via AgentTargetingRuleID)
---

**Table 27: Indexes for Agent\_Targeting\_Rule\_Range**

index_name	index_description	index_keys
XPKAgent_Targeting_Rule_Range	clustered, unique, primary key located on PRIMARY	AgentTargetingRuleID AgentTargetingRuleRangeID

**Fields in Agent\_Targeting\_Rule\_Range Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
AgentTargetingRuleRangeID	The ID for an extension range associated with a specific Agent Targeting Rule.	DBINT	PK, NOT NULL
AgentTargetingRuleID	The ID for a specific Agent Targeting Rule.	DBINT	NOT NULL

**Agent\_Team Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
LowExtension	Defines the low extension the Agent Targeting Rule applies to.	VARCHAR	NULL
HighExtension	Defines the high extension the Agent Targeting Rule applies to.	VARCHAR	NULL

**Agent\_Team Table**

This table is in the [Skill Target category \(page 544\)](#). To see database rules for these tables, click [here \(page 600\)](#).

An agent team is a group of agents who report to the same supervisor(s) and are associated with a single peripheral. The software does not route to agent teams and agents within a team do not necessarily share the same skills. Agent teams are used for administrative and monitoring purposes only.

Use Unified ICM Configuration Manager to add, update, and delete Agent\_Team records.

**Table 28: Related tables for Agent\_Team**

<a href="#">Agent (page 15)</a> (via PriSupervisorSkillTargetID and SecSupervisorSkillTargetID)	<a href="#">Agent Team Member (page 71)</a> (via AgentTeamID)
---	---

**Table 29: Indexes for Admin\_Script\_Schedule\_Map Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XAK1Agent_Team	nonclustered, unique, unique key located on PRIMARY	EnterpriseName
XIF112Agent_Team	nonclustered located on PRIMARY	PriSupervisorSkillTargetID
XPKAgent_Team	clustered, unique, primary key located on PRIMARY	AgentTeamID

**Fields in Agent\_Team Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
AgentTeamID	A unique identifier for the agent team.	DBINT	PK NOT NULL
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
Description	Additional information about the agent team.	DESCRIPTION	NULL
DialedNumberID	The dialed number identifier for the agent team.	DBINT	NULL
EnterpriseName	An enterprise name for the agent team that is unique among all agent teams in the enterprise.	VNAME32	AK-1 NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
PeripheralID	Identifies the peripheral the team is associated with.	DBSMALLINT	FK NOT NULL
PriSupervisorSkillTargetID	The agent who is the primary supervisor for the team.	DBINT	NULL

## Agent\_Team\_Member Table

This table is one of the Agent Detail tables in the [Skill Target category \(page 544\)](#). To see database rules for these tables, click [here \(page 600\)](#).

Specifies the mapping of agents to agent teams.

Use Unified ICM Configuration Manager to add or delete Agent\_Team\_Member records.

**Table 30: Related tables for Agent\_Team\_Member**

<a href="#">Agent (page 15)</a> (via SkillTargetID)	<a href="#">Agent Team (page 70)</a> (via AgentTeamID)
---	--

**Table 31: Indexes for Agent\_Team\_Member Table**

index_name	index_description	index_keys
XAK1Agent_Team_Member	nonclustered, unique, unique key located on PRIMARY	SkillTargetID
XIE1Agent_Team_Member	nonclustered, unique, primary key located on PRIMARY	AgentTeamID
XPKAgent_Team_Member	clustered, unique, primary key located on PRIMARY	AgentTeamID, SkillTargetID

**Fields in Agent\_Team\_Member Table :**

Field Name:	Description:	Data Type:	Keys and Null Option:
AgentTeamID	Identifies the agent team.	DBINT	PK, FK, IE-1 NOT NULL
SkillTargetID	Identifies the agent.	DBINT	FK, AK-1 NOT NULL

## Agent\_Team\_Supervisor Table

This table is in the [Skill Target category \(page 544\)](#). To see database rules for these tables, click [here \(page 600\)](#).

This table specifies the mapping of supervisors and agent teams.

Use Unified ICM Configuration Manager to add or delete Agent\_Team\_Supervisor records.

**Announcement Table****Table 32: Indexes for Agent\_Team\_Supervisor Table**

index_name	index_description	index_keys
XPKAgent_Team_Supervisor	clustered, unique, primary key located on PRIMARY	AgentTeamID, SupervisorSkillTargetID

**Fields in Agent\_Team\_Supervisor Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
AgentTeamID	Identifies the agent team.	DBINT	PK NOT NULL
SupervisorSkillTargetID	Identifies the SkillTargetID of the supervisor.	DBINT	PK NOT NULL

**Announcement Table**

This table is in the [Route category \(page 535\)](#). To see database rules for these tables, click [here \(page 597\)](#).

Each row corresponds to a voice announcement. The system software can route a call to an announcement.

Use Unified ICM Configuration Manager to add, update, and delete Announcement records.

**Table 33: Related Table for Announcement**

Network Target (page 294) (via NetworkTargetID)
---

**Table 34: Indexes for Announcement Table**

index_name	index_description	index_keys
XAK1Announcement	nonclustered, unique, unique key located on PRIMARY	EnterpriseName
XPKAnnouncement	clustered, unique, primary key located on PRIMARY	NetworkTargetID

**Related Table****Fields in Announcement Table :**

Field Name:	Description:	Data Type:	Keys and Null Option:
AnnouncementType	An integer value indicating the type of the announcement.	DBSMALLINT	NOT NULL
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
Description	Additional information about the announcement.	DESCRIPTION	NULL
EnterpriseName	An enterprise name for this announcement. This name must be unique among all announcements in the enterprise.	VNAME32	AK-1 NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
NetworkTargetID	Foreign key from the Network Target table.	DBINT	PK, FK NOT NULL

## Application\_Event Table

This table is in the [System category \(page 548\)](#). To see database rules for these tables, click [here \(page 601\)](#).

Central database only.

Contains information about events in the Unified ICM application. This is a subset of the events reported in the Event table.

**Table 35: Indexes for Application\_Event Table**

index_name	index_description	index_keys
XIE1Application_Event	nonclustered, unique, primary key located on PRIMARY	CentralControllerFileTime
XIE2Application_Event	nonclustered, unique, primary key located on PRIMARY	MessageId
XPKApplication_Event	clustered, unique, primary key located on PRIMARY	RecoveryKey

### Fields in Application\_Event Table :

Field Name:	Description:	Data Type:	Keys and Null Option:
BinData	Optional event binary data.	image	NULL
Category	The type of message.	VNAME32	NULL
CentralControllerFileTime	File Time event was processed at the Central Controller.	DBDATETIME	NOT NULL
CentralControllerTimeZone	Time zone at the Central Controller. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	NOT NULL
CentralControllerVirtualTime	Virtual Time event was processed at the Central Controller.	DBINT	NOT NULL
CustomerId	The customer ID.	DBINT	NOT NULL
Dword1	Optional event DWORD.	DBINT	NULL
Dword2	Optional event DWORD.	DBINT	NULL
Dword3	Optional event DWORD.	DBINT	NULL
Dword4	Optional event DWORD.	DBINT	NULL

Application\_Event Table

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
Dword5	Optional event DWORD.	DBINT	NULL
MessageId	Message ID from message compiler.	DBINT	NOT NULL
MessageString	Contents of message.	DESCRIPTION	NULL
ProcName	Name of the process that originated the event.	VNAME32	NOT NULL
RecoveryDay	Currently not used, set to zero (0).	DBINT	NOT NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL
Severity	The level of the message.	varchar(16)	NULL
Side	Side of event originator:  <b>A or B</b> = paired processes	DBCHAR	NOT NULL
SourceFileTime	File time event was generated (originator's time).	DBDATETIME	NOT NULL
SourceSystemName	Name of the node that generated the event.	VNAME32	NULL
SourceVirtualTime	Virtual time event was generated (originator's time).	DBINT	NOT NULL
StatusCode	Status code value.	DBINT	NOT NULL
StatusCodeString	String associated with the status code.	DESCRIPTION	NULL
StatusCodeType	Classification of the value in StatusCode field.	DBSMALLINT	NOT NULL
String1	Optional event string.	varchar(240)	NULL
String2	Optional event string.	varchar(240)	NULL
String3	Optional event string.	varchar(240)	NULL
String4	Optional event string.	varchar(240)	NULL
String5	Optional event string.	varchar(240)	NULL
SystemId	DMP system ID of the event originator. For a CallRouter or Logger, this value is always 0.	DBSMALLINT	NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
SystemType	The type of system that generated the event: <ul style="list-style-type: none"><li>• <b>0</b> = Unknown</li><li>• <b>1</b> = CallRouter</li><li>• <b>2</b> = Peripheral Gateway</li><li>• <b>3</b> = Network Interface Controller</li><li>• <b>4</b> = Administration &amp; Data Server</li><li>• <b>5</b> = Logger</li><li>• <b>6</b> = Listener</li><li>• <b>7</b> = CTI Gateway</li></ul>	DBSMALLINT	NOT NULL
VersionNum	EMS version number.	DBSMALLINT	NOT NULL

## Application\_Gateway Table

This table is part of the [Script category \(page 539\)](#). For database rules, click [here. \(page 599\)](#)

Each row describes an external application (custom gateway) or another Unified ICM platform that you can invoke from a routing script or administrative script.

Use Unified ICM Configuration Manager to add, update, and delete Application\_Gateway records.

Related Tables for Application Gateway

- [Application Gateway Connection \(page 76\)](#) (via ApplicationGatewayID)
- [ICR Instance \(page 267\)](#) (via ICRInstanceID)

**Table 36: Indexes for Application\_Gateway Table**

index_name	index_description	index_keys
XAK1Application_Gateway	nonclustered, unique, unique key located on PRIMARY	EnterpriseName
XIE1Application_Gateway	nonclustered, unique, primary key located on PRIMARY	ICRInstanceID
XPKApplication_Gateway	clustered, unique, primary key located on PRIMARY	ApplicationGatewayID

**Application\_Gateway\_Connection Table****Fields in Application\_Gateway Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
ApplicationGatewayID	A unique identifier for the application gateway.	DBINT	PK NOT NULL
ApplicationGatewayType	The type of gateway: <ul style="list-style-type: none"><li>• 0 = custom gateway</li><li>• 1 = remote ICM</li></ul>	DBINT	NOT NULL
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
Description	Additional information about the application gateway.	DESCRIPTION	NULL
Encryption	The encryption method used by the application gateway: <ul style="list-style-type: none"><li>• 0 = none</li><li>• 1 = private key</li></ul>	DBINT	NOT NULL
EnterpriseName	An enterprise name for the application gateway. This name must be unique among all application gateways in the enterprise.	VNAME32	AK-1 NOT NULL
FaultTolerance	The fault-tolerance strategy used by the application gateway. To see values for this field, click <a href="#">here (page 554)</a> .	DBINT	NOT NULL
ICRInstanceID	Identifies the instance associated with the application gateway.	DBINT	FK, IE-1 NULL
PreferredSide	Indicates which side of the Gateway the software should use when both are available: A or B. This applies only when ApplicationGatewayType is 0 (custom gateway).	char(1)	NULL

**Application\_Gateway\_Connection Table**

This table is part of the [Script category \(page 539\)](#). For database rules, click [here. \(page 599\)](#)

Each row describes the connection of one side of the CallRouter (side A or side B) to an Application Gateway host.

Use Unified ICM Configuration Manager to add, update, and delete Application\_Gateway\_Connection records.

**Related table**

[Application Gateway \(page 75\)](#) (via ApplicationGatewayID)

**Table 37: Indexes for Application\_Gateway\_Connection Table**

index_name	index_description	index_keys
XIF134Application_Gateway_Conn	nonclustered located on PRIMARY	ApplicationGatewayID
XPKApplication_Gateway_Connect	clustered, unique, primary key located on PRIMARY	ApplicationGatewayID, Side

**Fields in Application\_Gateway\_Connection Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
AbandonTimeout	An internal timeout used by the CallRouter to determine a failure in the application gateway interface process. The default value is 5000.	DBINT	NULL
Address	A string that describes the connection to the host. The format depends on the protocol. For TCP, the format is <i>hostname:port or IPAddress:port</i> .	varchar(255)	NULL
ApplicationGatewayID	Identifies the Application Gateway associated with the connection.	DBINT	PK, FK NOT NULL
Command	A command the software sends to the application gateway when the row is created or updated by the Update Central Controller operation. You can use this field to send one-time commands to the application gateway host.	DBINT	NULL
CommandParam	A parameter to be sent with the command.	DBINT	NULL
ConnectInfo	A string the software passes to the host during initialization. The software itself does not use or validate the value.	varchar(255)	NULL
Description	Additional information about the connection.	DESCRIPTION	NULL
ErrorThreshold	Number of consecutive errors that cause the software to declare the host unavailable. The software then initiates a reconnect.	DBINT	NULL
HeartbeatLimit	Number of consecutive unanswered heartbeats after which the CallRouter closes the connection. The default is 10. (For purposes of this count, a query is counted as a heartbeat.)	DBINT	NULL
HeartbeatRetry	Number of milliseconds to wait before retrying a missed heartbeat. The default is 200. The total time between heartbeat tries is HeartbeatTimeout + HeartbeatRetry.	DBINT	NULL
HeartbeatTimeout	Number of milliseconds the CallRouter waits for a host to respond to a heartbeat request. The default is 300.	DBINT	NULL
HeartbeatInterval	Number of milliseconds between heartbeats. The idle timeout for each host is 4 times this value.	DBINT	NULL

**Application\_Gateway\_Globals Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
InService	Indicates whether the connection is currently available: 'Y' (yes) or 'N' (no).	DBCHAR	NOT NULL
LateTimeout	Number of milliseconds the CallRouter waits for a response before considering it late. This does not affect CallRouter processing. It is for statistical use only.	DBINT	NULL
LinkTestThreshold	Currently not used.	DBINT	NULL
OpenTimeout	Number of milliseconds the CallRouter waits for a response to an open or close connection request. The default is 15000.	DBINT	NULL
Protocol	The communications protocol used for the connection. 1 = TCP (the only value currently supported).	DBINT	NOT NULL
RequestTimeout	Number of milliseconds the CallRouter waits for a response before timing out a request. The default value is 300.	DBINT	NULL
SessionRetry	Number of milliseconds the CallRouter waits before trying to reconnect after a connection terminates or a connection attempt fails. The default value is 30000.	DBINT	NULL
SessionRetryLimit	The maximum number of times the CallRouter attempts to connect or reconnect a session. (User intervention is then required to restart the connection.) If the value is 0, then no limit applies.	DBINT	NULL
Side	Indicates which side of the CallRouter uses the connection. Valid values are 'A' and 'B'.	char(1)	PK NOT NULL

**Application\_Gateway\_Globals Table**

This table is part of the [Script category \(page 539\)](#). For database rules, click [here. \(page 599\)](#)

Contains two rows that define default values for the Application\_Gateway\_Connection tables. One row defines defaults for external applications (custom gateways) and the other defines defaults for remote system software platforms.

Use the Application Gateway list tool to modify the Application\_Gateway\_Globals records.

**Table 38: Indexes for Application\_Gateway\_Globals Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XPKApplication_Gateway_Globals	clustered, unique, primary key located on PRIMARY	ID

**Fields in Application\_Gateway\_Globals Table :**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
AbandonTimeout	An internal timeout used by the CallRouter to determine a failure in the application gateway interface process. The default is 5000.	DBINT	NOT NULL
ApplicationGatewayType	The type of gateway: <ul style="list-style-type: none"> <li>• 0 = custom gateway</li> <li>• 1 = remote ICM</li> </ul> <p><b>Note:</b> You can define a separate set of defaults for each type.</p>	DBINT	NOT NULL
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
ErrorThreshold	Number of consecutive errors that cause the software to declare the host unavailable. The software then initiates a reconnect.	DBINT	NOT NULL
HeartbeatLimit	Number of consecutive unanswered heartbeats after which the CallRouter closes the connection. The default is 10. (For purposes of this count, a query is counted as a heartbeat.)	DBINT	NOT NULL
HeartbeatRetry	Number of milliseconds to wait before retrying a missed heartbeat. The default is 200. The total time between heartbeat tries is HeartbeatTimeout + HeartbeatRetry.	DBINT	NOT NULL
HeartbeatTimeout	Number of milliseconds the CallRouter waits for a host to respond to a heartbeat request. The default is 300.	DBINT	NOT NULL
HeartbeatInterval	Number of milliseconds between heartbeats. The idle timeout for each host is 4 times this value.	DBINT	NOT NULL
ID	A unique identifier for the row.	DBINT	PK NOT NULL
LateTimeout	Number of milliseconds the CallRouter waits for a response before considering it late. This does not affect CallRouter processing. It is for statistical use only.	DBINT	NOT NULL
LinkTestThreshold	Currently not used.	DBINT	NOT NULL
OpenTimeout	Number of milliseconds the CallRouter waits for a response to an open or close connection request. The default is 15000.	DBINT	NOT NULL
RequestTimeout	Number of milliseconds the CallRouter waits for a response before timing out a request. The default value is 300.	DBINT	NOT NULL

**Application\_Gateway\_Half\_Hour Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
SessionRetry	Number of milliseconds the CallRouter waits before trying to reconnect after a connection terminates or a connection attempt fails. The default is 30000.	DBINT	NOT NULL
SessionRetryLimit	The maximum number of times the CallRouter attempts to connect or reconnect a session. (User intervention is then required to restart the connection.) If the value is 0, then no limit applies.	DBINT	NOT NULL

**Application\_Gateway\_Half\_Hour Table**

This table is part of the [Script category \(page 539\)](#). For database rules, click [here](#). (page 599)

Central database only. Provides statistics on each Application Gateway.

The software updates these statistics every 30 minutes.

The software generates Application\_Gateway\_Half\_Hour records for each Application Gateway.

**Table 39: Related table for Application\_Gateway\_Half\_Hour**

<a href="#">Application Gateway (page 75)</a> (via ApplicationGatewayID)
--

**Table 40: Indexes for Application\_Gateway\_Half\_Hour Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XAK1Application_Gateway_Half_H	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XIE1Application_Gateway_Half_H	nonclustered, unique, primary key located on PRIMARY	DbDateTime
XPKApplication_Gateway_Half_Ho	clustered, unique, primary key located on PRIMARY	ApplicationGatewayID, DateTime, TimeZone

**Fields in Application\_Gateway\_Half\_Hour Table :**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
ApplicationGatewayID	Identifies the Application Gateway.	DBINT	PK, FK NOT NULL
AvgDelayToHalf	The average response time, in milliseconds, for all requests to the Application Gateway during the half-hour interval.	DBINT	NULL
DateTime	The Central Controller date and time at the start of the interval.	DBSMALLDATE	PK NOT NULL
DbDateTime	The current date and time stamp when the records are written to the HDS database. The logger database has NULL for this column.	DBDATETIME	IE-1 NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
ErrorsToHalf	Number of errors that occurred for Application Gateway requests during the half-hour interval. Consult EMS logs for specific error information.	DBINT	NULL
LatesToHalf	Number of responses that exceeded the LateTimeout value for the connection during the half-hour interval.	DBINT	NULL
MaxDelayToHalf	The longest response time, in milliseconds, for any request to the Application Gateway during the half-hour interval.	DBINT	NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL
RejectsToHalf	The number of requests rejected by the Application Gateway during the half-hour interval.	DBINT	NULL
RequestsToHalf	The number of request sent to the Application Gateway during the half-hour interval.	DBINT	NULL
TimeoutsToHalf	The number of requests to the Application Gateway that timed out during the half-hour interval.	DBINT	NULL
TimeZone	The time zone for the date and time. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK NOT NULL
UnavailableToHalf	Number of requests attempted while no Application Gateway was available during the half-hour interval.	DBINT	NULL

## Application\_Instance Table

This table is part of the [Media Routing category \(page 534\)](#). For database rules, click [here. \(page 597\)](#)

It contains configuration data about external application instances. The data in this table enables the software to identify application instances and grant them access to the Configuration Management Service (CMS).

### Related Table

[Application Path \(page 82\)](#) (via ApplicationInstanceID)

**Application\_Path Table****Table 41: Indexes for Application\_Instance Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XAK1Application_Instance	nonclustered, unique, unique key located on PRIMARY	EnterpriseName
XPKApplication_Instance	clustered, unique, primary key located on PRIMARY	ApplicationInstanceID

**Fields in Application\_Instance Table :**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
ApplicationInstanceID	Identifies the Application Instance.	DBINT	PK NOT NULL
ApplicationKey	A key supplied by the application which allows the application instance entry to CMS services.	varchar(32)	NOT NULL
ApplicationType	Provides a key to the characteristics of certain applications.	DBINT	NULL
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
Description	Additional information about this application instance.	DESCRIPTION	NULL
EnterpriseName	The unique name of the application instance.	VNAME32	AK-1 NOT NULL
PermissionLevel	Determines the permissions given to the application: <ul style="list-style-type: none"> <li>• <b>0</b> = Full read/write permission to all configuration tables.</li> <li>• <b>1</b> = Read-only permission to all configuration tables (the application may not change any data).</li> <li>• <b>2</b> = Authentication only (only the ConAPI authentication API's will function).</li> <li>• <b>3</b> = None</li> </ul>	DBINT	NOT NULL

**Application\_Path Table**

This table is part of the [Media Routing category \(page 534\)](#). For database rules, click [here](#). (page 597)

It defines a path from a registered application instance to a CTI Server. Applications need an interface to CTI Server in order to report logins, agent states, and task messages to the system software.

**Related Tables**

- [Application Instance \(page 81\)](#) (via ApplicationInstanceID).
- [Application Path Member \(page 83\)](#) (via ApplicationPathID).
- [Application Path Real Time \(page 84\)](#) (via ApplicationPathID).
- [Logical Interface Controller \(page 286\)](#) (via LogicalControllerID).
- [Media Routing Domain \(page 290\)](#) (via MRDomainID)

**Table 42: Indexes for Application\_Path Table**

index_name	index_description	index_keys
XAK1Application_Path	nonclustered, unique, unique key located on PRIMARY	EnterpriseName
XPKApplication_Path	clustered, unique, primary key located on PRIMARY	ApplicationPathID

**Fields in Application\_Path Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ApplicationInstanceID	Defines the application instance that uses this application path.	DBINT	FK NOT NULL
ApplicationPathID	A unique identifier for the application path.	DBINT	PK NOT NULL
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
Description	Additional information about this application path.	DESCRIPTION	NULL
EnterpriseName	The unique name of the application instance.	VNAME32	AK-1 NOT NULL
LogicalControllerID	Foreign key to the Logical_Interface_Controller table.	DBSMALLINT	FK NOT NULL

## Application\_Path\_Member Table

This table is part of the [Media Routing category \(page 534\)](#). For database rules, click [here. \(page 597\)](#)

It defines the Media Routing Domains (MRDs) that use a particular application path.

### Related Tables

- [Application Path \(page 82\)](#) (via ApplicationPathID).

- [Media Routing Domain \(page 290\)](#) (via MRDomainID).

- [Peripheral \(page 306\)](#) (via PeripheralID).

**Application\_Path\_Real\_Time Table****Table 43: Indexes for Application\_Path\_MemberTable**

index_name	index_description	index_keys
XIE1Application_Path_Member	nonclustered, unique, primary key located on PRIMARY	ApplicationPathID P
XPKApplication_Path_Member	clustered, unique, primary key located on PRIMARY	PeripheralID, MRDomainID

**Fields in Application\_Path\_Member Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ApplicationPathID	The application path identifier for this application path member.	DBINT	FK, IE-1 NOT NULL
MRDomainID	The MRD identifier for this application path member.	DBINT	PK, FK NOT NULL
PeripheralID	Link to the Peripheral table.	DBSMALLINT	PK, FK NOT NULL

**Application\_Path\_Real\_Time Table**

This table is part of the [Media Routing category \(page 534\)](#). For database rules, click [here](#). (page 597)

It provides real-time status and connection data for application paths.

**Related Table**

[Application Path \(page 82\)](#) (via ApplicationInstanceID)

**Table 44: Indexes for Application\_Path\_Real\_Time Table**

index_name	index_description	index_keys
XPKApplication_Path_Real_Time	clustered, unique, primary key located on PRIMARY	ApplicationPathID

**Fields in Application\_Path\_Real\_Time Table :**

Field Name:	Description:	Data Type:	Keys and Null Option:
ApplicationPathID	The application path identifier for this application path member.	DBINT	PK, FK NOT NULL
DateTime	The date and time when the data in this table was last updated.	DBDATETIME	NOT NULL
OnLine	Indicates whether or not the application path is currently on-line:  • Y = yes, on-line  • N = no, not on-line.	DBCHAR	NULL
OnLineDateTime	The date and time at which the application instance associated with this application path established connection to the CTI Server.	DBDATETIME	NULL

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
Text1	Application-specific strings.	varchar(40)	NULL
Text2	Application-specific strings.	varchar(40)	NULL
Text3	Application-specific strings.	varchar(40)	NULL
Text4	Application-specific strings.	varchar(40)	NULL
Text5	Application-specific strings.	varchar(40)	NULL
Text6	Application-specific strings.	varchar(40)	NULL
Text7	Application-specific strings.	varchar(40)	NULL
Text8	Application-specific strings.	varchar(40)	NULL
Text9	Application-specific strings.	varchar(40)	NULL
Text10	Application-specific strings.	varchar(40)	NULL

## Assignment\_Queue Table

The Assignment\_Queue table defines a queue used for skills based routing.

### **Fields in Assignment\_Queue Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
AgentOrdering	<p>The ordering used for agents in this queue.</p> <p>Values:</p> <ul style="list-style-type: none"> <li>• 0 = Unknown</li> <li>• 1 = LAA (agent availability time)</li> <li>• 2 = Most skilled agent</li> <li>• 3 - Least skilled agent</li> </ul>	DBINT	NOT NULL
AssignmentQueueID	ID and primary key.	DBINT	PK1,NOT NULL
CallOrdering	<p>The ordering used for calls in this queue.</p> <p>Values:</p>	DBINT	NOT NULL

**Assignment\_Queue\_Member Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	<ul style="list-style-type: none"> <li>• 0 = Unknown</li> <li>• 1 = Priority, then time in queue.</li> </ul>		
ChangeStamp	Change stamp	CHANGESTAMP	NOT NULL
Description	Description	DESCRIPTION	YES
EnterpriseName	Name of this attribute.	VNMAE32	AK1, NOT NULL
ScriptModificationAllowed	Y or N. If Y, an Unified ICM script is allowed to impose additional constraints on agent attributes when queueing to this AssignmentQueue.	DBCHAR	NOT NULL

**Assignment\_Queue\_Member Table**

The Assignment\_Queue\_Member table is a member table that relates Skill\_Group to Assignment\_Queue. Its parent, for ChangeStamp purposes, is Assignment\_Queue.

**Note:** This table should support individual adds and deletes, as well as delete all.

**Fields in Assignment\_Queue\_Member Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
AssignmentQueueID	Foreign key to the Assignment_Queue table, and part of primary key.	DBINT	PK1, NOT NULL
SkillTargetID	Foreign key to the Skill_Group table, and part of primary key.	DBINT	PK2, NOT NULL

**Assignment\_Queue\_Attribute Table**

The Assignment\_Queue\_Attribute table defines what attributes an agent must have to be a member of an Assignment Queue. Basically, it defines a formula that is a list of Attribute tests.

**Note:** This table does not support individual adds and deletes. Updates are always done by delete all, followed by adds.

**Fields in Assignment\_Queue\_Attribute Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
AssignmentQueueID	Foreign key to Assignment_Queue table, and part of primary key.	DBINT	PK1, NOT NULL
AttributeID	Foreign key to the Attribute table. Controls which attribute is tested. Null=Yes to allow for rules which don't test an attribute.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
AttributeRelation	<p>Indicates what kind of comparison is done on the attribute.</p> <p>Values:</p> <ul style="list-style-type: none"> <li>• 0 = Unknown</li> <li>• 1 = equal</li> <li>• 2 = not equal</li> <li>• 3 = less than</li> <li>• 4 = less than or equal</li> <li>• 5 = greater than</li> <li>• 6 = greater than or equal</li> <li>• 7 = between (inclusive)</li> <li>• 8 = member</li> </ul>	DBINT	NOT NULL
Description	Description	DESCRIPTION	NULL
Item	Integer that defines the order of rows for an Assignment Queue. Also part of the primary key.	DBINT	PK2, NOT NULL
ItemRelation	<p>Indicates the relationship of this term to the proceeding term.</p> <p>Values:</p> <ul style="list-style-type: none"> <li>• 1 = AND</li> <li>• 2 = OR</li> </ul>	DBINT	NOT NULL
ParentCount	Number of parenthesis around this term. A positive number indicates open parens before the term; a negative number indicates closed parents after the term. The total of ParentCount for all Assignment_Queue_Attribute entries for an Assignment_Queue must be 0.	DBINT	NOT NULL
Value1	The value that the attribute is tested against. If AttributeRelation is member, then this is a JSON compatible string listing the values. Must be convertible to the datatype specified in the Attribute table.	varchar(255)	NULL
Value2	A second value, only used as the upper bound when the AttributeRelation is between. It also can contain additional values for member if Value1 isn't enough. Must be convertible to the datatype specified in the Attribute table.	varchar(255)	NULL

**Attribute Table****Attribute Table**

This table defines attributes that agents may have and that calls may request.

**Note:** A skill is a special form attribute used to identify which attributes should be used in the most skilled agent and least skilled agent queue ordering. Other than that, they are just like any other attribute.

An attribute which is considered a skill must have the following:

1. DataType = Skill
2. MinimumValue = 1
3. MaximumValue = 100

**Fields in Attribute Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
AttributeDataType	<p>Data type for this attribute.</p> <p>Values:</p> <ul style="list-style-type: none"> <li>• 0 = Unknown</li> <li>• 1 = Integer</li> <li>• 2 = String</li> <li>• 3 = Boolean</li> <li>• 4 = Skill (special form of integer)</li> <li>• 5 = Float</li> </ul>	DBINT	NOT NULL
AttributeID	ID and primary key.	DBINT	PK1,NOT NULL
AppearsOnDesktop	Y or N. If Y, this attribute should appear on the agent's desktop. This flag is only advisory for the desktop software. Default: ?	DBCHAR	NOT NULL
ChangeStamp	Change stamp.	CHANGESTAMP	NOT NULL
DefaultValue	Must be convertable to the datatype specified.	varchar255	YES
Description	Description	DESCRIPTION	YES
EnterpriseName	Name of this attribute.	VNMAE32	AK1, NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
MaximumValue	Must be convertable to the datatype specified.	varchar255	YES
MinimumValue	Must be convertable to the datatype specified.	varchar255	YES
SettableByAgent	Y or N. If Y, the agent can set this attribute for the desktop. This flag is only advisory for the desktop software. Default: ?	DBCHAR	NOT NULL

## AWControl Table

This table is in the [System category \(page 548\)](#). To see database rules for these tables, click [here \(page 601\)](#).

Local database only.

Contains one record of control information about the Administration & Data Server. This information is used internally by the system.

### Fields in AWControl Table :

Field Name:	Description:	Data Type:	Keys and Null Option:
AWType	The AW type: <ul style="list-style-type: none"> <li>• <b>0</b> = Standard</li> <li>• <b>1</b> = NAM</li> <li>• <b>2</b> = CICM</li> <li>• <b>3</b> = Limited Administration &amp; Data Server.</li> </ul>	DBINT	NOT NULL
ConfigChangedBySystemName	The name of the workstation that last uploaded configuration or script information to the central database. This field is maintained by the real-time feed.	VNAME32	NULL
ConfigChangedByUserName	The name of the user that last uploaded configuration or script information to the central database. This field is maintained by the real-time feed.	varchar	NULL
ControllerConfigChangeKey	The recovery key value from the Config Message Log table when the configuration or script information in the central database was last updated. This field is maintained by the real-time feed.	DBFLT8	NOT NULL
ControllerConfigChangeTime	The time that the configuration or script information in the central database was last updated. This field is maintained by the real-time feed.	datetime	NULL

**Blended\_Agent\_Options Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
HDSPropertyEnabled	Indicates whether the Historical Data Server property is enabled: • Y = Yes (enabled) • N = No (not enabled)	DBCHAR	NOT NULL
LastRetrievalKey	The recovery key value copied from the Config Message Log table when the local database was last updated from the central database.	DBFLT8	NOT NULL
LastRetrievalTime	The time that the local Administration & Data Server database was last updated from the central database.	DATETIME	NULL

**Blended\_Agent\_Options Table**

This table is in the [Blended Agent category \(page 527\)](#). To see database rules for these tables, click [here \(page 593\)](#).

**Note:** If Outbound Option was not selected during setup, this table will contain no data.

Contains all options that are global to a Outbound Option deployment. There is only one row in this table.

Use the Outbound Option Configuration option within Unified ICM Configuration Manager to modify the Outbound Option Options records.

**Fields in Blended\_Agent\_Options Table :**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
CPAAnalysisPeriod	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Number of milliseconds the dialer will spend analyzing. Advanced configuration item.	DBINT	NULL
CPAJitterBufferDelay	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Used for fine tuning call progress analysis. Advanced configuration item.	DBINT	NULL
CPAMaxTermToneAnalysis	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Maximum milliseconds the dialer will analyze an answering machine voice message looking for a termination tone. Advanced configuration item.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
CPAMaxTimeAnalysis	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Maximum time allowed for analysis in milliseconds. Advanced configuration item.	DBINT	NULL
CPAMinimumValidSpeechTime	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Minimum number of milliseconds of voice required to qualify a call as voice detected. Advanced configuration item.	DBINT	NULL
CPAMinSilencePeriod	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Minimum silence period required to classify as a call voice detected. Advanced configuration item.	DBINT	NULL
DialEndHours	The latest valid hour to call a contact (in 24-hour format). The hour value is based on the contact's local time.	DBINT	NOT NULL
DialEndMinutes	The latest valid minute to call a contact. The minutes value is based on the contact's local time.	DBINT	NOT NULL
DialStartHours	The earliest valid hour to call a contact (in 24-hour format). The hour value is based on the contact's local time.	DBINT	NOT NULL
DialStartMinutes	The earliest valid minute to call a contact. The minutes value is based on the contact's local time.	DBINT	NOT NULL
FutureUseInt1	Reserved for future use	DBINT	NULL
FutureUseInt2	Reserved for future use	DBINT	NULL
FutureUseInt3	Reserved for future use	DBINT	NULL
FutureUseInt4	Reserved for future use	DBINT	NULL
FutureUseInt5	Reserved for future use	DBINT	NULL
FutureUseVarchar1	Reserved for future use	varchar(64)	NULL
FutureUseVarchar2	Reserved for future use	varchar(64)	NULL
FutureUseVarchar3	Reserved for future use	varchar(64)	NULL
IPDirectDialPreview	A Boolean value that indicates that all preview and personal callback modes should be direct dialed from the agent desktop rather than transferred from the dialer.	DBCHAR	NOT NULL

## Blended\_Agent\_Options Table

Field Name:	Description:	Data Type:	Keys and Null Option:
	A Y indicates enabled, N indicates disabled. The default is N.		
PcbAllowedSaturday	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Allow dialing of personal callbacks on Saturday. The default is N.	DBCHAR	NOT NULL
PcbAllowedSunday	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Allow dialing of personal callbacks on Sunday. The default is N.	DBCHAR	NOT NULL
PcbBusyRetry	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Personal callbacks. Minimum time in minutes before retrying a busy.	DBINT	NULL
PcbCheckRecords	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Frequency (in minutes) to check for records in the database.	DBINT	NULL
PcbMaxAttempts	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Maximum attempts to retry.	DBINT	NULL
PcbMode	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Indicates the personal callback mode to use if this personal callback was not associated with a campaign. The three mode choices are useVDN, Reschedule, or Abandon.	DBINT	NULL
PcbNoAnswerRetry	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Minimum time in minutes before retrying a no answer.	DBINT	NULL
PcbNoAnswerRingLimit	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Number of rings to wait before considering this call a no answer call.	DBINT	NULL
PcbPurgeRecords	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Days to wait before purging old records.	DBINT	NULL
PcbPurgeStatus	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Indicates which personal callback records to purge based on the call status. It is a string of dialing list status characters.	VARCHAR(64)	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
PcbRecordsToCache	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Number of personal callback records to cache in the dialer.	DBINT	NULL
PcbReserveRetry	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Minimum time before retrying a failed reservation.	DBINT	NULL
RescheduleCallbacks	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Indicates whether callbacks should be rescheduled or not. The default is Y.	DBCHAR	NOT NULL

## Bucket\_Interval Table

This configuration table holds the definition for Bucket Intervals that are used for Call type reporting. The Intervals are in sequentially increasing order, with the unused intervals having a NULL value.

Use the Unified ICM Configuration Manager Bucket Interval List Tool to modify Bucket intervals.

**Table 45: Indexes for Bucket\_Interval Table**

index_name	index_description	index_keys
XAK1Bucket_Interval	nonclustered, unique, unique key located on PRIMARY	EnterpriseName
XPKBucket_Interval	clustered, unique, primary key located on PRIMARY	BucketIntervalID

### Fields in Bucket\_Interval Table :

Field Name:	Description:	Data Type:	Keys and Null Option:
BucketIntervalID	The primary key for this table.	DBINT	PK NOT NULL
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
Deleted	The default is N.	DBCHAR	NOT NULL
EnterpriseName	The enterprise name for this table.	VNAME32	AK-1 NOT NULL
IntervalUpperBound1	Upper bound in seconds of interval 1	DBINT	NULL
IntervalUpperBound2	Upper bound in seconds of interval 2	DBINT	NULL

**Business\_Entity Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
IntervalUpperBound3	Upper bound in seconds of interval 3	DBINT	NULL
IntervalUpperBound4	Upper bound in seconds of interval 4	DBINT	NULL
IntervalUpperBound5	Upper bound in seconds of interval 5	DBINT	NULL
IntervalUpperBound6	Upper bound in seconds of interval 6	DBINT	NULL
IntervalUpperBound7	Upper bound in seconds of interval 7	DBINT	NULL
IntervalUpperBound8	Upper bound in seconds of interval 8	DBINT	NULL
IntervalUpperBound9	Upper bound in seconds of interval 9	DBINT	NULL

**Business\_Entity Table**

This table is in the [Security category \(page 543\)](#). To see database rules for these tables, click [here \(page 600\)](#).

It lists the business entities within the enterprise.

**Related tables**

[Enterprise Route \(page 228\)](#) (via Enterprise Route ID)

[Enterprise Service \(page 229\)](#) (via EntityID)

[Enterprise Skill Group \(page 231\)](#) (via EntityID)

[Master Script \(page 288\)](#) (via Entity ID)

[Schedule \(page 365\)](#) (via EntityID)

**Table 46: Indexes for Business\_Entity Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XAK1Business_Entity	nonclustered, unique, unique key located on PRIMARY	EntityName
XPKBusiness_Entity	clustered, unique, primary key located on PRIMARY	EntityID

**Fields in Business\_Entity Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
Description	Additional information about the business entity.	DESCRIPTION	NULL
EntityID	A unique identifier for the business entity.	DBINT	PK NOT NULL
EntityName	The name of the business entity.	varchar(30)	AK-1 NOT NULL

## Call\_Type Table

This table is part of the [Script category \(page 539\)](#). For database rules, click [here. \(page 599\)](#)

Each row describes a category of calls that the software can handle. The Dialed Number Map table determines which calls are assigned to each category; the Call Type Map table determines which scripts are executed for each call type.

Use the Call Type list tool to add, update, and delete Call\_Type records. This tool can be launched through the Configuration Manager.

### Related tables

<a href="#">Call Type Half Hour (page 96)</a> (via CallTypeID)	<a href="#">Call Type Map (page 121)</a> (via CallTypeID)	<a href="#">Call Type Real Time (page 142)</a> (via CallTypeID)
<a href="#">Customer Definition (page 194)</a> (via CustomerDefinitionID)	<a href="#">Default Call Type (page 195)</a> (via CallTypeID)	<a href="#">Dialed Number Map (page 200)</a> (via CallTypeID)
<a href="#">ICR Globals (page 264)</a> (Call_Type.CallTypeID maps to ICR_Globals.DefaultCallType)	<a href="#">Route Call Detail (page 338)</a> (via CallTypeID)	<a href="#">Termination Call Detail (page 490)</a> (via CallTypeID)

**Table 47: Indexes for Call\_Type Table**

index_name	index_description	index_keys
XAK1Call_Type	nonclustered, unique, unique key located on PRIMARY	EnterpriseName
XIE1Call_Type	nonclustered, unique, primary key located on PRIMARY	CustomerDefinitionID
XPKCall_Type	clustered, unique, primary key located on PRIMARY	CallTypeID

### Fields in Call\_Type Table :

Field Name:	Description:	Data Type:	Keys and Null Option:
BucketIntervalID	The ID for the entry in the Bucket_Interval Table used for this CallType. The default value is NULL.	DBINT	FK NULL

## Call\_Type\_Half\_Hour Table

Field Name:	Description:	Data Type:	Keys and Null Option:
	NULL means that the bucket interval from ICR_Globals will be used for this calltype.		
CallTypeID	A unique identifier for this call type.	DBINT	PK NOT NULL
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
CustomerDefinitionID	Identifies the customer definition, if any, associated with the call type.	DBINT	IE-1 NULL
Deleted	Deleted Flag. Stored as a character:  • Y = Yes  • N = No	DBCHAR	NOT NULL
Description	Additional information about the call type.	DESCRIPTION	NULL
EnterpriseName	An enterprise name for this call type. This name must be unique among all call types in the enterprise.	VNAME32	AK-1 NOT NULL
ReportingInterval	During the upgrade from 7.x to 8.0, this column value will be NULL and it is assumed to be a 30 minute interval. Also, this value indicates the router to calculate the Call Type and Call Type Skill Group data for that interval. Default: 30.  <b>Note:</b> This field is the Call Type Reporting Interval and not the PG reporting Interval the skill group is associated with.	DBINT	IE3, NULL
ServiceLevelThreshold	The time in seconds to be used as the service level threshold.	DBINT	NULL
ServiceLevelType	Default value that indicates how the software calculates the service level (that is, how it handles abandoned calls in calculating the service level). You can override this default for individual services.	DBSMALLINT	NULL

## Call\_Type\_Half\_Hour Table

This table is part of the [Script category \(page 539\)](#). For database rules, click [here. \(page 599\)](#)

Central database only.

Provides half-hour statistics for each call type defined in the system software. The system software generates Call\_Type\_Half\_Hour records for each call type.

**Note:**

- For fields applicable to Unified CCE and ACDs with translation routing; if the call is not transferred through the Unified ICM, the subsequent call legs are not tracked by the Unified ICM unless the call is transferred back to the Unified ICM at some point.
- For abandoned calls, in an Cisco Contact Center Gateway deployment, Unified ICM (parent) connected with an Unified CCE with an IPCC System PG (child) or Cisco Unified Contact Center Express (child) through IPCC Gateway PG, network queuing data is not available in the child or in the child agent/supervisor desktop. The time spent in the network queue is not included in the reporting metrics in the child. A call center manager who would normally only look at the Unified CCE child reports will need to also look at the parent Unified ICM reports for network queuing data.

**Note:**

- For answered calls, with the existence of a network VRU, for Unified CCE and for Unified ICM systems in which calls are translation-routed, the measurement of Answer Wait Time for a call begins when the call is queued, whereas the measurement of Service Level begins when the call arrives at the routing script, or when its call type is changed. This means that if self-service is performed on a call before the call is queued to an agent, the routing script must be set up to change the call type of the call when self-service is completed. Otherwise, the time spent in self-service will negatively impact the Service Level.
- For answered calls, in an Cisco Contact Center Gateway deployment, Unified ICM (parent) connected with an Unified CCE with an IPCC System PG (child) or Cisco Unified Contact Center Express (child) through IPCC Gateway PG, network queuing data is not available in the child or in the child agent/supervisor desktop. The time spent in the network queue is not included in the reporting metrics in the child. A call center manager who would normally only look at the Unified CCE child reports will need to also look at the parent Unified ICM reports for network queuing data.

**Note:** With the existence of a network VRU, for Unified CCE and for Unified ICM systems in which calls are translation-routed, the measurement of Answer Wait Time for a call begins when the call is queued, whereas the measurement of Service Level begins when the call arrives at the routing script, or when its call type is changed. This means that if self-service is performed on a call before the call is queued to an agent, the routing script must be set up to change the call type of the call when self-service is completed. Otherwise, the time spent in self-service will negatively impact the Service Level.

**Note:** In an Cisco Contact Center Gateway deployment, Unified ICM (parent) connected with an Unified CCE with an IPCC System PG (child) or Cisco Unified Contact Center Express (child) through IPCC Gateway PG, network queuing data is not available in the child or in the child agent/supervisor desktop. The time spent in the network queue is not included in the reporting metrics in the child. A call center manager who would normally only look at the Unified CCE child reports will need to also look at the parent Unified ICM reports for network queuing data.

**Note:** The *AbandInterval field* and *AnsInterval field* are applicable to both **Unified ICM** and **Unified CCE** with the following exception: the field is not incremented if the call abandons after it is routed to a standard ACD unless the call was translation routed.

**Call\_Type\_Half\_Hour Table****Related table**

[Call Type \(page 95\)](#) (via CallTypeID)

**Table 48: Indexes for Call\_Type\_Half\_Hour Table**

index_name	index_description	index_keys
XAK1Call_Type_Half_Hour	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XIE1Call_Type_Half_Hour	nonclustered, unique, primary key located on PRIMARY	DbDateTime
XPKCall_Type_Half_Hour	clustered, unique, primary key located on PRIMARY	DateTime, CallTypeID, TimeZone

**Note:** The Call\_Type\_Interval Table will be populated with 30/15 minute reporting data, depending on the Historical Reporting Interval setting for the PG. The Call\_Type\_Half\_Hour Table will not be populated with this data.

**Fields in Call\_Type\_Half\_Hour Table :**

Field Name:	Description:	Data Type:	Keys and Null Option:
AbandInterval1	Number of calls abandoned within interval 1.	DBINT	NULL
AbandInterval2	Number of calls abandoned within interval 2.	DBINT	NULL
AbandInterval3	Number of calls abandoned within interval 3.	DBINT	NULL
AbandInterval4	Number of calls abandoned within interval 4.	DBINT	NULL
AbandInterval5	Number of calls abandoned within interval 5 .	DBINT	NULL
AbandInterval6	Number of calls abandoned within interval 6 .	DBINT	NULL
AbandInterval7	Number of calls abandoned within interval 7.	DBINT	NULL
AbandInterval8	Number of calls abandoned within interval 8.	DBINT	NULL
AbandInterval9	Number of calls abandoned within interval 9 .	DBINT	NULL
AbandInterval10	Number of calls abandoned within interval 10.	DBINT	NULL
AgentErrorCountToHalf	During the half-hour interval, calls that encounter an error when the call is at the agent desktop.  These are calls that receive a TCD with CallDispositionFlag value 4.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	<p>Agent errors are counted in AgentErrorCount, and routing errors are counted in ErrorCount.</p> <p>Total Error count = ErrorCountToHalf + AgentErrorCountToHalf.</p>		
AnsInterval1	<p>Number of calls answered within interval 1.</p> <p>This field is applicable to both <b>Unified ICM</b> and <b>Unified CCE</b> with the following exception: the field is not incremented if the call abandons after it is routed to a standard ACD unless the call was translation routed.</p>	DBINT	NULL
AnsInterval2	Number of calls answered within interval 2.	DBINT	NULL
AnsInterval3	Number of calls answered within interval 3.	DBINT	NULL
AnsInterval4	Number of calls answered within interval 4.	DBINT	NULL
AnsInterval5	Number of calls answered within interval 5.	DBINT	NULL
AnsInterval6	Number of calls answered within interval 6.	DBINT	NULL
AnsInterval7	Number of calls answered within interval 7.	DBINT	NULL
AnsInterval8	Number of calls answered within interval 8.	DBINT	NULL
AnsInterval9	Number of calls answered within interval 9.	DBINT	NULL
AnsInterval10	Number of calls answered within interval 10.	DBINT	NULL
AnswerWaitTimeHalf	<p>The sum of answer wait time in seconds for all calls that were answered for the call type during the half-hour interval.</p> <p>This field is applicable to both <b>Unified ICM</b> and <b>Unified CCE</b> with the following exception: the field is not incremented if the call abandons after it is routed to a standard ACD unless the call was translation routed.</p> <p><b>Note:</b> For RONA calls that are answered subsequently, the AnswerWaitTimeHalf field does not include Wait Time or Ring Time prior to the RONA, unless Target Requery is used.</p>	DBINT	NULL
AvgRouterDelayQToHalf	Average delay in queue (in seconds) for calls removed from the Router queue during the half-hour interval.	DBINT	NULL

## Call\_Type\_Half\_Hour Table

Field Name:	Description:	Data Type:	Keys and Null Option:
	<b>RouterQueueWaitTimeToHalf / RouterQueueCallsToHalf</b>		
BucketIntervalID	The ID of Bucket Intervals from the Bucket_Interval table used to generate the following <i>AnsInterval</i> and <i>AbandInterval</i> fields in this record.	DBINT	NULL
CallDelayAbandTimeToHalf	<p>The total time spent by calls of this call type that abandoned in the half-hour interval.</p> <p>This time begins when the call reaches the Router and ends when the call disconnects.</p> <p>Does not include short calls.</p> <p><b>Note:</b> This time is not reset if the CallType changes.</p> <p><i>To determine the time that abandoned calls spend in the script before abandoning, subtract DelayQAbandTimeHalf and DelayAgentAbandTimeToHalf from CallDelayAbandTimeToHalf.</i></p>	DBINT	NULL
CallsAnsweredToHalf	<p>The total number of calls of this call type answered by agents in the half-hour interval.</p> <p>This field is applicable to both <b>Unified ICM</b> and <b>Cisco Unified Contact Center Express</b> with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.</p>	DBINT	NULL
CallsHandledHalf	<p>The total number of calls of this call type handled in the half-hour interval. Termination_Call_Detail records generated by agent PG with a CallDispositionFlag of 1 are counted as CallHandled.</p> <p>A handled call is:</p> <ul style="list-style-type: none"> <li>• An incoming ACD call that was answered by an agent, and then completed.</li> <li>• A call associated with Outbound Option that the agent answered, and then completed.</li> <li>• A non-voice task that the agent started working on then completed.</li> </ul> <p>A handled call/task is completed when the agent associated with the call/task finishes the wrap-up work associated with the call/task.</p> <p>This field is applicable to both <b>Unified ICM</b> and <b>Cisco Unified Contact Center Express</b> with the following exception: the field is</p>	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.		
CallsOfferedHalf	The total number of calls of this call type offered during the half-hour interval.	DBINT	NULL
CallsOnHoldToHalf	The number of calls placed on hold at least once for thecall type during the reporting interval	DBINT	YES
CallsQHandledToHalf	Number of calls handled in the half-hour interval that were queued in the Router at any time during the life of the call.  This field is applicable to both <b>Unified ICM</b> and <b>Cisco Unified Contact Center Express</b> with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.	DBINT	NULL
CallsRequeriedToHalf	During the half-hour interval, the number of router requery events for this calltype. A call may be requeried several times and counted as such. For example, if there are 10 calls offered and each is requeried twice, Calls Requeried is 20.	DBINT	NULL
CallsRONAToHalf	Number of calls that have been Redirected On No Answer in the half-hour interval. This does not include calls that are rerouted using the router requery feature. This is for calls with a call disposition of 5.  This field is applicable to both <b>Unified ICM</b> and <b>Cisco Unified Contact Center Express</b> with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.	DBINT	NULL
CallsRoutedNonAgentToHalf	For <b>Cisco Unified Contact Center Express</b> , the number of calls that executed a Label node or a Divert Label node in their routing script in the half-hour interval.  For <b>Unified ICM</b> , the number of calls that executed a Label node or a Divert Label node in their routing script; or were routed to a standard ACD without using a translation route in the half-hour interval.	DBINT	NULL
CallsRoutedToHalf	Number of calls of this type that have been routed during the half-hour interval.	DBINT	NULL
CallTypeID	Identifies the call type.	DBINT	PK, FK NOT NULL

## Call\_Type\_Half\_Hour Table

Field Name:	Description:	Data Type:	Keys and Null Option:
CTDelayAbandTimeToHalf	<p>The total time spent by calls of this call type that abandoned calls within the half-hour interval.</p> <p>This time begins when the call reaches the Router or when the call changes CallTypes and ends when the call disconnects.</p> <p>This time is reset if the CallType changes.</p> <p>Does not include short calls.</p>	DBINT	NULL
CTVRUTimeToHalf	<p>During the half-hour interval, the total time that all the calls spent at the VRU in the current call type.</p> <p><b>Note:</b> In a NAM/CICM deployment (VRU at NAM), this value is updated for calls that the Customer ICM (CICM) sends to the VRU. Calls that the NAM itself sends to the VRU update the call type metrics in the NAM.</p> <p><b>Note:</b> In a NAM/CICM deployment (VRU1 at NAM and VRU2 at CICM), this value is updated for calls that the CICM sends to VRU1. Calls that the NAM Router itself sends to VRU1 update the call type metrics in the NAM. Service data for VRU2 is stored in the CICM data base.</p>	DBINT	NULL
DateTime	The Central Controller date and time at the start of the interval when the row was generated..	DBSMALLDATE	PK NOT NULL
DbDateTime	The current date and time stamp when the records are written to the HDS database. The logger database has NULL for this column.	DBDATETIME	NULL
DelayAgentAbandTimeToHalf	<p>For the half-hour interval, the total time spent by all calls for this call type that abandoned at the agent's desktop before being answered.</p> <p>This time is not reset if the CallType changes.</p> <p>Does not include short calls.</p>	DBINT	NULL
DelayQAbandTimeHalf	<p>The total time spend by all calls for this call type that abandoned while in the queue, for this half-hour interval.</p> <p>This field changed in Release 7.0 from Abandon Time in Queue + Abandon Time At Agent + Abandon Time in VRU to Abandon Time in Queue only.</p> <p><b>Note:</b> Customers who migrate from Release 6.0 please note that the data stored in DelayQAbandTime will be moved to CallDelayAbandTime.</p>	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	<p>Does not include short calls.</p> <p>This time is not reset if the CallType changes.</p>		
ErrorCountToHalf	<p>During the half-hour interval, the number of calls that resulted in an error condition, such as when a routing script fails to find a target and there is no default route defined Refer to the Route_Call_Detail table, RouterErrorCode field.</p> <p>Examples:</p> <p>Translation-routed calls are abandoned while en route to destination target.</p> <p>Calls with mis-configured labels do not use default routing; for example, when a route has not been defined.</p>	DBINT	NULL
HandleTimeHalf	<p>The total handle time in seconds for handled calls of this call type ending during the half-hour interval.</p> <p>HandleTimeToHalf is the sum of the fields TalkTime, HoldTime and WorkTime from the Termination_Call_Detail record.</p> <p>This field is applicable to both <b>Unified ICM</b> and <b>Unified CCE</b>with the following exception: it does not include the delay time for a call that was abandoned after it was routed to a standard ACD unless the call was translation routed.</p>	DBINT	NULL
HoldTimeToHalf	<p>The total hold time in seconds for calls of this call type ending during the half-hour interval.</p> <p>This field is applicable to both <b>Unified ICM</b> and <b>Unified CCE</b>with the following exception: it does not include the delay time for a call that was abandoned after it was routed to a standard ACD unless the call was translation routed.</p>	DBINT	NULL
ICRDefaultRoutedToHalf	Number of calls of this type that were routed to the default label during the half-hour interval.	DBINT	NULL
IncompleteCallsHalf	<p>During the half-hour interval, the number of IncompleteCalls;which are calls that were routed to an agent but failed to arrive.</p> <p>An IncompleteCall can also be identified in the Termination_Call_Detail record, as can any call with a CallDispositionFlag of 7. This can occur under several conditions:</p>	DBINT	NULL

## Call\_Type\_Half\_Hour Table

Field Name:	Description:	Data Type:	Keys and Null Option:
	<ul style="list-style-type: none"> <li>Just as the CallRouter is about to send the agent a call, the agent, while in the AVAILABLE state, pushes the head set button to enable it.</li> <li>Just as the CallRouter is about to send the agent a call, the agent otherwise attempts to make a call from the hard phone.</li> <li>Just as the CallRouter is about to send the agent a call, the agent, while in the AVAILABLE state, is direct dialed.</li> <li>Network issues (congestion, glitches, etc).</li> <li>A caller disconnects in route to the agent.</li> </ul> <p><b>Note:</b> As IP transfers are so quick, this is an unlikely condition.</p> <ul style="list-style-type: none"> <li>An incorrect label is configured for a device target. The call is sent to the wrong number, so the agent never receives the call. This is a common new installation problem.</li> </ul> <p>This field is applicable to both <b>Unified ICM</b> and <b>Unified CCE</b> with the following exception: it does not include the delay time for a call that was abandoned after it was routed to a standard ACD unless the call was translation routed.</p>		
MaxHoldTimeToHalf	The max hold time in seconds for calls of this call type during the reporting interval.	DBINT	YES
NetworkAnnouncementToHalf	Number of calls routed with an announcement node during the half-hour period. This node returns a label to the network that specifies the announcement to be played.	DBINT	NULL
NetworkDefaultRoutedToHalf	Number of calls of this type that were routed to a Termination node that specifies "use network default" during the half-hour interval. This node returns a label to the network that tells it to apply its default treatment to the call.	DBINT	NULL
OverflowOutHalf	The number of calls overflowed to another call type during the half-hour interval. This field increments when a requalify or call type node is executed in the script.	DBINT	NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL
Reserved1	Reserved for future use.	DBINT	NULL
Reserved2	Reserved for future use.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
Reserved3	Reserved for future use.	DBINT	NULL
Reserved4	Reserved for future use.	DBINT	NULL
Reserved5	Reserved for future use.	DBFLT4	NULL
ReturnBusyToHalf	Number of calls of this type that were routed to the Busy target during the half-hour interval.	DBINT	NULL
ReturnReleaseToHalf	Count of calls that executed a Release node in their routing script in the half-hour interval.	DBINT	NULL
ReturnRingToHalf	Number of calls of this type that were routed to the Ring target during the half-hour interval.	DBINT	NULL
RouterCallsAbandQToHalf	<p>The number of calls to the call type that abandoned in the Router queue during the interval.</p> <p>Does not include short calls.</p> <p>The definition of this field changed in Release 7.0(0) from Calls Abandon in Queue + Calls Abandoned At Agent + Calls Abandoned in VRU to Calls Abandoned in Queue only.</p> <p>For customers who are migrating from Release 6.0 to Release 7.0, the data stored in RouterCallsAbandQ will be moved to TotalCallsAband.</p> <p><b>Note:</b> RouterCallsAbandQ does not include calls that were abandoned in the VRU. This value can be derived from TotalCallsAband - RouterCallsAbandQ - RouterCallsAbandToAgent</p>	DBINT	NULL
RouterCallsAbandToAgentToHalf	<p>The number of calls that abandoned at the agent desktop before being answered in the half-hour interval.</p> <p>Does not include short calls.</p> <p>Termination_Call_Detail records generated by agent PG with a CallDispositionFlag of 2 are counted as RouterCallsAbandToAgent.</p>	DBINT	NULL
RouterQueueCallsToHalf	The number of tasks of the call type assigned from the queue to be routed in the half hour interval.	DBINT	NULL
RouterQueueCallTypeLimitToHalf	During the half-hour interval, the number of Router queue attempts that failed because the limit for the call type was reached.	DBINT	NULL

## Call\_Type\_Half\_Hour Table

Field Name:	Description:	Data Type:	Keys and Null Option:
RouterQueueGlobalLimitToHalf	During the half-hour interval, the number of Router queue attempts that failed because the global system limit was reached.	DBINT	NULL
RouterQueueWaitTimeToHalf	<p>Number of seconds calls of this type spent in the Call Router queue during the half-hour interval.</p> <p>This count includes only calls that exited the queue during the interval. Calls still in the queue at the end of the interval are not counted.</p>	DBINT	NULL
ServiceLevelAbandHalf	<p>The total number of calls of this call type abandoned within the service level threshold during the half-hour interval.</p> <p>Valid for both <b>Unified CCE</b> and <b>standard ACD</b> targets that use translation routes.</p>	DBINT	NULL
ServiceLevelCallsHalf	<p>The total number of calls of this call type answered within the ICM service level threshold during the half-hour interval.</p> <p>Valid for both <b>Unified CCE</b> and <b>standard ACD</b> targets that use translation routes.</p>	DBINT	NULL
ServiceLevelCallsOfferedHalf	<p>The number of calls of this call type that had service level events during the half-hour interval.</p> <p>Calls are counted for service level purposes as soon as it is determined how the call contributes to the service level calculation. This determination is made when either the service level timer passes, the call is answered, or the caller abandons - whichever occurs first.</p> <p>Valid for both <b>Unified CCE</b> and <b>standard ACD</b> targets that use translation routes.</p> <p><b>service level event</b></p> <p>A service level event occurs when one of the following happens to the call:</p> <ul style="list-style-type: none"> <li>• <b>The call is answered by an agent before the service level threshold expires.</b> In this case, the <i>ServiceLevelCalls</i> and <i>ServiceLevelCallsOffered</i> database fields are incremented.</li> <li>• <b>The call abandons before the service level threshold expires.</b> In this case, the <i>ServiceLevelAband</i> and <i>ServiceLevelCallsOffered</i> database fields are incremented.</li> </ul>	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	<ul style="list-style-type: none"> <li><b>The call is Redirected on No Answer (RONAs) before the service level threshold expires.</b> In this case, only the <i>ServiceLevelCallsOffered</i> database field is incremented.</li> <li><b>The call reaches the service level threshold without being answered by an agent or abandoned.</b> In this case, the <i>ServiceLevelCallsOffered</i> database field is incremented.</li> </ul> <p>Tasks that abandon before the short calls timer (as defined in the ICM configuration) do not count towards the <i>ServiceLevelCallsOffered</i> or <i>ServiceLevelAband</i> call counters.</p> <p><b>Note:</b> In the ServicelevelCallsOffered field, calls sent to the labels or calls that encountered an error are counted, irrespective of how the calls ended (within or beyond the threshold). You can use the ErrorCount+AgentErrorCount fields to exclude all the erroneous calls and use ServiceLevelError field to exclude erroneous calls before threshold. For calls sent to labels, you can use the label related fields (e.g. CallsRoutedNonAgent, ReturnBusy, ReturnRing) to exclude all calls which are returned to the labels.</p>		
ServiceLevelErrorToHalf	Calls that ended in Error state within SL threshold within the half-hour interval.	DBINT	NULL
ServiceLevelHalf	<p>Service level for the call type during the half-hour interval.</p> <p>Service Level Type is configured in the Unified ICM Configuration Manager using the Call Type list tool and the System Information tool. ServiceLevel is calculated as follows depending on the service level type:</p> <ul style="list-style-type: none"> <li>Ignore Abandoned Calls: <math>\text{ServiceLevelCalls} / (\text{ServiceLevelCallsOffered} - \text{ServiceLevelAband})</math></li> <li>Abandoned Calls have Negative Impact: <math>\text{ServiceLevelCalls} / \text{ServiceLevelCallsOffered}</math></li> <li>Abandoned Calls have Positive Impact: <math>(\text{ServiceLevelCalls} + \text{ServiceLevelAband}) / \text{ServiceLevelCallsOffered}</math></li> </ul> <p>This field is applicable to both <b>Unified ICM</b> and <b>Unified CCE</b> with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.</p>	DBFLT4	NULL
ServiceLevelRONAToHalf	Calls that redirected on no answer within SL threshold within the half-hour interval.	DBINT	NULL

## Call\_Type\_Half\_Hour Table

Field Name:	Description:	Data Type:	Keys and Null Option:
ServiceLevelType	Service Level Type used to calculate Service level for the half-hour interval.	DBINT	NULL
ShortCallsHalf	<p>The total number of calls to the route that were too short to be considered abandoned during the half-hour interval. A call is determined to be a short call if it is abandoned before the Abandoned Call Wait Time expired. Short calls are not considered abandoned, nor are they accounted for in any of the Unified ICM abandoned calls calculations.</p> <p>This field is applicable to <b>Unified ICM</b>, <b>Unified CCE</b>, and <b>Outbound Option</b>.</p>	DBINT	NULL
TalkTimeHalf	<p>The total talk time in seconds for calls of this call type that were handled during the half-hour interval.</p> <p>This field is applicable to both <b>Unified ICM</b> and <b>Unified CCE</b> with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.</p>	DBINT	NULL
TimeZone	The time zone for the date and time. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK NOT NULL
TotalCallsAbandToHalf	<p>The total number of calls abandoned while in VRU (that is, while undergoing prompting or listening to voice menus options), calls abandoned while queued to skill group, and calls abandoned at agent desktop</p> <p>This field also includes abandons for calls that are not in the queue; for example, when the caller hangs up while listening to a VRU prompt. Therefore, the number of calls abandoned at a VRU before being queued is TotalCallsAband minus RouterCallsAbandToAgent and RouterCallsAbandQ.</p> <p>Does not include short calls.</p>	DBINT	NULL
VruAssistedCallsToHalf	Count of the VRU handled calls marked as routed to agents in the half-hour interval. This field is incremented only if the call's routing script sets the VRUPrintProgress script variable to a certain value.	DBINT	NULL
VruForcedXferredCallsToHalf	Count of the VRU calls marked as routed to agents as a result of caller difficulties in the half-hour period. This field is incremented only if the call's routing script sets the VRUPrintProgress script variable to a certain value.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
VruHandledCallsToHalf	Count of the VRU calls marked as handled at VRU in the half-hour interval. This field is incremented only if the call's routing script sets the VRUPrintProgress script variable to a certain value.	DBINT	NULL
VruOptOutUnhandledCallsToHalf	Count of the VRU unhandled calls that were marked as routed to agents by caller request in the half-hour interval. This field is incremented only if the call's routing script sets the VRUPrintProgress script variable to a certain value.	DBINT	NULL
VruOtherCallsToHalf	Count of VRU calls marked with any other VRUPrintProgress value other than the ToHalf in the half-hour period. This field is incremented only if the call's routing script sets the VRUPrintProgress script variable to a certain value.	DBINT	NULL
VruScriptedXferredCallsToHalf	Count of the VRU calls marked as routed to agents as a result of normal script procedure in the half-hour period. This field is incremented only if the call's routing script sets the VRUPrintProgress script variable to a certain value.	DBINT	NULL
VRUTimeToHalf	<p>The total time that all calls spent at the VRU in the half-hour interval.</p> <p>This is the total VRU time, whether the call was queued or not.</p> <p><b>Note:</b> In a NAM/CICM deployment (VRU at NAM), this value is updated for calls that the CICM sends to the VRU. Calls that the NAM itself sends to the VRU update the call type metrics in the NAM.</p> <p><b>Note:</b> In a NAM/CICM deployment (VRU1 at NAM and VRU2 at CICM), this value is updated for calls that the CICM sends to VRU1. Calls that the NAM Router itself sends to VRU1 update the call type metrics in the NAM. Service data for VRU2 is stored in the CICM data base.</p>	DBINT	NULL
VruUnhandledCallsToHalf	Count of calls marked as Offered to VRU but not handled in the half-hour interval. This field is incremented only if the call's routing script sets the VRUPrintProgress script variable to a certain value.	DBINT	NULL

## Call\_Type\_Interval Table

This section describes the Call Type Interval table.

**Call\_Type\_Interval Table****Note:**

- In an Cisco Contact Center Gateway deployment, Unified ICM (parent) connected with an Unified CCE with an IPCC System PG (child) or Cisco Unified Contact Center Express (child) through IPCC Gateway PG, network queuing data is not available in the child or in the child agent/supervisor desktop. The time spent in the network queue is not included in the reporting metrics in the child. A call center manager who would normally only look at the Unified CCE child reports will need to also look at the parent Unified ICM reports for network queuing data.
- With the existence of a network VRU, for Unified CCE and for Unified ICM systems in which calls are translation-routed, the measurement of Answer Wait Time for a call begins when the call is queued, whereas the measurement of Service Level begins when the call arrives at the routing script, or when its call type is changed. This means that if self-service is performed on a call before the call is queued to an agent, the routing script must be set up to change the call type of the call when self-service is completed. Otherwise, the time spent in self-service will negatively impact the Service Level.
- In the Call Type Interval table, the *Hold time* is calculated based on the call event.

**Fields in Call\_Type\_Interval Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
AbandInterval1	Number of calls abandoned within interval 1. This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.	DBINT	YES
AbandInterval2	Number of calls abandoned within interval 2. This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.	DBINT	YES
AbandInterval3	Number of calls abandoned within interval 3. This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.	DBINT	YES
AbandInterval4	Number of calls abandoned within interval 4. This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.	DBINT	YES
AbandInterval5	Number of calls abandoned within interval 5. This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.	DBINT	YES

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
AbandInterval6	Number of calls abandoned within interval 6. This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.	DBINT	YES
AbandInterval7	Number of calls abandoned within interval 7. This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.	DBINT	YES
AbandInterval8	Number of calls abandoned within interval 8. This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.	DBINT	YES
AbandInterval9	Number of calls abandoned within interval 9. This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.	DBINT	YES
AbandInterval10	Number of calls abandoned within interval 10. This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.	DBINT	YES
AgentErrorCount	During the reporting interval, calls that encounter an error when the call is at the agent desktop. These are calls that receive a TCD with CallDispositionFlag value 4. Agent errors are counted in AgentErrorCount, and routing errors are counted in ErrorCount. Total Error count = ErrorCount + AgentErrorCountTo Half.	DBINT	YES
AnsInterval1	Number of calls answered within interval 1. This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.	DBINT	YES
AnsInterval2	Number of calls answered within interval 2. This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.	DBINT	YES
AnsInterval3	Number of calls answered within interval 3. This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.	DBINT	YES

**Call\_Type\_Interval Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
AnsInterval4	Number of calls answered within interval 4. This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.	DBINT	YES
AnsInterval5	Number of calls answered within interval 5. This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.	DBINT	YES
AnsInterval6	Number of calls answered within interval 6. This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.	DBINT	YES
AnsInterval7	Number of calls answered within interval 7. This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.	DBINT	YES
AnsInterval8	Number of calls answered within interval 8. This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.	DBINT	YES
AnsInterval9	Number of calls answered within interval 9. This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.	DBINT	YES
AnsInterval10	Number of calls answered within interval 10. This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.	DBINT	YES
AnswerWaitTime	The sum of answer wait time in seconds for all calls that were answered for the call type during the reporting interval. This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.	DBINT	YES
AvgRouterDelayQ	Average delay in queue (in seconds) for calls removed from the Router queue during the half-hour interval. RouterQueueDelayQ / RouterQueueCalls	DBINT	YES

Field Name:	Description:	Data Type:	Keys and Null Option:
BucketIntervalID	The ID of Bucket Intervals from the Bucket_Interval table used to generate the following AnsInterval and AbandInterval fields in this record.	DBINT	YES
CallsAnswered	The total number of calls of this call type answered by agents in the reporting interval. This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.	DBINT	YES
CallDelayAbandTime	<p>The total time spent by calls of this call type that abandoned in the reporting interval. This time begins when the call reaches the Router and ends when the call disconnects. Does not include short calls.</p> <p><b>Note:</b> This time is not reset if the CallType changes. To determine the time that abandoned calls spend in the script before abandoning, subtract DelayQAbandTimeHalf and DelayAgentAbandTime from CallDelayAbandTime.</p>	DBINT	YES
CallsHandled	<p>The total number of calls of this call type handled in the reporting interval. Termination_Call_Detail records generated by agent PG with a CallDispositionFlag of 1 are counted as CallHandled.</p> <p>A handled call is:</p> <ol style="list-style-type: none"> <li>1. An incoming ACD call that was answered by an agent, and then completed.</li> <li>2. A call associated with Outbound Option that the agent answered, and then completed.</li> <li>3. A non-voice task that the agent started working on then completed.</li> </ol> <p>A handled call/task is completed when the agent associated with the call/task finishes the wrap-up work associated with the call/task. This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.</p>	DBINT	YES
CallsOffered	The total number of calls of this call type offered during the reporting interval.	DBINT	YES
CallsOnHold	The number of calls placed on hold at least once for the call type during the reporting interval	DBINT	YES
CallsQHandled	Number of calls answered within interval 1. This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is	DBINT	YES

## Call\_Type\_Interval Table

Field Name:	Description:	Data Type:	Keys and Null Option:
	not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.		
CallsRouted	Number of calls of this type that have been routed during the reporting interval.	DBINT	YES
CallsRequeried	During the reporting interval, the number of router requery events for this calltype. A call may be requeried several times and counted as such. For example, if there are 10 calls offered and each is requeried twice, Calls Requeried is 20.	DBINT	YES
CallsRoutedNonAgent	For Unified CCE, the number of calls that executed a Label node or a Divert Label node in their routing script in the reporting interval. For Unified ICM, the number of calls that executed a Label node or a Divert Label node in their routing script; or were routed to a standard ACD without using a translation route in the reporting interval.	DBINT	YES
CallsRONA	Number of calls that have been Redirected On No Answer in the reporting interval. This does not include calls that are rerouted using the router requery feature. This is for calls with a call disposition of 5. This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.	DBINT	YES
CallTypeID	Identifies the call type.	DBINT	PK2, NOT NULL
CTDelayAbandTime	The total time spent by calls of this call type that abandoned calls within the reporting interval. This time begins when the call reaches the Router or when the call changes CallTypes and ends when the call disconnects. This time is reset if the CallType changes. Does not include short calls.	DBINT	YES
CTVRUTime	During the reporting interval, the total time that all the calls spent at the VRU in the current call type.  <b>Note:</b> In a NAM/CICM deployment (VRU at NAM), this value is updated for calls that the CICM sends to the VRU. Calls that the NAM itself sends to the VRU update the call type metrics in the NAM.  <b>Note:</b> In a NAM/CICM deployment (VRU1 at NAM and VRU2 at CICM), this value is updated for calls that the CICM sends to VRU1. Calls that the NAM Router itself sends to VRU1 update the call type metrics in the NAM. Service data for VRU2 is stored in the CICM data base.	DBINT	YES
DateTime	The Central Controller date and time at the start of the interval when the row was generated.	DBSMALLDATE	PK1, NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
DbDateTime	The current date and time stamp when the records are written to the HDS database. The logger database has NULL for this column.	DBDATETIME	IE1, YES
DelayQAbandTime	<p>The total time spend by all calls for this call type that abandoned while in the queue, for this reporting interval. This field changed in Release 7.0 from Abandon Time in Queue + Abandon Time At Agent + Abandon Time in VRU to Abandon Time in Queue only.</p> <p><b>Note:</b> Customers who migrate from Release 6.0 please note that the data stored in DelayQAbandTime will be moved to CallDelayAbandTime. Does not include short calls. This time is not reset if the CallType changes.</p>	DBINT	YES
DelayAgentAbandTime	For the reporting interval, the total time spent by all calls for this call type that abandoned at the agent's desktop before being answered. This time is not reset if the CallType changes. Does not include short calls.	DBINT	YES
ErrorCount	<p>During the reporting interval, the number of calls that resulted in an error condition, such as when a routing script fails to find a target and there is no default route defined Refer to the Route_Call_Detail table, RouterErrorCode field.</p> <p>Examples: Translation-routed calls are abandoned while en route to destination target. Calls with mis-configured labels do not use default routing; for example, when a route has not been defined.</p>	DBINT	YES
HandleTime	The total handle time in seconds for handled calls of this call type ending during the reporting interval. HandleTime is the sum of the fields TalkTime, HoldTime and WorkTime from the Termination_Call_Detail record. This field is applicable to both Unified ICM and Unified CCE with the following exception: it does not include the delay time for a call that was abandoned after it was routed to a standard ACD unless the call was translation routed.	DBINT	YES
HoldTime	The total hold time in seconds for calls of this call type ending during the reporting interval. This field is applicable to bothUnified ICM and Unified CCEwith the following exception: it does not include the delay time for a call that was abandoned after it was routed to a standard ACD unless the call was translation routed.	DBINT	YES
ICRDefaultRouted	Number of calls of this type that were routed to the default label during the reporting interval.	DBINT	YES
IncompleteCalls	During the reporting interval, the number of IncompleteCalls;which are calls that were routed to an agent but failed to arrive. An IncompleteCall can also be identified in the Termination_Call_Detail record, as can any call with a CallDisposition of 7.	DBINT	YES

## Call\_Type\_Interval Table

Field Name:	Description:	Data Type:	Keys and Null Option:
	<p>This can occur under several conditions:</p> <ol style="list-style-type: none"> <li>1. Just as the CallRouter is about to send the agent a call, the agent, while in the AVAILABLE state, pushes the head set button to enable it.</li> <li>2. Just as the CallRouter is about to send the agent a call, the agent otherwise attempts to make a call from the hard phone.</li> <li>3. Just as the CallRouter is about to send the agent a call, the agent, while in the AVAILABLE state, is direct dialed.</li> <li>4. Network issues (congestion, glitches, etc).</li> <li>5. A caller disconnects in route to the agent.</li> </ol> <p><b>Note:</b> As IP transfers are so quick, this is an unlikely condition.</p> <ol style="list-style-type: none"> <li>6. An incorrect label is configured for a device target. The call is sent to the wrong number, so the agent never receives the call. This is a common new installation problem.</li> </ol> <p>This field is applicable to both Unified ICM and Unified CCE with the following exception: it does not include the delay time for a call that was abandoned after it was routed to a standard ACD unless the call was translation routed.</p>		
MaxHoldTime	The max hold time in seconds for calls of this call type during the reporting interval	DBINT	YES
MaxCallsQueued	The maximum number of calls in queue for this call type during this interval.	DBINT	NULL
MaxCallWaitTime	The longest time a call had to wait before it was dispositioned (abandoned, answered, etc.) in this interval.	DBINT	NULL
ReservationCalls	The number of times the Dialer reserved an agent for an agent campaign during this interval. This is a part of the equation for calls completed to balance with CallsOffered.	DBINT	NULL
NetworkDefaultRouted	Number of calls of this type that were routed to a Termination node that specifies "use network default" during the reporting interval. This node returns a label to the network that tells it to apply its default treatment to the call.	DBINT	YES

Field Name:	Description:	Data Type:	Keys and Null Option:
NetworkAnnouncement	Number of calls routed with an announcement node during the reporting period. This node returns a label to the network that specifies the announcement to be played.	DBINT	YES
OverflowOut	The number of calls overflowed to another call type during the reporting interval. This field increments when a requalify or call type node is executed in the script.	DBINT	YES
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM / Unified CCE software to track the record.	DBFLT8	AK1, NOT NULL
ReportingHalfHour	The value indicates Half Hour boundary interval (0 - 47). Two 15 minute interval records will have a unique half hour boundary value.	DBINT	IE2, NULL
ReportingInterval	During the upgrade from 7.x to 8.0, this column value will be NULL and it is assumed to be 30 minute interval.	DBINT	IE3, NULL
Reserved1	Reserved for future use.	DBINT	YES
Reserved2	Reserved for future use.	DBINT	YES
Reserved3	Reserved for future use.	DBINT	YES
Reserved4	Reserved for future use.	DBINT	YES
Reserved5	Reserved for future use.	DBFLT4	YES
ReturnBusy	Number of calls of this type that were routed to the Busy target during the reporting interval.	DBINT	YES
ReturnRing	Number of calls of this type that were routed to the Ring target during the reporting interval.	DBINT	YES
ReturnRelease	Count of calls that executed a Release node in their routing script in the reporting interval.	DBINT	YES
RouterQueueWaitTime	Number of seconds calls of this type spent in the Call Router queue during the reporting interval.  This count includes only calls that exited the queue during the interval. Calls still in the queue at the end of the interval are not counted.	DBINT	YES

## Call\_Type\_Interval Table

Field Name:	Description:	Data Type:	Keys and Null Option:
RouterQueueCalls	The number of tasks of the call type assigned from the queue to be routed in the reporting interval.	DBINT	YES
RouterCallsAbandQ	<p>The number of calls to the call type that abandoned in the Router queue during the interval. Does not include short calls. The definition of this field changed in Release 7.0(0) from Calls Abandon in Queue + Calls Abandoned At Agent + Calls Abandoned in VRU to Calls Abandoned in Queue only. For customers who are migrating from Release 6.0 to Release 7.0, the data stored in RouterCallsAbandQ will be moved to TotalCallsAband.</p> <p><b>Note:</b> RouterCallsAbandQ does not include calls that were abandoned in the VRU. This value can be derived from TotalCallsAband - RouterCallsAbandQ - RouterCallsAbandToAgent</p>	DBINT	YES
RouterQueueCallTypeLimit	During the reporting interval, the number of Router queue attempts that failed because the limit for the call type was reached.	DBINT	YES
RouterQueueGlobalLimit	During the reporting interval, the number of Router queue attempts that failed because the global system limit was reached.	DBINT	YES
RouterCallsAbandToAgent	<p>The number of calls that abandoned at the agent desktop before being answered in the reporting interval. Does not include short calls.</p> <p>Termination_Call_Detail records generated by agent PG with a CallDispositionFlag of 2 are counted as RouterCallsAbandToAgent.</p>	DBINT	YES
ServiceLevelAband	The total number of calls of this call type abandoned within the service level threshold during the reporting interval. Valid for both Unified CCE and standard ACD targets that use translation routes.	DBINT	YES
ServiceLevelCalls	The total number of calls of this call type answered within the service level threshold during the reporting interval. This field is incremented when the PG sends the answered event to the router within the service level threshold. Valid for both Unified CCE and standard ACD targets that use translation routes.	DBINT	YES
ServiceLevelCallsOffered	<p>The number of calls of this call type that had service level events during the reporting interval. Calls are counted for service level purposes as soon as it is determined how the call contributes to the service level calculation. This determination is made when either the service level timer passes, the call is answered, or the caller abandons - whichever occurs first. Valid for both Unified CCE and standard ACD targets that use translation routes.</p> <p>A service level event occurs when one of the following happens to the call:</p>	DBINT	YES

Field Name:	Description:	Data Type:	Keys and Null Option:
	<p>1. The call is answered by an agent before the service level threshold expires. In this case, the ServiceLevelCalls and ServiceLevelsCallsOffered database fields are incremented.</p> <p>2. The call abandons before the service level threshold expires. In this case, the ServiceLevelAband and ServiceLevelCallsOffered database fields are incremented.</p> <p>3. The call is Redirected on No Answer (RONAs) before the service level threshold expires. In this case, only the ServiceLevelCallsOffered database field is incremented.</p> <p>4. The call reaches the service level threshold without being answered by an agent or abandoned. In this case, the ServiceLevelCallsOffered database field is incremented. Tasks that abandon before the short calls timer (as defined in the Unified ICM configuration) do not count towards the ServiceLevelCallsOffered or ServiceLevelAband call counters.</p> <p><b>Note:</b> In the ServicelevelCallsOffered field, calls sent to the labels or calls that encountered an error are counted, irrespective of how the calls ended (within or beyond the threshold). You can use the ErrorCount+AgentErrorCount fields to exclude all the erroneous calls and use ServiceLevelError field to exclude erroneous calls before threshold. For calls sent to labels, you can use the label related fields (e.g. CallsRoutedNonAgent, ReturnBusy, ReturnRing) to exclude all calls which are returned to the labels.</p>		
ServiceLevel	<p>Service level for the call type during the reporting interval. Service Level Type is configured in the Unified ICM Configuration Manager using the Call Type list tool and the System Information tool.</p> <p>ServiceLevel is calculated as follows depending on the service level type:</p> <ol style="list-style-type: none"> <li>1. Ignore Abandoned Calls: <math>\text{ServiceLevelCalls} / (\text{ServiceLevelCallsOffered} - \text{ServiceLevelAband})</math></li> <li>2. Abandoned Calls have Negative Impact: <math>\text{ServiceLevelCalls} / \text{ServiceLevelCallsOffered}</math></li> <li>3. Abandoned Calls have Positive Impact: <math>(\text{ServiceLevelCalls} + \text{ServiceLevelAband}) / \text{ServiceLevelCallsOffered}</math></li> </ol> <p>This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.</p>	DBFLT4	YES

**Call\_Type\_Interval Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
ServiceLevelType	Service Level Type used to calculate Service level for the reporting interval.	DBINT	YES
ServiceLevelError	Calls that ended in Error state within SL threshold within the reporting interval.	DBINT	YES
ServiceLevelRONA	Calls that redirected on no answer within SL threshold within the reporting interval.	DBINT	YES
ShortCalls	The total number of calls to the route that were too short to be considered abandoned during the reporting interval. A call is determined to be a short call if it is abandoned before the Abandoned Call Wait Time expired. Short calls are not considered abandoned, nor are they accounted for in any of the Unified ICM abandoned calls calculations. This field is applicable to Unified ICM, Unified CCE , and Outbound Option.	DBINT	YES
TalkTime	The total talk time in seconds for calls of this call type that were handled during the reporting interval. This field is applicable to both Unified ICM and Unified CCEwith the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.	DBINT	YES
TimeZone	The time zone for the date and time. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK3, NOT NULL
TotalCallsAband	The total number of calls abandoned while in VRU (that is, while undergoing prompting or listening to voice menus options), calls abandoned while queued to skill group, and calls abandoned at agent desktop This field also includes abandons for calls that are not in the queue; for example, when the caller hangs up while listening to a VRU prompt. Therefore, the number of calls abandoned at a VRU before being queued is TotalCallsAband minus RouterCallsAbandToAgent and RouterCallsAbandQ. Does not include short calls.	DBINT	YES
VruUnhandledCalls	Count of calls marked as Offered to VRU but not handled in the reporting interval. This field is incremented only if the call's routing script sets the VRUProgress script variable to a certain value.	DBINT	YES
VruHandledCalls	Count of the VRU calls marked as handled at VRU in the reporting interval. This field is incremented only if the call's routing script sets the VRUProgress script variable to a certain value.	DBINT	YES
VruAssistedCalls	Count of the VRU handled calls marked as routed to agents in the reporting interval. This field is incremented only if the callâ€™s routing script sets the VRUProgress script variable to a certain value.	DBINT	YES

Field Name:	Description:	Data Type:	Keys and Null Option:
VruOptOutUnhandledCalls	Count of the VRU unhandled calls that were marked as routed to agents by caller request in the reporting interval. This field is incremented only if the call's routing script sets the VRUProgress script variable to a certain value.	DBINT	YES
VruScriptedXferredCalls	Count of the VRU calls marked as routed to agents as a result of normal script procedure in the reporting period. This field is incremented only if the call's routing script sets the VRUProgress script variable to a certain value.	DBINT	YES
VruForcedXferredCalls	Count of the VRU calls marked as routed to agents as a result of caller difficulties in the reporting period. This field is incremented only if the call's routing script sets the VRUProgress script variable to a certain value.	DBINT	YES
VruOtherCalls	Count of VRU calls marked with any VRUProgress value other than the in the reporting period. This field is incremented only if the call's routing script sets the VRUProgress script variable to a certain value.	DBINT	YES
VRUTime	<p>The total time that all calls spent at the VRU in the reporting interval. This is the total VRU time, whether the call was queued or not.</p> <p><b>Note:</b> In a NAM/CICM deployment (VRU at NAM), this value is updated for calls that the CICM sends to the VRU. Calls that the NAM itself sends to the VRU update the call type metrics in the NAM.</p> <p><b>Note:</b> In a NAM/CICM deployment (VRU1 at NAM and VRU2 at CICM), this value is updated for calls that the CICM sends to VRU1. Calls that the NAM Router itself sends to VRU1 update the call type metrics in the NAM. Service data for VRU2 is stored in the CICM data base.</p>	DBINT	YES

## Call\_Type\_Map Table

This table is part of the [Script category \(page 539\)](#). For database rules, click [here. \(page 599\)](#)

It maps call types to scheduled scripts. Use the Script Schedule facility of the Script Editor to add, update, and delete Call\_Type\_Map records.

### Related tables

[Call Type \(page 95\)](#) (via CallTypeID)

[Master Script \(page 288\)](#) (via MasterScriptID)

**Call\_Type\_Skill\_Group\_Half\_Hour Table****Table 49: Indexes for Call\_Type\_Map Table**

index_name	index_description	index_keys
XIE1Call_Type_Map	nonclustered, unique, primary key located on PRIMARY	MasterScriptID
XPK_Call_Type_Map	clustered, unique, primary key located on PRIMARY	CallTypeID, Item

**Fields in Call\_Type\_Map Table :**

Field Name:	Description:	Data Type:	Keys and Null Option:
CallTypeID	Foreign key from the Call Type table. CallTypeID and Item together form a unique key.	DBINT	PK, FK NOT NULL
Description	Additional information about the association of this script to this call type.	DESCRIPTION	NULL
Item	The position of this schedule entry within the list of entries for this call type.	DBINT	PK NOT NULL
MasterScriptID	Foreign key from the Master Script table.	DBINT	FK, IE-1 NOT NULL
ScriptSchedule	A script schedule entry in an internal format used by the Script Editor.	varchar(64)	NOT NULL

**Call\_Type\_Skill\_Group\_Half\_Hour Table**

This section describes the Call Type Skill Group Half Hour Table.

**Note:** The Call\_Type\_Skill\_Group\_Interval Table will be populated with 30/15 minute reporting data, depending on the Historical Reporting Interval setting for the PG. The Call\_Type\_Skill\_Group\_Half\_Hour Table will not be populated with this data.

In an Cisco Contact Center Gateway deployment, Unified ICM (parent) connected with an Unified CCE with an IPCC System PG (child) or Cisco Unified Contact Center Express (child) through IPCC Gateway PG, network queuing data is not available in the child or in the child agent/supervisor desktop. The time spent in the network queue is not included in the reporting metrics in the child. A call center manager who would normally only look at the Unified CCE child reports will need to also look at the parent Unified ICM reports for network queuing data.

With the existence of a network VRU, for Unified CCE and for Unified ICM systems in which calls are translation-routed, the measurement of Service Level begins when the call arrives at the routing script, or when its call type is changed. This means that if self-service is performed on a call before the call is queued to an agent, the routing script must be set up to change the call type of the call when self-service is completed. Otherwise, the time spent in self-service will negatively impact the Service Level.

**Fields in Call\_Type\_Skill\_Group\_Half\_Hour Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
AgentErrorCountToHalf	During the half hour, calls associated with this skill group that encounter an error when the call is at the agent desktop. These are calls that receive a TCD with CallDispositionFlag value 4. Agent errors are counted in AgentErrorCount, and routing errors are counted in ErrorCount. Total Error count = ErrorCount + AgentErrorCoun.	DBINT	YES
AnswerWaitTimeToHalf	The sum of answer wait time in seconds for all calls that were answered for the call type associated with this skill group answered during the half hour. This field is applicable to both ICM and IPCC Enterprise with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.  <b>Note:</b> With the existence of a network VRU, for Unified CCE and for Unified ICM systems in which calls are translation-routed, the measurement of Answer Wait Time for a call begins when the call is queued.	DBINT	YES
AvgRouterDelayQToHalf	Average delay in queue (in seconds) for calls removed from the Router queue during the half hour. RouterQueueWaitTime / RouterQueueCalls	DBINT	YES
CallDelayAbandTimeToHalf	The total time spent by calls of this call type associated with this skill group that abandoned in the half hour. This time begins when the call reaches the Router and ends when the call disconnects. Does not include short calls.  <b>Note:</b> This time is not reset if the CallType changes. To determine the time that abandoned calls spend in the script before abandoning, subtract DelayQAbandTime and DelayAgentAbandTime from CallDelayAbandTime.	DBINT	YES
CallsAnsweredToHalf	The total number of calls of this call type associated with this skill group that was answered by agents in the half hour. This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.  <b>Note:</b> With the existence of a network VRU, for Unified CCE and for Unified ICM systems in which calls are translation-routed, the measurement of Answer Wait Time for a call begins when the call is queued.	DBINT	YES
CallsHandledToHalf	The total number of calls of this call type assocctaed with this skill group that was handled in the half hour. Termination_Call_Detail	DBINT	YES

## Call\_Type\_Skill\_Group\_Half\_Hour Table

Field Name:	Description:	Data Type:	Keys and Null Option:
	<p>records generated by agent PG with a CallDispositionFlag of 1 are counted as CallHandled.</p> <p>A handled call is:</p> <ol style="list-style-type: none"> <li>1. An incoming ACD call that was answered by an agent, and then completed.</li> <li>2. A non-voice task that the agent started working on then completed.</li> </ol> <p>A handled call/task is completed when the agent associated with the call/task finishes the wrap-up work associated with the call/task. This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.</p>		
CallsReportedAgainstOtherToHalf	<p>Calls that were counted as CallsOfferedRouted but reported against another skill group.</p> <p><b>Note:</b> The call will be counted in the Skill Group where it is actually reported depending on the call disposition flag. For e.g: if the call disposition flag is 1, the field CallsHandledNotRouted is incremented in the actual skill group that the call was handled.</p> <p>There might be some other scenarios that this field can be incremented where the SkillGroupSkillTargetID is not provided and none of the call dispositions is used to categorize where the call is actually going.</p>	DBINT	YES
CallsQHandledToHalf	<p>Number of calls associated with this skill group that was handled in the half hour that were queued in the Router at any time during the life of the call. This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.</p>	DBINT	YES
CallsRONAToHalf	<p>Number of calls associated with this skill group that was that have been Redirected On No Answer in the half hour. This does not include calls that are rerouted using the router requery feature. This is for calls with CallDispositionFlag of 5 in TCD.</p> <p>This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.</p>	DBINT	YES

Field Name:	Description:	Data Type:	Keys and Null Option:
CallsRequeriedToHalf	During the half hour, the number of router requery events for this call type associated with this skill group. A call may be requeried several times and counted as such. For example, if there are 10 calls offered and each is requeried twice, Calls Requeried is 20.	DBINT	YES
CallsRoutedNonAgentToHalf	Number of Calls associated with this skill group that was routed in the half hour without translation route in TDM environment. The TCD that the peripheral cuts does not have any call type associated to it.	DBINT	YES
CallsHandledNotRoutedToHalf	Calls associated with this skill group that were handled but is not the skill group that was originally routed. Note: The field CallsReportedAgainstOther is incremented in the skill group that the call was routed.	DBINT	YES
CallsOfferedRoutedToHalf	The number of calls associated with this skill group that were routed by the Central Controller. This field is incremented for calls sent to skill group or service and it is incremented the following ways:  Skill Group: Router increments this field when the call is routed or queued to a skill group  Service: The Router increments this field using the agent real time data when the call is answered or using the TCD when the call is abandoned at the agent.	DBINT	YES
CallsOfferedNotRoutedToHalf	Calls offered to a skill group that was not routed by the Router. It happens in TDM and PG Gateway deployments where the ACD routes the call to a Skill Group different from the original routed Skill Group.	DBINT	YES
CallsOnHoldToHalf	The number of calls placed on hold at least once for the call type associated with the skill group during the half hour interval	DBINT	YES
CallTypeID	Identifies the call type.	DBINT	PK2, NOT NULL
DelayAgentAbandTimeToHalf	For the half hour, the total time spent by all calls for this call type associated with this skill group that abandoned at the agent's desktop before being answered. This time is not reset if the CallType changes. Does not include short calls.	DBINT	YES
DelayQAbandTimeToHalf	The total time spend by all calls associated with this skill group for this call type that abandoned while in the queue, for this half hour.  This time is not reset if the CallType changes.	DBINT	YES

Call\_Type\_Skill\_Group\_Half\_Hour Table

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
DateTime	The Central Controller date and time at the start of the interval when the row was generated.	DBSMALLDATE	PK1, NOT NULL
DbDateTime	The current date and time stamp when the records are written to the HDS database. The logger database has NULL for this column.	DBDATETIME	IE1, YES
ErrorCountToHalf	<p>During the half hour, the number of calls associated with this skill group that resulted in an error condition, such as when a routing script fails to find a target and there is no default route defined Refer to the Route_Call_Detail table, RouterErrorCode field.</p> <p>Examples: Translation-routed calls are abandoned while en route to destination target. Calls with mis-configured labels do not use default routing; for example, when a route has not been defined.</p>	DBINT	YES
HandleTimeToHalf	<p>The total handle time in seconds for handled calls of this call type associated with this skill group ending during the half hour.</p> <p>HandleTime is the sum of the fields TalkTime, HoldTime and WorkTime from the Termination_Call_Detail record. This field is applicable to both Unified ICM and Unified CCE with the following exception: it does not include the delay time for a call that was abandoned after it was routed to a standard ACD unless the call was translation routed.</p>	DBINT	YES
HoldTimeToHalf	<p>The total hold time in seconds for calls of this call type associated with this skill group ending during the half hour. This field is applicable to both Unified ICM and Unified CCE with the following exception: it does not include the delay time for a call that was abandoned after it was routed to a standard ACD unless the call was translation routed.</p>	DBINT	YES
IncompleteCallsToHalf	<p>During the half hour, the number of IncompleteCalls which are calls associated with this skill group that were routed to an agent but failed to arrive. An IncompleteCall can also be identified in the Termination_Call_Detail record, as can any call with a CallDispositionFlag of 7 in TCD.</p> <p><b>Note:</b> As IP transfers are so quick, this is an unlikely condition. An incorrect label is configured for a device target. The call is sent to the wrong number, so the agent never receives the call. This is a common new installation problem.</p> <p>This can occur under several conditions:</p>	DBINT	YES

Field Name:	Description:	Data Type:	Keys and Null Option:
	<p>1. Just as the CallRouter is about to send the agent a call, the agent, while in the AVAILABLE state, pushes the head set button to enable it.</p> <p>2. Just as the CallRouter is about to send the agent a call, the agent otherwise attempts to make a call from the hard phone.</p> <p>3. Just as the CallRouter is about to send the agent a call, the agent, while in the AVAILABLE state, is direct dialed.</p> <p>4. Network issues (congestion, glitches, etc).</p> <p>5. A caller disconnects in route to the agent.</p> <p>This field is applicable to both Unified ICM and Unified CCE with the following exception: it does not include the delay time for a call that was abandoned after it was routed to a standard ACD unless the call was translation routed.</p>		
MaxHoldTimeToHalf	The max hold time in seconds for calls of the call type associated with the skill group during the half hour interval	DBINT	YES
OverflowOutToHalf	The number of calls overflowed to another call type during the half hour interval. This field increments when a requalify or call type node is executed in the script.	DBINT	YES
RecoveryKey	Unique ID assigned to each record and used internally by the Unified ICM / Unified CCE software to track the record.	DBFLT8	AK1, NOT NULL
RouterCallsAbandQToHalf	<p>The number of calls to the call type associated with this skill group that abandoned in the Router queue during the half hour. Does not include short calls.</p> <p><b>Note:</b> RouterCallsAbandQ does not include calls that were abandoned in the VRU. This value can be derived from TotalCallsAband - RouterCallsAbandQ - RouterCallsAbandToAgent</p>	DBINT	YES
RouterCallsAbandToAgentToHalf	The number of calls associated with this skill group that abandoned at the agent desktop before being answered in the half hour. Does not include short calls. Termination_Call_Detail records generated by agent PG with a CallDispositionFlag of 2 are counted as RouterCallsAbandToAgent.	DBINT	YES
RouterQueueWaitTimeToHalf	Number of seconds calls of this calltype associated with this skill group spent in the Call Router queue during the half hour.	DBINT	YES

**Call\_Type\_Skill\_Group\_Half\_Hour Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	This count includes only calls that exited the queue during the interval. Calls still in the queue at the end of the interval are not counted.		
RouterQueueCallsToHalf	The number of tasks of the call type associated with this skill group assigned from the queue to be routed in the half hour.	DBINT	YES
RouterCallsDequeuedToHalf	It is incremented when the call is removed from the queue.	DBINT	YES
Reserved1	Reserved for future use.	DBINT	YES
Reserved2	Reserved for future use.	DBINT	YES
Reserved3	Reserved for future use.	DBINT	YES
Reserved4	Reserved for future use.	DBINT	YES
Reserved5	Reserved for future use.	DBFLT4	YES
SkillGroupSkillTargetID	Together with CallTypeID identifies call type association with skill group in this table.	DBINT	PK3, NOT NULL
ShortCallsToHalf	The total number of calls associated with this skill group to the route that were too short to be considered abandoned during the half hour. A call is determined to be a short call if it is abandoned before the Abandoned Call Wait Time expired. Short calls are not considered abandoned, nor are they accounted for in any of the Unified ICM abandoned calls calculations. This field is applicable to Unified ICM, Unified CCE, and Outbound Option.	DBINT	YES
ServiceLevelAbandToHalf	The total number of calls of this call type associated with this skill group abandoned within the service level threshold during the half hour. Valid for both Unified CCE and standard ACDtargets that use translation routes.	DBINT	YES
ServiceLevelCallsToHalf	The total number of calls of this call type associated with this skill group answered within the service level threshold during the half hour. This field is incremented when the PG sends the answered event to the router within the service level threshold. Valid for both Unified CCE and standard ACDtargets that use translation routes.	DBINT	YES
ServiceLevelCallsOfferedToHalf	The number of calls of this call type associated with this skill group that had service level events during the half hour. Calls are counted for service level purposes as soon as it is determined how the call contributes to the service level calculation. This determination is made	DBINT	YES

Field Name:	Description:	Data Type:	Keys and Null Option:
	<p>when either the service level timer passes, the call is answered, or the caller abandons - whichever occurs first. Valid for both Unified CCE and standard ACD targets that use translation routes.</p> <p>A service level event occurs when one of the following happens to the call:</p> <ol style="list-style-type: none"> <li>1. The call is answered by an agent before the service level threshold expires. In this case, the ServiceLevelCalls and ServiceLevelsCallsOffered database fields are incremented.</li> <li>2. The call abandons before the service level threshold expires. In this case, the ServiceLevelAband and ServiceLevelCallsOffered database fields are incremented.</li> <li>3. The call is Redirected on No Answer (RONAs) before the service level threshold expires. In this case, ServiceLevelRONA and ServiceLevelCallsOffered database fields are incremented.</li> <li>4. The call reaches the service level threshold without being answered by an agent or abandoned. In this case, the ServiceLevelCallsOffered database field is incremented. Tasks that abandon before the short calls timer (as defined in the Unified ICM configuration) do not count towards the ServiceLevelCallsOffered or ServiceLevelAband call counters.</li> </ol> <p><b>Note:</b> In the ServicelevelCallsOffered field, calls that encountered an error are counted, irrespective of how the calls ended (within or beyond the threshold). You can use the ErrorCount+AgentErrorCount field to exclude all the erroneous calls and use ServiceLevelError field to exclude erroneous calls before threshold.</p>		
ServiceLevelToHalf	<p>The service level for the call type associated with this skill group during the half hour. Service Level Type is configured in the Unified ICM Configuration Manager using the Skill Group explorer and PG explorer.</p> <p>The router uses the Call Type ServiceLevel and ServiceLevelType to calculate the Service level for the half hour.</p> <p>ServiceLevel is calculated as follows depending on the service level type:</p> <ol style="list-style-type: none"> <li>1. Ignore Abandoned  <math display="block">\text{Calld:ServiceLevelCalls} / (\text{ServiceLevelCallsOffered} - \text{RouterCallsDequeued} - \text{RouterCallsAbandDequeued} - \text{ServiceLevelAband})</math> </li> </ol>	DBFLT4	YES

**Call\_Type\_Skill\_Group\_Half\_Hour Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	<p>2. Abandoned Calls has Negative Impact: ServiceLevelCalls/(ServiceLevelCallsOffered-RouterCallsDequeued - RouterCallsAbandDequeued)</p> <p>3. Abandoned Calls have Positive Impact: ServiceLevelCalls + ServiceLevelAband/(ServiceLevelCallsOffered-RouterCallsDequeued - RouterCallsAbandDequeued )</p> <p>This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.</p>		
ServiceLevelErrorToHalf	Calls associated with this skill group that ended in Error state within SL threshold within the half hour.	DBINT	YES
ServiceLevelRONAToHalf	Calls associated with this skill group that redirected on no answer within SL threshold within the half hour.	DBINT	YES
ServiceLevelType	The router uses the Call Type ServiceLevel and ServiceLevelType to calculate the Service level for the half hour.	DBINT	YES
ServiceLevelCallsDequeueToHalf	<p>The number of queued calls associated with this skill group that was de-queued within the skill Service Level threshold in the half hour. Calls may be de-queued via Cancel Queue node or de-queued from this Skill Group to be routed to a different Skill Group.</p> <p><b>Note:</b> This field is relevant to the Unified CCE environment only.</p> <p><b>Note:</b> With the existence of a network VRU, this value includes time in the network queue.</p>	DBINT	YES
TalkTimeToHalf	The total talk time in seconds for calls of this call type associated with this skill group that were handled during the half hour. This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.	DBINT	YES
TimeZone	The time zone for the date and time. The value is the offset in minutes from GMT.	DBINT	PK4, NOT NULL

## Call\_Type\_Skill\_Group\_Interval Table

This section describes the Call Type Skill Group Interval table.

**Note:**

- In the Call Type Skill Group Interval table, the *Hold time* is calculated based on the call event.
- In an Cisco Contact Center Gateway deployment, Unified ICM (parent) connected with an Unified CCE with an IPCC System PG (child) or Cisco Unified Contact Center Express (child) through IPCC Gateway PG, network queuing data is not available in the child or in the child agent/supervisor desktop. The time spent in the network queue is not included in the reporting metrics in the child. A call center manager who would normally only look at the Unified CCE child reports will need to also look at the parent Unified ICM reports for network queuing data.
- With the existence of a network VRU, for Unified CCE and for Unified ICM systems in which calls are translation-routed, the measurement of Service Level begins when the call arrives at the routing script, or when its call type is changed. This means that if self-service is performed on a call before the call is queued to an agent, the routing script must be set up to change the call type of the call when self-service is completed. Otherwise, the time spent in self-service will negatively impact the Service Level.

**Fields in Call\_Type\_Skill\_Group\_Interval Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
AbandInterval1	<p>Number of calls abandoned within interval 1.</p> <p>This column is applicable to both third party ACDs and CCEnterprise with the following exception: the column is not incremented if the call abandons after it is routed to a standard ACD unless the call was translation routed.</p> <p><b>Note:</b> In an Cisco Contact Center Gateway deployment, Unified ICM (parent) connected with an Unified CCE with an IPCC System PG (child) or Cisco Unified Contact Center Express (child) through IPCC Gateway PG, network queuing data is not available in the child or in the child agent/supervisor desktop. The time spent in the network queue is not included in the reporting metrics in the child. A call center manager who would normally only look at the Unified CCE child reports will need to also look at the parent Unified ICM reports for network queuing data.</p>	DBINT	NULL
AbandInterval2	<p>Number of calls abandoned within interval 2.</p> <p><b>Note:</b> See AbandInterval1</p>	DBINT	NULL
AbandInterval3	Number of calls abandoned within interval 3.	DBINT	NULL

## Call\_Type\_Skill\_Group\_Interval Table

Field Name:	Description:	Data Type:	Keys and Null Option:
	<b>Note:</b> See AbandInterval1		
AbandInterval4	Number of calls abandoned within interval 4.  <b>Note:</b> See AbandInterval1	DBINT	NULL
AbandInterval5	Number of calls abandoned within interval 5.  <b>Note:</b> See AbandInterval1	DBINT	NULL
AbandInterval6	Number of calls abandoned within interval 6.  <b>Note:</b> See AbandInterval1	DBINT	NULL
AbandInterval7	Number of calls abandoned within interval 7.  <b>Note:</b> See AbandInterval1	DBINT	NULL
AbandInterval8	Number of calls abandoned within interval 8.  <b>Note:</b> See AbandInterval1	DBINT	NULL
AbandInterval9	Number of calls abandoned within interval 9.  <b>Note:</b> See AbandInterval1	DBINT	NULL
AbandInterval10	Number of calls abandoned within interval 10.  <b>Note:</b> See AbandInterval1	DBINT	NULL
AnsInterval1	Number of calls answered within interval 1.  This column is applicable to both third party ACDs and CC Enterprise with the following exception: the column is not incremented if the call is answered by an agent on a third party ACD unless the call was translation routed.  <b>Note:</b> In an Cisco Contact Center Gateway deployment, Unified ICM (parent) connected with an Unified CCE with an IPCC System PG (child) or Cisco Unified Contact Center Express (child) through IPCC Gateway PG, network queuing data is not available in the child or in the child agent/supervisor desktop. The time spent in the network queue is not included in the reporting metrics in the child. A call center manager who would normally only look at the Unified CCE child reports will need to also look at the parent Unified ICM reports for network queuing data.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	<p><b>Note:</b> With the existence of a network VRU, for Unified CCE and for Unified ICM systems in which calls are translation-routed, the measurement of Service Level begins when the call arrives at the routing script, or when its call type is changed. This means that if self-service is performed on a call before the call is queued to an agent, the routing script must be set up to change the call type of the call when self-service is completed. Otherwise, the time spent in self-service will negatively impact the Service Level.</p>		
AnsInterval2	<p>Number of calls answered within interval 2.</p> <p><b>Note:</b> See AnsInterval1</p>	DBINT	NULL
AnsInterval3	<p>Number of calls answered within interval 3.</p> <p><b>Note:</b> See AnsInterval1</p>	DBINT	NULL
AnsInterval4	<p>Number of calls answered within interval 4.</p> <p><b>Note:</b> See AnsInterval1</p>	DBINT	NULL
AnsInterval5	<p>Number of calls answered within interval 5.</p> <p><b>Note:</b> See AnsInterval1</p>	DBINT	NULL
AnsInterval6	<p>Number of calls answered within interval 6.</p> <p><b>Note:</b> See AnsInterval1</p>	DBINT	NULL
AnsInterval7	<p>Number of calls answered within interval 7.</p> <p><b>Note:</b> See AnsInterval1</p>	DBINT	NULL
AnsInterval8	<p>Number of calls answered within interval 8.</p> <p><b>Note:</b> See AnsInterval1</p>	DBINT	NULL
AnsInterval9	<p>Number of calls answered within interval 9.</p> <p><b>Note:</b> See AnsInterval1</p>	DBINT	NULL
AnsInterval10	<p>Number of calls answered within interval 10.</p> <p><b>Note:</b> See AnsInterval1</p>	DBINT	NULL

**Call\_Type\_Skill\_Group\_Interval Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
AnswerWaitTime	<p>The sum of answer wait time in seconds for all calls that were answered for the call type associated with this skill group during the reporting interval.</p> <p>This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.</p> <p>Note: With the existence of a network VRU, for Unified ICM and Unified CCE systems in which calls are translation-routed, the measurement of Answer Wait Time for a call begins when the call is queued.</p>	DBINT	YES
AvgRouterDelayQ	Average delay in queue (in seconds) for calls removed from the Router queue during the reporting interval. RouterQueueWaitTime / RouterQueueCalls	DBINT	YES
AgentErrorCount	During the reporting interval, calls associated with this skill group that encounter an error when the call is at the agent desktop. These are calls that receive a TCD with CallDispositionFlag value 4. Agent errors are counted in AgentErrorCount, and routing errors are counted in ErrorCount. Total Error count = ErrorCount + AgentErrorCount.	DBINT	YES
BucketIntervalID	The ID of Bucket Intervals from the Bucket_Interval table used to generate the following AnsInterval and AbandInterval fields in this record.	DBINT	NULL
CallTypeID	Identifies the call type.	DBINT	PK2, NOT null
CallDelayAbandTime	<p>The total time spent by calls of this call type associated with this skill group that abandoned in the reporting interval. This time begins when the call reaches the Router and ends when the call disconnects. Does not include short calls.</p> <p><b>Note:</b> This time is not reset if the CallType changes. To determine the time that abandoned calls spend in the script before abandoning, subtract DelayQAbandTime and DelayAgentAbandTime from CallDelayAbandTime.</p>	DBINT	YES
CallsAnswered	<p>The total number of calls of this call type associated with this skill group that was answered by agents in the reporting interval. This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.</p> <p><b>Note:</b> With the existence of a network VRU, for Unified CCE and for Unified ICM systems in which calls are translation-routed, the measurement of Answer Wait Time for a call begins when the call is queued.</p>	DBINT	YES

Field Name:	Description:	Data Type:	Keys and Null Option:
CallsHandled	<p>The total number of calls of this call type associated with this skill group that was handled in the reporting interval.</p> <p>Termination_Call_Detail records generated by agent PG with a CallDispositionFlag of 1 are counted as CallHandled.</p> <p>A handled call is:</p> <ol style="list-style-type: none"> <li>1. An incoming ACD call that was answered by an agent, and then completed.</li> <li>2. A call associated with Outbound Option that the agent answered, and then completed.</li> <li>3. A non-voice task that the agent started working on then completed.</li> </ol> <p>A handled call/task is completed when the agent associated with the call/task finishes the wrap-up work associated with the call/task. This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.</p>	DBINT	YES
CallsReportedAgainstOther	<p>Calls that were counted as CallsOfferedRouted but reported against another skill group.</p> <p><b>Note:</b> The call will be counted in the Skill Group where it is actually reported depending on the call disposition flag. For e.g: if the call disposition flag is 1, the field CallsHandledNotRouted is incremented in the actual skill group that the call was handled.</p> <p>There might be some other scenarios that this field can be incremented where the SkillGroupSkillTargetID is not provided and none of the call dispositions is used to categorize where the call is actually going .</p>	DBINT	YES
CallsQHandled	Number of calls associated with this skill group that was handled in the reporting interval that were queued in the Router at any time during the life of the call. This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.	DBINT	YES
CallsRONA	Number of calls associated with this skill group that was that have been Redirected On No Answer in the reporting interval. This does not include calls that are rerouted using the router query feature. This is for calls with CallDispositionFlag of 5 in TCD. This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is	DBINT	YES

**Call\_Type\_Skill\_Group\_Interval Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.		
CallsRequeried	During the reporting interval, the number of router requery events for this call type associated with this skill group. A call may be requeried several times and counted as such. For example, if there are 10 calls offered and each is requeried twice, Calls Requeried is 20.	DBINT	YES
CallsRoutedNonAgent	Number of Calls associated with this skill group that was routed in the reporting interval without translation route in TDM environment. The TCD that the peripheral cuts does not have any call type associated to it.	DBINT	YES
CallsHandledNotRouted	Calls associated with this skill group that were handled but is not the skill group that was originally routed. Note: The field CallsReportedAgainstOther is incremented in the skill group that the call was routed.	DBINT	YES
CallsOfferedRouted	The number of calls associated with this skill group that were routed by the Central Controller. This field is incremented for calls sent to skill group or service and it is incremented in the following ways:  Skill Group: The Router increments this field when the call is routed or queued to a skill group.  Service: The Router increments this field using the agent real time data when the call is answered, or using TCD when the call is abandoned by the agent.	DBINT	YES
CallsOfferedNotRouted	Calls offered to a skill group that was not routed by the Router. It happens in TDM and PG Gateway deployments where the ACD routes the call to a Skill Group different from the original routed Skill Group.	DBINT	YES
CallsOnHold	The number of calls placed on hold at least once for the call type associated with the skill group during the reporting interval	DBINT	YES
DateTime	The Central Controller date and time at the start of the interval when the row was generated.	DBSMALLDATE	PK1,NOT NULL
DbDateTime	The current date and time stamp when the records are written to the HDS database. The logger database has NULL for this column.	DBDATETIME	IE1, YES
DelayAgentAbandTime	For the reporting interval, the total time spent by all calls for this call type associated with this skill group that abandoned at the agent's desktop before being answered. This time is not reset if the CallType changes. Does not include short calls.	DBINT	YES

Field Name:	Description:	Data Type:	Keys and Null Option:
DelayQAbandTime	The total time spend by all calls associated with this skill group for this call type that abandoned while in the queue, for this reporting interval.	DBINT	YES
ErrorCount	<p>During the reporting interval, the number of calls associated with this skill group that resulted in an error condition, such as when a routing script fails to find a target and there is no default route defined Refer to the Route_Call_Detail table, RouterErrorCode field.</p> <p>Examples: Translation-routed calls are abandoned while en route to destination target. Calls with mis-configured labels do not use default routing; for example, when a route has not been defined.</p>	DBINT	YES
HandleTime	The total handle time in seconds for handled calls of this call type associated with this skill group ending during the reporting interval. HandleTime is the sum of the fields TalkTime, HoldTime and WorkTime from the Termination_Call_Detail record. This field is applicable to bothUnified ICM and Unified CCE with the following exception: it does not include the delay time for a call that was abandoned after it was routed to a standard ACD unless the call was translation routed.	DBINT	YES
HoldTime	The total hold time in seconds for calls of this call type associated with this skill group ending during the reporting interval. This field is applicable to both Unified ICM and Unified CCE with the following exception: it does not include the delay time for a call that was abandoned after it was routed to a standard ACD unless the call was translation routed.	DBINT	YES
IncompleteCalls	<p>During the reporting interval, the number of IncompleteCalls;which are calls associated with this skill group that were routed to an agent but failed to arrive. An IncompleteCall can also be identified in the Termination_Call_Detail record, as can any call with a CallDispositionFlag of 7 in TCD. Network issues (congestion, glitches, etc).</p> <p>This can occur under several conditions:</p> <ol style="list-style-type: none"> <li>1. Just as the CallRouter is about to send the agent a call, the agent, while in the AVAILABLE state, pushes the head set button to enable it.</li> <li>2. Just as the CallRouter is about to send the agent a call, the agent otherwise attempts to make a call from the hard phone.</li> <li>3. Just as the CallRouter is about to send the agent a call, the agent, while in the AVAILABLE state, is direct dialed.</li> <li>4. A caller disconnects in route to the agent.</li> </ol> <p><b>Note:</b> As IP transfers are so quick, this is an unlikely condition.</p>	DBINT	YES

**Call\_Type\_Skill\_Group\_Interval Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	<p>5. An incorrect label is configured for a device target. The call is sent to the wrong number, so the agent never receives the call. This is a common new installation problem.</p> <p>This field is applicable to both Unified ICM and Unified CCE with the following exception: it does not include the delay time for a call that was abandoned after it was routed to a standard ACD unless the call was translation routed.</p>		
MaxHoldTime	The max hold time in seconds for calls of the call type associated with the skill group during the reporting interval	DBINT	YES
MaxCallsQueued	The maximum number of calls in queue for this call type during this interval.	DBINT	NULL
MaxCallWaitTime	The longest time a call had to wait before it was dispositioned (abandoned, answered, etc...) in this interval.	DBINT	NULL
OverflowOut	The number of calls overflowed to another call type during the reporting interval. This field increments when a requalify or call type node is executed in the script.	DBINT	YES
RecoveryKey	Unique ID assigned to each record and used internally by the Unified ICM / Unified CCE software to track the record.	DBFLT8	AK1, NOT NULL
ReportingHalfHour	<p>The value indicates Half Hour boundary interval (0 - 47). Two 15 minute interval records will have a unique half hour boundary value.</p> <p><b>Note:</b> This field uses the CentralController UTC time and not the local time to calculate the Half Hour index. Therefore, based on the time zone, the Half Hour boundary interval (0 - 47) may vary.</p>	DBINT	IE2, NULL
ReportingInterval	During the upgrade from 7.x to 8.0, this column value will be NULL and it is assumed to be 30 minute interval.	DBINT	IE3, NULL
ReservationCalls	The number of times the Dialer reserved an agent for an agent campaign during this interval. This is a part of the equation for calls completed to balance with CallsOffered.	DBINT	NULL
RouterCallsAbandQ	The number of calls to the call type associated with this skill group that abandoned in the Router queue during the reporting interval. Does not include short calls.	DBINT	YES

Field Name:	Description:	Data Type:	Keys and Null Option:
	<b>Note:</b> RouterCallsAbandQ does not include calls that were abandoned in the VRU. This value can be derived from TotalCallsAband - RouterCallsAbandQ - RouterCallsAbandToAgent		
RouterCallsAbandToAgent	The number of calls associated with this skill group that abandoned at the agent desktop before being answered in the reporting interval. Does not include short calls. Termination_Call_Detail records generated by agent PG with a CallDispositionFlag of 2 are counted as RouterCallsAbandToAgent.	DBINT	YES
RouterQueueWaitTime	Number of seconds calls of this calltype associated with this skill group spent in the Call Router queue during the reporting interval.  This count includes only calls that exited the queue during the interval. Calls still in the queue at the end of the interval are not counted.	DBINT	YES
RouterQueueCalls	The number of tasks of the call type associated with this skill group assigned from the queue to be routed in the reporting interval.	DBINT	YES
RouterCallsDequeued	It is incremented when the call is removed from the queue.	DBINT	YES
Reserved1	Reserved for future use.	DBINT	YES
Reserved2	Reserved for future use.	DBINT	YES
Reserved3	Reserved for future use.	DBINT	YES
Reserved4	Reserved for future use.	DBINT	YES
Reserved5	Reserved for future use.	DBFLT4	YES
RouterCallsAbandDequeued	The number of calls associated with the skill group that were abandoned and de-queued from this skill group. When a call is queued to multiple skill groups and abandoned, the RouterCallsAbandQ field is incremented for one skill group and RouterCallsAbandDequeued is incremented for all of the other skill groups. The group that is charged with the abandon is the group to which the call had been continuously queued to the longest at the time of the abandon. Normally, this would be the first group the script queued the call to, unless a more complicated dequeue, queue, or requeue scenario changes the order.  The term "continuously queued" means that if a call is queued to a group, later dequeued, and still later requeued, the earlier time in queue is not used in determining which group the abandon is charged against.	DBINT	YES

**Call\_Type\_Skill\_Group\_Interval Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	This field is applicable to Unified CCE environments and to Unified ICM environments where calls are translation-routed to Skill Groups.		
SkillGroupSkillTargetID	Together with CallTypeID identifies call type association with skill group in this table.	DBINT	PK3,NOT NULL
ShortCalls	The total number of calls associated with this skill group to the route that were too short to be considered abandoned during the reporting interval. A call is determined to be a short call if it is abandoned before the Abandoned Call Wait Time expired. Short calls are not considered abandoned, nor are they accounted for in any of the Unified ICM abandoned calls calculations. This field is applicable to Unified ICM, Unified CCE, and Outbound Option.	DBINT	YES
ServiceLevelAband	The total number of calls of this call type associated with this skill group abandoned within the service level threshold during the reporting interval. Valid for both Unified CCE and standard ACDtargets that use translation routes.	DBINT	YES
ServiceLevelCalls	The total number of calls of this call type associated with this skill group answered within the service level threshold during the reporting interval. This field is incremented when the PG sends the answered event to the router within the service level threshold. Valid for both Unified CCE and standard ACDtargets that use translation routes.	DBINT	YES
ServiceLevelCallsOffered	<p>The number of calls of this call type associated with this skill group that had service level events during the reporting interval. Calls are counted for service level purposes as soon as it is determined how the call contributes to the service level calculation. This determination is made when either the service level timer passes, the call is answered, or the caller abandons - whichever occurs first. Valid for both Unified CCE and standard ACD targets that use translation routes.</p> <p>A service level event occurs when one of the following happens to the call:</p> <ol style="list-style-type: none"> <li>1. The call is answered by an agent before the service level threshold expires. In this case, the ServiceLevelCalls and ServiceLevelCallsOffered database fields are incremented.</li> <li>2. The call abandons before the service level threshold expires. In this case, the ServiceLevelAband and ServiceLevelCallsOffered database fields are incremented.</li> </ol>	DBINT	YES

Field Name:	Description:	Data Type:	Keys and Null Option:
	<p>3. The call is Redirected on No Answer (RONAs) before the service level threshold expires. In this case, ServiceLevelRONA and ServiceLevelCallsOffered database fields are incremented.</p> <p>4. The call reaches the service level threshold without being answered by an agent or abandoned. In this case, the ServiceLevelCallsOffered database field is incremented. Tasks that abandon before the short calls timer (as defined in the Unified ICM configuration) do not count towards the ServiceLevelCallsOffered or ServiceLevelAband call counters.</p> <p><b>Note:</b> In the ServicelevelCallsOffered field, calls that encountered an error are counted, irrespective of how the calls ended (within or beyond the threshold). You can use the ErrorCount+AgentErrorCount field to exclude all the erroneous calls and use ServiceLevelError field to exclude erroneous calls before threshold.</p>		
ServiceLevel	<p>The service level for the call type associated with this skill group during the reporting interval. Service Level Type is configured in the Unified ICM Configuration Manager using the Skill Group explorer and PG explorer.</p> <p>The router uses the Call Type ServiceLevel and ServiceLevelType to calculate the Service level of the reporting interval.</p> <p>ServiceLevel is calculated as follows depending on the service level type:</p> <ol style="list-style-type: none"> <li>IgnoreAbandCall:ServiceLevelCalls/(ServiceLevelCallsOffered- RouterCallsDequeued - RouterCallsAbandDequeued -ServiceLevelAband)</li> <li>Abandoned Calls has Negative Impact: ServiceLevelCalls/(ServiceLevelCallsOffered- RouterCallsDequeued - RouterCallsAbandDequeued)</li> <li>Abandoned Calls have Positive Impact: ServiceLevelCalls + ServiceLevelAband/(ServiceLevelCallsOffered- RouterCallsDequeued - RouterCallsAbandDequeued )</li> </ol> <p>This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.</p>	DBFLT4	YES
ServiceLevelError	Calls associated with this skill group that ended in Error state within SL threshold within the reporting interval.	DBINT	YES

## Call\_Type\_Real\_Time Table

Field Name:	Description:	Data Type:	Keys and Null Option:
ServiceLevelRONA	Calls associated with this skill group that redirected on no answer within SL threshold within the reporting interval.	DBINT	YES
ServiceLevelType	The router uses the Call Type ServiceLevel and ServiceLevelType to calculate the Service level of the reporting interval.	DBINT	YES
ServiceLevelCallsDequeue	The number of queued calls associated with this skill group that was de-queued within the skill Service Level threshold in the reporting interval. Calls may be de-queued via Cancel Queue node or de-queued from this Skill Group to be routed to a different Skill Group.  <b>Note:</b> This field is relevant to the Unified CCE environment only. Note: With the existence of a network VRU, this value includes time in the network queue.	DBINT	YES
TimeZone	The time zone for the date and time. The value is the offset in minutes from GMT.	DBINT	PK4,NOT NULL
TalkTime	The total talk time in seconds for calls of this call type associated with this skill group that were handled during the reporting interval. This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.	DBINT	YES

## Call\_Type\_Real\_Time Table

This table is part of the [Script category \(page 539\)](#). For database rules, click [here. \(page 599\)](#)

Local database only.

**Note:**

- With the existence of a network VRU, for Unified CCE and for Unified ICM systems in which calls are translation-routed, the measurement of Service Level begins when the call arrives at the routing script, or when its call type is changed. This means that if self-service is performed on a call before the call is queued to an agent, the routing script must be set up to change the call type of the call when self-service is completed. Otherwise, the time spent in self-service will negatively impact the Service Level.
- In an Cisco Contact Center Gateway deployment, UnifiedICM (parent) connected with an Unified CCE with an IPCC SystemPG (child) or Cisco Unified Contact Center Express (child) throughIPCC Gateway PG, network queuing data is not available in thechild or in the child agent/supervisor desktop. The time spent inthe network queue is not included in the reporting metrics in thechild. A call center manager who would normally only look at theUnified CCE

child reports will need to also look at the parentUnified ICM reports for network queuing data.

Provides real-time statistics for each call type defined in the software. The software generates a Call\_Type\_Real\_Time record for each call type.

### Related tables

[Call Type \(page 95\)](#) (via CallTypeID)

[Master Script \(page 288\)](#) (via MasterScriptID)

[Script \(page 377\)](#) (via ScriptID)

**Table 50: Indexes for Call\_Type\_Real\_Time Table**

index_name	index_description	index_keys
XPKCall_Type_Real_Time	clustered, unique, primary key located on PRIMARY	CallTypeID

**Fields in Call\_Type\_Real\_Time Table :**

Field Name:	Description:	Data Type:	Keys and Null Option:
AgentErrorCountHalf	Within the current half-hour interval, the number of calls that encountered an error when the call is at the agent desktop.	DBINT	NULL
AgentErrorCountToday	The number of calls that encounter an error when the call is at the agent desktop since midnight.	DBINT	NULL
AnswerWaitTimeHalf	The sum of answer wait time in seconds for all calls of this call type that were answered during the current half-hour interval.  This field is applicable to both <b>Unified ICM</b> and <b>Unified CCE</b> with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.	DBINT	NULL
AnswerWaitTimeTo5	The sum of answer wait time in seconds for all calls answered for this call type during the rolling five-minute interval.	DBINT	NULL
AnswerWaitTimeToday	The sum of answer wait time in seconds for all calls of this call type answered since midnight.	DBINT	NULL
AvgRouterDelayQHalf	Average number of seconds spent in the CallRouter queue for calls of this type that have been removed from the queue so far during the current half-hour interval.	DBINT	NULL
AvgRouterDelayQNow	Average number of seconds spent in the CallRouter queue for calls of this type that are currently in queue.	DBINT	NULL

## Call\_Type\_Real\_Time Table

Field Name:	Description:	Data Type:	Keys and Null Option:
AvgRouterDelayQTo5	Average number of seconds spent in the CallRouter queue for calls of this type that were removed from the queue during the rolling five-minute interval.	DBINT	NULL
AvgRouterDelayQToday	Average number of seconds spent in the CallRouter queue for calls of this type that were removed from the queue since midnight.	DBINT	NULL
CallDelayAbandTimeHalf	<p>The time spent by all calls for this call type that abandoned before being answered during the current half-hour interval.</p> <p><i>To determine the time that abandoned calls spend in the script before abandoning, subtract DelayQAbandTimeHalf and DelayAgentAbandTimeHalf from CallDelayAbandTimeHalf.</i></p>	DBINT	NULL
CallDelayAbandTimeTo5	<p>The time spent by all calls for this call type that abandoned before being answered within the rolling 5 minutes</p> <p><i>To determine the time that abandoned calls spend in the script before abandoning, subtract DelayQAbandTimeTo5 and DelayAgentAbandTimeTo5 from CallDelayAbandTimeTo5.</i></p>	DBINT	NULL
CallDelayAbandTimeToday	<p>The time spent by all calls for this call type that abandoned before being answered since midnight.</p> <p><i>To determine the time that abandoned calls spend in the script before abandoning, subtract DelayQAbandTimeToday and DelayAgentAbandTimeToday from CallDelayAbandTimeToday.</i></p>	DBINT	NULL
CallsAnsweredHalf	<p>The number of calls answered by an agent in the current half-hour interval.</p> <p>This field is applicable to both <b>Unified ICM</b> and <b>Unified CCE</b> with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.</p>	DBINT	NULL
CallsAnsweredTo5	The number of calls answered by an agent during the rolling five-minute interval.	DBINT	NULL
CallsAnsweredToday	The number of calls answered by an agent since midnight.	DBINT	NULL
CallsAtAgentNow	<p>The number calls that Unified CCE agents are currently working on.</p> <p>An agent is considered to be working on a call/task until the agent finishes the wrap-up work associated with the call/task, if any.</p>	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	<b>Note:</b> This field is not applicable to ICM.		
CallsAtVRUNow	<p>The number calls that are currently at the VRU. This includes calls that are in prompting at the VRU (non-queued calls) and those in the queue.</p> <p><b>Note:</b> In a NAM/CICM deployment (VRU at NAM), this value is updated for calls that the CICM sends to the VRU. Calls that the NAM itself sends to the VRU update the call type metrics in the NAM.</p> <p><b>Note:</b> In a NAM/CICM deployment (VRU1 at NAM and VRU2 at CICM), this value is updated for calls that the CICM sends to VRU1. Calls that the NAM Router itself sends to VRU1 update the call type metrics in the NAM. Service data for VRU2 is stored in the CICM data base.</p>	DBINT	NULL
CallsHandledHalf	<p>The total number of calls of this call type handled in the current half-hour interval.</p> <p>Termination_Call_Detail records generated by agent PG with a CallDispositionFlag of 1 are counted as CallHandled.</p> <p><b>A handled call is:</b></p> <ul style="list-style-type: none"> <li>• An incoming ACD call that was answered by an agent, and then completed.</li> <li>• A call associated with Outbound Option that the agent answered, and then completed.</li> <li>• A non-voice task that the agent started working on then completed.</li> </ul> <p>A handled call/task is completed when the agent associated with the call/task finishes the wrap-up work associated with the call/task.</p> <p>This field is applicable to both <b>Unified ICM</b> and <b>Unified CCE</b> with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.</p>	DBINT	NULL
CallsHandledTo5	The total number of calls of this call type handled during the rolling five-minute interval.	DBINT	NULL
CallsHandledToday	The total number of calls of this call type handled since midnight.	DBINT	NULL
CallsLeftQTo5	The total number of calls of this call type that left the CallRouter queue during the rolling five-minute interval.	DBINT	NULL

## Call\_Type\_Real\_Time Table

Field Name:	Description:	Data Type:	Keys and Null Option:
CallsOfferedHalf	The total number of calls of this call type offered during the current half-hour interval.	DBINT	NULL
CallsOfferedTo5	The number of calls of this call type offered during the rolling five-minute interval.	DBINT	NULL
CallsOfferedToday	The total number of calls of this call type offered to this call type since midnight.	DBINT	NULL
CallsRONAHalf	<p>The number of calls that have been Redirected On No Answer in the current half-hour interval. This does not include calls rerouted using the router query feature.</p> <p>This field is applicable to both <b>Unified ICM</b> and <b>Unified CCE</b> with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.</p>	DBINT	NULL
CallsRONATo5	The number of calls that have been Redirected On No Answer in this in the rolling five-minute interval. This does not include calls rerouted using the router query feature.	DBINT	NULL
CallsRONAToday	The number of calls that have been Redirected On No Answer since midnight. This does not include calls rerouted using the router query feature.	DBINT	NULL
CallsRoutedNonAgentHalf	<p>For <b>Cisco Unified Contact Center Express</b>, the number of calls that executed a Label node or a Divert Label node in their routing script in the current half-hour interval.</p> <p>For <b>Unified ICM</b>, the number of calls that executed a Label node or a Divert Label node in their routing script; or were routed to a standard ACD without using a translation route in the half-hour interval.</p>	DBINT	NULL
CallsRoutedNonAgentTo5	<p>For <b>Cisco Unified Contact Center Express</b>, the number of calls that executed a Label node or a Divert Label node in their routing script in the rolling five-minute interval.</p> <p>For <b>Unified ICM</b>, the number of calls that executed a Label node or a Divert Label node in their routing script; or were routed to a standard ACD without using a translation route in this five-minute interval.</p>	DBINT	NULL
CallsRoutedNonAgentToday	For <b>Cisco Unified Contact Center Express</b> , the number of calls that executed a Label node or a Divert Label node in their routing script since midnight.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	For <b>Unified ICM</b> , the number of calls that executed a Label node or a Divert Label node in their routing script; or were routed to a standard ACD without using a translation route since midnight.		
CallsRoutedToday	Number of calls of this type that have been routed since midnight.	DBINT	NULL
CallsRoutedToHalf	Number of calls of this type that have been routed during the current half-hour interval.	DBINT	NULL
CallTypeID	Identifies the call type.	DBINT	PK, FK NOT NULL
CTDelayAbandTimeHalf	<p>The total time spent by calls of this call type that abandoned calls within the current half-hour interval.</p> <p>This time begins when the call reaches the Router or when the call changes CallTypes and ends when the call disconnects.</p> <p>This time is reset if the CallType changes.</p>	DBINT	NULL
CTDelayAbandTimeTo5	<p>The total time spent by calls of this call type that abandoned calls within the rolling five-minute interval.</p> <p>This time begins when the call reaches the Router or when the call changes CallTypes and ends when the call disconnects.</p> <p>This time is reset if the CallType changes.</p>	DBINT	NULL
CTDelayAbandTimeToday	<p>The total time spent by calls of this call type that abandoned calls since midnight.</p> <p>This time begins when the call reaches the Router or when the call changes CallTypes and ends when the call disconnects.</p> <p>This time is reset if the CallType changes.</p>	DBINT	NULL
DateTime	The Central Controller date and time at the start of the interval when the row was generated.	DBDATETIME	NOT NULL
DelayAgentAbandTimeHalf	<p>For the current half-hour interval, the total time spent by all calls for this call type that abandoned at the agent's desktop before being answered.</p> <p>This time is not reset if the CallType changes.</p>	DBINT	NULL

**Call\_Type\_Real\_Time Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
DelayAgentAbandTimeTo5	For the rolling five-minute interval, the total time spent by all calls for this call type that abandoned at the agent's desktop before being answered.  This time is not reset if the CallType changes.	DBINT	NULL
DelayAgentAbandTimeToday	For the half-hour interval, the total time spent by all calls for this call type that abandoned at the agent's desktop before being answered.  This time is not reset if the CallType changes.	DBINT	NULL
DelayQAbandTimeHalf	The total time spend by all calls for this call type that abandoned while in the queue, during the current half-hour interval.  This time is not reset if the CallType changes.	DBINT	NULL
DelayQAbandTimeTo5	The total time spend by all calls for this call type that abandoned while in the queue, for this rolling five-minute interval.  This time is not reset if the CallType changes.	DBINT	NULL
DelayQAbandTimeToday	The total time spend by all calls for this call type that abandoned while in the queue, since midnight.  This time is not reset if the CallType changes.	DBINT	NULL
ErrorCountToday	Number of calls since midnight that resulted an error condition , such as when a routing script failed to find a target and there are no default routes defined. This field increments when: <ul style="list-style-type: none"> <li>• Translation-routed calls are abandoned while on route to destination target.</li> <li>• Calls with misconfigured labels use default routing. (In this case, the ICRDefaultRoutedToHalf field also increments.)</li> <li>• Calls with misconfigured labels do not use default routing (for instance, when a default route has not been defined).</li> </ul>	DBINT	NULL
ErrorCountToHalf	In the current half-hour interval, the number of calls that resulted in an error condition, such as when a routing script fails to find a target and there is no default route defined. This field increments when: <ul style="list-style-type: none"> <li>• Translation-routed calls are abandoned while on route to destination target.</li> </ul>	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	<ul style="list-style-type: none"> <li>Calls with misconfigured labels use default routing. (In this case, the ICRDefaultRoutedToHalf field also increments.)</li> <li>Calls with misconfigured labels do not use default routing (for instance, when a default route has not been defined).</li> </ul>		
HandleTimeHalf	<p>The total handle time in seconds for all calls of this call type ending during the current half-hour interval.</p> <p>This field is applicable to both <b>Unified ICM</b> and <b>Unified CCE</b> with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.</p>	DBINT	NULL
HandleTimeTo5	The total handle time in seconds for all calls of this call type ending during the rolling five-minute interval.	DBINT	NULL
HandleTimeToday	The total handle time in seconds for all calls of this call type ending since midnight.	DBINT	NULL
HoldTimeHalf	<p>The total hold time in seconds for calls of this call type ending during the current half-hour interval.</p> <p>This field is applicable to both <b>Unified ICM</b> and <b>Unified CCE</b> with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.</p>	DBINT	NULL
HoldTimeTo5	The total hold time in seconds for calls of this call type ending during the rolling five-minute interval.	DBINT	NULL
HoldTimeToday	The total hold time in seconds for calls of this call type ending since midnight.	DBINT	NULL
ICRDefaultRoutedToday	Number of calls that were routed to the default label since midnight.	DBINT	NULL
ICRDefaultRoutedToHalf	Number of calls that were routed to the default label during the current half-hour interval.	DBINT	NULL
MasterScriptID	The master script currently scheduled for the call type.	DBINT	NULL
NetworkAnnouncementToday	<p>The number of calls routed with an announcement node since midnight.</p> <p>This node returns a label to the network that specifies the announcement to be played.</p>	DBINT	NULL

**Call\_Type\_Real\_Time Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
NetworkAnnouncementToHalf	The number of calls routed with an announcement node during the current half-hour period. This node returns a label to the network that specifies the announcement to be played.	DBINT	NULL
NetworkDefaultRoutedToday	Number of calls that were routed to a Termination node that specifies "Use network default" since midnight. This node returns a label to the network telling it to apply its default treatment to the call.	DBINT	NULL
NetworkDefaultRoutedToHalf	Number of calls of this type for which the IXC used default routing during the current half-hour interval.	DBINT	NULL
OverflowOutHalf	The number of calls that overflowed to another call type during the current half-hour interval. This field increments when a requalify or call type node is executed in the script.	DBINT	NULL
OverflowOutTo5	The number of calls that overflowed to another call type during the rolling five-minute interval. This field increments when a requalify or call type node is executed in the script.	DBINT	NULL
OverflowOutToday	The number of calls that overflowed to another call type since midnight. This field increments when a requalify or call type node is executed in the script.	DBINT	NULL
ReturnBusyToday	Number of calls of this type that were routed to the Busy target since midnight.	DBINT	NULL
ReturnBusyToHalf	Number of calls of this type that were routed to the Busy target during the current half-hour interval.	DBINT	NULL
ReturnReleaseHalf	Count of calls that executed a Release node in their routing script in the current half-hour interval.	DBINT	NULL
ReturnReleaseToday	Count of calls that executed a Release node in their routing script since midnight.	DBINT	NULL
ReturnRingToday	Number of calls of this type that were routed to the Ring target since midnight.	DBINT	NULL
ReturnRingToHalf	Number of calls of this type that the software routed to the Ring target during the current half-hour interval.	DBINT	NULL
RouterCallsAbandQHalf	Number of calls of this type abandoned in the Router queue during the current half-hour interval.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	This field is applicable to both <b>Unified ICM</b> and <b>Unified CCE</b> with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.		
RouterCallsAbandQTo5	Number of calls of this type abandoned in the Router queue during the rolling five-minute interval.	DBINT	NULL
RouterCallsAbandQToday	Number of calls of this type abandoned in the Router queue since midnight.	DBINT	NULL
RouterCallsAbandToAgentHalf	The number of calls that abandoned at the agent desktop before being answered in the current half-hour interval.	DBINT	NULL
RouterCallsAbandToAgentTo5	The number of calls that abandoned at the agent desktop before being answered within the rolling five-minute interval.	DBINT	NULL
RouterCallsAbandToAgentToday	The number of calls that abandoned at the agent desktop before being answered since midnight.	DBINT	NULL
RouterCallsQNow	Number of calls of this type currently in the CallRouter queue. This metric does not show calls in queue at the local ACD.	DBINT	NULL
RouterCallsQNowTime	Total number of seconds spent in queue for all calls of this type currently in the CallRouter queue. This metric does not show calls in queue at the local ACD.	DBINT	NULL
RouterLongestCallQ	The time that the longest currently queued call for this call type entered the CallRouter queue.  This field is applicable to both <b>Unified ICM</b> and <b>Unified CCE</b> with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.	DBDATETIME	NULL
RouterQueueCallsHalf	Number of calls of this type that left the CallRouter queue to be routed during the current half-hour interval.	DBINT	NULL
RouterQueueCallsTo5	Number of calls of this type that left the CallRouter queue to be routed during the rolling five-minute interval.	DBINT	NULL
RouterQueueCallsToday	Number of calls of this type that left the CallRouter queue to be routed since midnight.	DBINT	NULL
RouterQueueWaitTimeHalf	Number of seconds calls of this type spent in the CallRouter queue during the current half-hour interval.	DBINT	NULL

## Call\_Type\_Real\_Time Table

Field Name:	Description:	Data Type:	Keys and Null Option:
	<b>Note:</b> This count includes only calls that exited the queue during the interval. Calls still in the queue at the end of the interval are not counted.		
RouterQueueWaitTimeTo5	<p>Number of seconds calls of this type spent in the CallRouter queue during the rolling five-minute interval.</p> <p><b>Note:</b> This count includes only calls that exited the queue during the interval. Calls still in the queue at the end of the interval are not counted.</p>	DBINT	NULL
RouterQueueWaitTimeToday	<p>Number of seconds calls of this type spent in the CallRouter queue since midnight.</p> <p><b>Note:</b> This count includes only calls that exited the queue during the interval. Calls still in the queue at the end of the interval are not counted.</p>	DBINT	NULL
ScriptID	The script currently scheduled for the call type.	DBINT	NULL
ShortCallsToHalf	<p>The total number of calls to the route that were too short to be considered abandoned during the ShortCallsHalfhalf-hour interval. A call is determined to be a shortcall if it is abandoned before the Abandoned CallWait Time expired. Short calls are not considered abandoned, nor are they accounted for in any of the Unified ICM abandoned calls calculations.</p> <p>This field is applicable to Unified ICM, UnifiedCCE, and Outbound Option.</p>	DBINT	NULL
ShortCallsToday	<p>The total number of calls to the route that were too short to be considered abandoned after mid-night. A call is determined to be a shortcall if it is abandoned before the Abandoned CallWait Time expired. Short calls are not considered abandoned, nor are they accounted for in any of the Unified ICM abandoned calls calculations.</p> <p>This field is applicable to Unified ICM, UnifiedCCE, and Outbound Option.</p>	DBINT	NULL
ServiceLevelAbandHalf	<p>The total number of calls of this call type abandoned within the service level threshold during the current half-hour interval.</p> <p>This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.</p>	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
ServiceLevelAbandTo5	The number of calls of this call type abandoned within the service level during the rolling five-minute interval.	DBINT	NULL
ServiceLevelAbandToday	The number of calls of this call type abandoned within the service level since midnight.	DBINT	NULL
ServiceLevelCallsHalf	<p>The total number of calls of this call type answered within the service level threshold during the half-hour interval.</p> <p>This field is incremented when the PG sends the answered event to the router within the service level threshold.</p> <p>This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.</p>	DBINT	NULL
ServiceLevelCallsOfferedHalf	<p>The number of calls of this call type that had a service level event during the current half-hour interval.</p> <p>Calls are counted for service level purposes as soon as it is determined how the call contributes to the service level calculation. This determination is made when either the service level timer passes, the call is answered, or the caller abandons - whichever occurs first.</p> <p>This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.</p>	DBINT	NULL
ServiceLevelCallsOfferedTo5	<p>The number of calls of this call type that had service level events during the rolling five-minute interval.</p> <p>Calls are counted for service level purposes as soon as it is determined how the call contributes to the service level calculation. This determination is made when either the service level timer passes, the call is answered, or the caller abandons - whichever occurs first.</p>	DBINT	NULL
ServiceLevelCallsOfferedToday	<p>The number of calls of this call type that had service level events since midnight.</p> <p>Calls are counted for service level purposes as soon as it is determined how the call contributes to the service level calculation. This determination is made when either the service level timer passes, the call is answered, or the caller abandons - whichever occurs first.</p>	DBINT	NULL

**Call\_Type\_Real\_Time Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
ServiceLevelCallsQHeld	The number of calls of this call type that had been in queue longer than the service level threshold since midnight.	DBINT	NULL
ServiceLevelCallsTo5	The total number of calls of the call type handled within the service level during the rolling five-minute interval.	DBINT	NULL
ServiceLevelCallsToday	The total number of calls of the call type handled within the service level since midnight.	DBINT	NULL
ServiceLevelErrorHalf	Calls that ended in Error state within SL threshold within the current half-hour interval.	DBINT	NULL
ServiceLevelErrorToday	Calls that ended in Error state within SL threshold since midnight.	DBINT	NULL
ServiceLevelHalf	The service level for this call type during the current half-hour interval.  This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.	DBFLT4	NULL
ServiceLevelTo5	The service level for this call type during the rolling five-minute interval. This is derived from ServiceLevelCallsTo5 and ServiceLevelCallsHandledTo5.	DBFLT4	NULL
ServiceLevelToday	The service level for this call type since midnight. This is derived from ServiceLevelCallsToday and ServiceLevelCallsOfferedToday.	DBFLT4	NULL
ServiceLevelRONAHalf	Calls that redirected on no answer within SL threshold within the current half-hour interval.	DBINT	NULL
ServiceLevelRONATo5	Calls that redirected on no answer within SL threshold within the rolling five-minute interval.	DBINT	NULL
ServiceLevelRONAToday	Calls that redirected on no answer within SL threshold since midnight.	DBINT	NULL
TalkTimeHalf	The total talk time in seconds for calls of this call type ending during the current half-hour interval.  This field is applicable to both Unified ICM and Unified CCE with the following exception: the field is not incremented if the call is answered by an agent on a standard ACD unless the call was translation routed.	DBINT	NULL
TalkTimeTo5	The total talk time in seconds for calls of this call type ending during the rolling five-minute interval.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
TalkTimeToday	A total of talk time in seconds for calls of this call type ending since midnight.	DBINT	NULL
TotalCallsAbandHalf	The total number of queued calls, non-queued calls, and calls that abandoned at the agent desktop in the current half-hour interval.	DBINT	NULL
TotalCallsAbandTo5	The total number of queued calls, non-queued calls, and calls that abandoned at the agent desktop in the rolling five-minute interval.	DBINT	NULL
TotalCallsAbandToday	The total number of queued calls, non-queued calls, and calls that abandoned at the agent desktop since midnight.	DBINT	NULL

## Campaign Table

This table is in the [Blended Agent category \(page 527\)](#). To see database rules for these tables, click [here \(page 593\)](#).

It contains a description of all the configured campaigns that a Outbound Option implementation may use. There is a single row for every configured campaign.

Use the Outbound Option Configuration option within Unified ICM Configuration Manager to modify Campaign table records.

**Note:** If Outbound Option was not selected during setup, this table will contain no data.

### Related Tables

[Campaign Skill Group \(page 180\)](#) (via CampaignID)

[Campaign Target Sequence \(page 182\)](#) (via CampaignID)

[Campaign Query Rule \(page 164\)](#) (via CampaignID)

[Campaign Half Hour \(page 163\)](#) (via CampaignID)

[Campaign Query Rule Half Hour \(page 166\)](#)

[Dialer Time \(page 172\)](#) (via CampaignID)

[Dialer Detail \(page 206\)](#) (via CampaignID)

[Dialer Port Real Time \(page 218\)](#) (via CampaignID)

[Dialer Skill Group Real Time \(page 226\)](#) (via CampaignID)

**Campaign Table****Table 51: Indexes for Campaign Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XAK1Campaign	nonclustered, unique, unique key located on PRIMARY	CampaignName
XPKCampaign	clustered, unique primary key located on PRIMARY	CampaignID

**Fields in Campaign Table :**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
AbandonCustomerCallback	The number of minutes to wait before calling back a customer who abandoned the call.	DBINT	NULL
AbandonedDialerCallback	The number of minutes to wait before calling back a customer who was abandoned by the dialer.	DBINT	NULL
AbandonEnabled	Indicates whether the predictive algorithm should use AbandonPercent: <ul style="list-style-type: none"><li>• <b>Y</b> = Use abandon percent algorithm.</li><li>• <b>N</b> = Do not take abandoned calls into consideration while calculating the predictive algorithm.</li></ul>	DBCHAR	NOT NULL
AbandonPercent	Used in the predictive algorithm to identify the upper limit of abandon percentage allowed.	DBFLT8	NOT NULL
AMDTreatmentMode	When AMD is enabled for "agent" campaigns: <ol style="list-style-type: none"><li>1. Abandon Call</li><li>2. Transfer to Agent</li><li>3. Transfer to IVR Route Point</li></ol>	DBINT	NOT NULL
AnswerDetectEnabled	Valid options are: <ul style="list-style-type: none"><li>• <b>Y</b> = Answering machine detection is enabled.</li><li>• <b>N</b> = Answering machine detection is disabled</li></ul>	DBCHAR	NOT NULL
BusyCallback	The number of minutes to wait before attempting a callback to a number that was busy.	DBINT	NOT NULL
AnsweringMachineCallback	The number of minutes to wait before calling back a previously dialed number that was answered by an answering machine.	DBINT	NULL
BusyRetryEnabled	Valid options are:	DBCHAR	NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	<ul style="list-style-type: none"> <li>• Y = A busy number should be retried.</li> <li>• N = The next number in the list should be tried.</li> </ul>		
CallbackTimeLimit	Maximum amount of time, in minutes, after a scheduled callback before giving up the callback attempt.	DBSMALLINT	NOT NULL
CampaignID	A unique identifier for this campaign. This is the primary key for this table.  This field is applicable to <b>Outbound Option</b> only.	DBINT	PK NOT NULL
CampaignName	A customer-entered name for this campaign.	VNAME32	AK-1 NOT NULL
CampaignPurposeType	Can be set to <b>Agent Campaign</b> or <b>Xfer to IVR Campaign</b> .	DBINT	NOT NULL
CancelledCallRetryTime	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Number of minutes to wait to retry a cancelled call.	DBINT	NULL
CancelRinging	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Identifies behavior dialer takes for cancelling ringing calls. Default is 0, which means do not cancel ringing calls.	DBINT	NOT NULL
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
CloseAbandonedToIVR	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Indicates whether abandoned calls sent to IVR should be considered closed or not.	DBCHAR	NOT NULL
ConfigParam	Additional configuration parameters.	varchar	NULL
CPAAnalysisPeriod	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Number of milliseconds dialer will spend analyzing. Advanced configuration item.	DBINT	NULL
CPAMaxTermToneAnalysis	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Maximum milliseconds the dialer will analyze an answering machine voice message looking for a termination tone. Advanced configuration item.	DBINT	NULL
CPAMinSilencePeriod	Minimum silence period required to classify a call as voice detected. Default: 375.	DBINT	NOT NULL

**Campaign Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
CPAMinimumValidSpeech	Minimum number of milliseconds of voice required to qualify a call as voice detected. Default: 112.	DBINT	NOT NULL
CPAMaxTimeAnalysis	Max time allowed for analysis in milliseconds before identifying a problem analysis as dead air/ low volume. Default: 3000 .	DBINT	NOT NULL
CustomerNotHomeCallback	The number of minutes to wait before calling a customer back when the call was answered by the wrong person.	DBINT	NULL
Deleted	Valid options are: <ul style="list-style-type: none"><li>• <b>Y</b> = Yes</li><li>• <b>N</b> = No</li></ul>	DBCHAR	NOT NULL
Description	A description of the campaign.	DESCRIPTION	NULL
DisableCPA	Y = Disable IP Call Progress Analysis. (as in Release 5.0).  N = IP Call Progress Analysis enabled.  Default = N	DBCHAR	NOT NULL
DSTLocation	Starting daily saving time. Default:1	DBINT	Not Null
EdgeDetectEnabled	Deleted Flag. Stored as a character: <ul style="list-style-type: none"><li>• <b>Y</b>= Voice detection should be done at the beginning of the initial greeting sound.</li><li>• <b>N</b>= Enables a faster but less accurate voice/answering machine detection.</li></ul>	DBCHAR	NOT NULL
Enabled	Indicates whether a campaign is currently active ( <b>Y</b> ) or not ( <b>N</b> ).	DBCHAR	NOT NULL
EnableRecordWaveFile	Indicates whether the debug setting for Recording wave files should be enabled for connected outbound calls in this campaign. (Default 'N'). Will get information from BA Options Table if not configured here. Default is 'N' (disabled).	DBCHAR	NOT NULL
EnableMediaTermination	Indicates the dialer will terminate media streams for connected outbound calls in this campaign. Default is 'N' (disabled).	DBCHAR	NOT NULL
ExhaustedCallsEnabled	Valid options are:	DBCHAR	NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	<ul style="list-style-type: none"> <li>• Y = Allow resetting the records that have reached the maximum number of attempts.</li> <li>• N = Do not allow the resetting of these records.</li> </ul>		
FutureUseInt1	Reserved for future use	DBINT	NULL
FutureUseInt2	Reserved for future use	DBINT	NULL
FutureUseInt3	Reserved for future use	DBINT	NULL
FutureUseInt4	Reserved for future use	DBINT	NULL
FutureUseInt5	Reserved for future use	DBINT	NULL
FutureUseVarchar1	Reserved for future use	varchar(64)	NULL
FutureUseVarchar2	Reserved for future use	varchar(64)	NULL
FutureUseVarchar3	Reserved for future use	varchar(64)	NULL
FutureUseFloat1	Reserved for future use	DBFLT8	NULL
FutureUseFloat2	Reserved for future use	DBFLT8	NULL
FutureUseFloat3	Reserved for future use	DBFLT8	NULL
HomeEnabled	<p>Valid options are:</p> <ul style="list-style-type: none"> <li>• Y = Allow dialing to home numbers.</li> <li>• N = Do not allow dialing to home numbers.</li> </ul>	DBCHAR	NOT NULL
HomeEndHours	Home telephone numbers will not be dialed later than HomeEndHours:HomeEndMinutes. Hours are in 24-hour format.	DBINT	NOT NULL
HomeEndMinutes	Home telephone numbers will not be dialed later than HomeEndHours:HomeEndMinutes.	DBINT	NOT NULL
HomeStartHours	Home telephone numbers will be dialed no earlier than HomeStartHours:HomeStartMinutes. Hours are in 24-hour format.	DBINT	NOT NULL
HomeStartMinutes	Home telephone numbers will be dialed no earlier than HomeStartHours:HomeStartMinutes.	DBINT	NOT NULL

**Campaign Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
IPAMDEnabled	Boolean to indicate that AMD is enabled on IP Dialers. A <b>Y</b> indicates enabled, an <b>N</b> is disabled.	DBCHAR	NOT NULL
IPTerminatingBeepDetect	Boolean to indicate that Terminating Tone Detection is enabled on IP Dialers. Can be used for Transfer to IVR campaigns as well as Agent campaigns.  A <b>Y</b> indicates enabled, an <b>N</b> indicates disabled. The default value is <b>N</b> .	DBCHAR	NOT NULL
LeaveMessageEnabled	Indicates whether the Unified ICM should leave automated messages on answering machines: <ul style="list-style-type: none"><li>• <b>Y</b> = Yes, leave automated messages on answering machines.</li><li>• <b>N</b> = No, do not leave automated messages on answering machines.</li></ul>	DBCHAR	NOT NULL
LinesPerAgent	The fixed number of lines to use per agent. Note that this number need not be an integer.	DBFLT8	NOT NULL
MaxAttempts	The maximum number of attempts permitted per contact within the current campaign.	DBINT	NOT NULL
MaxBusyAttempts	The maximum number of times to retry a busy number before trying the next number in the list.	DBSMALLINT	NOT NULL
MaximumLineAgent	The maximum number of lines dialed per agent. Note that this number need not be an integer.	DBFLT8	NOT NULL
MinimumCallDuration	The number of seconds that a customer conversation must last before a call is considered complete. If the minimum call duration is not reached, the call will be classified as busy and retried.	DBSMALLINT	NOT NULL
NoAnswerCallback	The number of minutes to wait before attempting a callback to a number that was not answered.	DBINT	NOT NULL
NoAnswerRingLimit	The number of rings before considering a call as not answered.	DBINT	NOT NULL
PersonalizedCallbackEnabled	Valid options are: <ul style="list-style-type: none"><li>• <b>Y</b> = Personalized callback is enabled.</li><li>• <b>N</b> = Personalized callback is not enabled.</li></ul>	DBCHAR	NOT NULL
PredictiveCorrectionPace	A correction is applied to the Lines per Agent when the attempted calls exceeds "PredictiveConnectionPace" calls. If Null, the Dialer	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	value takes precedence. Otherwise, this value takes precedence. The default is NULL.		
PredictiveGain	The PredictiveGain term controls the overall rate of corrective adjustment for the Lines per Agent. This is the multiplier for the Proportional corrective term in the algorithm. If Null, the Dialer value takes precedence. Otherwise, this value takes precedence. The default is NULL.	DBFLT8	NULL
PredictiveHistoricGain	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The Historic Gain term calculates an additional correction based on the last 5 measurement sets. As a default, it should be set to half the PredictiveGain. It attempts to correct for systematic undershooting or overshooting over several correction cycles. If Null, the Dialer value takes precedence. Otherwise, this value takes precedence. The default is NULL.	DBFLT8	NULL
PredictiveLowAbandonGain	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Multiplier for the Proportional term when the measured Abandoned Call Rate is less than the target rate. This compensates for the fact that the upside difference between the target and measured Abandoned Call Rate can be much larger than the downside difference. If Null, the Dialer value takes precedence. Otherwise, this value takes precedence. The default is NULL.	DBFLT8	NULL
PrefixDigits	Digits that should be prefixed to each customer number dialed from this campaign.  This feature is used to create a unique prefix that can be used by Cisco Communication Manager's Translation Pattern function to change the ANI that customers see.	varchar(15)	Null
QuickDetectEnabled	Valid options are: <ul style="list-style-type: none"><li>• <b>Y</b> = Voice/answering machine detection should be done quickly rather than accurately.</li><li>• <b>N</b> = Voice/answering should be done accurately, but not as quickly as with the quick detect feature.</li></ul>	DBCHAR	NOT NULL
ReleaseCallbackEnabled	Valid options are: <ul style="list-style-type: none"><li>• <b>Y</b> = A personalized callback should be sent to another agent if the original agent is not available.</li></ul>	DBCHAR	NOT NULL

**Campaign Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	<ul style="list-style-type: none"> <li>• <b>N</b> = A personalized callback should not be sent to another agent.</li> </ul>		
RescheduleCallbackMode	<p>Valid options include:</p> <ul style="list-style-type: none"> <li>• <b>1</b> = If a callback should be rescheduled for the same time period the next day.</li> <li>• <b>2</b> = If the callback will be rescheduled for the next valid dialing period.</li> <li>• <b>3</b> = If the callback will be abandoned (not attempted again).</li> </ul>	DBSMALLINT	NOT NULL
SPClosedRecordCount	The number of customer close record requests to queue before calling a stored procedure for third-party processing.	DBSMALLINT	NOT NULL
SPClosedRecordEnabled	<p>Valid options are:</p> <ul style="list-style-type: none"> <li>• <b>Y</b> = Indicates that a stored procedure should be called after a customer record has been closed. This stored procedure resides in the Outbound Option private database.</li> <li>• <b>N</b> = This stored procedure should not be called.</li> </ul>	DBCHAR	NOT NULL
UseGMTFromRegionPrefix	Boolean to indicate that customer GMT should be obtained from the Region Prefix table. Replaces the <i>ImportAreaProcDisable</i> registry setting. The default is <b>Y</b> .	DBCHAR	NOT NULL
WaitForBusyRetry	<p><b>Y</b>= When a busy number has been reached wait until the busy retry timeout and call the busy number again instead of calling the next phone number in the customers list. Note: if the Busy retry interval is greater than 5 minutes the system will not wait.</p> <p><b>N</b> = Do not wait to retry a busy number, try the next number in the list.</p> <p>Default = <b>N</b></p>	DBCHAR	NOT NULL
WorkEnabled	<p>Valid options are:</p> <ul style="list-style-type: none"> <li>• <b>Y</b> = Allow dialing to work numbers.</li> <li>• <b>N</b> = Do not allow dialing to work numbers.</li> </ul>	DBCHAR	NOT NULL
WorkEndHours	Work telephone numbers will not be dialed later than WorkEndHours:WorkEndMinutes. Hours are in 24-hour format.	DBINT	NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
WorkEndMinutes	Work telephone numbers will not be dialed later than WorkEndHours:WorkEndMinutes.	DBINT	NOT NULL
WorkStartHours	Work telephone numbers will be dialed no earlier than WorkStartHours:WorkStartMinutes. Hours are in 24-hour format.	DBINT	NOT NULL
WorkStartMinutes	Work telephone numbers will be dialed no earlier than WorkStartHours:WorkStartMinutes.	DBINT	NOT NULL

## Campaign\_Half\_Hour Table

**Note: THIS TABLE IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.**

This table is in the [Blended Agent category \(page 527\)](#). To see database rules for these tables, click [here \(page 593\)](#).

Central database only.

Provides historical reporting for campaign attributes.

### Related Tables

[Campaign \(page 155\)](#) (via CampaignID)

**Table 52: Indexes for Campaign\_Half\_Hour Table**

index_name	index_description	index_keys
XAK1Campaign_Half_Hour	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XIE1Campaign_Half_Hour	nonclustered, unique, primary key located on PRIMARY	DbDateTime
XPKCampaign_Half_Hour	clustered, unique primary key located on PRIMARY	CampaignID, DateTime, TimeZone

### Fields in Campaign\_Half\_Hour Table:

Field Name:	Description:	Data Type:	Keys and Null Option:
ActiveTimeToHalf	Indicates how long in seconds the campaign has been configured to be active during the current half hour.	DBINT	AK1 NULL
CampaignID	The unique identifier of the Campaign.	DBINT	PK, FK NOT NULL
DateTime	The central controller date and time at the start of the interval.	DBSMALLDATE	PK NOT NULL

**Campaign\_Query\_Rule Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
DbDateTime	The current date and time stamp when the records are written to the database.	DBDATETIME	IE1-Indexed NULL
FutureUseInt1	Reserved for future use.	DBINT	NULL
FutureUseInt2	Reserved for future use.	DBINT	NULL
FutureUseInt3	Reserved for future use.	DBINT	NULL
FutureUseInt4	Reserved for future use.	DBINT	NULL
FutureUseInt5	Reserved for future use.	DBINT	NULL
RecoveryKey	Unique record identifier.	DBFLT8	NOT NULL
TimeZone	The Time Zone for the date and time. The value is offset in minutes from UTC (formerly GMT).	DBINT	PK NOT NULL

**Campaign\_Query\_Rule Table**

This table is in the [Blended Agent category \(page 527\)](#). To see database rules for these tables, click [here \(page 593\)](#).

It contains a set of associations between query rules and campaigns.

**Note:** If Outbound Option was not selected during setup, this table will contain no data.

Use the Outbound Option Configuration option within Unified ICM Configuration Manager to modify Campaign\_Query\_Rule records.

### Related tables

[Campaign \(page 155\)](#) (via CampaignID)

[Query Rule \(page 325\)](#) (via QueryRuleID)

**Table 53: Indexes for Campaign\_Query\_Rule Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XPKCampaign_Query_Rule	clustered, unique, primary key located on PRIMARY	CampaignID, QueryRuleID

**Fields in Campaign\_Query\_Rule Table :**

Field Name:	Description:	Data Type:	Keys and Null Option:
CampaignID	The campaign to which this query rule belongs. This field is a foreign key from the Campaign table.  This field is applicable to <b>Outbound Option only.</b>	DBINT	PK, FK NOT NULL
Duration	The amount of time (in minutes) to use the current query rule before going on to the next.	DBINT	NOT NULL
DurationEnabled	Indicates whether or not to use duration rate to move between query rules within this campaign:  • Y = Use duration (time spent within a query rule)  • N = Do not use duration	DBCHAR	NOT NULL
EndHours	The contact will not be dialed past the EndHours:EndMinutes. Hours are in 24-hour format and are based on the Unified ICM Central Controller time.	DBINT	NOT NULL
EndMinutes	The contact will not be dialed past the EndHours:EndMinutes. Time is based on the Unified ICM Central Controller time.	DBINT	NOT NULL
FutureUseInt1	Reserved for future use	DBINT	NULL
FutureUseInt2	Reserved for future use	DBINT	NULL
FutureUseInt3	Reserved for future use	DBINT	NULL
FutureUseInt4	Reserved for future use	DBINT	NULL
FutureUseInt5	Reserved for future use	DBINT	NULL
FutureUseVarchar1	Reserved for future use	varchar(64)	NULL
FutureUseVarchar2	Reserved for future use	varchar(64)	NULL
FutureUseVarchar3	Reserved for future use	varchar(64)	NULL
HitRate	The percentage of hits (completed/attempted) per campaign considered as a threshold by the predictive algorithm. The percentage value is a whole number between 0 and 100.	DBINT	NOT NULL
HitRateEnabled	Indicates whether or not to use hit rate to move between query rules within this campaign:	DBCHAR	NOT NULL

**Campaign\_Query\_Rule\_Half\_Hour Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	<ul style="list-style-type: none"> <li>• <b>Y</b> = Use hit rate</li> <li>• <b>N</b> = Do not use hit rate</li> </ul>		
ListOrder	The order in which the query rules are to be used.	DBINT	NOT NULL
Penetration	The percentage of this query rule to be attempted before shifting to the next query rule within the current campaign. The percentage value is a whole number between 0 and 100.	DBINT	NOT NULL
PenetrationEnabled	Indicates whether or not to use penetration rate to move between query rules within this campaign: <ul style="list-style-type: none"> <li>• <b>Y</b> = Use penetration rate</li> <li>• <b>N</b> = Do not use penetration rate</li> </ul>	DBCHAR	NOT NULL
QueryRuleEnabled	Indicates whether the query rule is enabled or disabled within this campaign: <ul style="list-style-type: none"> <li>• <b>Y</b> = Enabled</li> <li>• <b>N</b> = Disabled</li> </ul>	DBCHAR	NOT NULL
QueryRuleID	The query rule belonging to the campaign identified by the CampaignID. This field is a foreign key from the Query Rule table.  This field is applicable to <b>Outbound Option only</b> .	DBINT	PK, FK NOT NULL
StartHours	TThe contact will not be dialed earlier than the StartHours:StartMinutes. Hours are in 24-hour format and are based on the Unified ICM Central Controller time.	DBINT	NOT NULL
StartMinutes	TThe contact will not be dialed earlier than the StartHours:StartMinutes. Time is based on the Unified ICM Central Controller time.	DBINT	NOT NULL

**Campaign\_Query\_Rule\_Half\_Hour Table**

This table is in the [Blended Agent category \(page 527\)](#). To see database rules for these tables, click [here \(page 593\)](#).

Central database only. Each row provides half-hour statistics on a particular Campaign-Query Rule combination. The statistics reflect counters used in the Outbound Option predictive dialing algorithm.

### Related tables

[Campaign \(page 155\)](#) (via CampaignID)

[Query Rule \(page 325\)](#) (via QueryRuleID)

**Table 54: Indexes for Campaign\_Query\_Rule\_Half\_Hour Table**

index_name	index_description	index_keys
XAK1Campaign_Query_Rule_Half_Hour	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XIE1Campaign_Query_Rule_Half_Hour	nonclustered, unique, primary key located on PRIMARY	DbDateTime
XPKCampaign_Query_Rule_Half_Hour	clustered, unique, primary key located on PRIMARY	DateTime, CampaignID, QueryRuleID, TimeZone

**Note:** The Campaign\_Query\_Rule\_Interval Table will be populated with 30/15 minute reporting data, depending on the Historical Reporting Interval setting for the PG. The Campaign\_Query\_Rule\_Half\_Hour Table will not be populated with this data.

**Fields in Campaign\_Query\_Rule\_Half\_Hour Table :**

Field Name:	Description:	Data Type:	Keys and Null Option:
AbandonDetectToHalf	The number of calls in a half-hour period where the dialer abandoned a customer call.	DBINT	NULL
AbandonToIVRToHalf	The number of calls in a half-hour period that had to be abandoned. However, instead of hanging-up on a customer, the call was transferred to an IVR which played a message to the customer.	DBINT	NULL
AgentClosedDetectToHalf	The number of preview/callback calls in a half-hour period that were closed by the agent (these customers will not be dialed).	DBINT	NULL
AgentRejectedDetectToHalf	The number of preview/callback calls in a half-hour period that were rejected by the agent.	DBINT	NULL
AnsweringMachineDetectToHalf	The number of calls in a half-hour period that detected an answering machine.	DBINT	NULL
BusyDetectToHalf	The number of calls in a half-hour period that detected a busy signal.	DBINT	NULL
CallbackCountToHalf	The total number of records scheduled for a callback.	DBINT	NULL
CampaignID	The campaign to which this query rule belongs.  This field is applicable to <b>Outbound Option only</b> .	DBINT	PK, FK NOT NULL

**Campaign\_Query\_Rule\_Half\_Hour Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
CampaignOutOfNumbersToHalf	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Indicates how much time an active query rule was asked to retrieve numbers but could not find any valid ones for this time frame in its dialing list.	DBINT	NULL
CancelledDetectToHalf	The number of calls in a half-hour period where the dialer cancelled a ringing customer call.	DBINT	NULL
ContactsAttemptedToHalf	The number of attempted calls within a half-hour period.	DBINT	NULL
CustomerAbandonDetectToHalf	The number of calls in a half-hour period that were abandoned by the customer after they picked up the telephone.	DBINT	NULL
CustomerNotHomeCountToHalf	The number of calls that were answered by the wrong party; the customer was not home.	DBINT	NULL
DateTime	The Unified ICM Central Controller date and time at the start of the interval.	DBSMALLDATE	PK NOT NULL
DbDateTime	The current date and time stamp when the records are written to the HDS database. The logger database has NULL for this column.	DBDATETIME	IE-1 NULL
FaxDetectToHalf	The number of calls in a half-hour period that detected a FAX machine.	DBINT	NULL
FutureUseInt1	Reserved for future use	DBINT	NULL
FutureUseInt2	Reserved for future use	DBINT	NULL
FutureUseInt3	Reserved for future use	DBINT	NULL
FutureUseInt4	Reserved for future use	DBINT	NULL
FutureUseInt5	Reserved for future use	DBINT	NULL
LowNoiseVolumeToHalf	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Number of calls where the voice energy was not significant enough to count.	DBINT	NULL
NetworkAnsMachineDetectToHalf	The number of calls in a half-hour period that detected a network answering machine. A network answering machine can be a network based IVR, or a network based answering service.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
NoAnswerDetectToHalf	The number of calls in a half-hour period that were not answered.	DBINT	NULL
NoDialToneDetectToHalf	The number of calls in a half-hour period that did not receive a dial tone.	DBINT	NULL
NoRingBackDetectToHalf	The number of calls in the current half hour period that did not receive a ring-back tone, that were disconnected by the carrier or the network while ringing, or that were flagged with a data error or a no-value call.	DBINT	NULL
PersonalCallbackCountToHalf	The number of calls where the customer requested a personal callback.	DBINT	NULL
QueryRuleActiveTimeToHalf	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Indicates how long the campaign was active during this half hour.	DBINT	NULL
QueryRuleID	The query rule belonging to the campaign identified by the CampaignID.  This field is applicable to <b>Outbound Option only</b> .	DBINT	PK, FK NOT NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL
SITToneDetectToHalf	The number of calls in a half-hour period that detected a network SIT tone.	DBINT	NULL
TalkTimeToHalf	The total number of seconds agents spent talking on the phone during the last half-hour.	DBINT	NULL
TimeZone	The time zone for the date and time. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK NOT NULL
VoiceDetectToHalf	The total number of calls ending in an agent answering the call during the last half-hour.  <b>Outbound Option:</b> The number of calls in a half-hour period that detected a live person.	DBINT	NULL
WrapupTimeToHalf	The total number of seconds agents spent in wrap-up mode during the last half-hour.	DBINT	NULL
WrongNumberCountToHalf	The number of calls where the customer's phone number was incorrect (the e. customer did not live there).	DBINT	NULL

**Campaign\_Query\_Rule\_Interval Table****Campaign\_Query\_Rule\_Interval Table**

This section describes the Campaign Query Rule Interval Table

**Fields in Campaign\_Query\_Rule\_Interval Table :**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
AbandonDetect	The number of calls in a reporting interval period where the dialer abandoned a customer call.	DBINT	NULL
AbandonToIVR	The number of calls in a reporting interval period that had to be abandoned. However, instead of hanging-up on a customer, the call was transferred to an IVR which played a message to the customer.	DBINT	NULL
AgentClosedDetect	The number of preview/callback calls in a reporting interval period that were closed by the agent (these customers will not be dialed).	DBINT	NULL
AgentRejectedDetect	The number of preview/callback calls in a reporting interval period that were rejected by the agent.	DBINT	NULL
AnsweringMachineDetect	The number of calls in a reporting interval period that detected an answering machine.	DBINT	NULL
BusyDetect	The number of calls in a reporting interval period that detected a busy signal.	DBINT	NULL
CallbackCount	The total number of records scheduled for a callback.	DBINT	NULL
CampaignID	The campaign to which this query rule belongs.	DBINT	PK2 , NOT NULL
CampaignOutOfNumbers	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Indicates how much time an active query rule was asked to retrieve numbers but could not find any valid ones for this time frame in its dialing list.	DBINT	NULL
CancelledDetect	The number of calls in a reporting interval period where the dialer cancelled a ringing customer call.	DBINT	NULL
ContactsAttempted	The number of attempted calls within the reporting interval.	DBINT	NULL
CustomerAbandonDetect	The number of calls in a reporting interval period that were abandoned by the customer after they picked up the telephone.	DBINT	NULL
CustomerNotHomeCount	The number of calls that were answered by the wrong party; the customer was not home.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
DateTime	The Unified ICM Central Controller date and time at the start of the interval.	DBSMALLDATE	PK1,NOT NULL
DbDateTime	The current date and time stamp when the records are written to the HDS database. The logger database has NULL for this column.	DBDATETIME	IE1, NULL
FaxDetect	The number of calls in a reporting interval period that detected a FAX machine.	DBINT	NULL
FutureUseInt1	Reserved for future use	DBINT	NULL
FutureUseInt2	Reserved for future use	DBINT	NULL
FutureUseInt3	Reserved for future use	DBINT	NULL
FutureUseInt4	Reserved for future use	DBINT	NULL
FutureUseInt5	Reserved for future use	DBINT	NULL
LowNoiseVolume	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Number of calls where the voice energy was not significant enough to count.	DBINT	NULL
NetworkAnsMachineDetect	The number of calls in a reporting interval period that detected a network answering machine. A network answering machine can be a network based IVR, or a network based answering service.	DBINT	NULL
NoAnswerDetect	The number of calls in a reporting interval period that were not answered.	DBINT	NULL
NoDialToneDetect	The number of calls in a reporting interval period that did not receive a dial tone.	DBINT	NULL
NoRingBackDetect	The number of calls in the current reporting interval period that did not receive a ring-back tone, that were disconnected by the carrier or the network while ringing, or that were flagged with a data error or a no-value call.	DBINT	NULL
PersonalCallbackCount	The number of calls where the customer requested a personal callback.	DBINT	NULL
QueryRuleActiveTime	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Indicates how long the campaign was active during this reporting interval.	DBINT	NULL

**Campaign\_Query\_Rule\_Real\_Time Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
QueryRuleID	The query rule belonging to the campaign identified by the CampaignID.	DBINT	PK3,NOT NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK1, NOT NULL
ReportingHalfHour	The value indicates Half Hour boundary interval (0 - 47). Two 15 minute interval records will have a unique half hour boundary value.	DBINT	IE2, NULL
ReportingInterval	During the upgrade from 7.x to 8.0, this column value will be NULL and it is assumed to be 30 minute interval.	DBINT	IE3, NULL
SITToneDetect	The number of calls in a reporting interval period that detected a network SIT tone.	DBINT	NULL
TalkTime	The total number of seconds agents spent talking on the phone during the last reporting interval.	DBINT	NULL
TimeZone	The time zone for the date and time. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK4, NOT NULL
VoiceDetect	The total number of calls ending in an agent answering the call during the last reporting interval.	DBINT	NULL
WrapupTime	The total number of seconds agents spent in wrap-up mode during the last reporting interval.	DBINT	NULL
WrongNumberCount	The number of calls where the customer's phone number was incorrect (the e. customer did not live there).	DBINT	NULL

**Campaign\_Query\_Rule\_Real\_Time Table**

This table is in the [Blended Agent category \(page 527\)](#). To see database rules for these tables, click [here \(page 593\)](#).

Local database only.

Each row provides real-time statistics on a particular Campaign-Query Rule combination. The statistics reflect counters used in the Outbound Option predictive dialing algorithm.

The data in this table is reset nightly.

### Related tables

[Campaign \(page 155\)](#) (via CampaignID)

[Query Rule \(page 325\)](#) (via QueryRuleID)

**Table 55: Indexes for Campaign\_Query\_Rule\_Real\_Time Table**

index_name	index_description	index_keys
XPKCampaign_Query_Rule_Real_Time	clustered, unique, primary key located on PRIMARY	CampaignID, QueryRuleID

**Fields in Campaign\_Query\_Rule\_Real\_Time Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
AbandonDetectCount	The number of calls abandoned by the dialer.	DBINT	NULL
AbandonDetectTo5	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of calls in a five minute period where the dialer abandoned a customer call.	DBINT	NULL
AbandonDetectToHalf	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of calls in a half-hour period where the dialer abandoned a customer call.	DBINT	NULL
AbandonToIVRCount	The number of calls that detected an answering machine.	DBINT	NULL
AbandonToIVRTo5	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of calls in a five minute period that had to be abandoned. However, instead of hanging-up on a customer, the call was transferred to an IVR which played a message to the customer.	DBINT	NULL
AbandonToIVRToHalf	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of calls in a half-hour period that had to be abandoned. However, instead of hanging-up on a customer, the call was transferred to an IVR which played a message to the customer.	DBINT	NULL
AgentClosedCount	The number of preview/callback calls that were closed by the agent (these customers will not be dialed).	DBINT	NULL
AgentClosedDetectTo5	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of preview/callback calls in a five minute period that were closed by the agent (these customers will not be dialed).	DBINT	NULL
AgentClosedDetectToHalf	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of preview/callback	DBINT	NULL

## Campaign\_Query\_Rule\_Real\_Time Table

Field Name:	Description:	Data Type:	Keys and Null Option:
	calls in a half-hour period that were closed by the agent (these customers will not be dialed).		
AgentRejectedCount	The number of preview/callback calls that were rejected by the agent.	DBINT	NULL
AgentRejectedDetectTo5	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of preview/callback calls in a five minute period that were rejected by the agent.	DBINT	NULL
AgentRejectedDetectToHalf	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of preview/callback calls in a half-hour period that were rejected by the agent.	DBINT	NULL
AnsweringMachineCount	The number of calls that were abandoned by the dialer. However, instead of hanging-up on the customer, the call was transferred to an IVR which played a message to the customer.	DBINT	NULL
AnsweringMachineDetectTo5	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of calls in a five minute period that detected an answering machine.	DBINT	NULL
AnsweringMachineDetectToHalf	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of calls in a half-hour period that detected an answering machine.	DBINT	NULL
AttemptedCount	The number of attempted calls so far today. (CallBackCount + VoiceCount + BusyCount + NoAnswerDetectCount + NoRingBackDetectCount + NoDialToneDetectCount + FaxDetectCount + NetworkAnsMachineDetectCount + AnsweringMachineCount + SITToneDetectCount + CancelledDetectCount + WrongNumberCount + CustomerNotHomeCount + PersonalCallbackCount + AbandonDetectCount + AbandonToIVRCount + CustomerAbandonDetectCount)	DBINT	NULL
BusyCount	The number of calls that detected a busy signal.	DBINT	NULL
BusyDetectTo5	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of calls in a five minute period that detected a busy signal.	DBINT	NULL
BusyDetectToHalf	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of calls in a half-hour period that detected a busy signal.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
CallBackCount	The total number of records scheduled for a callback today.	DBINT	NULL
CallbackCountTo5	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The total number of records scheduled for a callback in a five minute period.	DBINT	NULL
CallbackCountToHalf	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The total number of records scheduled for a callback in a half-hour period.	DBINT	NULL
CampaignID	The campaign to which this query rule belongs.  This field is applicable to <b>Outbound Option only</b> .	DBINT	PK, FK NOT NULL
CancelledDetectCount	The number of calls where the dialer cancelled a ringing customer call.	DBINT	NULL
CancelledDetectTo5	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of calls in a five minute period where the dialer cancelled a ringing customer call.	DBINT	NULL
CancelledDetectToHalf	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of calls in a half-hour period where the dialer cancelled a ringing customer call.	DBINT	NULL
ClosedCount	Records customer calls closed for any reason other than reaching a live customer.	DBINT	NULL
ContactsAttemptedTo5	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of attempted calls within a five minute period.	DBINT	NULL
ContactsAttemptedToHalf	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of attempted calls within a half-hour period.	DBINT	NULL
CustomerAbandonDetectCount	The number of calls where the customer hung-up immediately after picking up the telephone.	DBINT	NULL
CustomerAbandonDetectTo5	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of calls in a five minute period that were abandoned by the customer after they picked up the telephone.	DBINT	NULL

## Campaign\_Query\_Rule\_Real\_Time Table

Field Name:	Description:	Data Type:	Keys and Null Option:
CustomerAbandonDetectToHalf	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of calls in a half-hour period that were abandoned by the customer after they picked up the telephone.	DBINT	NULL
CustomerNotHomeCount	The number of calls that were answered by the wrong party because the customer was not home.	DBINT	NULL
CustomerNotHomeCountTo5	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of calls in a five minute period that were answered by the wrong party because the customer was not home.	DBINT	NULL
CustomerNotHomeCountToHalf	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of calls in a half-hour period that were answered by the wrong party because the customer was not home.	DBINT	NULL
DateTime	The Unified ICM Central Controller date and time when this data was last updated.	DBDATETIME	NOT NULL
FaxDetectCount	The number of calls that detected a FAX.	DBINT	NULL
FaxDetectTo5	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of calls in a five minute period that detected a FAX machine.	DBINT	NULL
FaxDetectToHalf	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of calls in a half-hour period that detected a FAX machine.	DBINT	NULL
FutureUseInt1	Reserved for future use	DBINT	NULL
FutureUseInt2	Reserved for future use	DBINT	NULL
FutureUseInt3	Reserved for future use	DBINT	NULL
FutureUseInt4	Reserved for future use	DBINT	NULL
FutureUseInt5	Reserved for future use	DBINT	NULL
LowNoiseVolumeToday	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Number of calls in a one day period where the voice energy was not significant enough to count.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
LowNoiseVolumeTo5	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Number of calls in a five minute period where the voice energy was not significant enough to count.	DBINT	NULL
LowNoiseVolumeToHalf	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Number of calls in a half-hour period where the voice energy was not significant enough to count.	DBINT	NULL
NetworkAnsMachineCount	The number of calls that detected a network answering machine. A network answering machine can be a network based IVR, or a network based answering service.	DBINT	NULL
NetworkAnsMachineDetectTo5	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of calls in a five minute period that detected a network answering machine. A network answering machine can be a network based IVR, or a network based answering service.	DBINT	NULL
NetworkAnsMachineDetectToHalf	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of calls in a half-hour period that detected a network answering machine. A network answering machine can be a network based IVR, or a network based answering service.	DBINT	NULL
NoAnswerDetectCount	The number of calls that were not answered.	DBINT	NULL
NoAnswerDetectTo5	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of calls in a five minute period that were not answered.	DBINT	NULL
NoAnswerDetectToHalf	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of calls in a half-hour period that were not answered.	DBINT	NULL
NoDialToneDetectCount	The number of calls that did not detect a dial tone.	DBINT	NULL
NoDialToneDetectTo5	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of calls in a five minute period that did not receive a dial tone.	DBINT	NULL
NoDialToneDetectToHalf	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of calls in a half-hour period that did not receive a dial tone.	DBINT	NULL

## Campaign\_Query\_Rule\_Real\_Time Table

Field Name:	Description:	Data Type:	Keys and Null Option:
NoRingBackDetectCount	The number of calls in the current half hour period that did not receive a ring-back tone, that were disconnected by the carrier or the network while ringing, or that were flagged with a data error or a no-value call.	DBINT	NULL
NoRingBackDetectTo5	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of calls in a five minute period that did not receive a ring back tone.	DBINT	NULL
NoRingBackDetectToHalf	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of calls in a half-hour period that did not receive a ring back tone.	DBINT	NULL
PendingRecordsZone1	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Number of pending records which are eligible for dialing now in zone 1.	DBINT	NULL
PendingRecordsZone2	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Number of pending records which are eligible for dialing now in zone 2.	DBINT	NULL
PendingRetryRecordsZone1	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Number of campaign records that are pending retry in Zone 1 that are dialable now. This is significant since retries get higher priority and can reduce hit rate and agent efficiency.	DBINT	NULL
PendingRetryRecordsZone2	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Number of campaign records that are pending retry in Zone 2 that are dialable now. This is significant since retries get higher priority and can reduce hit rate and agent efficiency.	DBINT	NULL
PersonalCallbackCount	The number of calls where the customer requested a personal call-back.	DBINT	NULL
PersonalCallbackCountTo5	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of calls in a five minute period where the customer requested a personal callback.	DBINT	NULL
PersonalCallbackCountToHalf	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of calls in a half-hour period where the customer requested a personal callback.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
QueryRuleActive	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Indicates whether the current campaign is active or not.	DBINT	NULL
QueryRuleID	The query rule belonging to the campaign identified by the CampaignID.  This field is applicable to <b>Outbound Option only.</b>	DBINT	PK, FK NOT NULL
SITToneDetectCount	The number of calls that detected a Special Information Tone (SIT).	DBINT	NULL
SITToneDetectTo5	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of calls in a five minute period that detected a network SIT tone.	DBINT	NULL
SITToneDetectToHalf	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of calls in a half-hour period that detected a network SIT tone.	DBINT	NULL
TalkTimeCount	The total number of seconds agents spent talking on the telephone since midnight.	DBINT	NULL
TalkTimeToHalf	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The total number of seconds agents spent talking on the phone during the last half-hour.	DBINT	NULL
TotalCount	The total number of records available to dial for the current campaign query rule.	DBINT	NULL
VoiceCount	The number of calls for the day that ended in successful customer contact.  <b>Outbound Option:</b> The number of calls that detected a live person.	DBINT	NULL
VoiceDetectTo5	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The total number of calls ending in an agent answering the call during the last five minutes.  <b>Outbound Option:</b> The number of calls in a five minute period that detected a live person.	DBINT	NULL
VoiceDetectToHalf	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The total number of calls ending in an agent answering the call during the last half-hour.	DBINT	NULL

**Campaign\_Skill\_Group Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	<b>Outbound Option:</b> The number of calls in a half-hour period that detected a live person.		
WrapupTimeCount	The number of seconds agents spent in wrap-up mode since midnight.	DBINT	NULL
WrapupTimeToHalf	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The total number of seconds agents spent in wrap-up mode during the last half-hour.	DBINT	NULL
WrongNumberCount	The number of calls where the customer phone number was incorrect (the customer did not live there).	DBINT	NULL
WrongNumberCountTo5	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of calls in a five minute period where the customer's phone number was incorrect (the customer did not live there).	DBINT	NULL
WrongNumberCountToHalf	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of calls in a half-hour period where the customer's phone number was incorrect (the customer did not live there).	DBINT	NULL

**Campaign\_Skill\_Group Table**

This table is in the [Blended Agent category \(page 527\)](#). To see database rules for these tables, click [here \(page 593\)](#).

It contains the associations between campaigns and skill groups within the software.

**Note:** If Outbound Option was not selected during setup, this table will contain no data.

Use the Outbound Option Configuration option within Unified ICM Configuration Manager to modify Campaign\_Skill\_Group records.

#### Related tables

[Campaign \(page 155\)](#) (via CampaignID)

[Skill Group \(page 432\)](#) (SkillGroupID maps to Skill\_Group.SkillTargetID)

**Table 56: Indexes for Campaign\_Skill\_Group Table**

index_name	index_description	index_keys
XPKTarget_Group	clustered, unique, primary key located on PRIMARY	CampaignID, SkillTargetID

**Fields in Campaign\_Skill\_Group Table :**

Field Name:	Description:	Data Type:	Keys and Null Option:
AbandonedRoutePoint	Abandoned Contacts are transferred to this route point, which points to an IVR.	varchar(50)	NULL
AutoAnswerReservationCall	This variable controls whether the dialer will use CTI Server to answer the reservation call and the transfer call sent to the agent or allow the agent's phone to answer the call on its own.  Possible values: 1: Auto answer on; 2: Auto-answer off	DBINT	NULL
CampaignID	The campaign to which this target group belongs. Foreign key from the Campaign table.  This field is applicable to <b>Outbound Option only</b> .	DBINT	PK, FK NOT NULL
ConfigParam	Additional configuration parameters.	varchar(255)	NULL
DialedNumber	For Unified CCE, indicates the DN that should be used when sending a new call request via the MR PIM. This DN will be used to run a routing script where an agent should be reserved from the same skill that has been assigned to the campaign.  Note that each skill group should have a unique DN associated with it.  For Avaya Definity ACD, indicates the number that should be dialed to reach the VDN for the selected skill group.	VNAME32	NULL
FutureUseInt1	Reserved for future use	DBINT	NULL
FutureUseInt2	Reserved for future use	DBINT	NULL
FutureUseInt3	Reserved for future use	DBINT	NULL
FutureUseInt4	Reserved for future use	DBINT	NULL
FutureUseInt5	Reserved for future use	DBINT	NULL
FutureUseVarchar1	Reserved for future use	varchar(64)	NULL

**Campaign\_Target\_Sequence Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
FutureUseVarchar2	Reserved for future use	varchar(64)	NULL
FutureUseVarchar3	Reserved for future use	varchar(64)	NULL
IVRPorts	Number of ports supported by the IVR for the current skill group (3 digits).	DBINT	NOT NULL
IVRRoutePoint	Contacts are transferred to this route point, which points to an IVR.	varchar(50)	NULL
OverflowAgents	The number of agents per skill group to ignore during predictive dialer calculations.	DBINT	NOT NULL
RecordsToCache	The number of records that should be cached by the dialer for a specific campaign-skill group combination.	DBINT	NOT NULL
ReservationPercentage	The percentage of agents to reserve within this skill group. The variable is only relevant in preview mode. For all other modes, 100 percent of agents are reserved.	DBINT	NULL
SkillTargetID	A unique key indicating the skill group with which this target group is associated. Foreign key to the Skill Group table.	DBINT	PK, FK NOT NULL

**Campaign\_Target\_Sequence Table**

This table is in the [Blended Agent category \(page 527\)](#). To see database rules for these tables, click [here \(page 593\)](#).

It contains the target type (home or work) and the sequence with which numbers are dialed within a campaign.

**Note:** If Outbound Option was not selected during setup, this table will contain no data.

### Related tables

[Campaign \(page 155\)](#) (via CampaignID)

[Dialer Detail \(page 206\)](#) (via Phone Index)

**Table 57: Indexes for Campaign\_Target\_Sequence Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XPKCampaign_Target_Sequence	clustered, unique, primary key located on PRIMARY	CampaignID, SequenceNumber

**Fields in Campaign\_Target\_Sequence Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
CampaignID	The campaign to which this target sequence belongs. Foreign key from the Campaign table.  This field is applicable to <b>Outbound Option only.</b>	DBINT	PK, FK NOT NULL
ConfigParam	Additional configuration parameters.	varchar(255)	NULL
FutureUseInt1	Reserved for future use	DBINT	NULL
FutureUseInt2	Reserved for future use	DBINT	NULL
FutureUseInt3	Reserved for future use	DBINT	NULL
FutureUseInt4	Reserved for future use	DBINT	NULL
FutureUseInt5	Reserved for future use	DBINT	NULL
FutureUseVarchar1	Reserved for future use	varchar(64)	NULL
FutureUseVarchar2	Reserved for future use	varchar(64)	NULL
FutureUseVarchar3	Reserved for future use	varchar(64)	NULL
PhoneIndex	Indicates the phone number that should be used within the zone.  This value can range from 0 through 9.  An index value of 0 represents the Phone1 in the configuration tool.	DBINT	NOT NULL
SequenceNumber	Part of the primary key. Indicates the sequence of the number to dial within a campaign.	DBINT	PK NOT NULL
ZoneIndex	Indicates the zone to which the configured phone number belongs:  0 = Zone 1  1 = Zone 2	DBINT	NOT NULL

## Cfg\_Mngr\_App\_Snapshot\_State Table

This table is part of the [User Preferences group \(page 550\)](#). To see database rules for this table, click [here \(page 602\)](#).

**Cfg\_Mngr\_App\_Snapshot\_State Table**

This table defines a specific state of the Unified ICM Configuration Manager user interface that a user has saved. Information from this table is used to reconstruct the state of the Unified ICM Configuration Manager when the Administration & Data Server is restarted.

**Related table**

[Cfg Mngr User Desktop Snap \(page 185\)](#) (via DesktopSnapShotID)

**Table 58: Indexes for Cfg\_Mngr\_App\_Snapshot\_State Table**

index_name	index_description	index_keys
XPKCfg_Mngr_App_Snapshot_State	clustered, unique, primary key located on PRIMARY	DesktopSnapShotID, ApplicationID

**Fields in Cfg\_Mngr\_App\_Snapshot\_State Table :**

Field Name:	Description:	Data Type:	Keys and Null Option:
ApplicationID	Identifies the application	DBINT	PK, NOT NULL
ApplicationOpen	Valid options include: <ul style="list-style-type: none"> <li>• <b>Y</b> = Indicates that the application was open when Configuration Manager was closed.</li> <li>• <b>N</b> = The application was not open when Configuration Manager was closed.</li> </ul>	DBCHAR	NOT NULL
DesktopSnapShotID	A unique identifier for the desktop snapshot.	DBINT	PK, FK NOT NULL
Filter1	ID for the first filter key of the application.	DBINT	NULL
Filter2	ID for the second filter key of the application.	DBINT	NULL
Filter3FieldName	A field name used for the third filter criteria.	VNAME32	NULL
Filter3FieldType	A field type identifier used for text/numeric lookup.	DBSMALLINT	NULL
Filter3OptionSelection	The selection type.	DBSMALLINT	NULL
Filter3Selection	The selection value.	varchar(255)	NULL
POSX	The application's X position on the desktop.	DBSMALLINT	NULL
POSY	The application's Y position on the desktop.	DBSMALLINT	NULL

## Cfg\_Mngr\_Globals Table

This table is part of the [User Preferences group \(page 550\)](#). To see database rules for this table, click [here \(page 602\)](#).

This table contains a single record that stores version information about the menu system that Unified ICM Configuration Manager is currently using.

**Table 59: Indexes for Cfg\_Mngr\_Globals Table**

index_name	index_description	index_keys
XPKCfg_Mngr_Globals	clustered, unique, primary key located on PRIMARY	VersionID

### Fields in Cfg\_Mngr\_Globals Table :

Field Name:	Description:	Data Type:	Keys and Null Option:
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
Version	Stores version information about the menu system the Unified ICM Configuration Manager is currently using.	DBINT	NOT NULL
VersionID	A unique identifier for the version.	DBINT	PK NOT NULL

## Cfg\_Mngr\_User/Desktop\_Snap Table

This table is part of the [User Preferences group \(page 550\)](#). To see database rules for this table, click [here \(page 602\)](#).

This table retains information on current Unified ICM Configuration Manager state for a particular user.

### Related table

[Cfg Mngr App Snapshot State \(page 183\)](#) (via DesktopSnapShotID)

**Table 60: Cfg\_Mngr\_User/Desktop\_Snap Table**

index_name	index_description	index_keys
XPKCfg_Mngr_User/Desktop_Snap	clustered, unique, primary key located on PRIMARY	DesktopSnapShotID

**Cfg\_Mngr\_User/Desktop\_Snap Table****Fields in Cfg\_Mngr\_User/Desktop\_Snap Table :**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
AllowMultipleAppInstances	Determines whether multiple executing instances of a tool should be allowed: <ul style="list-style-type: none"> <li>• <b>Y</b> = (Default) Yes, allow multiple instances to run at once.</li> <li>• <b>N</b> = No, do not allow multiple instances.</li> </ul>	DBCHAR	NOT NULL
AutoRetrieve	Indicates whether or not the tools should automatically retrieve data when they start: <ul style="list-style-type: none"> <li>• <b>Y</b> = Yes, automatically retrieve data at startup.</li> <li>• <b>N</b> = (Default) No, do not automatically retrieve data.</li> </ul>	DBCHAR	NOT NULL
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
DesktopSnapShotID	A unique identifier for the desktop snapshot.	DBINT	PK NOT NULL
DesktopSnapShotName	A name for the desktop snapshot.	varchar(128)	NOT NULL
MenuID	A unique identifier for the menu.	DBINT	FK NULL
OpenAppsOnLoad	Determines whether tools should be reopened when a snapshot is loaded: <ul style="list-style-type: none"> <li>• <b>Y</b> = Yes, reopen tool when snapshot is loaded.</li> <li>• <b>N</b> = (Default) No, do not reopen tool.</li> </ul>	DBCHAR	NOT NULL
SaveApplicationPositions	Indicates whether or not the application should start in the screen position it was in when it was last run by the user: <ul style="list-style-type: none"> <li>• <b>Y</b> = Yes, start application in same position.</li> <li>• <b>N</b> = (Default) No, start it in application's default position.</li> </ul>	DBCHAR	NOT NULL
SaveFilterData	Determines whether or not filter settings should be saved for all tools: <ul style="list-style-type: none"> <li>• <b>Y</b> = (Default) Yes, save filter settings.</li> <li>• <b>N</b> = No, do not save filter settings.</li> </ul>	DBCHAR	NOT NULL
UserSettingsID	A foreign key to the Cfg_Mngr_User_Settings table.	DBINT	FK NOT NULL

## Cfg\_Mngr\_User\_Menu Table

This table is part of the [User Preferences group \(page 550\)](#). To see database rules for this table, click [here \(page 602\)](#).

This table holds information that describes the default and custom menus in use for each user of the Unified ICM Configuration Manager.

### Related table

[Cfg Mngr View \(page 188\)](#) (via MenuID)

**Table 61: Indexes for Cfg\_Mngr\_User\_Menu Table**

index_name	index_description	index_keys
XPKCfg_Mngr_User_Menu	clustered, unique, primary key located on PRIMARY	MenuID

### Fields in Cfg\_Mngr\_User\_Menu Table:

Field Name:	Description:	Data Type:	Keys and Null Option:
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
DesktopSnapShotID	Identifies the last desktop snapshot.	DBINT	NULL
MenuID	A unique identifier for the menu.	DBINT	PK NOT NULL
MenuName	A name for the menu.	VNAME32	NOT NULL

## Cfg\_Mngr\_User\_Settings Table

This table is part of the [User Preferences group \(page 550\)](#). To see database rules for this table, click [here \(page 602\)](#).

This table holds specific Unified ICM Configuration Manager settings for each user of the Unified ICM Configuration Manager tool.

### Related table

[Cfg Mngr User Desktop Snap \(page 185\)](#) (via UserSettingsID)

**Table 62: Indexes for Cfg\_Mngr\_User\_Settings Table**

index_name	index_description	index_keys
XAK1Cfg_Mngr_User_Settings	nonclustered, unique, unique key located on PRIMARY	LoginName

**Cfg\_Mngr\_View Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XPKCfg_Mngr_User_Settings	clustered, unique, primary key located on PRIMARY	UserSettingsID

**Fields in Cfg\_Mngr\_User\_Settings Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
LastDesktopSnapShotID	Identifier for the last desktop snapshot that the user had opened before closing the Unified ICM Configuration Manager.	DBINT	NULL
LoginName	The unique login name of the user who owns these settings.	varchar(128)	AK-1 NOT NULL
SaveSnapShotOnExit	Indicates whether or not to save the current desktop snapshot settings when the Unified ICM Configuration Manager is closed: <ul style="list-style-type: none"> <li>• <b>Y</b> = Yes, save settings on exit (the default).</li> <li>• <b>N</b> = No, do not save settings on exit.</li> </ul>	DBCCHAR	NOT NULL
UserSettingsID	A unique identifier for the user settings.	DBINT	PK NOT NULL

**Cfg\_Mngr\_View Table**

This table is part of the [User Preferences group \(page 550\)](#). To see database rules for this table, click [here \(page 602\)](#).

This table holds the information necessary to produce the tree view structure for multiple default and custom menus within the Unified ICM Configuration Manager. The Primary Key (PK) is nonclustered.

Related table

[Cfg Mngr User Menu \(page 187\)](#) (via MenuID)

**Table 63: Indexes for Cfg\_Mngr\_View Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XIE1Cfg_Mngr_View	nonclustered, unique, primary key located on PRIMARY	PeerNodeID
XIE2Cfg_Mngr_View	nonclustered, unique, primary key located on PRIMARY	ChildNodeID
XPKCfg_Mngr_View	nonclustered, unique, primary key located on PRIMARY	NodeID, MenuID

**Fields in Cfg\_Mngr\_View Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ApplicationID	Identifies the application.	DBINT	NULL
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
ChildNodeID	Identifies the child node in the tree view.	DBINT	IE-2 NULL
MenuID	A unique identifier for the menu.	DBINT	PK, FK NOT NULL
NodeID	A unique identifier for the node in the tree view.	DBINT	PK NOT NULL
PeerNodeID	Identifies the peer node in the tree view.	DBINT	IE-1 NULL

**Class\_Access\_Xref Table**

This table is in the [Security category \(page 543\)](#). To see database rules for these tables, click [here \(page 600\)](#).

It lists the access levels available for each class. The Primary Key (PK) is nonclustered.

**Related Table**

[Class List \(page 190\)](#) (via ClassID)

**Table 64: Indexes for Class\_Access\_Xref Table**

index_name	index_description	index_keys
XAK1Class_Access_Xref	clustered, unique, unique key located on PRIMARY	AccessLevel, ClassID
XPKClass_Access_Xref	nonclustered, unique, primary key located on PRIMARY	ClassAccessXrefID

**Fields in Class\_Access\_Xref Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
AccessLevel	A supported access level for the class. To see values, click <a href="#">here (page 553)</a> .	DBINT	AK-1 NOT NULL
ClassAccessXrefID	A unique identifier for the record.	DBINT	PK NOT NULL
ClassID	Identifies the class from the Class_List table.	DBINT	AK-1 NOT NULL

**Class\_List Table****Class\_List Table**

This table is in the [Security category \(page 543\)](#). To see database rules for these tables, click [here \(page 600\)](#).

It lists the available classes. The contents of this table are set up when the software is installed and never change.

**Related tables**

[Class Security \(page 190\)](#) (via ClassID)

[ClassIDTo ObjectType \(page 191\)](#) (via ClassID)

**Table 65: Indexes for Class\_List Table**

index_name	index_description	index_keys
XAK1Class_List	clustered, unique, unique key located on PRIMARY	Name
XPKSecurity_Class	nonclustered, unique, primary key located on PRIMARY	ClassID

**Fields in Class\_List Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ClassID	A unique identifier for the class.	DBINT	PK NOT NULL
Description	Additional information about the class.	DESCRIPTION	NULL
Name	The name of the class.	varchar(30)	AK-1 NOT NULL

**Class\_Security Table**

This table is in the [Security category \(page 543\)](#). To see database rules for these tables, click [here \(page 600\)](#).

It lists the level of security each user or group has for a class.

**Related Tables**

[Class List \(page 190\)](#) (via ClassID)

[User Group \(page 514\)](#) (via UserGroupName)

**Table 66: Indexes for Class\_Security Table**

index_name	index_description	index_keys
XPKClass_Security	clustered, unique, primary key located on PRIMARY	ClassSecurityID

**Fields in Class\_Security Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
AccessLevel	The access level the user group has for the class. To see values, click <a href="#">here</a> (page 553).	DBINT	NOT NULL
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
ClassID	Identifies the class from the Class_List table.	DBINT	NOT NULL
ClassSecurityID	A unique identifier for the record.	DBINT	PK NOT NULL
UserGroupName	Identifies the user group.	varchar(64)	NOT NULL

## ClassID\_To\_ObjectType Table

This table is in the [Security category \(page 543\)](#). To see database rules for these tables, click [here](#) (page 600).

Maps each class to its component object types

Related Tables

[Class List \(page 190\)](#) (via ClassID)

[Object List \(page 304\)](#) (via ObjectType + ObjectID)

**Table 67: Indexes for ClassID\_To\_ObjectType Table**

index_name	index_description	index_keys
XIE1ClassID_To_ObjectType	nonclustered, unique, primary key located on PRIMARY	ObjectType
XPKClassID_To_ObjectType	clustered, unique, primary key located on PRIMARY	ClassID, ObjectType

**Fields in ClassID\_To\_ObjectType Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ClassID	Identifies the class from the Class_List table.	DBINT	PK, FK NOT NULL
ObjectID	For Logical Interface Controller objects: • 2 = PG	DBINT	NOT NULL

**Configuration\_Limit Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	<ul style="list-style-type: none"> <li>• 3 = NIC</li> </ul> <p><b>Note:</b> For all other object types, this field is 0.</p>		
ObjectType	Identifies the type of the object.	DBINT	PK, FK, IE-1 NOT NULL

**Configuration\_Limit Table**

This table defines safe outer boundaries for Unified ICM Configuration parameters. The default values set for Configuration Limits are the maximum values that have been tested and confirmed by Cisco. Your system deployment may require lower limits or may allow higher limits.

However, if you configure beyond the ConfigLimitID values and experience difficulties, you may be required to change values to correspond to the defined limits before Cisco can troubleshoot.

At this time, the only ConfigLimitName is for Skill Groups Per Agent, which is set to a default and current value of 50.

**Table 68: Indexes for Configuration\_Limit Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XPKConfiguration_Limit	clustered, unique, primary key located on PRIMARY	ConfigLimitID

**Fields in Configuration\_Limit Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
ConfigLimitID	This is created by the schema.	DBINT	PK-1, clustered, NOT NULL
ConfigLimitName	The configuration limit rule name	VNAME32	NOT NULL
ConfigLimitDefaultValue	The default limitation value	DBINT	NOT NULL
ConfigLimitCurrentValue	The current limitation value	DBINT	NOT NULL
Description	Description	Description	NULL
ChangeStamp	Change Stamp	ChangeStamp	NOT NULL

## Config\_Message\_Log Table

This table is in the [System category \(page 548\)](#). To see database rules for these tables, click [here \(page 601\)](#).

Central database only.

A database system table used to store configuration messages.

**Table 69: Indexes for Config\_Message\_Log Table**

index_name	index_description	index_keys
XPKConfig_Message_Log	clustered, unique, primary key located on PRIMARY	RecoveryKey

**Fields in Config\_Message\_Log Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ConfigMessage	All configuration messages in a transaction.	image	NULL
DateTime	The date and time when a set of messages was logged.	DBDATETIME	NOT NULL
LogOperation	The type of configuration change. Examples include "Add" and "Update".	VNAME32	NULL
RecoveryKey	A value used internally by the software to track virtual time.	DBFLT8	PK NOT NULL
TableName	The name of the table affected by the configuration change.	VNAME32	NULL

## Controller\_Time Table

This table is in the [System category \(page 548\)](#). To see database rules for these tables, click [here \(page 601\)](#).

A database system table that stores the current time at the Unified ICM platform.

**Fields in Controller\_Time Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
NowTime	The most recently reported time from the Central Controller.	DBDATETIME	NULL
TimeZone	The time zone for the device. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	NULL
TimeZoneName	The name of the time zone.	DESCRIPTION	NULL

**Customer\_Definition Table****Customer\_Definition Table**

This table is part of the [Script category \(page 539\)](#). For database rules, click [here](#). (page 599)

Each row defines a customer associated with an Unified ICM instance. Use the Customer list tool to create, update, or delete a customer definition.

**Related tables**

<a href="#">Call Type (page 95)</a> (via CustomerDefinitionID)	<a href="#">Customer Options (page 195)</a> (via CustomerDefinitionID)	<a href="#">Customer Definition (page 194)</a> (via CustomerDefinitionID)
<a href="#">Feature Control Set (page 236)</a> (via via FeatureSetID)	<a href="#">ICR Instance (page 267)</a> (via ICRInstanceID)	<a href="#">Label (page 281)</a> (via CustomerDefinitionID)
<a href="#">Master Script (page 288)</a> (via CustomerDefinitionID)	<a href="#">Network VRU (page 300)</a> (via NetworkTargetID)	<a href="#">Scheduled Target (page 375)</a> (via CustomerDefinitionID)
<a href="#">User Group (page 514)</a> (via CustomerDefinitionID)		

**Table 70: Indexes for Customer\_Definition Table**

index_name	index_description	index_keys
XAK1Customer_Definition	nonclustered, unique, unique key located on PRIMARY	EnterpriseName
XIE1Customer_Definition	nonclustered, unique, primary key located on PRIMARY	ICRInstanceID
XPKCustomer_Definition	clustered, unique, primary key located on PRIMARY	CustomerDefinitionID

**Fields in Customer\_Definition Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
CustomerDefinitionID	A unique identifier for the customer definition.	DBINT	PK NOT NULL
Description	Additional information about the customer definition.	DESCRIPTION	NULL
EnterpriseName	An enterprise name for the customer. This name must be unique among all customer definitions in the enterprise.	VNAME32	AK-1 NOT NULL
FeatureSetID	Identifies a feature set from the Feature_Control_Set Table.	DBINT	FK NULL
ICRInstanceID	Identifies the instance associated with the customer.	DBINT	FK, IE-1 NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
NetworkTargetID	Identifies the Network VRU, if any, associated with the customer.	DBINT	FK, NULL

## Customer\_Options Table

This table is part of the [Script category \(page 539\)](#). For database rules, click [here](#). (page 599)

Each row identifies options installed for a specific customer.

### Related table

[Customer Definition \(page 194\)](#) (via CustomerDefinitionID)

**Table 71: Indexes for Customer\_Options Table**

index_name	index_description	index_keys
XPKCustomer_Options	clustered, unique, primary key located on PRIMARY	CustomerDefinitionID, Type

### Fields in Customer\_Options Table:

Field Name:	Description:	Data Type:	Keys and Null Option:
CustomerDefinitionID	Identifies the customer definition associated with the row.	DBINT	PK, FK NOT NULL
OptionValue	The option value.	varchar(255)	NULL
Type	The customer option defined by the row. To see values, click <a href="#">here</a> (page 557).	DBINT	PK NOT NULL

## Default\_Call\_Type Table

This table is part of the [Script category \(page 539\)](#). For database rules, click [here](#). (page 599)

Each row specifies the default call type. You can associate a default call type with each routing client.

**Note:** You can also create a general default call type in the ICR\_Globals table.

To add, update, and delete Default\_Call\_Type records, use Unified ICM Configuration Manager to modify the Routing Client configuration.

### Related tables

[Call Type \(page 95\)](#) (via CallTypeID)

[Routing Client \(page 357\)](#) (via RoutingClientID)

**Device\_Target Table****Table 72: Indexes for Default\_Call\_Type Table**

index_name	index_description	index_keys
XPKDefault_Call_Type	clustered, unique, primary key located on PRIMARY	RoutingClientID

**Fields in Default\_Call\_Type Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
CallTypeID	The call type.	DBINT	NULL
RoutingClientID	The routing client.	DBSMALLINT	NOT NULL

**Device\_Target Table**

This table is in the [Route category \(page 535\)](#). To see database rules for these tables, click [here \(page 597\)](#).

Each row represents one or more enterprise agents. When an enterprise agents logs on, the system software dynamically assigns him or her to a device target. To route calls to an enterprise agent, you must have defined a label associated with the device target. Use Unified ICM Configuration Manager to create, delete, and modify device targets.

**Related tables**

[Agent Logout \(page 33\)](#) (via NetworkTargetID)

[Agent Real Time \(page 34\)](#) (via NetworkTargetID)

[Network Target \(page 294\)](#) (via NetworkTargetID)

**Table 73: Indexes for Device\_Target Table**

index_name	index_description	index_keys
XAK1Device_Target	nonclustered, unique, unique key located on PRIMARY	EnterpriseName
XAK2Device_Target	nonclustered, unique, unique key located on PRIMARY	DeviceAddressType, GlobalAddress
XPKDevice_Target	clustered, unique, primary key located on PRIMARY	NetworkTargetID

**Fields in Device\_Target Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
ConfigParam	An optional string to be sent to the device during initialization.	varchar(255)	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
Description	Additional information about the device target.	DESCRIPTION	NULL
DeviceAddressType	Type of address defined in the GlobalAddressfield: 1 = Internet Protocol (IP).	DBINT	AK-2 NOT NULL
DeviceTargetType	The type of the target.  <b>Note:</b> Currently only Voice is supported.  • 1 = <b>Voice</b>  • 2 = <b>FAX</b>  • 3 = <b>E-mail</b>	DBINT	NOT NULL
EnterpriseName	An enterprise name for the target. This name must be unique among all device targets in the enterprise.	VNAME32	AK-1 NOT NULL
GlobalAddress	A unique identifier. This field is used to enforce validation that the agent desktop and the agent phone are at the same IP address for media terminated agent desktops, including Enterprise Agent. The decimal format for an IP address is xxx.xxx.xxx.xxx. For example, 128.127.50.224. If validating the IP address of an agent desktop and agent phone is not the case, then the global address can be set to any unique string.	varchar(64)	AK-2 NOT NULL
NetworkTargetID	Unique identifier for the target.	DBINT	PK, FK NOT NULL

## Dialed\_Number Table

This table is in the [Route category \(page 535\)](#). To see database rules for these tables, click [here \(page 597\)](#).

Each row describes a dialed number serviced by the system software. Use Unified ICM Configuration Manager to add, update, and delete Dialed\_Number records.

### Related tables

[Customer Definition \(page 194\)](#) (via CustomerDefinitionID)

[Dialed Number Label \(page 199\)](#) (via DialedNumberID)

[Dialed Number Map \(page 200\)](#) (via DialedNumberID)

[Dialed Number Plan \(page 201\)](#) (via DialedNumberID)

**Dialed\_Number Table**

- [Label \(page 281\)](#) (via LabelID)
- [Media Routing Domain \(page 290\)](#) (via MRDomainID)
- [Route Call Detail \(page 338\)](#)(via DialedNumberID)
- [Routing Client \(page 357\)](#) (via RoutingClientID)

**Table 74: Indexes for Dialed\_Number Table**

index_name	index_description	index_keys
XAK1Dialed_Number	nonclustered, unique, unique key located on PRIMARY	EnterpriseName
XAK2Dialed_Number	nonclustered, unique, unique key located on PRIMARY	RoutingClientID, DialedNumberString
XIE1Dialed_Number	nonclustered, unique, primary key located on PRIMARY	LabelID
XIE2Dialed_Number	nonclustered, unique, primary key located on PRIMARY	CustomerDefinitionID
XPKDialed_Number	clustered, unique, primary key located on PRIMARY	DialedNumberID

**Fields in Dialed\_Number Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
CustomerDefinitionID	Identifies the customer definition associated with the dialed number.	DBINT	IE-2, FK NULL
Deleted	Deleted Flag. Stored as a character:  • <b>Y</b> = Yes  • <b>N</b> =No	DBCHAR	NOT NULL
Description	Additional information about the dialed number.	DESCRIPTION	NULL
DialedNumberID	A unique identifier for this dialed number.	DBINT	PK NOT NULL
DialedNumberString	The string the routing client passes to the system software to represent this dialed number.	VNAME32	AK-2 NOT NULL
EnterpriseName	An enterprise name for the number. This name must be unique among all dialed numbers in the database.	VNAME32	AK-1 NOT NULL
LabelID	References the default label for this dialed number.	DBINT	IE-1, FK NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
MRDomainID	The Media Routing Domain associated with this dialed number.	DBINT	FK NOT NULL
PermitApplicationRouting	Used to indicate if remote routing by a CTI client (ACMI) is permitted on this dialed number.  Default = 'N'.	DBCHAR	NOT NULL
ReservedByIVR	Used for queuing on the Simplified IPCC PG only.  Stored as 'Y' or 'N'. Default = 'N'.	DBCHAR	NOT NULL
RoutingClientID	References the routing client that services this dialed number.	DBSMALLINT	AK-2, FK NOT NULL

## Dialed\_Number\_Label Table

This table is in the [Route category \(page 535\)](#). To see database rules for these tables, click [here \(page 597\)](#).

It indicates which Label values are valid for each Dialed\_Number value. Use Unified ICM Configuration Manager to add, update, and delete Dialed\_Number\_Label records.

### Related tables

[Dialed Number \(page 197\)](#) (via DialedNumberID)

[Label \(page 281\)](#) (via LabelID)

**Table 75: Indexes for Dialed\_Number\_Label Table**

index_name	index_description	index_keys
XIE1Dialed_Number_Label	nonclustered, unique, primary key located on PRIMARY	LabelID
XPKDialed_Number_Label	clustered, unique, primary key located on PRIMARY	DialedNumberID, LabelID

### Fields in Dialed\_Number\_Label Table:

Field Name:	Description:	Data Type:	Keys and Null Option:
DialedNumberID	Foreign key from the Dialed Number table.	DBINT	PK, FK NOT NULL
LabelID	Foreign key from the Label table.	DBINT	PK, FK NOT NULL

**Dialed\_Number\_Map Table****Dialed\_Number\_Map Table**

This table is part of the [Script category \(page 539\)](#). For database rules, click [here](#). (page 599)

Describes the call qualifier values (dialed number, calling line ID, and caller-entered digits) associated with each call type. Use the Call Type Directory dialog of the Script Editor to add, update, and delete Dialed\_Number\_Map records.

**Related tables**

[Call Type \(page 95\)](#) (via CallTypeID)

[Dialed Number \(page 197\)](#) (via DialedNumberID)

[Region \(page 332\)](#) (via RegionID)

**Table 76: Indexes for Dialed\_Number\_Map Table**

index_name	index_description	index_keys
XIE1Dialed_Number_Map	nonclustered, unique, primary key located on PRIMARY	CallTypeID, RegionID
XPKDialed_Number_Map	clustered, unique, primary key located on PRIMARY	DialedNumberID, Item

**Fields in Dialed\_Number\_Map Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ANIWildCard	ANI value or region name. An ANI value can be a prefix of any length (the leading digits of the telephone number) or a complete telephone number.	varchar(30)	NULL
ANIWildCardType	Indicates what type the ANIWildCard is. To see the list of values, click <a href="#">here (page 559)</a> .	DBSMALLINT	NOT NULL
CallTypeID	Foreign key from Call Type table.	DBINT	FK NOT NULL
CEDWildCard	Value to match against CED: <ul style="list-style-type: none"> <li>• '_A' = All</li> <li>• '_NR' = None Required</li> <li>• '_NE' = None Entered</li> <li>• '_N' = None Required or Entered</li> </ul>	varchar(30)	NULL
Description	Additional information about the mapping of these call qualifiers to this call type.	DESCRIPTION	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
DialedNumberID	Foreign key from the Dialed Number table. DialedNumberID and Item together form an alternate key that is used by the system software to determine the order in which to match the wildcards.	DBINT	PK, FK NOT NULL
Item	The order in which the rows for a dialed number are tested against the call qualifiers.	DBINT	PK NOT NULL
RegionID	If ANIWildCardType is 4 (Region), this is the foreign key of the region from the Region table.	DBINT	FK NULL

## Dial\_Number\_Plan Table

This is in the [Device \(page 529\)](#) category. For database rules, click [here \(page 595\)](#).

Defines special dialing codes that allow enterprise agents to use the system software to place calls to services, other agents, skill groups, enterprise skill groups, supervisors, the local public network, a long-distance network, or to specific trunks. Use Unified ICM Configuration Manager to add, update, and delete Dial\_Number\_Plan records.

### Related tables

[Dialed Number \(page 197\)](#) (via DialedNumberID)

[Routing Client \(page 357\)](#) (via RoutingClientID)

**Table 77: Indexes for Dial\_Number\_Plan Table**

index_name	index_description	index_keys
XAK1Dial_Number_Plan	nonclustered, unique, unique key located on PRIMARY	RoutingClientID, WildcardPattern
XPKDial_Number_Plan	clustered, unique, primary key located on PRIMARY	DialNumberPlanID

### Fields in Dial\_Number\_Plan Table:

Field Name:	Description:	Data Type:	Keys and Null Option:
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
Description	Additional information about the dial number plan.	DESCRIPTION	NULL
DialedNumberID	Identifies the dialed number associated with the dial number plan if PostRoute is Y, the dialed number is used to determine a call type.	DBINT	FK NULL
DialNumberPlanID	A unique identifier for the plan.	DBINT	PK NOT NULL

**Dialer Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
DialNumberPlanType	The type of the plan.	DBINT	NULL
DialString	The dial string if PostRoute setting is N.	VNAME32	NULL
PostRoute	Indicates whether to issue a Post-Routing request if the dialed number supplied by the agent matches the WildcardPattern: <ul style="list-style-type: none"><li>• <b>Y</b> = Yes, issue a Post-Routing request.</li><li>• <b>N</b> = No, do not issue a Post-Routing request.</li></ul>	DBCHAR	NOT NULL
RoutingClientID	Identifies the routing client associated with the dial number plan.	DBSMALLINT	AK-1, FK NOT NULL
WildcardPattern	A string the system software compares to the dialed number or dial string. The string can contain letters, digits, asterisks (*), and number signs (#). It can also include the wildcard characters ? and !. The ? character represents any single letter. The ! character represents any string of characters and can appear only at the end of the pattern.	VNAME32	AK-1 NOT NULL

**Dialer Table**

This table is in the [Blended Agent category \(page 527\)](#). To see database rules for these tables, click [here \(page 593\)](#).

Contains configuration information for each dialer. Use the Blended Agent Configuration option within Unified ICM Configuration Manager to modify Dialer records.

**Note:** If Outbound Option was not selected during setup, this table will contain no data.

**Related tables**

[Peripheral \(page 306\)](#) (via PeripheralID)

[Dialer Detail \(page 206\)](#) (via DialerID)

[Dialer Half Hour \(page 211\)](#) (via DialerID)

[Dialer Port Map \(page 217\)](#) (via DialerID)

[Dialer Port Real Time \(page 218\)](#) (via DialerID)

[Dialer Skill Group Half Hour \(page 223\)](#) (via DialerID)

[Dialer Skill Group Real Time \(page 226\)](#) (via DialerID)

**Table 78: Indexes for Dialer Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XAK1Dialer	nonclustered, unique, unique key located on PRIMARY	DialerName
XAK2Dialer	nonclustered, unique, unique key located on PRIMARY	ComputerName
XPKDialer	clustered, unique, primary key located on PRIMARY	DialerID

**Fields in Dialer Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
DialerType	Indicate what type of protocol that the Dialer uses. The default value is 3.  Other values  1. 1: Not used  2. 2: SCCP  3. 3: SIP	DBINT	NOT NULL
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
ComputerName	The network name of the computer hosting the dialer component.	varchar(64)	AK-2 NOT NULL
CPAAnalysisPeriod	<b>THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.</b> Number of milliseconds that the dialer will spend analyzing. Advanced configuration item.	DBINT	NULL
CPAJitterBufferDelay	<b>THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.</b> Advanced configuration item.	DBINT	NULL
CPAMaxTermToneAnalysis	<b>THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.</b> Maximum milliseconds the dialer will analyze an answering machine voice message looking for a termination tone. Advanced configuration item.	DBINT	NULL
CPAMaxTimeAnalysis	<b>THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.</b> Maximum time allowed for analysis in milliseconds. Advanced configuration item.	DBINT	NULL
CPAMinimumValidSpeechTime	<b>THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.</b> Minimum number of milliseconds of voice required to qualify a call as voice detected. Advanced configuration item.	DBINT	NULL

## Dialer Table

Field Name:	Description:	Data Type:	Keys and Null Option:
CPAMinSilencePeriod	<b>THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.</b> Minimum silence period required to classify a call as voice detected.	DBINT	NULL
CPARecordWaveFile	<b>THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.</b> Indicates whether the debug setting for recording wave files should be enabled for the dialer.	DBINT	AK-2 NOT NULL
ConfigParam	Additional configuration parameters.	varchar(255)	NULL
Deleted	Deleted Flag. Stored as a character:  • <b>Y</b> = Yes  • <b>N</b> = No	DBCHAR	NOT NULL
Description	Additional information about the dialer, such as its location.	DESCRIPTION	NULL
DialerID	A unique identifier for this dialer.	DBINT	PK NOT NULL
DialerName	A name give to a particular dialer during configuration.	VNAME32	AK-1 NOT NULL
DialToneDetectEnabled	Valid options are:  • <b>Y</b> = Attempt dial tone detection before calling a contact. (This will ensure that the ACD has allocated a resource to allow access to the outside world.)  • <b>N</b> = Do not attempt dial tone detection before calling a contact.	DBCHAR	NOT NULL
Enabled	Valid options include:  • <b>Y</b> = The dialer is available for calling contacts.  • <b>N</b> = The dialer is not available for calling contacts.	DBCHAR	NOT NULL
FutureUseInt1	Reserved for future use	DBINT	NULL
FutureUseInt2	Reserved for future use	DBINT	NULL
FutureUseInt3	Reserved for future use	DBINT	NULL
FutureUseInt4	Reserved for future use	DBINT	NULL
FutureUseInt5	Reserved for future use	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
FutureUseVarchar1	Reserved for future use	varchar(64)	NULL
FutureUseVarchar2	Reserved for future use	varchar(64)	NULL
FutureUseVarchar3	Reserved for future use	varchar(64)	NULL
HangupTime	The number of seconds to wait after hanging-up a port on a dialer card before attempting to use the port again. (This option is designed to give the telephone system enough time to sense a hang-up and release the line.)	DBINT	NOT NULL
IPBridgingEnabled	Reserved for future use.  Default = 'N'.	DBCHAR	NOT NULL
LocalAreaCode	The local area code for this dialer. (This value is compared to numbers being dialed to determine whether '1' and the area code should be prefixed to the dialed number.)	varchar(100)	NULL
LongDistancePrefix	Long distance prefix - previously set in the Dialer registry.	varchar(32)	NULL
PeripheralID	The peripheral ID for the ACD.	DBSMALLINT	FK NOT NULL
PortThrottle	<b>THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.</b> Calls per second allowed in any one second for any one dialer. Calls will be distributed evenly over the time interval.	DBFLT8	NULL
PredictiveCorrectionPace	<b>THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.</b> A correction is applied to the Lines per Agent when the voice calls exceeds "PredictiveConnectionPace" calls. The default is 100.	DBINT	NOT NULL
PredictiveGain	<b>THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.</b> The PredictiveGain term controls the overall rate of corrective adjustment for the Lines per Agent. This is the multiplier for the Proportional corrective term in the algorithm. The default is 14.	DBFLT8	NOT NULL
PredictiveHistoricGain	<b>THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.</b> The Historic Gain term calculates an additional correction based on the last 5 measurement sets. As a default, it should be set to half the PredictiveGain. It attempts to correct for systematic undershooting or overshooting over several correction cycles. The default is 7.	DBFLT8	NOT NULL

## Dialer\_Detail Table

Field Name:	Description:	Data Type:	Keys and Null Option:
PredictiveLowAbandonGain	<b>THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.</b> Multiplier for the Proportional term when the measured Abandoned Call Rate is less than the target rate. This compensates for the fact that the upside difference between the target and measured Abandoned Call Rate can be much larger than the downside difference. The default is 1.5.	DBFLT8	NOT NULL
PrefixDigits	Dial a prefix string before the regular phone number. (This would be used, for example, to dial a '9' to reach an external line.)	varchar(32)	NULL
TenDigitDialEnabled	Valid options are: <ul style="list-style-type: none"> <li>• <b>Y</b> = Always dial the area code instead of stripping it out for local numbers.</li> <li>• <b>N</b> = Strip out the area code for local numbers.</li> </ul>	DBCHAR	NOT NULL

## Dialer\_Detail Table

This table is in the [Blended Agent category \(page 527\)](#). To see database rules for these tables, [click here \(page 593\)](#).

This table can become very large. Running custom reporting queries against it while it is on the HDS can degrade performance. To optimize performance, extract the data from the HDS into your own custom database on a separate server (one that is not used for other Unified ICM/Unified CCE components). Use only DBDateTime (date and time of the record that was written to the HDS database) to perform the extraction. The table on the custom database can be indexed according to the custom reporting needs.

**Note:** If Outbound Option was not selected during setup, this table will contain no data.

This historical table tracks data on all outbound attempts, including personal callback attempts and preview calls that are skipped by an agent.

**Note: Unified CCE and G3 Support:** The Dialer\_Detail table is supported for **Unified CCE** only. Dialer Detail records are not supported for the **G3** dialer. Some records might be written to the Dialer\_Detail table for older G3 dialers, but the records should not be used.

## Related Tables for Dialer\_Detail

- [Agent \(page 15\)](#) (via PeripheralNumber)
- [Campaign \(page 155\)](#)(via CampaignID)
- [Dialer \(page 202\)](#) (via DialerID)

- Peripheral (page 306) (via PeripheralID)
- Query Rule (page 325) (via QueryRuleID)
- SkillGroup (via SkillTargetID)
- Campaign\_Target\_Sequence (page 182) (via Phone Index)

**Table 79: Indexes for Dialer\_Detail Table**

index_name	index_description	index_keys
XIE1Dialer_Detail	nonclustered, unique, primary key located on PRIMARY	DbDateTime
XPKDialer_Detail	clustered, unique, primary key located on PRIMARY	RecoveryKey

**Fields in Dialer\_Detail Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
AccountNumber	Customer account number.	VARCHAR	NULL
ActiveThreshold	ActiveThreshold: The actually calculated active threshold during the period for computing the noise floor.	DBINT	YES
AgentPeripheralNumber	PeripheralNumber / AgentID of the Agent that handled the call.	VARCHAR(32)	NULL
CallbackPhone	The phone number at which the customer requested to be called back. This field remains populated with customer-requested callback numbers for all personal callback calls or regular callback calls.	VARCHAR(20)	NULL
CallbackDateTime	Reserved for future use	DBSMALLDATE	NULL
CallDuration	Reserved for future use	DBINT	NULL
CallGUID	An identifier assigned to the call by the SIP Dialer.	VARCHAR(20)	YES, IE4
CallResult	Telephony call result (busy, no answer, etc.) or agent reservation attempt result (Agent Rejected Call, Unable to reserve, etc.). <a href="#">Click here to see the field values that can populate CallResult (page 559).</a>	DBINT	NULL
CallResultDetail	Reserved for future use	DBINT	NULL
CallStatusZone1	Current status of the customer record for Zone1.  <a href="#">Click here to see the values that can populate this field. (page 560)</a>	CHAR(1)	NULL

## Dialer\_Detail Table

Field Name:	Description:	Data Type:	Keys and Null Option:
CallStatusZone2	Current status of the customer record for Zone2.  <a href="#">Click here to see the values that can populate this field. (page 560)</a>	CHAR(1)	NULL
CampaignReportingDateTime	This value indicates interval date time that Router used TCD record to calculate Call Type related historical data.	DBDATETIME	IE2, YES
CampaignID	The campaign that the call was placed for.	DBINT	NULL
CustomerTimeZone	The value is the offset in minutes that the customer is from UTC (formerly GMT). [NOTE: For release 8.0(1), this field is set to NULL for personal callback calls (otherwise it is appropriately populated).]	DBINT	NULL
DateTime	The UTC date and time at the start of the interval when the row was generated.	DBDATETIME	NOT NULL, IE5
DbDateTime	The current date and time stamp when the records are written to the HDS database. The logger database has NULL for this column.	DBDATETIME	NULL, Index
DialerID	DialerID of the dialer where the outbound call was initiated.	DBINT	NULL
DialingListID	Unique identifier from the dialing list (DL_<CampaignID>_<QueryRuleID>) table in the outbound database.  If the attempt is a Personal Callback, then this unique identifier refers to the PersonalCallbackListID field in the Personal_Callback_List table in the outbound database.	DBINT	NULL
DialingMode	Campaign mode the call was called.  <a href="#">Click here to see the field values. (page 561)</a>	DBINT	NULL
FirstName	First name of the contact	VARCHAR(50)	NULL
FutureUseInt1 - FutureUseInt8	Reserved for future use	DBINT	NULL
FutureUseVarChar1-4	Reserved for future use	VARCHAR(64)	NULL
ImportRuleDateTime	The Unified ICM Central Controller date/time when the record was imported.	DBDATETIME	NULL
InternalUse1 - InternalUse11	These fields should not be used.	DBINT	NULL

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
LastName	Last name of the contact	VARCHAR(50)	NULL
MaxActiveGlitchTime	MaxActiveGlitchTime: Maximum amount of time that signal is detected as active glitch (in mS).	DBINT	YES
MaxPostSpeechSilenceGlitchTime	Maximum amount of time that signal is detected as post speech silence glitch (in mS).	DBINT	YES
MaxZCRstdev	MaxZCRstdev: Maximum ZCR standard deviation during the tone determination.	DBINT	YES
NoiseThreshold	NoiseThreshold: The actually calculated noise threshold during the period for computing the noise floor.	DBINT	YES
NumOfActiveGlitches	NumOfActiveGlitches: The total numbers of active glitches before a speech energy is detected, or during the CPAMaxTermToneAnalysis period.	DBINT	YES
NumOfPostSpeechSilenceGlitches	NumOfPostSpeechSilenceGlitches: The total numbers of post speech silence glitches.	DBINT	YES
PeripheralCallKey	An identifier for the call that is provided by Unified CM and is unique to the Unified CM cluster.	DBINT	NULL
PeripheralID	Peripheral ID for the peripheral that the Agent is associated with.	DBINT	NULL
Phone	Phone number that was called.	VARCHAR(20)	NULL
PhoneExt	Phone extension that was imported.	VARCHAR(8)	NULL
PhoneID	The identifier of the phone that was dialed. This can be any of phones 1 through 10. This field should be NULL for both Personal Callback calls and Regular Callback calls.	DBINT	NULL
Phone Index	Phone index in the campaign target sequence. This field should be NULL for both Personal Callback calls and Regular Callback calls.	DBINT	NULL
PickupTime	PickupTime: the time period the first active voice energy is detected after the customer answered the call in milliseconds.	DBINT	YES
PortNumber	Reserved for future use	DBINT	NULL

## Dialer\_Detail Table

Field Name:	Description:	Data Type:	Keys and Null Option:
PreviewTime	The time that the Agent took to Accept, Skip, or Reject a customer call when the skill group is in preview mode and direct preview mode.	D	YES
ProtocolID	<p>Internal reference ID used to identify the component class (PBX/VRU/ACD).</p> <p>The possible values are:</p> <ul style="list-style-type: none"> <li>• NULL for all DialerDetail records prior 8.0 upgrade.</li> <li>• 1 = SCCP</li> <li>• 2 = SIP</li> </ul>	DBINT	NULL
QueryRuleID	The query rule that the call was placed for.	DBINT	NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	Clustered Index, Not Null
ReservationCallDuration	ReservationCallDuration: the call duration (in milliseconds) that agent was reserved. In preview mode this includes the time of the last preview and the time the Dialer spends dialing, performing CPA, and transferring the customer call to the agent.	DBINT	YES
RouterCallKey	A call key counter created and set by the system software. This value forms the unique portion of the 64-bit key for the call. The system software resets this counter at midnight.	DBINT	YES, IE3
RouterCallKeyDay	<p>The day that the call was taken and the Dialer_Detail record was created. This field contains a value only for calls that were translation-routed or post-routed to or from an ACD.</p> <p>Together with RouterCallKey, the Day value forms a unique 64-bit key for the call. The Dialer might not have this information for all calls, but if it does, it allows you to track all states of a call between the Route_Call_Detail and the Dialer_Detail tables by using the cradle-to-grave call tracking facility. (For calls that span a day, the day may not correspond to the day specified in the DateTime field.)</p>	DBINT	YES, IE3
SilencePeriod	SilencePeriod: Amount of time that the signal is silent after speech detection to declare a live speech (in mS).	DBINT	YES
SkillGroupSkillTargetID	Skill Group ID of the agent who handled the call.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
TermToneDetectionTime	TermToneDetectionTime: Amount of time that the answering machine terminating tone is detected after declaring answering machine detection (in mS).	DBINT	YES
TimeZone	The value is the offset in minutes that the Campaign Manager is from Central Controller time.	DBINT	NULL
ValidSpeechTime	ValidSpeechTime: Amount of time that energy is active for declaring speech energy.	DBINT	YES
WrapupData	Wrap up data that was entered by the outbound agent.	Varchar(40)	YES
ZoneIndex	The zone that was active at the time that the attempt was made. This can be 0 or 1. This field should be NULL for both Personal Callback calls and Regular Callback calls.	DBSMALLINT	NULL

## Dialer\_Half\_Hour Table

This table is in the [Blended Agent category \(page 527\)](#). To see database rules for these tables, click [here \(page 593\)](#).

Central database only.

Contains statistics produced by Blended Agent when a dialing list is executed. Each row provides half-hour statistics for a particular dialer.

### Related table

[Dialer \(page 202\)](#) (via DialerID)

**Table 80: Indexes for Dialer\_Half\_Hour Table**

index_name	index_description	index_keys
XAK1Dialer_Half_Hour	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XIE1Dialer_Half_Hour	nonclustered, unique, primary key located on PRIMARY	DbDateTime
XPKDialer_Half_Hour	clustered, unique, primary key located on PRIMARY	DateTime, DialerID, TimeZone

**Note:** The Dialer\_Interval Table will be populated with 30/15 minute reporting data, depending on the Historical Reporting Interval setting for the PG. The Dialer\_Half\_Hour Table will not be populated with this data.

**Dialer\_Half\_Hour Table****Fields in Dialer\_Half\_Hour Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
AbandonDetectToHalf	The number of calls made during the half hour interval that were abandoned.	DBINT	NULL
AbandonToIVRToHalf	The number of calls in a half-hour period that had to be abandoned. However, instead of hanging-up on a customer, the call was transferred to an IVR which played a message to the customer.	DBINT	NULL
AgentClosedDetectToHalf	The number of preview/callback calls in a half-hour period that were rejected by the agent (these customers will not be dialed).	DBINT	NULL
AgentRejectedDetectToHalf	The number of preview/callback calls in a half-hour period that were rejected by the agent.	DBINT	NULL
AllPortsBusyCountToHalf	Reserved for future use.	DBINT	NULL
AnsweringMachineDetectToHalf	The number of calls made during the half hour interval in which an answering machines was detected.	DBINT	NULL
BusyDetectToHalf	The number of calls in the half-hour period that detected a busy signal.	DBINT	NULL
CallbackCountToHalf	The total number of records scheduled for a callback.	DBINT	NULL
CancelledDetectToHalf	The number of calls in a half-hour period that were dropped while ringing the customer's telephone.	DBINT	NULL
ContactsDialedToHalf	The number of contacts dialed during the half hour interval.	DBINT	NULL
CustomerAbandonDetectToHalf	The number of calls in a half-hour period that were abandoned by the customer after they picked up the telephone.	DBINT	NULL
CustomerNotHomeCountToHalf	The number of calls that were answered by the wrong party; the customer was not home.	DBINT	NULL
DateTime	The Central Controller date and time at the start of the half-hour interval.	DBSMALLDATE	PK NOT NULL
DbDateTime	The current date and time stamp when the records are written to the HDS database. The logger database has NULL for this column.	DBDATETIME	IE-1 NULL
DialerID	The dialer to which these statistics refer.	DBINT	PK, FK NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
DialingTimeToHalf	The total time all ports configured on the dialer spent dialing contacts during this half hour interval. This includes time spent in transfer and call progress detection.	DBINT	NULL
FaxDetectToHalf	The number of calls in a half-hour period that detected a FAX machine.	DBINT	NULL
FutureUseInt1	This field is temporarily being used to report the number of reservation calls that this Dialer attempted during this half hour.	DBINT	NULL
FutureUseInt2	This field is temporarily being used to record the amount of time all dialer ports were busy during this half hour. The time is recorded in seconds.	DBINT	NULL
FutureUseInt3	Reserved for future use	DBINT	NULL
FutureUseInt4	Reserved for future use	DBINT	NULL
FutureUseInt5	Reserved for future use	DBINT	NULL
IdlePortTimeToHalf	The total time all ports configured on the dialer spent idle during a 30 minute interval.	DBINT	NULL
LowNoiseVolumeToHalf	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Number of calls where the voice energy was not significant enough to count.	DBINT	NULL
NetworkAnsMachineDetectToHalf	The number of calls in a half-hour period that detected a network answering machine.	DBINT	NULL
NoAnswerDetectToHalf	The number of calls made during the half hour interval which were not answered.	DBINT	NULL
NoDialToneDetectToHalf	The number of calls in a half-hour period not receiving dial tone.	DBINT	NULL
NoRingBackDetectToHalf	The number of calls in the current half hour period that did not receive a ring-back tone, that were disconnected by the carrier or the network while ringing, or that were flagged with a data error or a no-value call.	DBINT	NULL
PersonalCallbackCountToHalf	The number of calls where the customer requested a personal callback.	DBINT	NULL

**Dialer\_Interval Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
RecoveryKey	A value used internally by the system software to track virtual time.	DBFLT8	AK-1 NOT NULL
ReservePortTimeToHalf	The total time all ports configured on the dialer spent reserving agents during the 30 minute interval. This may also include time in queue if the reservation script is using a queue node.	DBINT	NULL
SITToneDetectToHalf	The number of calls made during the half-hour interval in which SIT tones were detected.	DBINT	NULL
TimeZone	The time zone for the date and time. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK NOT NULL
VoiceDetectToHalf	The number of calls made during the half-hour interval in which a voice was detected.	DBINT	NULL
WrongNumberCountToHalf	The number of calls where the customer phone number was incorrect (the customer did not live there).	DBINT	NULL

**Dialer\_Interval Table**

This section describes the Dialer Interval Table

**Fields in Dialer\_Interval Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
AbandonDetect	The number of calls made during the reporting interval that were abandoned.	DBINT	YES
AbandonToIVR	The number of calls in a reporting interval period that had to be abandoned. However, instead of hanging-up on a customer, the call was transferred to an IVR which played a message to the customer.	DBINT	YES
AgentClosedDetect	The number of preview/callback calls in a reporting interval period that were rejected by the agent (these customers will not be dialed).	DBINT	YES
AgentRejectedDetect	The number of preview/callback calls in a reporting interval period that were rejected by the agent.	DBINT	YES
AllPortsBusyCount	Reserved for future use.	DBINT	YES
AnsweringMachineDetect	The number of calls made during the reporting interval in which an answering machines was detected.	DBINT	YES

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
BusyDetect	The number of calls in the reporting interval period that detected a busy signal.	DBINT	YES
CallbackCount	The total number of records scheduled for a callback.	DBINT	YES
CancelledDetect	The number of calls in a reporting interval period that were dropped while ringing the customer's telephone.	DBINT	YES
ContactsDialed	The number of contacts dialed during the reporting interval.	DBINT	YES
CustomerAbandonDetect	The number of calls in a reporting interval period that were abandoned by the customer after they picked up the telephone.	DBINT	YES
CustomerNotHomeCount	The number of calls that were answered by the wrong party; the customer was not home.	DBINT	YES
DateTime	The Central Controller date and time at the start of the reporting interval.	DBSMALLDATE	PK1 ,NOT NULL
DbDateTime	The current date and time stamp when the records are written to the HDS database. The logger database has NULL for this column.	DBDATETIME	IE1 , YES
DialerID	The dialer to which these statistics refer.	DBINT	PK2 ,NOT NULL
DialingTime	The total time all ports configured on the dialer spent dialing contacts during this reporting interval. This includes time spent in transfer and call progress detection.	DBINT	YES
FaxDetect	The number of calls in a reporting interval period that detected a FAX machine.	DBINT	YES
FutureUseInt1	This field is temporarily being used to report the number of reservation calls that this Dialer attempted during this reporting.	DBINT	YES
FutureUseInt2	This field is temporarily being used to record the amount of time all dialer ports were busy during this reporting. The time is recorded in seconds.	DBINT	YES
FutureUseInt3	Reserved for future use.	DBINT	YES
FutureUseInt4	Reserved for future use.	DBINT	YES
FutureUseInt5	Reserved for future use.	DBINT	YES

**Dialer\_Interval Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
IdlePortTime	The total time all ports configured on the dialer spent idle during a 30 minute interval.	DBINT	YES
LowNoiseVolume	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Number of calls where the voice energy was not significant enough to count.	DBINT	YES
NetworkAnsMachineDetect	The number of calls in a reporting interval period that detected a network answering machine.	DBINT	YES
NoAnswerDetect	The number of calls made during the reporting interval which were not answered.	DBINT	YES
NoDialToneDetect	The number of calls in a reporting interval period not receiving dial tone.	DBINT	YES
NoRingBackDetect	The number of calls in the current reporting interval period that did not receive a ring-back tone, that were disconnected by the carrier or the network while ringing, or that were flagged with a data error or a no-value call.	DBINT	YES
PersonalCallbackCount	The number of calls where the customer requested a personal callback.	DBINT	YES
RecoveryKey	A value used internally by the system software to track virtual time.	DBFLT8	AK1 , NOT NULL
ReportingHalfHour	The value indicates Half Hour boundary interval (0 - 47). Two 15 minute interval records will have a unique half hour boundary value.	DBINT	NULL
ReportingInterval	During the upgrade from 7.x to 8.0, this column value will be NULL and it is assumed to be 30 minute interval.	DBINT	NULL
ReservePortTime	The total time all ports configured on the dialer spent reserving agents during the 30 minute interval. This may also include time in queue if the reservation script is using a queue node.	DBINT	YES
SITToneDetect	The number of calls made during the reporting interval in which SIT tones were detected.	DBINT	YES
TimeZone	The time zone for the date and time. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK3 , NOT NULL
VoiceDetect	The number of calls made during the reporting interval in which a voice was detected.	DBINT	YES

Field Name:	Description:	Data Type:	Keys and Null Option:
WrongNumberCount	The number of calls where the customer phone number was incorrect (the customer did not live there).	DBINT	YES

## Dialer\_Port\_Map Table

This table is in the [Blended Agent category \(page 527\)](#). To see database rules for these tables, click [here \(page 593\)](#).

**Note:** If Outbound Option was not selected during setup, this table will contain no data.

Maps port numbers on the dialer to the ports on the ACD, and identifies the ACD stations and their mapping to dialer ports. Use the Blended Agent Configuration option within Unified ICM Configuration Manager to modify Dialer\_Port\_Map records. The Primary Key (**PK**) is **nonclustered**.

### Related table

[Dialer \(page 202\)](#) (via DialerID)

**Table 81: Indexes for Dialer\_Port\_Map Table**

index_name	index_description	index_keys
XPKPort_Map	clustered, unique, primary key located on PRIMARY	DialerID, PortNumber

### Fields in Dialer\_Port\_Map Table:

Field Name:	Description:	Data Type:	Keys and Null Option:
DialerID	The dialer to which these statistics refer.	DBINT	PK, FK NOT NULL
FutureUseInt1	Reserved for future use	DBINT	NULL
FutureUseInt2	Reserved for future use	DBINT	NULL
FutureUseInt3	Reserved for future use	DBINT	NULL
FutureUseInt4	Reserved for future use	DBINT	NULL
FutureUseInt5	Reserved for future use	DBINT	NULL
FutureUseVarchar1	Reserved for future use	varchar(64)	NULL
FutureUseVarchar2	Reserved for future use	varchar(64)	NULL
FutureUseVarchar3	Reserved for future use	varchar(64)	NULL

**Dialer\_Port\_Real\_Time Table**

Field Name:	Description:	Data Type:	Keys and Null Option:
PortNumber	Identifies the particular dialer port on this dialer that matches the ACD port.	DBINT	PK NOT NULL
Station	Identifies the ACD station and its mapping to a dialer port.	varchar(32)	NULL

**Dialer\_Port\_Real\_Time Table**

This table is in the [Blended Agent category \(page 527\)](#). To see database rules for these tables, click [here \(page 593\)](#).

Local database only.

Contains the current status of every telephone line for every dialer in Blended Agent. The Primary Key (**PK**) is **nonclustered**.

#### Related tables

[Dialer \(page 202\)](#) (via DialerID)

[Campaign \(page 155\)](#) (via CampaignID)

[Query Rule \(page 325\)](#) (via QueryRuleID)

**Table 82: Indexes for Dialer\_Port\_Real\_Time Table**

index_name	index_description	index_keys
XPKDialer_Port_Real_Time	clustered, unique, primary key located on PRIMARY	DialerID, PortNumber

#### Fields in Dialer\_Port\_Real\_Time Table:

Field Name:	Description:	Data Type:	Keys and Null Option:
AccountNumber	If the port is dialing, this value is the account number (if available) being dialed.	VNAME32	NULL
CampaignID	If the port is dialing, this value indicates the campaign from which the contact being dialed was retrieved.	DBINT	FK NULL
DateTime	The Central Controller date and time at which each row was saved.	DBDATETIME	NOT NULL
DialerID	The dialer to which these statistics refer.	DBINT	PK, FK NOT NULL
FutureUseInt1	Reserved for future use	DBINT	NULL
FutureUseInt2	Reserved for future use	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
FutureUseInt3	Reserved for future use	DBINT	NULL
FutureUseInt4	Reserved for future use	DBINT	NULL
FutureUseInt5	Reserved for future use	DBINT	NULL
PhoneNumber	If the port is dialing, this value is the phone number being dialed.	varchar(32)	NULL
PortNumber	The dialer port (line) number within the current dialer.	DBINT	PK NOT NULL
PortStatus	The current line status (for example, dialing, on-hook, off-hook). To see the list of values, click <a href="#">here (page 568)</a> .	DBINT	NOT NULL
QueryRuleID	If the port is dialing, this value identifies the query rule from which the contact being dialed was retrieved.	DBINT	FK NULL

## Dialer\_Real\_Time Table

This table is in the [Blended Agent category \(page 527\)](#). To see database rules for these tables, click [here \(page 593\)](#).

Local database only.

Contains statistics produced by Blended Agent when a dialing list is executed. Each row provides real-time statistics for a particular dialer.

### Related table

[Dialer \(page 202\)](#) (via DialerID)

**Table 83: Indexes for Dialer\_Real\_Time Table**

index_name	index_description	index_keys
XPKDialer_Log_Real_Time	clustered, unique, primary key located on PRIMARY	DialerID

### Fields in Dialer\_Real\_Time Table:

Field Name:	Description:	Data Type:	Keys and Null Option:
AbandonDetectToday	The number of calls abandoned by customers since midnight.	DBINT	NULL
AbandonToIVRHalf	The number of calls in the current half hour period that had to be abandoned.	DBINT	NULL

## Dialer\_Real\_Time Table

Field Name:	Description:	Data Type:	Keys and Null Option:
	However, there was not a hang-up. Instead, the call was transferred to an IVR that played a message to the customer.		
AgentClosedDetectHalf	Number or preview/call-back calls that were rejected by the agent in the current half hour period. (These customers will not be dialed.)	DBINT	NULL
AgentRejectedDetectHalf	Number or preview/call-back calls that were rejected by the agent in the current half hour period.	DBINT	NULL
AllocatedPorts	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of ports configured now.	DBINT	NULL
AllPortsBusyToday	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of times all ports were busy today.	DBINT	NULL
AllPortsBusyToHalf	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of times all ports were busy during the last 30 minute interval.	DBINT	NULL
AnsweringMachineDetectToday	The number of answering machines detected since midnight.	DBINT	NULL
BusyDetectToday	The number of busy signals detected since midnight.	DBINT	NULL
CallbackCount	The total number of records scheduled for a call-back.	DBINT	NULL
CancelledDetectHalf	The number of calls in the current half hour period that were dropped while ringing the customer phone.	DBINT	NULL
ContactsDialedToday	The number of attempted calls since midnight.	DBINT	NULL
ContactsDialedToHalf	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of attempted calls within a half-hour period.	DBINT	NULL
CTI_Status	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Status of the CTI connection.	Char(1)	NULL
CustomerAbandonDetectHalf	In the current half-hour period, the number of calls that were abandoned by the customer after they picked up the phone	DBINT	NULL
CustomerNotHomeCount	Number of calls in a half hour period that were abandoned by the customer after they picked up the phone.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
CustomerPortTimeToday	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The total time all ports configured on the dialer spent dialing contacts today. This includes time spent in transfer and call progress detection.	DBINT	NULL
CustomerPortTimeToHalf	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The total time all ports configured on the dialer spent dialing contacts during the last 30 minutes. This includes time spent in transfer and call progress detection.	DBINT	NULL
DateTime	The date and time this record was saved.	DBDATETIME	NOT NULL
DialerID	The dialer to which these statistics refer.	DBINT	PK, FK NOT NULL
DialerStatus	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Status of the dialer as observed and reported by the Campaign Manager.	DBINT	NULL
FaxDetectHalf	The number of calls in the current half hour period that detected a fax machine.	DBINT	NULL
FutureUseInt1	Reserved for future use	DBINT	NULL
FutureUseInt2	Reserved for future use	DBINT	NULL
FutureUseInt3	Reserved for future use	DBINT	NULL
FutureUseInt4	Reserved for future use	DBINT	NULL
FutureUseInt5	Reserved for future use	DBINT	NULL
IdlePortTimeToday	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The total time all ports configured on the dialer spent idle today.	DBINT	NULL
IdlePortTimeToHalf	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The total time all ports configured on this dialer spend idle during the last half hour.	DBINT	NULL
MRStatus	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> Status of the Media Routing connection.	Char(1)	NULL

## Dialer\_Real\_Time Table

Field Name:	Description:	Data Type:	Keys and Null Option:
NetworkAnsMachineDetectHalf	The number of calls in the current half hour period that detected a network answering machine.	DBINT	NULL
NoAnswerDetectToday	The number of call attempts that were not answered since midnight.	DBINT	NULL
NoDialToneDetectHalf	The number of calls in the current half hour period that did not receive dial tone.	DBINT	NULL
NoRingBackDetectHalf	The number of calls in the current half hour period that did not receive a ring-back tone, that were disconnected by the carrier or the network while ringing, or that were flagged with a data error or a no-value call.	DBINT	NULL
PersonalCallbackCount	The number of calls where the customer requested a personal call-back.	DBINT	NULL
RegisteredPorts	The number of ports that are in a working state, meaning that they are fully registered.	DBINT	NULL
ReservePortTimeToday	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The total time all ports configured on the dialer spent reserving agents today.	DBINT	NULL
ReservePortTimeToHalf	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The total time all ports configured on this dialer spent reserving agents during the last half hour.	DBINT	NULL
SITToneDetectToday	SIT tones detected since midnight.	DBINT	NULL
SITToneDetectToHalf	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The number of calls in a half-hour period that detected a network SIT tone.	DBINT	NULL
VoiceDetectToday	The number of calls answered by people since midnight.	DBINT	NULL
VoiceDetectToHalf	<b>(THIS FIELD IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.)</b> The total number of calls ending in an agent answering the call during the last half-hour.	DBINT	NULL
WrongNumberCount	The number of calls where the phone number was incorrect (the customer did not live there).	DBINT	NULL

## Dialer\_Skill\_Group\_Half\_Hour Table

**Note: THIS TABLE IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.**

This table is in the [Blended Agent category \(page 527\)](#). To see database rules for these tables, click [here \(page 593\)](#).

Central database only.

Provides historical reporting for campaigns running on a dialer. Each skill group maps to a campaign. This is similar to the dump alloc provided in the dialer traces.

### Related Tables

[Dialer \(page 202\)](#) (via DialerID)

[Skill Group \(page 432\)](#) (via SkillGroupSkillTargetID)

**Table 84: Indexes for Dialer\_Skill\_Group\_Half\_Hour Table**

index_name	index_description	index_keys
XAK1Dialer_Skill_Group_Half_Hour	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XIE1Dialer_Skill_Group_Half_Hour	nonclustered, unique, primary key located on PRIMARY	DbDateTime
XPKDialer_Skill_Group_Half_Hour	clustered, unique primary key located on PRIMARY	DialerID, DateTime, SkillGroupSkillTargetID, TimeZone

**Fields in Dialer\_Skill\_Group\_Half\_Hour Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
AbandonDetectToHalf	The number of calls in a half-hour period where the dialer abandoned a customer call.	DBINT	NULL
AbandonToIVRToHalf	The number of calls in a half-hour period that had to be abandoned. However, instead of hanging-up on a customer, the call was transferred to an IVR which played a message to the customer.	DBINT	NULL
AgentClosedDetectToHalf	The number of preview/callback calls in a half-hour period that were closed by the agent (these customers will not be dialed).	DBINT	NULL
AgentPercentToHalf	Configured by the script editor, this is the percent of agents within the skill group that the dialer is allowed to reserve.	DBFLT4	NULL

**Dialer\_Skill\_Group\_Half\_Hour Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
AgentRejectedDetectToHalf	The number of preview/callback calls in a half-hour period that were rejected by the agent.	DBINT	NULL
AnsweringMachineDetectToHalf	The number of calls in a half-hour period that detected an answering machine.	DBINT	NULL
BusyDetectToHalf	The number of calls in a half-hour period that detected a busy signal.	DBINT	NULL
CallbackCountToHalf	The total number of records scheduled for a callback.	DBINT	NULL
CancelledDetectToHalf	The number of calls in a half-hour period where the dialer cancelled a ringing customer call.	DBINT	NULL
ContactsAttemptedToHalf	The number of attempted calls within a half-hour period.	DBINT	NULL
CustomerAbandonDetectToHalf	The number of calls in a half-hour period that were abandoned by the customer after they picked up the telephone.	DBINT	NULL
CustomerNotHomeCountToHalf	The number of calls that were answered by the wrong party; the customer was not home.	DBINT	NULL
DateTime	The central controller date and time at the start of the interval.	DBSMALLDATE	PK NOT NULL
DbDateTime	The current date and time stamp when the records are written to the database.	DBDATETIME	IE1-Indexed NULL
DialerID	The unique identifier of the Dialer.	DBINT	PK, FK NOT NULL
DialerSkillGroupEnabled	Indicates whether all of the necessary factors are in place to be dialing right now. (Y or N) This includes, but is not limited to, campaign activation and having available agents.	Char(1)	NULL
DialerSkillGroupMode	Mode of the campaign for this dialer as set in script editor for this skill group. (N=None, P=Preview, R=Predictive/Progressive, A=Callback)	Char(1)	NULL
DialerSkillGroupType	Type or direction of the campaign as set in the script editor for this skill group (N=None, I=Inbound, O=Outbound, B=Blended)	Char(1)	NULL
FaxDetectToHalf	The number of calls in a half-hour period that detected a FAX machine.	DBINT	NULL
FutureUseInt1	Reserved for future use.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
FutureUseInt2	Reserved for future use.	DBINT	NULL
FutureUseInt3	Reserved for future use.	DBINT	NULL
FutureUseInt4	Reserved for future use.	DBINT	NULL
FutureUseInt5	Reserved for future use.	DBINT	NULL
LinesPerAgentToHalf	Number of lines being dialed per agent right now.	DBFLT4	NULL
LowNoiseVolumeToHalf	Number of calls where the voice energy was not significant enough to count.	DBINT	NULL
NetworkAnsMachineDetectToHalf	The number of calls in a half-hour period that detected a network answering machine. A network answering machine can be a network based IVR, or a network based answering service.	DBINT	NULL
NoAnswerDetectToHalf	The number of calls in a half-hour period that were not answered.	DBINT	NULL
NoDialToneDetectToHalf	The number of calls in a half-hour period that did not receive a dial tone.	DBINT	NULL
NoRingBackDetectToHalf	The number of calls in a half-hour period that did not receive a ring back tone.	DBINT	NULL
PersonalCallbackCountToHalf	The number of calls where the customer requested a personal callback.	DBINT	NULL
RecoveryKey	The unique record identifier.	DBFLT8	AK1 NOT NULL
SITToneDetectToHalf	The number of calls in a half-hour period that detected a network SIT tone.	DBINT	NULL
SkillGroupSkillTargetID	The unique identifier of the skill group.	DBINT	PK, FK NOT NULL
TimeZone	The Time Zone for the date and time. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK NOT NULL
VoiceDetectToHalf	The total number of calls ending in an agent answering the call during the last half-hour.  <b>Outbound Option:</b> The number of calls in a half-hour period that detected a live person.	DBINT	NULL

**Dialer\_Skill\_Group\_Real\_Time Table**

Field Name:	Description:	Data Type:	Keys and Null Option:
WrongNumberCountToHalf	The number of calls where the customer's phone number was incorrect (the customer did not live there).	DBINT	NULL

**Dialer\_Skill\_Group\_Real\_Time Table**

**Note: THIS TABLE IS NOT CURRENTLY BEING USED. IT IS RESERVED FOR FUTURE USE.**

This table is in the [Blended Agent category \(page 527\)](#). To see database rules for these tables, click [here \(page 593\)](#).

Local database only.

Real time reporting for how campaigns are running on a dialer. Each skill group maps to a campaign. This is similar to the dump alloc provided in the dialer traces.

### Related Tables

[Dialer \(page 202\)](#) (via DialerID)

[Campaign \(page 155\)](#) (via CampaignID)

Skill Group (via SkillGroupSkillTargetID)

**Table 85: Indexes for Dialer\_Skill\_Group\_Real\_Time Table**

index_name	index_description	index_keys
XPKDialer_Skill_Group_Real_Time	clustered, unique primary key located on PRIMARY	DialerID, SkillGroupSkillTargetID

### Fields in Dialer\_Skill\_Group\_Real\_Time Table:

Field Name:	Description:	Data Type:	Keys and Null Option:
AgentPercent	Configured by the script editor, this is the percent of agents within this skill group that the dialer is allowed to reserve.	DBFLT4	NULL
AnsweredCountToday	Count of calls that were answered today. This includes calls where agent marked the calls as a Wrong Number or Not Home.	DBINT	NULL
AnsweredCountTo5	Count of calls that were answered to five. This includes calls where agent marked the calls as a Wrong Number or Not Home.	DBINT	NULL
AnsweredCountToHalf	Count of calls that were answered to half. This includes calls where agent marked the calls as a Wrong Number or Not Home.	DBINT	NULL
CallsAbandonedToday	Calls abandoned during this time period.	DBINT	NULL

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
CallsAbandonedTo5	Calls abandoned during this time period.	DBINT	NULL
CallsAbandonedToHalf	Calls abandoned during this time period.	DBINT	NULL
CallsAttemptedToday	Calls attempted during this time period.	DBINT	NULL
CallsAttemptedTo5	Calls attempted during this time period.	DBINT	NULL
CallsAttemptedToHalf	Calls attempted during this time period.	DBINT	NULL
CallsCancelledToday	Calls cancelled during this time period.	DBINT	NULL
CallsCancelledTo5	Calls cancelled during this time period.	DBINT	NULL
CallsCancelledToHalf	Calls cancelled during this time period.	DBINT	NULL
CampaignID	The unique identifier for the Campaign.	DBINT	FK NULL
DateTime	The central controller date and time at the start of the interval.	DBDATETIME	NOT NULL
DialerID	The unique identifier of the Dialer.	DBINT	PK, FK NOT NULL
DialerSkillGroupEnabled	Indicates whether all of the necessary factors are in place to be dialing right now (Y or N). This includes, but is not limited to, campaign activation and having available agents.	Char(1)	NULL
DialerSkillGroupMode	Mode of the campaign for this dialer as set in script editor for this skill group. (N=None, P=Preview, R=Predictive/Progressive, A=Callback)	Char(1)	NULL
DialerSkillGroupType	Type or direction of the campaign as set in the script editor for this skill group (N=None, I=Inbound, O=Outbound, B=Blended)	Char(1)	NULL
ErrorCountToday	Errors detected during this time period including no ringback, reorder, no dialer tone.	DBINT	NULL
ErrorCountTo5	Errors detected during this time period including no ringback, reorder, no dialer tone.	DBINT	NULL
ErrorCountToHalf	Errors detected during this time period including no ringback, reorder, no dialer tone.	DBINT	NULL
FutureUseInt1	Reserved for future use.	DBINT	NULL

**Enterprise\_Route Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
FutureUseInt2	Reserved for future use.	DBINT	NULL
FutureUseInt3	Reserved for future use.	DBINT	NULL
FutureUseInt4	Reserved for future use.	DBINT	NULL
FutureUseInt5	Reserved for future use.	DBINT	NULL
IdleRecords	Number of available records in the cache to dial right now.	DBINT	NULL
LinesPerAgent	Number of lines being dialed per agent right now.	DBFLT4	NULL
SkillGroupSkillTargetID	The unique identifier of the Skill Group.	DBINT	PK, FK NOT NULL
UsedRecords	Number of records being used for dialing right now.	DBINT	NULL
VoiceCountToday	Customers contacted during this time period.	DBINT	NULL
VoiceCountTo5	Customers contacted during this time period.	DBINT	NULL
VoiceCountToHalf	Customers contacted during this time period.	DBINT	NULL

**Enterprise\_Route Table**

This table is one of the [Enterprise tables \(page 532\)](#). For database rules click [here \(page 596\)](#).

Each row defines an enterprise-wide route composed of routes from different peripherals. Use Unified ICM Configuration Manager to add, update, and delete Enterprise\_Route records. The Primary Key (**PK**) is **nonclustered**. The AlternateKey (**AK**) is **clustered**.

### Related Tables

[Business Entity \(page 94\)](#) (via EntityID)

[Enterprise Route Member \(page 229\)](#) (via EnterpriseRouteID)

**Table 86: Indexes for Enterprise\_Route Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XAK1Enterprise_Route	clustered, unique, unique key located on PRIMARY	EnterpriseName, EntityID
XPKEnterprise_Route	nonclustered, unique, primary key located on PRIMARY	EnterpriseRouteID

**Fields in Enterprise\_Route Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
Description	Additional information about the enterprise route.	DESCRIPTION	NULL
EnterpriseName	An enterprise name for this enterprise route. This name must be unique among all enterprise routes within the business entity.	VNAME32	AK-1 NOT NULL
EnterpriseRouteID	Unique identifier for this enterprise route.	DBINT	PK NOT NULL
EntityID	If partitioning is enabled, indicates the business entity to which this enterprise route belongs.	DBINT	AK-1, FK NOT NULL

**Enterprise\_Route\_Member Table**

This table is one of the [Enterprise tables \(page 532\)](#). For database rules click [here \(page 596\)](#).

It maps routes to enterprise routes. Use Unified ICM Configuration Manager to add, update, and delete Enterprise\_Route\_Member records.

**Related Table**

[Enterprise Route \(page 228\)](#) (via EnterpriseRouteID)

**Table 87: Indexes for Enterprise\_Route\_Member Table**

index_name	index_description	index_keys
XPKEnterprise_Route_Member	clustered, unique, primary key located on PRIMARY	EnterpriseRouteID, RouteID

**Fields in Enterprise\_Route\_Member Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
EnterpriseRouteID	Foreign key from the Enterprise_Route table.	DBINT	PK, FK NOT NULL
RouteID	Foreign key from the Route table.	DBINT	PK, FK NOT NULL

**Enterprise\_Service Table**

This table is one of the [Enterprise tables \(page 532\)](#). For database rules click [here \(page 596\)](#).

Each row defines an enterprise-wide service composed of services from different peripherals. Use Unified ICM Configuration Manager to add, update, and delete Enterprise\_Service records.

**Related tables**

**Enterprise\_Service Member Table**

[Business Entity \(page 94\)](#) (via EntityID)

[Enterprise Service Member \(page 230\)](#) (via EnterpriseServiceID)

**Table 88: Indexes for Enterprise\_Service Table**

index_name	index_description	index_keys
XAK1Enterprise_Service	nonclustered, unique, unique key located on PRIMARY	EntityID, EnterpriseName
XPKEEnterprise_Service	clustered, unique, primary key located on PRIMARY	EnterpriseServiceID

**Fields in Enterprise\_Service Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
Description	Additional information about the enterprise service.	DESCRIPTION	NULL
EnterpriseName	An enterprise name for this enterprise service. This name must be unique among all enterprise services within the business entity.	VNAME32	AK-1 NOT NULL
EnterpriseServiceID	Unique identifier for this enterprise service.	DBINT	PK NOT NULL
EntityID	If partitioning is enabled, indicates the business entity to which the enterprise service belongs.	DBINT	AK-1, FK NOT NULL

**Enterprise\_Service\_Member Table**

This table is one of the [Enterprise tables \(page 532\)](#). For database rules click [here \(page 596\)](#).

It maps services to enterprise services. Use Unified ICM Configuration Manager to add or delete Enterprise\_Service\_Member records.

**Related tables**

[Enterprise Service \(page 229\)](#) (via EnterpriseServiceID)

[Service \(page 386\)](#) (via SkillTargetID)

**Table 89: Indexes for Enterprise\_Service\_Member Table**

index_name	index_description	index_keys
XIE1Enterprise_Service_Member	nonclustered unique, primary key located on PRIMARY	SkillTargetID
XPKEEnterprise_Service_Members	clustered, unique, primary key located on PRIMARY	EnterpriseServiceID, SkillTargetID

**Fields in Enterprise\_Service\_Member Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
EnterpriseServiceID	Foreign key from the Enterprise Service table.	DBINT	PK, FK NOT NULL
SkillTargetID	Foreign Key from the Service table.	DBINT	PK, FK, IE-1 NOT NULL

**Enterprise\_Skill\_Group Table**

This table is one of the [Enterprise tables \(page 532\)](#). For database rules click [here \(page 596\)](#).

Each row defines an enterprise-wide skill group composed of skill groups from different peripherals. Use Unified ICM Configuration Manager to add, update, and delete Enterprise\_Skill\_Group records.

**Related Tables**

[Business Entity \(page 94\)](#) (via EntityID)

[Enterprise Skill Group Member \(page 232\)](#) (via EnterpriseSkillGroupID)

**Table 90: Indexes for Enterprise\_Skill\_Group Table**

index_name	index_description	index_keys
XAK1Enterprise_Skill_Group	nonclustered, unique, unique key located on PRIMARY	EntityID, EnterpriseName
XPKEnterprise_Skill_Group	clustered, unique, primary key located on PRIMARY	EnterpriseSkillGroupID

**Fields in Enterprise\_Skill\_Group Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
Description	Additional information about the enterprise skill group.	DESCRIPTION	NULL
EnterpriseName	An enterprise name for this enterprise skill group. This name must be unique among all enterprise skill groups within the business entity.	VNAME32	AK-1 NOT NULL
EnterpriseSkillGroupID	Unique identifier for this enterprise skill group.	DBINT	PK NOT NULL
EntityID	If partitioning is enabled, indicates the business entity to which the enterprise skill group belongs.	DBINT	AK-1, FK NOT NULL

**Enterprise\_Skill\_Group\_Member Table****Enterprise\_Skill\_Group\_Member Table**

This table is one of the [Enterprise tables \(page 532\)](#). For database rules click [here \(page 596\)](#).

It maps skill groups to enterprise skill groups. Use Unified ICM Configuration Manager to add or delete Enterprise\_Skill\_Group\_Member records

**Related tables**

[Enterprise Skill Group \(page 231\)](#) (via EnterpriseSkillGroupID)

[Skill Group \(page 432\)](#) (via SkillTargetID)

**Table 91: Indexes for Enterprise\_Skill\_Group\_Member Table**

index_name	index_description	index_keys
XIE1Enterprise_Skill_Group_Mem	nonclustered unique, primary key located on PRIMARY	SkillTargetID
XPKEEnterprise_Skill_Members	clustered, unique, primary key located on PRIMARY	EnterpriseSkillGroupID, SkillTargetID

**Fields in Enterprise\_Skill\_Group\_Member Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
EnterpriseSkillGroupID	Foreign Key from the Enterprise Skill Group table.	DBINT	PK, FK NOT NULL
SkillTargetID	Foreign Key from the Skill Group table.	DBINT	PK, FK, IE-1 NOT NULL

**Event Table**

This table is in the [System category \(page 548\)](#). To see database rules for these tables, click [here \(page 601\)](#).

Central database only.

Contains system events generated by the system software.

**Table 92: Indexes for Event Table**

index_name	index_description	index_keys
XIE1Event	nonclustered unique, primary key located on PRIMARY	CentralControllerFileTime
XIE2Event	nonclustered, unique, primary key located on PRIMARY	MessageId
XPKEvent	clustered, unique, primary key located on PRIMARY	RecoveryKey

**Fields in Event Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
BinData	Optional event binary data.	image	NULL
Category	The type of message.	VNAME32	NULL
CentralControllerFileTime	File Time event was processed at the Central Controller.	DBDATETIME	IE-1 NOT NULL
CentralControllerTimeZone	Time zone at the Central Controller. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	NOT NULL
CentralControllerVirtualTime	Virtual Time event was processed at the Central Controller.	DBINT	NOT NULL
CustomerId	The customer ID.	DBINT	NOT NULL
Dword1	Optional event DWORD.	DBINT	NULL
Dword2	Optional event DWORD	DBINT	NULL
Dword3	Optional event DWORD.	DBINT	NULL
Dword4	Optional event DWORD.	DBINT	NULL
Dword5	Optional event DWORD.	DBINT	NULL
MessageId	Message ID from message compiler.	DBINT	NOT NULL
MessageString	Contents of message.	DESCRIPTION	NULL
ProcName	Name of the process that originated the event.	VNAME32	NOT NULL
RecoveryDay	A value used internally by the system software to track virtual time.	DBINT	NOT NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL
Severity	The level of the message.	varchar(16)	NULL
Side	Side of event originator:  • A or B = Paired processes  • \0 = A non-paired process	DBCHAR	NOT NULL
SourceFileTime	File time event was generated (originator's time).	DBDATETIME	NOT NULL

**Expanded\_Call\_Variable Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
SourceSystemName	Name of the node that generated the event.	VNAME32	NULL
SourceVirtualTime	Virtual time event was generated (originator's time).	DBINT	NOT NULL
StatusCode	Status code value.	DBINT	NOT NULL
StatusCodeString	String associated with the status code.	DESCRIPTION	NULL
StatusCodeType	Classification of the value in StatusCode field.	DBSMALLINT	NOT NULL
String1	Optional event string.	varchar(240)	NULL
String2	Optional event string.	varchar(240)	NULL
String3	Optional event string.	varchar(240)	NULL
String4	Optional event string.	varchar(240)	NULL
String5	Optional event string.	varchar(240)	NULL
SystemId	DMP system ID of the event originator. For a CallRouter or Logger, this value is always 0.	DBSMALLINT	NOT NULL
SystemType	The type of system that generated the event. To see the list of values, click <a href="#">here (page 562)</a> .	DBSMALLINT	NOT NULL
VersionNum	EMS version number.	DBSMALLINT	NOT NULL

**Expanded\_Call\_Variable Table**

This table is in the [Route category \(page 535\)](#). To see database rules for these tables, click [here \(page 597\)](#).

Each row describes an expanded call variable. Use Unified ICM Configuration Manager to add, update, and delete Expanded\_Call\_Variable records.

**Related tables**

[Route Call Variable \(page 343\)](#) (via ExpandedCallVariableID)

[Termination Call Variable \(page 502\)](#) (via ExpandedCallVariableID)

**Table 93: Indexes for Expanded\_Call\_Variable Table**

index_name	index_description	index_keys
XAK1Expanded_Call_Variable	nonclustered, unique, unique key located on PRIMARY	EnterpriseName
XPKExpanded_Call_Variable	clustered, unique, primary key located on PRIMARY	ExpandedCallVariableID

**Fields in Expanded\_Call\_Variable Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
Deleted	Deleted Flag. Stored as a character:  • Y = Yes  • N = No	DBCHAR	NOT NULL
Description	Additional information about the call variable.	DESCRIPTION	NULL
ECCArray	Indicates whether the call variable is an array:  • Y = Yes  • N = No	DBCHAR	NOT NULL
Enabled	Indicates whether the call variable is currently enabled:  • Y = Yes  • N = No	DBCHAR	NOT NULL
EnterpriseName	An enterprise name for this call variable. This name must be unique among all expanded call variables within the business entity.	VNAME32	AK-1 NOT NULL
ExpandedCallVariableID	A unique identifier for the call variable.	DBSMALLINT	PK NOT NULL
GeoTelProvided	Indicates whether the call variable is provided by Cisco:  • Y = Yes  • N = No	DBCHAR	NOT NULL
MaximumArraySize	If the call variable is an array, the maximum number of elements in the array: 1 to 255.	DBINT	NULL
MaximumLength	The maximum length of the call variable value: <b>1 to 210</b> .	DBINT	NOT NULL

**Feature\_Control\_Set Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
Persistent	<p>Y or N. Default is N.</p> <p>Specifies whether or not each individual ECC variable is persistent (is written to the historical database with the TCD or RCD record).</p> <p>The 'Persistent' value is configurable using the Expanded Call Context Variable list tool.</p> <p>For newly-added ECC variables, the checkbox for the Persistent value is unchecked; that is, the default value is 'N'. To change the value to 'Y', check this box in the configuration tool.</p> <p>In an upgrade, pre-existing ECC variables, which were previously persistent by default, are not changed; they remain 'Y'. You may reconfigure them to 'N'</p> <p><b>Note:</b> Only persistent ECC variables (those set to 'Y') are written to the database. Non-persistent ECC variables (those set to 'N') are not written to the database, but they can be used in routing scripts.</p>	DBCHAR	NOT NULL

**Feature\_Control\_Set Table**

This table is in the [Security category \(page 543\)](#). To see database rules for these tables, click [here \(page 600\)](#).

It contains information about the different feature sets that may be used by different users.

**Note:** The Feature Control Set List tool is not available on a limited AW.

Use Unified ICM Configuration Manager to add, update, and delete Feature\_Control\_Set records.

**Related tables**

[User Group \(page 514\)](#) (via FeatureSetID)

[Customer Definition \(page 194\)](#) (via FeatureSetID)

**Table 94: Indexes for Feature\_Control\_Set Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XAKFeature_Control_Set	nonclustered, unique, unique key located on PRIMARY	EnterpriseName
XPKFeature_Control_Set	clustered, unique, primary key located on PRIMARY	FeatureSetID

**Fields in Feature\_Control\_Set Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ChangeStamp	This value is incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
Description	A description of the feature set.	DESCRIPTION	NULL
EnterpriseName	A unique name among all feature sets in the enterprise.	VNAME32	AK NOT NULL
FeatureSetData	Contains all the information about the feature set.	image	NULL
FeatureSetID	A unique identifier for this feature set.	DBINT	PK NOT NULL

**Galaxy\_Agent\_Call\_Count Table**

This table is in the [Galaxy category \(page 533\)](#). For database rules, click [here \(page 596\)](#).

Central database only.

This table applies to Rockwell Galaxy ACDs only. Each row provides call counts an agent configured on a Galaxy ACD.

**Related table**

[Peripheral \(page 306\)](#) (via PeripheralID)

**Table 95: Indexes for Galaxy\_Agent\_Call\_Count Table**

index_name	index_description	index_keys
XAK1Galaxy_Agent_Call_Count	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XPKGalaxy_Agent_Call_Count	nonclustered, unique, primary key located on PRIMARY	DateTime, PeripheralID, PortID, TimeZone

**Fields in Galaxy\_Agent\_Call\_Count Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
AgentIGroup	The Galaxy identifier for the I-Group of the agent	DBSMALLINT	NOT NULL
CallCount	The number of calls handled by the agent.	DBSMALLINT	NOT NULL
DateTime	The date and time at the end of the reporting interval..	DBDATETIME	PK NOT NULL
PeripheralID	The system software identifier for the ACD.	DBSMALLINT	PK, FK NOT NULL
PeripheralTimeZone	The time zone in which the ACD is located. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	NOT NULL

**Galaxy\_Agent\_IGroup Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
PhoneNumber	Agent's phone number. Invalid if TerminationType is Voice Operated Relay.	DBSMALLINT	NOT NULL
PortID	The identifier of the Galaxy port associated with the agent.	DBSMALLINT	PK NOT NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	PK NOT NULL
TerminationType	For the list of valid options, click <a href="#">here (page 562)</a> .	DBSMALLINT	NOT NULL
TimeZone	The time zone for the date and time. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK NOT NULL

**Galaxy\_Agent\_IGroup Table**

This table is in the [Galaxy category \(page 533\)](#). For database rules, click [here \(page 596\)](#).

Central database only.

This table applies to Rockwell Galaxy ACDs only. Each row provides information about an agent information group configured on a Galaxy ACD.

### Related table

[Peripheral \(page 306\)](#) (via PeripheralID)

**Table 96: Indexes for Galaxy\_Agent\_IGroup Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XAK1Galaxy_Agent_IGroup	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XPKGalaxy_Agent_IGroup	nonclustered, unique, primary key located on PRIMARY	DateTime, PeripheralID, IGroupID, TimeZone

**Fields in Galaxy\_Agent\_IGroup Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
AssignedTime	Total time, in seconds, that agents were assigned to this I-group.	DBINT	NOT NULL
AvailableTime	Total time, in seconds, that agents were in the Available state for the I-group.	DBINT	NOT NULL
BreakTime	Total time, in seconds, that agents spent in the Break state	DBINT	NOT NULL
CallsTransferredOut	Number of calls handled by this I-group and then transferred.	DBSMALLINT	NOT NULL

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
DateTime	The date and time at the end of the reporting interval.	DBDATETIME	PK NOT NULL
IGroupID	The Galaxy identifier for the group.	DBSMALLINT	PK NOT NULL
OutCalls	Number of out calls made by an agent position on an outbound trunk or dial tandem tie-line.	DBSMALLINT	NOT NULL
OutCallTalkTime	Total time, in seconds, that agents were connected to an outbound trunk or tie-line with no inbound call in progress.	DBINT	NOT NULL
PeripheralID	The system software identifier for the ACD.	DBSMALLINT	PK, FK NOT NULL
PeripheralTimeZone	The time zone in which the ACD is located. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	NOT NULL
PlugInTime	Total time, in seconds, that agents were plugged-in to this I-group.	DBINT	NOT NULL
PrimaryCallsHandled	Number of external calls, internal gate transfer calls, and internal gate calls connected to a primary agent position during the interval.	DBSMALLINT	NOT NULL
PrimaryCallworkTime	Total time, in seconds, that primary agents spent in wrap-up for external, internal gate transfer calls, and internal gate calls.	DBINT	NOT NULL
PrimaryODCallsHandled	Number of overflow/diversion-in calls connected to a primary agent position during the interval.	DBSMALLINT	NOT NULL
PrimaryODCallworkTime	Total time, in seconds, that primary agents spent in wrap-up for overflow/diversion-in calls.	DBINT	NOT NULL
PrimaryOTalkTIme	Total time, in seconds, that primary agents were connected to overflow/diversion-in calls.	DBINT	NOT NULL
PrimaryTalkTime	Total time, in seconds, that primary agents were connected to external calls, internal gate transfer calls, or internal gate calls.	DBINT	NOT NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL
SecondaryCallsHandled	Number of external calls, internal gate transfer calls, and internal gate calls connected to a secondary agent position during the interval.	DBSMALLINT	NOT NULL
SecondaryCallworkTime	Total time, in seconds, that secondary agents spent in wrap-up for external, internal gate transfer, and internal gate transfer calls.	DBINT	NOT NULL

**Galaxy\_Agent\_Performance Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
SecondaryODCallsHandled	Number of overflow/diversion-in calls connected to a secondary agent position during the interval.	DBSMALLINT	NOT NULL
SecondaryODCallworkTime	Total time, in seconds, that secondary agents spent in wrap-up for overflow/diversion-in calls.	DBINT	NOT NULL
SecondaryODTalkTime	Total time, in seconds, that secondary agents were connected to overflow/diversion-in calls.	DBINT	NOT NULL
SecondaryTalkTime	Total time, in seconds, that secondary agents were connected to external calls, internal gate transfer calls, or internal gate calls.	DBINT	NOT NULL
SecondsInPeriod	Total time, in seconds, that I-group data was being accumulated during the reporting interval.	DBSMALLINT	NOT NULL
TimeZone	The time zone for the date and time. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK NOT NULL

**Galaxy\_Agent\_Performance Table**

This table is in the [Galaxy category \(page 533\)](#). For database rules, click [here \(page 596\)](#).

Central database only.

This table applies to Rockwell Galaxy ACDs only. Each row provides performance information about an agent configured on a Galaxy ACD.

**Related tables**

[Agent \(page 15\)](#) (via SkillTargetID)

[Peripheral \(page 306\)](#) (via PeripheralID)

**Table 97: Indexes for Galaxy\_Agent\_Performance Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XAK1Galaxy_Agent_Performance	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XPKGalaxy_Agent_Performance	nonclustered, unique, primary key located on PRIMARY	SignInTime, PeripheralID, AgentID, TimeZone

**Fields in Galaxy\_Agent\_Performance Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
ActivityIndicator	A yes/no indicator.	DBTINYINT	NOT NULL

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
AgentID	The Galaxy identifier for the agent.	DBINT	PK NOT NULL
AgentName	The agent's name, as known to the ACD.	VNAME32	NULL
AgentPhoneNumber	Four-digit extension number.	DBSMALLINT	NOT NULL
AssistQueueCount	Number of times the agent used the Supervisor key to request assistance.	DBSMALLINT	NOT NULL
AvailTime	Total time, in seconds, the agent was in the Available state.	DBSMALLINT	NOT NULL
BreakTime	Total time, in seconds, the agent spent in the Break state.	DBSMALLINT	NOT NULL
OutCalls	Number of out calls by this agent on an outbound trunk or dial tandem tie-line.	DBSMALLINT	NOT NULL
OutCallTime	Total time, in seconds, the agent spent connected to an outbound trunk or tie-line with no inbound call in progress.	DBSMALLINT	NOT NULL
PeripheralID	An system software identifier for the ACD.	DBSMALLINT	PK, FK NOT NULL
PeripheralTimeZone	The time zone for the ACD. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	NOT NULL
PortID	The ACD port to which the agent is connected.	DBSMALLINT	NOT NULL
PriCallsHandled	Number of external calls, internal gate transfer calls, internal gate calls, and overflow/diversion-in calls connected to the agent while primarily assigned to the gate.	DBSMALLINT	NOT NULL
PriCallworkTime	Total time, in seconds, the agent spent in wrap-up after primary assignment external, internal gate transfer, overflow/diversion-in, and internal gate calls.	DBSMALLINT	NOT NULL
PriGate	Gate number of the agent's primary assignment.	DBTINYINT	NOT NULL
PriTalkTime	Total time, in seconds, the agent was connected as a primary assignment to external calls, internal gate transfer calls, overflow/diversion-in calls, or internal gate calls.	DBSMALLINT	NOT NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL

**Galaxy\_Alarm Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
SecCallsHandled	Number of external calls, internal gate transfer calls, internal gate calls, and overflow/diversion-in calls connected to the agent while secondarily assigned to the gate.	DBSMALLINT	NOT NULL
SecCallworkTime	Total time, in seconds, the agent spent in wrap-up after secondary assignment external, internal gate transfer, overflow/diversion-in, and internal gate calls.	DBSMALLINT	NOT NULL
SecGate	Gate number of the agent's secondary assignment.	DBTINYINT	NOT NULL
SecTalkTime	Total time, in seconds, the agent was connected as a secondary assignment to external calls, internal gate transfer calls, overflow/diversion-in calls, or internal gate calls.	DBSMALLINT	NOT NULL
SerialNumber	A sequential counter maintained by the ACD.	DBSMALLINT	NOT NULL
SignedInSeconds	Number of seconds elapsed since the agent signed in.	DBINT	NOT NULL
SignInTime	The Central Controller date and time when the agent signed in.	DBDATETIME	PK NOT NULL
SkillTargetID	The system software identifier for the agent.	DBINT	FK NULL
Tertype	Termination type. For valid options, click <a href="#">here (page 562)</a> .	DBTINYINT	NOT NULL
TimeZone	The time zone for the Central Controller. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK NOT NULL

**Galaxy\_Alarm Table**

This table is in the [Galaxy category \(page 533\)](#). For database rules, click [here \(page 596\)](#).

Central database only.

This table applies to Rockwell Galaxy ACDS only. Each row provides information about a system alarm output by the Call or Reports processor on a Galaxy ACD.

#### **Related table**

[Peripheral \(page 306\)](#) (via PeripheralID)

**Table 98: Indexes for Galaxy\_Alarm Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XAK1Galaxy_Alarm	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XPKGalaxy_Alarm	nonclustered, unique, primary key located on PRIMARY	DateTime, PeripheralID, TimeZone

**Fields in Galaxy\_Alarm Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
AlarmCode	Three-digit alarm code.	DBSMALLINT	NOT NULL
AlarmData1	Additional data the Galaxy provided in the alarm message.	VNAME32	NULL
AlarmData2	Additional data the Galaxy provided in the alarm.	VNAME32	NULL
AlarmProcessor	Processor that output the alarm: Call or Reports.	VNAME32	NULL
AlarmProcessor	Processor that output the alarm: Call or Reports.	VNAME32	NULL
AlarmSubcode	A subcode, if any, the Galaxy provided for the alarm.	VNAME32	NULL
AlarmTime	Galaxy time that the alarm occurred.	DBSMALLINT	NOT NULL
DateTime	The date and time at the end of the reporting interval.	DBDATETIME	PK NOT NULL
PeripheralID	The system software identifier for the ACD.	DBSMALLINT	PK, FK NOT NULL
PeripheralTimeZone	The time zone in which the ACD is located. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	NOT NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL
TimeZone	The time zone for the date and time. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK NOT NULL

## Galaxy\_DNIS Table

This table is in the [Galaxy category \(page 533\)](#). For database rules, click [here \(page 596\)](#).

Central database only.

This table applies to Rockwell Galaxy ACDs only. Each row provides information about a DNIS configured on a Galaxy ACD.

**Galaxy\_DNIS Table****Related table**

[Peripheral \(page 306\)](#) (via PeripheralID)

**Table 99: Indexes for Galaxy\_DNIS Table**

index_name	index_description	index_keys
XAK1Galaxy_DNIS	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XPKGalaxy_DNIS	nonclustered, unique, primary key located on PRIMARY	DateTime, PeripheralID, DNIS, TimeZone

**Fields in Galaxy\_DNIS Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
CallDuration	Total call time, in seconds, for calls to this DNIS.	DBINT	NOT NULL
DateTime	The Central Controller date and time at the beginning of the reporting interval.	DBDATETIME	PK NOT NULL
DNIS	The DNIS value ( <b>0000</b> through <b>9999</b> ).	VNAME32	PK NOT NULL
NumberCallsAbandoned	Number of calls with this DNIS that were abandoned.	DBSMALLINT	NOT NULL
NumberCallsAnswered	Number of calls with this DNIS that were answered.	DBSMALLINT	NOT NULL
PeripheralID	The system software identifier for the ACD.	DBSMALLINT	PK, FK NOT NULL
PeripheralTimeZone	The time zone for the ACD. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	NOT NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL
SecondsInPeriod	Number of seconds in the reporting period.	DBSMALLINT	NOT NULL
TimeToAnswer	Total answer time, in seconds, for calls with this DNIS.	DBINT	NOT NULL
TimeZone	The time zone for the Central Controller. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK NOT NULL
ValidType	Valid options include:  • <b>0</b> = Valid DNIS number  • <b>1</b> = Invalid DNIS number	DBSMALLINT	PK NOT NULL

## Galaxy\_Gate Table

This table is in the [Galaxy category \(page 533\)](#). For database rules, click [here \(page 596\)](#).

Central database only.

This table applies to Rockwell Galaxy ACDs only. Each row provides information about a gate configured on a Galaxy ACD.

### Related table

[Peripheral \(page 306\)](#) (via PeripheralID)

[Service \(page 386\)](#) (via SkillTargetID)

**Table 100: Indexes for Galaxy\_Gate Table**

index_name	index_description	index_keys
XAK1Galaxy_Gate	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XPKGalaxy_Gate	nonclustered, unique, primary key located on PRIMARY	DateTime, PeripheralID, GateID, TimeZone

**Fields in Galaxy\_Gate Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
CallsAbandoned	Number of external, internal gate transfer, and internal gate calls for the gate that were lost before being connected to an agent position.	DBSMALLINT	NOT NULL
CallsHeld	Number of external, internal gate transfer, internal gate, and overflow/diversion-in calls that were either abandoned or held beyond a specific system threshold.	DBSMALLINT	NOT NULL
CallsTransferredIn	Number of calls directly transferred to primary agents for this gate.	DBINT	NOT NULL
CallsTransferredOut	Number of external, internal gate transfer, internal gate, or overflow/diversion-in calls that were handed by the gate and then transferred.	DBSMALLINT	NOT NULL
DateTime	The Central Controller date and time at the beginning of the reporting interval.	DBDATETIME	PK NOT NULL
DelayTimeToAbandoned	Total time, in seconds, that external, internal gate, internal gate transfer, and overflow/diversion-in calls waited before being lost.	DBINT	NOT NULL

**Galaxy\_Gate Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
DelayTimeToHandle	Total time, in seconds, that external, internal gate, internal gate transfer, and overflow/diversion-in calls waited before being answered by an agent.	DBINT	NOT NULL
GateID	The Galaxy identifier for the gate.	DBSMALLINT	PK NOT NULL
LoadTransferOutCalls	This field applies to Galaxy-8 ACDs only.	DBSMALLINT	NOT NULL
ODAbandoned	Number of overflow/diversion-in calls accepted from another node, but lost before being connected to an agent position.	DBSMALLINT	NOT NULL
ODInRejected	Number of overflow/diversion-in calls rejected by this gate.	DBSMALLINT	NOT NULL
OutCalls	Number of out calls made by primary agents for this gate on outbound trunks or dial tandem tie-lines.	DBSMALLINT	NOT NULL
OutCallTalkTime	Total time, in seconds, that primary agents for this gate were connected to an out trunk or tie-line with no incoming calls in progress.	DBINT	NOT NULL
OverflowCallWorkTime	Total time, in seconds, that primary agents for this gate spent in wrap-up after external, internal gate transfer, and internal gate calls for another gate.	DBINT	NOT NULL
OverflowHandled	Number of external, internal gate transfer, and internal gate calls for other gates that were handled by agents in this gate because of their secondary assignments.	DBSMALLINT	NOT NULL
OverflowODCallWorkTime	Total time, in seconds, that primary agents for this gate spent in wrap-up after overflow/diversion-in calls for another gate.	DBINT	NOT NULL
OverflowODHandled	Number of overflow/diversion calls for other gates that were handled by agents in this gate because of their secondary assignments.	DBSMALLINT	NOT NULL
OverflowODTalkTime	Total time, in seconds, that primary agents for this gate were connected to overflow/diversion-in calls as a secondary assignment.	DBINT	NOT NULL
OverflowTalkTime	Total time, in seconds, that primary agents for this gate were connected to external, internal gate transfer, or internal gate calls as a secondary assignment.	DBINT	NOT NULL
PeripheralID	The system software identifier for the ACD.	DBSMALLINT	PK, FK NOT NULL

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
PeripheralTimeZone	The time zone for the ACD. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	NOT NULL
PrimaryAssignedTime	Total time, in seconds, that agents had a primary assignment for this gate.	DBINT	NOT NULL
PrimaryAvailableTime	Total time, in seconds that primary agents were in the Available state for this gate.	DBINT	NOT NULL
PrimaryCallWorkTime	Total time, in seconds, that primary agents for this gate spent in wrap-up after external, internal gate transfer, and internal gate calls for this gate.	DBINT	NOT NULL
PrimaryHandled	Number of external, internal gate transfer, and internal gate calls connected to primary agents for the gate during the interval.	DBSMALLINT	NOT NULL
PrimaryODCallWorkTime	Total time, in seconds, that primary agents for this gate spent in wrap-up after overflow/diversion-in calls to this gate.	DBINT	NOT NULL
PrimaryODHandled	Number of overflow/diversion in calls connected to primary agents for this gate.	DBSMALLINT	NOT NULL
PrimaryODTalkTime	Total time, in seconds, that primary agents for this gate were connected to overflow/diversion-in calls.	DBINT	NOT NULL
PrimaryPluggedTime	Total time, in seconds, that primary agents for this gate were connected to overflow/diversion-in calls.	DBINT	NOT NULL
PrimaryTalkTime	Total time, in seconds, that primary agents were connected to external, internal gate transfer, or internal gate calls for the gate.	DBINT	NOT NULL
QueueLimitingRejectCount	Number of external, internal gate transfer, and internal gate calls that were rejected	DBSMALLINT	NOT NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL
SecondaryAssignedTime	Total time, in seconds, that agents had a secondary assignment for this gate.	DBINT	NOT NULL
SecondaryCallWorkTime	Total time, in seconds, that secondary agents for this gate spent in wrap-up after external, internal gate transfer, and internal gate calls for this gate.	DBINT	NOT NULL

**Galaxy\_Gate\_Delayed\_Call Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
SecondaryHandled	Number of external, internal gate transfer, and internal gate calls connected to secondary agents for the gate during the interval.	DBSMALLINT	NOT NULL
SecondaryODCallWorkTime	Total time, in seconds, that secondary agents for this gate spent in wrap-up after overflow/diversion-in calls to this gate.	DBINT	NOT NULL
SecondaryODHandled	Number of overflow/diversion in calls for this gate that were handed by agents in other gates because of their secondary assignments..	DBSMALLINT	NOT NULL
SecondaryODTalkTime	Total time, in seconds, that secondary agents for this gate were connected to overflow/diversion-in calls.	DBINT	NOT NULL
SecondaryPluggedTime	Total time, in seconds, that secondary agents were plugged into this gate.	DBINT	NOT NULL
SecondaryTalkTime	Total time, in seconds, that secondary agents were connected to external, internal gate transfer, or internal gate calls for the gate.	DBINT	NOT NULL
SecondsInPeriod	Number of seconds in the reporting period.	DBSMALLINT	NOT NULL
SkillTargetID	The system software identifier for the service.	DBINT	FK NULL
TimeZone	The time zone for the Central Controller. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK NOT NULL

**Galaxy\_Gate\_Delayed\_Call Table**

This table is in the [Galaxy category \(page 533\)](#). For database rules, click [here \(page 596\)](#).

Central database only.

This table applies to Rockwell Galaxy ACDs only.

Each row provides delayed call information about a gate configured on a Galaxy ACD.

#### **Related table**

[Peripheral \(page 306\)](#) (via PeripheralID)

[Service \(page 386\)](#) (via SkillTargetID)

**Table 101: Indexes for Galaxy\_Gate\_Delayed\_Call Table**

index_name	index_description	index_keys
XAK1Galaxy_Gate_Delayed_Call	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XPKGalaxy_Gate_Delayed_Call	nonclustered, unique, primary key located on PRIMARY	DateTime, PeripheralID, GateID, TimeZone

**Fields in Galaxy\_Gate\_Delayed\_Call Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
Abandoned0	Number of abandoned calls were abandoned time was less than 1 second.	DBSMALLINT	NOT NULL
Abandoned5	Number of abandoned calls were abandon time was greater than or equal to 1 second, but less than 5 seconds.	DBSMALLINT	NOT NULL
Abandoned10	Number of abandoned calls were abandon time was greater than or equal to 5 seconds, but less than 10 seconds.	DBSMALLINT	NOT NULL
Abandoned15	Number of abandoned calls were abandon time was greater than or equal to 10 seconds, but less than 15 seconds.	DBSMALLINT	NOT NULL
Abandoned20	Number of abandoned calls were abandon time was greater than or equal to 15 seconds, but less than 20 seconds.	DBSMALLINT	NOT NULL
Abandoned25	Number of abandoned calls were abandon time was greater than or equal to 20 seconds, but less than 25 seconds.	DBSMALLINT	NOT NULL
Abandoned30	Number of abandoned calls were abandon time was greater than or equal to 25 seconds, but less than 30 seconds.	DBSMALLINT	NOT NULL
Abandoned40	Number of abandoned calls were abandon time was greater than or equal to 30 seconds, but less than 40 seconds.	DBSMALLINT	NOT NULL
Abandoned50	Number of abandoned calls were abandon time was greater than or equal to 40 seconds, but less than 50 seconds.	DBSMALLINT	NOT NULL
Abandoned60	Number of abandoned calls were abandon time was greater than or equal to 50 seconds, but less than 60 seconds.	DBSMALLINT	NOT NULL
Abandoned90	Number of abandoned calls were abandon time was greater than or equal to 60 seconds, but less than 90 seconds.	DBSMALLINT	NOT NULL
Abandoned120	Number of abandoned calls were abandon time was greater than or equal to 90 seconds, but less than 120 seconds.	DBSMALLINT	NOT NULL

**Galaxy\_Gate\_Delayed\_Call Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
Abandoned180	Number of abandoned calls were abandon time was greater than or equal to 120 seconds, but less than 180 seconds.	DBSMALLINT	NOT NULL
AbandonedOver180	Number of abandoned calls were abandon time was greater than or equal to 180 seconds.	DBSMALLINT	NOT NULL
DateTime	The Central Controller date and time at the beginning of the reporting interval.	DBDATETIME	PK NOT NULL
GateID	TThe Galaxy identifier for the gate.	DBSMALLINT	PK NOT NULL
Handled0	Number of handled calls were wait time was less than 1 second.	DBSMALLINT	NOT NULL
Handled5	Number of handled calls were wait time was greater than or equal to 1 second, but less than 5 seconds.	DBSMALLINT	NOT NULL
Handled10	Number of handled calls were wait time was greater than or equal to 5 seconds, but less than 10 seconds.	DBSMALLINT	NOT NULL
Handled15	Number of handled calls were wait time was greater than or equal to 10 seconds, but less than 15 seconds.	DBSMALLINT	NOT NULL
Handled20	Number of handled calls were wait time was greater than or equal to 15 seconds, but less than 20 seconds.	DBSMALLINT	NOT NULL
Handled25	Number of handledcalls were wait time was greater than or equal to 20 seconds, but less than 25 seconds.	DBSMALLINT	NOT NULL
Handled30	Number of handled calls were wait time was greater than or equal to 25 seconds, but less than 30 seconds.	DBSMALLINT	NOT NULL
Handled40	Number of handled calls were wait time was greater than or equal to 30 seconds, but less than 40 seconds.	DBSMALLINT	NOT NULL
Handled50	Number of handled calls were wait time was greater than or equal to 40 seconds, but less than 50 seconds.	DBSMALLINT	NOT NULL
Handled60	Number of handled calls were wait time was greater than or equal to 50 seconds, but less than 60 seconds.	DBSMALLINT	NOT NULL
Handled90	Number of handled calls were wait time was greater than or equal to 60 seconds, but less than 90 seconds.	DBSMALLINT	NOT NULL
Handled120	Number of handled calls were wait time was greater than or equal to 90 seconds, but less than 120 seconds.	DBSMALLINT	NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
Handled180	Number of handled calls were wait time was greater than or equal to 120 seconds, but less than 180 seconds.	DBSMALLINT	NOT NULL
HandledOver180	Number of handled calls were wait time was greater than or equal to 180 seconds.	DBSMALLINT	NOT NULL
LongestDelay	Maximum number of seconds that any call waited before being either answered or abandoned.	DBSMALLINT	NOT NULL
MaximumDelayQueueLength	Maximum number of calls in any agent's queue.	DBSMALLINT	NOT NULL
PeripheralID	The system software identifier for the ACD.	DBSMALLINT	PK, FK NOT NULL
PeripheralTimeZone	The time zone for the ACD. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	NOT NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL
SecondsInPeriod	Number of seconds in the reporting period.	DBSMALLINT	NOT NULL
SkillTargetID	The system software identifier for the service.	DBINT	FK NULL
TimeZone	The time zone for the Central Controller. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK NOT NULL

## Galaxy\_Overflow Table

This table is in the [Galaxy category \(page 533\)](#). For database rules, click [here \(page 596\)](#).

Central database only.

This table applies to Rockwell Galaxy ACDs only. Each row provides information about calls overflowed from a gate on the Galaxy ACD.

### Related table

[Peripheral \(page 306\)](#) (via PeripheralID)

[Service \(page 386\)](#) (via SkillTargetID)

**Galaxy\_Overflow Table****Table 102: Indexes for Galaxy\_Overflow Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XAK1Galaxy_Overflow	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XPKGalaxy_Overflow	nonclustered, unique, primary key located on PRIMARY	DateTime, PeripheralID, GateID, TimeZone

**Fields in Galaxy\_Overflow Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
AcceptedOnRoute1	Number of internal overflow/diversion-out calls from the gate accepted on route number 1.	DBSMALLINT	NOT NULL
AcceptedOnRoute2	Number of internal overflow/diversion-out calls from the gate accepted on route number 2..	DBSMALLINT	NOT NULL
AcceptedOnRoute3	Number of internal overflow/diversion-out calls from the gate accepted on route number 3.	DBSMALLINT	NOT NULL
AcceptedOnRoute4	Number of internal overflow/diversion-out calls from the gate accepted on route number 4.	DBSMALLINT	NOT NULL
AcceptedOnRoute5	Number of internal overflow/diversion-out calls from the gate accepted on route number 5.	DBSMALLINT	NOT NULL
AcceptedOnRoute6	Number of internal overflow/diversion-out calls from the gate accepted on route number 6.	DBSMALLINT	NOT NULL
AcceptedOnRoute7	Number of internal overflow/diversion-out calls from the gate accepted on route number 7.	DBSMALLINT	NOT NULL
AcceptedOnRoute8	Number of internal overflow/diversion-out calls from the gate accepted on route number 8.	DBSMALLINT	NOT NULL
AcceptedOnRoute9	Number of internal overflow/diversion-out calls from the gate accepted on route number 9.	DBSMALLINT	NOT NULL
AcceptedOnRoute10	Number of internal overflow/diversion-out calls from the gate accepted on route number 10.	DBSMALLINT	NOT NULL
AcceptedOnRoute11	Number of internal overflow/diversion-out calls from the gate accepted on route number 11.	DBSMALLINT	NOT NULL
AcceptedOnRoute12	Number of internal overflow/diversion-out calls from the gate accepted on route number 12.	DBSMALLINT	NOT NULL

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
AcceptedOnRoute13	Number of internal overflow/diversion-out calls from the gate accepted on route number 13.	DBSMALLINT	NOT NULL
AcceptedOnRoute14	Number of internal overflow/diversion-out calls from the gate accepted on route number 14.	DBSMALLINT	NOT NULL
AcceptedOnRoute15	Number of internal overflow/diversion-out calls from the gate accepted on route number 15.	DBSMALLINT	NOT NULL
AcceptedOnRoute16	Number of internal overflow/diversion-out calls from the gate accepted on route number 16.	DBSMALLINT	NOT NULL
DateTime	The Central Controller date and time at the beginning of the reporting interval.	DBDATETIME	PK NOT NULL
GateID	The Galaxy identifier for the gate.	DBSMALLINT	PK NOT NULL
NetworkOnRoute1	Number of network overflow/diversion-out calls from the gate sent to route number 1.	DBSMALLINT	NOT NULL
NetworkOnRoute2	Number of network overflow/diversion-out calls from the gate sent to route number 2.	DBSMALLINT	NOT NULL
NetworkOnRoute3	Number of network overflow/diversion-out calls from the gate sent to route number 3.	DBSMALLINT	NOT NULL
NetworkOnRoute4	Number of network overflow/diversion-out calls from the gate sent to route number 4.	DBSMALLINT	NOT NULL
NetworkOnRoute5	Number of network overflow/diversion-out calls from the gate sent to route number 5.	DBSMALLINT	NOT NULL
NetworkOnRoute6	Number of network overflow/diversion-out calls from the gate sent to route number 6.	DBSMALLINT	NOT NULL
NetworkOnRoute7	Number of network overflow/diversion-out calls from the gate sent to route number 7.	DBSMALLINT	NOT NULL
NetworkOnRoute8	Number of network overflow/diversion-out calls from the gate sent to route number 8.	DBSMALLINT	NOT NULL
NetworkOnRoute9	Number of network overflow/diversion-out calls from the gate sent to route number 9.	DBSMALLINT	NOT NULL

**Galaxy\_Overflow Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
NetworkOnRoute10	Number of network overflow/diversion-out calls from the gate sent to route number 10.	DBSMALLINT	NOT NULL
NetworkOnRoute11	Number of network overflow/diversion-out calls from the gate sent to route number 11.	DBSMALLINT	NOT NULL
NetworkOnRoute12	Number of network overflow/diversion-out calls from the gate sent to route number 12.	DBSMALLINT	NOT NULL
NetworkOnRoute13	Number of network overflow/diversion-out calls from the gate sent to route number 13.	DBSMALLINT	NOT NULL
NetworkOnRoute14	Number of network overflow/diversion-out calls from the gate sent to route number 14.	DBSMALLINT	NOT NULL
NetworkOnRoute15	Number of network overflow/diversion-out calls from the gate sent to route number 15.	DBSMALLINT	NOT NULL
NetworkOnRoute16	Number of network overflow/diversion-out calls from the gate sent to route number 16.	DBSMALLINT	NOT NULL
ODOutCallsHandled	Total number of overflow/diversion-out calls from the gate.	DBINT	NOT NULL
PeripheralID	The system software identifier for the ACD.	DBSMALLINT	PK, FK NOT NULL
PeripheralTimeZone	The time zone for the ACD. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	NOT NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL
RejectedOnRoute1	Number of internal overflow/diversion-out calls from the gate rejected on route number 1.	DBSMALLINT	NOT NULL
RejectedOnRoute2	Number of internal overflow/diversion-out calls from the gate rejected on route number 2.	DBSMALLINT	NOT NULL
RejectedOnRoute3	Number of internal overflow/diversion-out calls from the gate rejected on route number 3.	DBSMALLINT	NOT NULL
RejectedOnRoute4	Number of internal overflow/diversion-out calls from the gate rejected on route number 4.	DBSMALLINT	NOT NULL
RejectedOnRoute5	Number of internal overflow/diversion-out calls from the gate rejected on route number 5.	DBSMALLINT	NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
RejectedOnRoute6	Number of internal overflow/diversion-out calls from the gate rejected on route number 6.	DBSMALLINT	NOT NULL
RejectedOnRoute7	Number of internal overflow/diversion-out calls from the gate rejected on route number 7.	DBSMALLINT	NOT NULL
RejectedOnRoute8	Number of internal overflow/diversion-out calls from the gate rejected on route number 8.	DBSMALLINT	NOT NULL
RejectedOnRoute9	Number of internal overflow/diversion-out calls from the gate rejected on route number 9.	DBSMALLINT	NOT NULL
RejectedOnRoute10	Number of internal overflow/diversion-out calls from the gate rejected on route number 10.	DBSMALLINT	NOT NULL
RejectedOnRoute11	Number of internal overflow/diversion-out calls from the gate rejected on route number 11.	DBSMALLINT	NOT NULL
RejectedOnRoute12	Number of internal overflow/diversion-out calls from the gate rejected on route number 12.	DBSMALLINT	NOT NULL
RejectedOnRoute13	Number of internal overflow/diversion-out calls from the gate rejected on route number 13.	DBSMALLINT	NOT NULL
RejectedOnRoute14	Number of internal overflow/diversion-out calls from the gate rejected on route number 14.	DBSMALLINT	NOT NULL
RejectedOnRoute15	Number of internal overflow/diversion-out calls from the gate rejected on route number 15.	DBSMALLINT	NOT NULL
RejectedOnRoute16	Number of internal overflow/diversion-out calls from the gate rejected on route number 16.	DBSMALLINT	NOT NULL
SecondsInPeriod	Number of seconds in the reporting period.	DBSMALLINT	NOT NULL
SkillTargetID	The system software identifier for the service.	DBINT	FK NULL
TimeZone	The time zone for the Central Controller. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK NOT NULL

## Galaxy\_PBX Table

This table is in the [Galaxy category \(page 533\)](#). For database rules, click [here \(page 596\)](#).

**Galaxy\_PBX Table**

Central database only. This table applies to Rockwell Galaxy ACDs only. Each row provides information about a PBX termination configured on a Galaxy ACD.

**Related table**

[Peripheral \(page 306\)](#) (via PeripheralID)

**Table 103: Indexes for Galaxy\_PBX Table**

index_name	index_description	index_keys
XAK1Galaxy_PBX	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XPKGalaxy_PBX	nonclustered, unique, primary key located on PRIMARY	DateTime, PeripheralID, PortID, TimeZone

**Fields in Galaxy\_PBX Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
AbandonedNoAnswer	Number of calls to the destination that were abandoned.	DBSMALLINT	NULL
CallDuration	Total number of seconds for all incoming calls (counted from time of answer or end of dialing until disconnect).	DBINT	NOT NULL
DateTime	The date and time at the end of the reporting DBINTerval.	DBDATETIME	PK NOT NULL
DepartmentNumber	Identifier for the customer-defined group of PBX extensions.	DBSMALLINT	NOT NULL
EntensionNumber	Termination phone number.	DBSMALLINT	NOT NULL
ForwardedCalls	Number of calls automatically forwarded from this destination because the termination is busy and is in a hunt group, or because either the All Calls or No Answer options of Call Forwarding were in use.	DBSMALLINT	NOT NULL
HuntGroupInformation	For valid options, click <a href="#">here (page 562)</a> .	DBSMALLINT	NOT NULL
InCalls	Number of calls answered by this termination.	DBSMALLINT	NOT NULL
NextHuntGroupPhone	If in the termination is in a hunt group, the phone number of the next extension in the group.	DBSMALLINT	NOT NULL
OutCalls	Number of calls dialed from this termination.	DBSMALLINT	NOT NULL
PeripheralID	The system software identifier for the ACD.	DBSMALLINT	PK, FK NOT NULL
PeripheralTimeZone	The time zone in which the ACD is located. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
PickedUpCalls	Number of calls that rang at this termination but were intercepted by another phone.	DBSMALLINT	NOT NULL
PortID	Galaxy identifier for the phone's port.	DBSMALLINT	PK NOT NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL
SecondCallDuration	Total number of seconds that second calls were on the phone.	DBINT	NOT NULL
SecondCalls	Number of calls made while a previous call is on hold. Dialing an expanded PBX option feature also counts as a second call.	DBSMALLINT	NOT NULL
SubscriberNumber	In a multiple subscriber system, indicates which subscriber has control of the termination.	DBSMALLINT	NOT NULL
TerminationType	42 = Tone PBX	DBSMALLINT	NOT NULL
TimeZone	The time zone for the date and time. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK NOT NULL
TollCalls	Number of toll calls placed from the extension.	DBSMALLINT	NOT NULL

## Galaxy\_Single\_Trunk Table

This table is in the [Galaxy category \(page 533\)](#). For database rules, click [here \(page 596\)](#).

Central database only.

This table applies to Rockwell Galaxy ACDs only.

Each row provides information about a trunk configured on a Galaxy ACD.

### Related table

[Peripheral \(page 306\)](#) (via PeripheralID)

[Trunk \(page 506\)](#) (via TrunkID)

**Table 104: Indexes for Galaxy\_Single\_Trunk Table**

index_name	index_description	index_keys
XAK1Galaxy_Single_Trunk	nonclustered, unique, unique key located on PRIMARY	RecoveryKey

**Galaxy\_Transaction\_Code Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XPKGalaxy_Single_Trunk	nonclustered, unique, primary key located on PRIMARY	DateTime, PeripheralID, PortID, TimeZone

**Fields in Galaxy\_Single\_Trunk Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
BusyTimer	Time the trunk became busy (used to calculate busy times).	DBSMALLINT	NOT NULL
DateTime	The Central Controller date and time at the beginning of the reporting interval.	DBDATETIME	PK NOT NULL
ISDNCallByCallLimitRejects	Number of ISDN trunk rejections.	DBSMALLINT	NOT NULL
PeripheralID	The system software identifier for the ACD.	DBSMALLINT	PK, FK NOT NULL
PeripheralTimeZone	The time zone in which the ACD is located. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	NOT NULL
PortID	Galaxy port assignment for the trunk.	DBSMALLINT	PK NOT NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL
SeizureCount	Total number of calls on inbound, outbound, and combination trunks (whether connected to an ACD gate or not).	DBSMALLINT	NOT NULL
TerminationType	For valid options, click <a href="#">here (page 562)</a>	DBSMALLINT	NOT NULL
TimeZone	The time zone for the Central Controller. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK NOT NULL
TotalBusyTime	Total number of seconds the trunk was busy for inbound or outbound calls. For an incoming call, busy time is from when a valid call is detected to disconnect. For an outbound call, busy time is circuit selection to disconnect.	DBINT	NOT NULL
TrunkGroup	The system software identifier of the trunk group containing the trunk.	DBSMALLINT	NOT NULL
TrunkIGroup	Galaxy Trunk Information Group identifier.	DBSMALLINT	NOT NULL

**Galaxy\_Transaction\_Code Table**

This table is in the [Galaxy category \(page 533\)](#). For database rules, click [here \(page 596\)](#).

Central database only.

This table applies to Rockwell Galaxy ACDs only. Each row provides information about a transaction on a Galaxy ACD.

### Related table

[Peripheral \(page 306\)](#) (via PeripheralID)

**Table 105: Indexes for Galaxy\_Transaction\_Code Table**

index_name	index_description	index_keys
XAK1Galaxy_Galaxy_Transaction_Code	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XPKGalaxy_Galaxy_Transaction_Code	nonclustered, unique, primary key located on PRIMARY	DateTime, PeripheralID, TransactionCodeNumber, TimeZone

**Fields in Galaxy\_Transaction\_Code Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
DateTime	The Central Controller date and time at the beginning of the reporting interval.	DBDATETIME	PK NOT NULL
Description	A description of the transaction type.	VNAME32	NULL
PeripheralID	The system software identifier for the ACD.	DBSMALLINT	PK, FK NOT NULL
PeripheralTimeZone	The time zone in which the ACD is located. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	NOT NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL
SecondsInPeriod	Number of seconds in the reporting period.	DBSMALLINT	NOT NULL
TimeZone	The time zone for the Central Controller. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK NOT NULL
TransactionCodeNumber	Identifier for the transaction.	DBINT	PK NOT NULL
TransactionCount	Number of transactions that occurred.	DBSMALLINT	PK NOT NULL

## Galaxy\_Trunk\_Call\_Count Table

This table is in the [Galaxy category \(page 533\)](#). For database rules, click [here \(page 596\)](#).

Central database only.

**Galaxy\_Trunk\_IGroup Table**

This table applies to Rockwell Galaxy ACDs only. Each row provides call counts for a trunk configured on a Galaxy ACD.

**Related table**

[Peripheral \(page 306\)](#) (via PeripheralID)

[Trunk \(page 506\)](#) (via TrunkID)

**Table 106: Indexes for Galaxy\_Trunk\_Call\_Count Table**

index_name	index_description	index_keys
XAK1Galaxy_Galaxy_Trunk_Call_Count	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XPKGalaxy_Galaxy_Trunk_Call_Count	nonclustered, unique, primary key located on PRIMARY	DateTime, PeripheralID, PortID, TimeZone

**Fields in Galaxy\_Trunk\_Call\_Count Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
CallCount	Number of calls counted on the trunk.	DBSMALLINT	NOT NULL
DateTime	The Central Controller date and time at the beginning of the reporting interval.	DBDATETIME	PK NOT NULL
PeripheralID	The system software identifier for the ACD.	DBSMALLINT	PK, FK NOT NULL
PeripheralTimeZone	The time zone in which the ACD is located. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	NOT NULL
PortID	Galaxy port assignment for the trunk.	DBSMALLINT	PK NOT NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL
TerminationType	For valid options, click <a href="#">here (page 562)</a>	DBSMALLINT	NOT NULL
TimeZone	The time zone for the Central Controller. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK NOT NULL
TrunkIGroup	Galaxy identifier for the Trunk Information Group that contains this trunk.	DBSMALLINT	NOT NULL

**Galaxy\_Trunk\_IGroup Table**

This table is in the [Galaxy category \(page 533\)](#). For database rules, click [here \(page 596\)](#).

Central database only.

This table applies to Rockwell Galaxy ACDs only. Each row provides information about a trunk information group configured on a Galaxy ACD.

### Related table

[Peripheral \(page 306\)](#) (via PeripheralID)

[Trunk \(page 506\)](#) (via TrunkID)

**Table 107: Indexes for Galaxy\_Trunk\_IGroup Table**

index_name	index_description	index_keys
XAK1Galaxy_Galaxy_Trunk_IGroup	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XPKGalaxy_Galaxy_Trunk_IGroup	nonclustered, unique, primary key located on PRIMARY	DateTime, PeripheralID, IGroupID, TimeZone

**Fields in Galaxy\_Trunk\_IGroup Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
AllTrunksBusyTime	Total time, in seconds, that all trunks in the I-group were busy.	DBINT	NOT NULL
CallsAbandoned	Number of external calls on this trunk group that were lost before being answered.	DBSMALLINT	NOT NULL
CallsHandled	Number of external calls on this trunk group that were answered.	DBSMALLINT	NOT NULL
CallsHeld	Number of external calls that exceed a specified system threshold before being answered or abandoned.	DBSMALLINT	NOT NULL
DateTime	The Central Controller date and time at the beginning of the reporting interval.	DBDATETIME	PK NOT NULL
GateAssignment	The Galaxy identifier of the gate to which the I-group is assigned.	DBTINYINT	NOT NULL
GateValid	Indicates whether all trunks in the I-group remained assigned to the gate for the entire reporting interval.	DBTINYINT	NOT NULL
IGroupID	The Galaxy identifier for the trunk I-group.	DBSMALLINT	PK NOT NULL
InODCallsAbandoned	Number of overflow/diversion-in calls accepted on tie-lines in this group, but lost before being answered.	DBSMALLINT	NOT NULL
InODCallsHandled	Number of overflow/diversion-in calls handled on tie-lines in this group.	DBSMALLINT	NOT NULL

**Galaxy\_Trunk\_IGroup Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
InODCallsRejected	Number of overflow/diversion-in calls offered on tie-lines in this group, but rejected.	DBSMALLINT	NOT NULL
ISDNCallByCallRejects	Number of ISDN calls rejected by this I-group because of call-by-call service limitations.	DBSMALLINT	NOT NULL
ISDNCallsWithAniSid	Number of ISDN calls on this I-group for which ANI was received.	DBSMALLINT	NOT NULL
LoadODOutHoldTime	Total time, in seconds, that tie-lines and load transfer trunks in this I-group were used for overflow/diversion and load transfer of out calls.	DBINT	NOT NULL
LoadTransferOut	This field applies to Galaxy-8 ACDs only.	DBSMALLINT	NOT NULL
OutCalls	Number of calls made on outbound trunks.	DBSMALLINT	NOT NULL
OutCallTalkTime	Total time, in seconds, that trunks in this I-group were used for outbound calls.	DBINT	NOT NULL
OutODCallsAccepted	Number of overflow/diversion-out calls made on tie-lines in this group and accepted by the receiving node.	DBSMALLINT	NOT NULL
OutODCallsRejected	Number of overflow/diversion-out calls made on tie-lines in this group and rejected by the receiving node.	DBSMALLINT	NOT NULL
PeripheralID	Number of overflow/diversion-out calls made on tie-lines in this group and rejected by the receiving node.	DBSMALLINT	PK, FK NOT NULL
PeripheralTimeZone	The time zone for the ACD. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	NOT NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL
SecondsInPeriod	Number of seconds in the reporting period.	DBSMALLINT	NOT NULL
TimeZone	The time zone for the Central Controller. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK NOT NULL
TrunkAssignedTime	Total time, in seconds, that trunks were assigned to this I-group.	DBINT	NOT NULL
TrunkGroupID	The system software identifier for the trunk group associated with this I-group.	DBINT	FK NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
TrunkIdleTime	Total time, in seconds, that trunks in the I-group were not busy with in or out calls.	DBINT	NOT NULL

## Group\_Security\_Control Table

This table is in the [Security category \(page 543\)](#). To see database rules for these tables, click [here \(page 600\)](#).

Each row describes the access members of a group have for a specific object. This table is used as an intermediate step in creating User\_Security\_Control records for each member of the group.

### Related table

[User Group \(page 514\)](#) (via UserGroupID)

**Table 108: Indexes for Group\_Security\_Control Table**

index_name	index_description	index_keys
XIE1Group_Security_Control	nonclustered, unique, primary key located on PRIMARY	ObjectID, ObjectType, UserGroupName
XIE2Group_Security_Control	nonclustered, unique, primary key located on PRIMARY	UserGroupID

### Fields in Group\_Security\_Control Table:

Field Name:	Description:	Data Type:	Keys and Null Option:
AccessLevel	Identifies the level of access group members have to the object. To see values. click <a href="#">here (page 553)</a> .	DBINT	NOT NULL
ObjectID	Together with ObjectType, identifies the object.	DBINT	IE-1 NOT NULL
ObjectType	Together with ObjectID, identifies the object.	DBINT	IE-1 NOT NULL
OriginClassID	If the access to the object was inherited from a class, this field identifies that class. Otherwise, it is 0.	DBINT	NOT NULL
OriginObjectID	If the access to the object was inherited from another object, this field identifies that object. Otherwise, it is 0.	DBINT	NOT NULL
OriginObjectType	If the access to the object was inherited from another object, this field identifies the type that object.	DBINT	NOT NULL
UserGroupID	Identifies the user group.	DBINT	IE-2 NOT NULL
UserGroupName	Identifies the user group. Only groups of type 'G' are referenced.	varchar(64)	IE-1 NOT NULL

**ICR\_Globals Table****ICR\_Globals Table**

This table is in the [System category \(page 548\)](#). To see database rules for these tables, click [here \(page 601\)](#).

Contains a single record containing general information about the Unified ICM configuration. You can use Unified ICM Configuration Manager to modify some fields of the ICR\_Globals records.

**Related tables**

[Call Type \(page 95\)](#)(DefaultCallTypeID maps to Call\_Type.CallTypeID)

[Network VRU \(page 300\)](#) (DefaultNetworkTargetID maps to Network\_VRU.NetworkTargetID)

**Fields in ICR\_Globals Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
BucketIntervalID	The ID for the entry in the Bucket_Interval Table used for all CallTypes as the default Bucket Intervals. The <b>default</b> value is <b>1</b> .	DBINT	FK NOT NULL
CompanyName	Name of the customer.	varchar(32)	NULL
CallTypeAbandonCallWaitTime	The minimum time in seconds an incoming call must be in process (in queue, listening to announcements, answering prompts) before being considered an abandoned call if the caller hangs up. The <b>default</b> value is <b>5</b> .	DBSMALLINT	NULL
CallTypeServiceLevelThreshold	The time in seconds to be used as the service level threshold. The <b>default</b> value is <b>20</b> .	DBINT	NULL
CallTypeServiceLevelType	Default value that indicates how the system software calculates the service level (that is, how it handles abandoned calls in calculating the service level). You can override this default for individual CallType. The <b>default</b> value is <b>1</b> .	DBSMALLINT	NULL
CCDomainName	The name of the NT domain that contains the Central Controller.	varchar(64)	NOT NULL
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
CLIDMaskingDigitsToMask	The number of digits of CLID to mask.	DBINT	NULL
CLIDMaskingEnable	Valid options are: • <b>Y</b> = CLID masking is enabled.	DBCHAR	NOT NULL

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	• <b>N</b> = CLID masking is not enabled.		
CLIDMaskingMaskCharacter	The character to use when masking digits.	varchar(1)	NULL
CLIDMaskingRemoveDigits	<p>Valid options are:</p> <ul style="list-style-type: none"> <li>• <b>Y</b> = Remove digits.</li> <li>• <b>N</b> = Mask digits.</li> </ul>	DBCHAR	NULL
CompatibleECCPayloadRules	Reserved for future use.	DBCHAR	NOT NULL
DefaultCallTypeID	Identifies a general default call type. This default is used if a call does not map to a specific call type and no default call type is defined for the associated routing client.	DBINT	FK NULL
DefaultNetworkTargetID	Identifies the default network VRU to use for a customer that has no network VRU defined or for a dialed number that is not associated with a customer.	DBINT	FK NULL
EnableExpandedCallContext	<p>Indicates whether expanded call context is enabled for the Unified ICM. Valid options are:</p> <ul style="list-style-type: none"> <li>• <b>Y</b> = ECC is enabled</li> <li>• <b>N</b> = (Default) ECC is not enabled.</li> </ul>	DBCHAR	NOT NULL
EnableHHThrottle	Enable/Disable PG to CC HH Throttling. The default value is Y.	DBCHAR	NOT NULL
ExternalAuthentication	Enables the use of an external authenticator with the Configuration Management Service (CMS) for the LoginName in the Person table. Valid options are:	DBCHAR	NOT NULL
ExternalScriptValidation	Name of external DLL to be used for script validation.	Varchar (255)	NULL
HistoricalReportingInterval	The value indicates router to calculate Call Type and Call Type Skill Group data for that interval. Default: 30.	DBINT	NOT NULL
ICRType	<p>Valid options include:</p> <ul style="list-style-type: none"> <li>• <b>0</b> = Standard</li> </ul>	DBINT	NOT NULL

## ICR\_Globals Table

Field Name:	Description:	Data Type:	Keys and Null Option:
	<ul style="list-style-type: none"> <li>• <b>1</b> = NAM</li> <li>• <b>2</b> = CICM</li> </ul>		
Unified CCE DeploymentType	Which of the allowed Unified CCE "simplified" deployment options the user has selected in the web-based config "Deployment Wizard".	DBINT	NULL
Unified CCE DeploymentState	<p>The state of the Unified CCE deployment as known by the web-based config "Deployment Wizard."</p> <p>Values</p> <ul style="list-style-type: none"> <li>• 0 – Not Done.</li> <li>Value 0 inserted at database create-time.</li> <li>• 1 – Aborted.</li> <li>• 2 – Done.</li> </ul>	DBINT	NOT NULL
KeepNScriptVersions	Maximum number of script versions to retain for each master script. If the value is 0, all versions are retained.	DBSMALLINT	NOT NULL
LoginCaseUnique	<p>Specifies whether or not LoginNames in the Person table are case-sensitive. Valid options are:</p> <ul style="list-style-type: none"> <li>• <b>Y</b> = Indicates that LoginNames in the Person table are case sensitive.</li> <li>• <b>N</b> = Indicates that the case of LoginNames in the Person table does not matter.</li> </ul> <p><b>Note:</b> (1) Changing this property will cause ALL person login names in the database to be changed appropriately. (2) It is possible that not all person records can be converted from case sensitive to not case sensitive or the reverse. This can happen if changing the case causes a name conflict with other login names in the system.</p>	DBCHAR	NOT NULL
MaxCorrelationNumber	The maximum value to be used as a correlation value for calls sent to a network VRU.	DBINT	NULL
MaxPartitions	The maximum number of partitions that can be configured for the system if partitioning is enabled.	DBINT	NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
MinCorrelationNumber	The minimum value to be used as a correlation value for calls sent to a network VRU.	DBINT	NULL
MinPasswordLength	Specifies a minimum password length for a Person.	DBINT	NOT NULL
MinScriptSchedTime	The shortest interval, in seconds, at which an administrative script can be scheduled.	DBINT	NOT NULL
PartitioningIndicator	Indicates whether or not partitioning is enabled. Valid options are: <ul style="list-style-type: none"><li>• <b>Y</b> = Partitioning is enabled.</li><li>• <b>N</b> = Partitioning is not enabled.</li></ul>	DBCHAR	NULL
PasswordType	Indicates if every component on the system can handle encoded passwords (PGs, 3rd Party applications, and so forth) <ul style="list-style-type: none"><li>• <b>1</b> = MD5</li><li>• <b>2</b> = SHA-2</li></ul> The default is 1.	DBSMALLINT	NOT NULL

## ICR\_Instance Table

This table is part of the [Script category \(page 539\)](#). For database rules, click [here. \(page 599\)](#)

Each row defines an Unified ICM instance. For a Network Applications Manager (NAM), you should configure an instance for each associated Customer ICM. Use Unified ICM Configuration Manager to create, update, or delete an Unified ICM instance.

### Related tables

[Application Gateway \(page 75\)](#) (via ICRInstanceID)

[Customer Definition \(page 194\)](#) (via ICRInstanceID)

[ICR Node \(page 269\)](#) (via ICRInstanceID)

**Table 109: Indexes for ICR\_Instance Table**

index_name	index_description	index_keys
XAK1ICR_Instance	nonclustered, unique, unique key located on PRIMARY	EnterpriseName

**ICR\_Locks Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XIE1ICR_Instance	nonclustered, unique, primary key located on PRIMARY	NetworkICRInstanceID
XPKICR_Instance	clustered, unique, primary key located on PRIMARY	ICRInstanceID

**Fields in ICR\_Instance Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
Description	Any additional information about the instance.	DESCRIPTION	NULL
EnterpriseName	An enterprise name for the instance. This name must be unique for all Unified ICM instances in the enterprise.	VNAME32	AK-1 NOT NULL
ICRInstanceID	A unique identifier for the instance.	DBINT	PK NOT NULL
LastUpdateKey	Key value this instance received from the NAM with the last configuration update.	DBFLT8	NULL
NetworkICRInstanceID	The Network Unified ICM instance, if any, associated with the instance.	DBINT	FK, IE-1 NULL
Number	The number the identifies the instance in Web Setup.	DBINT	NOT NULL
Type	Indicates whether the instance is Network ICM or a Customer ICM.	DBSMALLINT	NOT NULL

**ICR\_Locks Table**

This table is in the [System category \(page 548\)](#). To see database rules for these tables, click [here \(page 601\)](#).

Contains information about system locks currently held by users.

**Table 110: Indexes for ICR\_Locks Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XPKICR_Locks	clustered, unique, primary key located on PRIMARY	LockType, LockID

**Fields in ICR\_Locks Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
DataFld	Additional information the system software maintains for the lock.	varchar(255)	NULL
DateTime	The date and time at which the lock was obtained.	DBDATETIME	NOT NULL
LockID	Identifies the object that is locked. For example, for a Script lock, LockID holds the ScriptID value.	DBINT	PK NOT NULL
LockName	The name of the object that is locked. For example, for a Script lock, LockName holds the name of the script.	DESCRIPTION	NOT NULL
LockType	The type of the lock. To see values, click <a href="#">here (page 565)</a> .	DBINT	PK NOT NULL
ReleaseOnSend	Indicates whether the system software should automatically release the lock when the associated data are saved to the system database.	DBINT	NOT NULL
SystemName	The system from which the user obtained the lock.	VNAME32	NOT NULL
UserName	The name of the user who holds the lock.	varchar(64)	NOT NULL

## ICR\_Node Table

This table is part of the [Script category \(page 539\)](#). For database rules, click [here. \(page 599\)](#)

Each row represents a real-time distributor associated with an Unified ICM instance. On a Network ICM, you must configure the distributors associated with each Customer ICM. The Network ICM needs this information to forward certain configuration changes. Use Unified ICM Configuration Manager to create, modify, or delete an Unified ICM node.

### Related table

[ICR Instance \(page 267\)](#)(via ICRInstanceID)

**Table 111: Indexes for ICR\_Node Table**

index_name	index_description	index_keys
XAK1ICR_Node	nonclustered, unique, unique key located on PRIMARY	EnterpriseName
XIE1ICR_Node	nonclustered, unique, primary key located on PRIMARY	ICRInstanceID
XPKICR_Node	clustered, unique, primary key located on PRIMARY	ICRNodeID

**ICR\_View Table****Fields in ICR\_Node Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
ConfigParam	Parameters to be passed to the node at initialization.	varchar(255)	NULL
Description	Additional information about the node.	DESCRIPTION	NULL
DomainName	The name of the NT domain that contains the node.	varchar(64)	NOT NULL
EnterpriseName	An enterprise name for the node. This name must be unique for all nodes in the enterprise.	VNAME32	AK-1 NOT NULL
ICRInstanceID	The Unified ICM instance associated with the node.	DBINT	FK, IE-1 NOT NULL
ICRNodeID	A unique identifier for the node.	DBINT	PK NOT NULL
SystemName	The host name of the machine on which the node runs.	VNAME32	NOT NULL
Type	The type of node: <ul style="list-style-type: none"><li>• <b>1</b> = Primary Distributor</li><li>• <b>2</b> = Backup Distributor</li></ul>	DBSMALLINT	NOT NULL

**ICR\_View Table**

This table is in the [Schedule category \(page 538\)](#). To see database rules, click [here \(page 598\)](#).

Each ICR\_View describes how the system software interprets the data imported for a schedule. The individual columns within the view are described in associated View\_Column rows.

**Related table**

[Schedule \(page 365\)](#) (via ICRViewID)

[View Column \(page 520\)](#) (via ICRViewID)

**Table 112: Indexes for ICR\_View Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XAK1ICR_View	nonclustered, unique, unique key located on PRIMARY	EnterpriseName
XPKICR_View	clustered, unique, primary key located on PRIMARY	ICRViewID

**Fields in ICR\_View Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
BaseTableName	The name of the table in the system from which it is imported.	VNAME32	NOT NULL
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
Description	Additional information about the view.	DESCRIPTION	NULL
EnterpriseName	A unique name for the view.	VNAME32	AK-1 NOT NULL
ICRViewID	A unique identifier for the view.	DBINT	PK NOT NULL
ReadBaseTable	Indicates whether fields in the Schedule Import table can be read directly rather than through a view. Valid options are: <ul style="list-style-type: none"><li>• Y = Yes</li><li>• N = No</li></ul>	DBCHAR	NOT NULL
ViewName	The name of the view.	VNAME32	NOT NULL
ViewType	The type of view.	DBINT	NOT NULL

**Ids Table**

This table is in the [Security category \(page 543\)](#). To see database rules for these tables, click [here \(page 600\)](#).

Indicates whether a specific object type supports row-level security. For those object types that do support row-level security, the Ids table contains one row for each object of that type.

**Related tables**

[Object List \(page 304\)](#) (via ObjectType)

[Object Security \(page 305\)](#) (via ObjectType + ObjectID)

[User Security Control \(page 516\)](#) (via ObjectType + ObjectID)

**Table 113: Indexes for IDs Table**

index_name	index_description	index_keys
XPKIds	clustered, unique, primary key located on PRIMARY	ObjectType, ObjectID

**Import\_Log Table****Fields in Ids Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ObjectID	Identifies a specific object for which row-level security is supported. If the object type does not support row-level security, this value is 0.	DBINT	PK NOT NULL
ObjectType	Identifies the object type.	DBINT	PK, FK NOT NULL
ParentObjectID	Identifies the object's parent. A value of 0 indicates that the object has no parent.	DBINT	NOT NULL
ParentObjectType	Identifies the object type of the object's parent. For example, a peripheral is a parent to its trunk groups. A value of 0 indicates that the object has no parent.	DBINT	NOT NULL

**Import\_Log Table**

This table is in the [Schedule category \(page 538\)](#). To see database rules, click [here \(page 598\)](#).

Central database only. Contains information about schedule import operations that have been performed. The system software automatically creates an Import\_Log row each time it imports schedule information. The Primary Key (**PK**) is **nonclustered**.

**Related table**

[Schedule \(page 365\)](#) (via ScheduleID)

**Table 114: Indexes for Import\_Log Table**

index_name	index_description	index_keys
XAK1Import_Log	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XPKImport_Log	clustered, unique, primary key located on PRIMARY	DateTime, ScheduleID, TimeZone

**Fields in Import\_Log Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
DateTime	The date and time when the row was generated.	DBDATETIME	PK NOT NULL
LogOperation	The operation that was logged; for example Import or Edit.	VNAME32	NOT NULL
Message	Indicates 'Success' or describes an error.	DESCRIPTION	NOT NULL
RecoveryKey	A value used internally by the system software to track virtual time.	DBFLT8	AK-1 NOT NULL
RowsCopied	The number of rows imported or modified.	DBINT	NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
ScheduleID	Identifies the schedule affected.	DBINT	PK, FK NOT NULL
TimeZone	The time zone for the date and time. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK NOT NULL
WorkstationName	The workstation from which data was imported.	VNAME32	NOT NULL

## Import\_Rule Table

This table is in the [Blended Agent category \(page 527\)](#). To see database rules for these tables, click [here \(page 593\)](#).

Contains a list of all the import rules and their associated import lists. Use the Blended Agent Configuration option within Unified ICM Configuration Manager to modify Import\_Rule records.

**Note:** If Outbound Option was not selected during setup, this table will contain no data.

### Related tables

[Query Rule \(page 325\)](#) (via ImportRuleID)

[Import Rule Clause \(page 277\)](#) (via ImportRuleID)

[Import Rule History \(page 278\)](#) (via ImportRuleID)

[Import Rule Real Time \(page 279\)](#) (via ImportRuleID)

**Table 115: Indexes for Import\_Rule Table**

index_name	index_description	index_keys
XAK1Import_Rule	nonclustered, unique, unique key located on PRIMARY	ImportRuleName
XPKImport_Rule	clustered, unique, primary key located on PRIMARY	ImportRuleID

### Fields in Import\_Rule Table:

Field Name:	Description:	Data Type:	Keys and Null Option:
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
ContactTableName	The name of the contact table into which this file is to be imported.	varchar(64)	NOT NULL
DayOfMonth	The day of the month to run this import. Only used when MonthlyEnabled is set to Y.	DBINT	NULL

**Import\_Rule Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
Deleted	Deleted Flag. Stored as a character: <ul style="list-style-type: none"><li>• <b>Y</b> = Yes</li><li>• <b>N</b> = No</li></ul>	DBCHAR	NOT NULL
Enabled	A flag that indicates whether this import should be run at the scheduled time: <ul style="list-style-type: none"><li>• <b>Y</b> = Run at scheduled time.</li><li>• <b>N</b> = Do not run at scheduled time.</li></ul>	DBCHAR	NOT NULL
FilePath	The directory where the file to be imported is stored. UNC naming convention.	varchar(255)	NULL
FilePollingEnabled	Valid options include: <ul style="list-style-type: none"><li>• <b>Y</b> = Import files are imported as soon as they are created. After the import is complete, the import file is renamed or deleted.</li><li>• <b>N</b> = Import files are not imported as soon as they are created.</li></ul>	DBCHAR	NOT NULL
FixedFormatEnabled	Indicates whether file is fixed format <ul style="list-style-type: none"><li>• <b>Y</b> = Yes, fixed format</li><li>• <b>N</b> = Not fixed format (comma-delimited).</li></ul>	DBCHAR	NOT NULL
FridayEnabled	Flag that indicates if this import should be performed every Friday: <ul style="list-style-type: none"><li>• <b>Y</b> = Perform import every Friday.</li><li>• <b>N</b> = Do not perform import every Friday.</li></ul>	DBCHAR	NOT NULL
FutureUseInt1	Reserved for future use	DBINT	NULL
FutureUseInt2	Reserved for future use	DBINT	NULL
FutureUseInt3	Reserved for future use	DBINT	NULL
FutureUseInt4	Reserved for future use	DBINT	NULL
FutureUseInt5	Reserved for future use	DBINT	NULL
FutureUseVarchar1	Reserved for future use	varchar(64)	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
FutureUseVarchar2	Reserved for future use	varchar(64)	NULL
FutureUseVarchar3	Reserved for future use	varchar(64)	NULL
ImportRuleID	A unique identifier for this import rule.	DBINT	PK NOT NULL
ImportRuleName	The customer-entered name for this import rule.	VNAME32	AK-1 NOT NULL
ImportType	Indicates if this is a Contact Import or a Do-Not-Call import:  • <b>Y</b> = The import type is Contact Import.  • <b>N</b> = The import type is Do-Not-Call.	DBINT	NOT NULL
MondayEnabled	Flag that indicates if this import should be performed every Monday:  • <b>Y</b> = Perform import every Monday.  • <b>N</b> = Do not perform import every Monday.	DBCHAR	NOT NULL
MonthlyEnabled	If enabled, this import schedule will run based on the day of the month instead of the current week day:  • <b>Y</b> = Import will occur one day per month.  • <b>N</b> = Import will occur on a daily/weekly basis.	DBCHAR	NOT NULL
OverwriteEnabled	Indicates whether a contact table that already exists should be overwritten:  • <b>Y</b> = Yes, overwrite  • <b>N</b> = No, append to.	DBCHAR	NOT NULL
RenameEnabled	Valid options include:  • <b>Y</b> = The import file must be renamed after it is imported; otherwise, it will be deleted.  • <b>N</b> = The import file need not be renamed.	DBCHAR	NOT NULL
RenameMaxVersions	The number of import tile versions that are maintained. After an import file is imported, its name can be appended with a .001 through .nnn.	DBSMALLINT	NOT NULL
SaturdayEnabled	Flag that indicates if this import should be performed every Saturday:	DBCHAR	NOT NULL

**Import\_Rule Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	<ul style="list-style-type: none"> <li>• <b>Y</b> = Perform import every Saturday.</li> <li>• <b>N</b> = Do not perform import every Saturday.</li> </ul>		
ScheduleStartHours	The hour at which the import should start. Hours are in 24-hour format and are based on Central Controller time.	DBINT	NOT NULL
ScheduleStartMinutes	The minute at which the import should start, based on Central Controller time.	DBINT	NOT NULL
SPPostImportEnabled	Valid options include: <ul style="list-style-type: none"> <li>• <b>Y</b> = A stored procedure is executed after the build process has been completed.</li> <li>• <b>N</b> = A stored procedure is not executed.</li> </ul>	DBCHAR	NOT NULL
SPPreImportEnabled	Valid options include: <ul style="list-style-type: none"> <li>• <b>Y</b> = A stored procedure is executed prior to reading the import file but after the customer table has been created.</li> <li>• <b>N</b> = A stored procedure is not executed.</li> </ul>	DBCHAR	NOT NULL
SundayEnabled	Flag that indicates if this import should be performed every Sunday: <ul style="list-style-type: none"> <li>• <b>Y</b> = Perform import every Sunday.</li> <li>• <b>N</b> = Do not perform import every Sunday.</li> </ul>	DBCHAR	NOT NULL
ThursdayEnabled	Flag that indicates if this import should be performed every Thursday: <ul style="list-style-type: none"> <li>• <b>Y</b> = Perform import every Thursday.</li> <li>• <b>N</b> = Do not perform import every Thursday.</li> </ul>	DBCHAR	NOT NULL
TuesdayEnabled	Flag that indicates if this import should be performed every Tuesday: <ul style="list-style-type: none"> <li>• <b>Y</b> = Perform import every Tuesday.</li> <li>• <b>N</b> = Do not perform import every Tuesday.</li> </ul>	DBCHAR	NOT NULL
WednesdayEnabled	Flag that indicates if this import should be performed every Wednesday: <ul style="list-style-type: none"> <li>• <b>Y</b> = Perform import every Wednesday.</li> <li>• <b>N</b> = Do not perform import every Wednesday.</li> </ul>	DBCHAR	NOT NULL

## Import\_Rule\_Clause Table

This table is in the [Blended Agent category \(page 527\)](#). To see database rules for these tables, click [here \(page 593\)](#).

Defines the portions of an import list to be imported by the Blended Agent Import Rule process. Use the Blended Agent Configuration option within Unified ICM Configuration Manager to modify Import\_Rule\_Clause records.

**Note:** If Outbound Option was not selected during setup, this table will contain no data.

### Related table

[Import\\_Rule \(page 273\)](#) (via ImportRuleID)

**Table 116: Indexes for Import\_Rule\_Clause Table**

index_name	index_description	index_keys
XPKImport_Rule_Clause	clustered, unique, primary key located on PRIMARY	ImportRuleID, SequenceNumber

### Fields in Import\_Rule\_Clause Table:

Field Name:	Description:	Data Type:	Keys and Null Option:
DecimalPlaces	Indicates how many positions after the decimal point.	DBINT	NOT NULL
FieldName	The name of the column within the contact table into which the corresponding field within the import file will be inserted.	varchar(64)	NOT NULL
FutureUseInt1	Reserved for future use	DBINT	NULL
FutureUseInt2	Reserved for future use	DBINT	NULL
FutureUseInt3	Reserved for future use	DBINT	NULL
FutureUseInt4	Reserved for future use	DBINT	NULL
FutureUseInt5	Reserved for future use	DBINT	NULL
FutureUseVarchar1	Reserved for future use	varchar(64)	NULL
FutureUseVarchar2	Reserved for future use	varchar(64)	NULL
FutureUseVarchar3	Reserved for future use	varchar(64)	NULL
ImportRuleID	The import rule to which this clause belongs.	DBINT	PK, FK NOT NULLNULL

**Import\_Rule\_History Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
IndexColumnEnabled	Valid options include: <ul style="list-style-type: none"><li>• <b>Y</b> = Index will be created on this column.</li><li>• <b>N</b> = Index will not be created on this column.</li></ul>	DBCHAR	NOT NULL
Length	The length of the column.	DBINT	NOT NULL
NullEnabled	Valid options include: <ul style="list-style-type: none"><li>• <b>Y</b> = Column allows a NULL entry.</li><li>• <b>N</b> = Column does not allow NULL values.</li></ul>	DBCHAR	NOT NULL
SequenceNumber	The index for clauses within a given import rule.	DBINT	PK NOT NULL
StandardColumnType	The name of a Blended Agent standard column to which this field will default.	DBINT	NULL
Type	The data type of the column.	DBINT	NOT NULL

**Import\_Rule\_History Table**

This table is in the [Blended Agent category \(page 527\)](#). To see database rules for these tables, click [here \(page 593\)](#).

Central database only.

Contains the history of every Blended Agent import and shows how many records succeeded and failed.

#### Related table

[Import\\_Rule \(page 273\)](#) (via ImportRuleID)

**Table 117: Indexes for Import\_Rule\_History Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XAK1Import_Rule_History	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XPKImport_Rule_History	clustered, unique, primary key located on PRIMARY	StartTime, ImportRuleID, TimeZone

**Fields in Import\_Rule\_History Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
BadRecords	The number of records that had errors while importing.	DBINT	NOT NULL
EndDateTime	The date and time when the import was finished.	DBDATETIME	NOT NULL
GoodRecords	The number of records successfully imported so far.	DBINT	NOT NULL
FutureUseInt1	Reserved for future use	DBINT	NULL
FutureUseInt2	Reserved for future use	DBINT	NULL
FutureUseInt3	Reserved for future use	DBINT	NULL
FutureUseInt4	Reserved for future use	DBINT	NULL
FutureUseInt5	Reserved for future use	DBINT	NULL
ImportedToDialingListCount	Number of records which were imported to DialingLists. This number may be larger than the number of records in the import if this import list is associated with more than one campaign query rule.	DBINT	NULL
ImportRuleID	The current active import.	DBINT	PK, FK NOT NULL
RecoveryKey	A value used internally by the system software to track virtual time.	DBFLT8	AK-1 NOT NULL
StartTime	The date and time when the import was started.	DBDATETIME	PK NOT NULL
TimeZone	The time zone for the date and time. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK NOT NULL
TotalRecords	The total number of records contained in the import file.	DBINT	NOT NULL
UnmatchedRegionPrefixCount	Number of records which did not match any of the existing region prefixes, thus getting the default campaign time zone.	DBINT	NULL

**Import\_Rule\_Real\_Time Table**

This table is in the [Blended Agent category \(page 527\)](#). To see database rules for these tables, click [here \(page 593\)](#).

Local database only.

**Import\_Rule\_Real\_Time Table**

Contains the name and current status of the import list that is currently being generated by the Blended Agent Import Rule process.

**Related table**

[Import\\_Rule \(page 273\)](#) (via ImportRuleID)

**Table 118: Indexes for Import\_Rule\_Real\_Time Table**

index_name	index_description	index_keys
XPKImport_Rule_Real_Time	clustered, unique, primary key located on PRIMARY	ImportRuleID

**Fields in Import\_Rule\_Real\_Time Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
BadRecords	The number of records that had errors while being imported. (Note: A new-line character with a space character can result in a bad record. For example, if you enter 10 customer records into a text file and then press the Enter key after the 10th record, an 11th "bad record" is created by this process.)	DBINT	NULL
DateTime	The date and time when the import was changed.	DBDATETIME	NOT NULL
DateTimeStart	The date and time at which this import was started.	DBDATETIME	NULL
FutureUseInt1	Reserved for future use	DBINT	NULL
FutureUseInt2	Reserved for future use	DBINT	NULL
FutureUseInt3	Reserved for future use	DBINT	NULL
FutureUseInt4	Reserved for future use	DBINT	NULL
FutureUseInt5	Reserved for future use	DBINT	NULL
GoodRecords	The number of records successfully imported so far.	DBINT	NULL
ImportRuleID	The current active import.	DBINT	PK, FK NOT NULL
Status	The real-time import status: 380, Import Begin; 385, Import Update; 420, Import End; 430, DNC Begin; 450 DNC End.	DBINT	NULL
TotalRecords	A count of all records within an import file.	DBINT	NULL

## Import\_Schedule Table

This table is in the [Schedule category \(page 538\)](#). To see database rules, click [here \(page 598\)](#).

Defines a command that the system software executes periodically to import data into a schedule. Use the Workforce Management Integration System to schedule import operations.

### Related tables

[Schedule \(page 365\)](#) (via ScheduleID)

**Table 119: Indexes for Import\_Schedule Table**

index_name	index_description	index_keys
XIE1Import_Schedule	nonclustered, unique, primary key located on PRIMARY	ScheduleID
XPKImport_Schedule	clustered, unique, primary key located on PRIMARY	ImportScheduleID

### Fields in Import\_Schedule Table:

Field Name:	Description:	Data Type:	Keys and Null Option:
AtCommand	The command the system software executes to import the data.	varchar(255)	NOT NULL
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
Description	Additional information about the schedule import.	DESCRIPTION	NULL
ImportScheduleID	A unique identifier for the Import Schedule record.	DBINT	PK NOT NULL
ScheduleID	Identifies the Schedule for which the data is imported.	DBINT	FK NOT NULL
WorkstationName	The host name of the workstation from which the system software imports schedule data.	VNAME32	NOT NULL

## Label Table

This table is in the [Route category \(page 535\)](#). To see database rules for these tables, click [here \(page 529\)](#).

Defines the label that is sent to the routing client for each Network Target value. Use the Unified ICM Configuration Manager to add, update, and delete Label records.

### Related tables

[Customer Definition \(page 194\)](#) (via CustomerDefinitionID)

**Label Table**

- [Dialed Number \(page 197\)](#) (via LabelID)
- [Dialed Number Label \(page 199\)](#)(via LabelID)
- [Network Target \(page 294\)](#)(via NetworkTargetID)
- [Network Vru \(page 300\)](#) (via LabelID)
- [Routing Client \(page 357\)](#) (via RoutingClientID)

**Table 120: Indexes for Label Table**

index_name	index_description	index_keys
XAK1Label	nonclustered, unique, unique key located on PRIMARY	RoutingClientID, Label
XIE1Label	nonclustered, unique, primary key located on PRIMARY	CustomerDefinitionID
XPKLabel	clustered, unique, primary key located on PRIMARY	LabelID

**Fields in Label Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
CustomerDefinitionID	Identifies the customer associated with the label.	DBINT	FK, IE-1 NULL
Description	Additional information about the label.	DESCRIPTION	NULL
ICRInstanceID	For network VRU labels with multiple NAMs, this field contains a foreign key to identify the Network Applications Manager (NAM) instance for which the label is valid.	DBINT	FK NULL
Label	The label to be returned to the routing client.	VNAME32	AK-1 NOT NULL
LabelID	Unique identifier for this label.	DBINT	PK NOT NULL
LabelType	The type of the label. For the list of values, click <a href="#">here (page 565)</a> .	DBSMALLINT	NOT NULL
NetworkTargetID	Foreign key from the Network Target table. Each label maps to one and only one network target.	DBINT	FK NULL
RoutingClientID	Identifies the routing client that can receive this label.	DBSMALLINT	AK-1, FK NOT NULL

## Logger\_Admin Table

This table is in the [System category \(page 548\)](#). To see database rules for these tables, click [here \(page 601\)](#).

Central database only.

Contains one record of information for each administrative task the system software applies to the central database. Specifically, this table tracks Purges and Update Statistics operations. These operations are run automatically as scheduled jobs.

**Table 121: Indexes for Logger\_Admin Table**

index_name	index_description	index_keys
XAK1Logger_Admin	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XIE1Logger_Admin	nonclustered, unique, primary key located on PRIMARY	TableName, ScheduledAt, FunctionName
XIE2Logger_Admin	nonclustered, unique, primary key located on PRIMARY	DateTime
XPKLogger_Admin	clustered, unique, primary key located on PRIMARY	RecoveryKey

### Fields in Logger\_Admin Table :

Field Name:	Description:	Data Type:	Keys and Null Option:
DateTime	The date and time at which the scheduled job was submitted.	DBDATETIME	IE-2 NOT NULL
EndTime	Time at which the operation completed.	DBDATETIME	NULL
FromRecoveryKey	For a Purge operation, the recovery key of the earliest record purged.	DBFLT8	NULL
FunctionName	The operation performed; for example, Purge.	VNAME32	IE-1 NOT NULL
RecoveryKey	A value used internally by the system software to track the time the record is created.	DBFLT8	PK, AK-1 NOT NULL
Retain	For a Purge operation, the number of days records are retained. Records older than this are deleted in the Purge.	DBINT	NULL
RowsPurged	For a purge operation, the number of rows purged.	DBINT	NULL
ScheduledAt	Date and time the scheduled job executed.	DBDATETIME	IE-1 NOT NULL
StartTime	Time at which the operation started.	DBDATETIME	NULL

**Logger\_Meters Table**

Field Name:	Description:	Data Type:	Keys and Null Option:
TableName	The name of the database table on which the operation was performed.	VNAME32	IE-1 NOT NULL
ToRecoveryKey	For a Purge operation, the recovery key of the most recent record purged.	DBFLT8	NULL

**Logger\_Meters Table**

This table is in the [System category \(page 548\)](#). To see database rules for these tables, click [here \(page 601\)](#).

Central database only.

Contains performance information about the Logger process. One copy of the Logger process runs on the Central Controller and another runs on each Administration & Data Server.

The Logger process on the Administration & Data Server creates a new Logger Meters row in the local database every five minutes. The Logger process on the Central Controller creates a new Logger Meters row in the central database every five minutes.

**Table 122: Indexes for Logger\_Meters Table**

index_name	index_description	index_keys
XAK1Logger_Meters	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XPKLogger_Meters	clustered, unique, primary key located on PRIMARY	DateTime, TimeZone

**Fields in Logger\_Meters Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ConfigMessagesTo5	The number of configuration changes written during the five-minute interval.	DBINT	NOT NULL
DataMessagesTo5	Number of data messages received in the five-minute interval.	DBINT	NOT NULL
DataPagesAllocated	Number of data pages allocated.	DBFLT8	NOT NULL
DataPagesUsed	Number of data pages used.	DBFLT8	NOT NULL
DateTime	Record timestamp (unique).	DBSMALLDATETIME	PK NOT NULL
EMSSMessagesTo5	Number of EMS messages received in the five-minute interval.	DBINT	NOT NULL
FiveMinuteHistoryTo5	Total number of five-minute records written during the five-minute interval.	DBINT	NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
HalfHourHistoryTo5	Total number of half-hour records written during the five-minute interval.	DBINT	NOT NULL
LogPagesAllocated	Number of log pages allocated.	DBFLT8	NOT NULL
LogPagesUsed	Number of log pages used.	DBFLT8	NULL
MDSMessagesTo5	Number of MDS messages received in the five-minute interval.	DBINT	NOT NULL
MessageTimeTo5	Time spent processing messages in the five-minute interval, in milliseconds.	DBINT	NOT NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL
RouteCallDetailTo5	Number of Route Call Detail rows written during the five-minute interval.	DBINT	NOT NULL
TerminationCallDetailTo5	Number of Termination Call Detail rows written during the five-minute interval.	DBINT	NOT NULL
TimeZone	The time zone for the date and time. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK NOT NULL

## Logger\_Type Table

This table is in the [System category \(page 548\)](#). To see database rules for these tables, click [here \(page 601\)](#).

Identifies the Logger type (that is, standard, Customer ICM (CICM), or Network Applications Manager (NAM)). If the Logger is a NAM Logger, this table also specifies whether or not the NAM is a slave NAM.

### Fields in Logger\_Type Table:

Field Name:	Description:	Data Type:	Keys and Null Option:
LoggerType	<p>The type of Logger:</p> <ul style="list-style-type: none"> <li>• 1 =Standard</li> <li>• 2 = CICM</li> <li>• 3= NAM</li> </ul>	DBINT	NOT NULL
SlaveNICR	Indicates whether or not the NAM is slave to another NAM:	DBCHAR	NOT NULL

**Logical\_Interface\_Controller Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	<ul style="list-style-type: none"> <li>• <b>Y</b> = System is a slave NAM</li> <li>• <b>N</b> = System is not a slave NAM.</li> </ul>		

**Logical\_Interface\_Controller Table**

This table is in the [Device \(page 529\)](#) category. For database rules, click [here \(page 595\)](#).

Each row corresponds to a (possibly duplexed) Network Interface Controller (NIC) or Peripheral Gateway (PG). A duplexed NIC has two entries in the Physical Interface Controller table and a single entry in the Logical Interface Controller table. Use Unified ICM Configuration Manager to add, update, and delete Logical\_Interface\_Controller records.

**Related tables**

[Network Trunk Group \(page 295\)](#) (via LogicalControllerID)

[Peripheral \(page 306\)](#) (via LogicalControllerID)

[Physical Interface Controller \(page 324\)](#) (via LogicalControllerID)

[Routing Client \(page 357\)](#)(via LogicalControllerID)

[Service Array \(page 388\)](#) (via LogicalControllerID)

[Translation Route \(page 503\)](#) (via LogicalControllerID)

**Table 123: Indexes for Logical\_Interface\_Controller Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XAK1Logical_Interface_Controll	nonclustered, unique, unique key located on PRIMARY	EnterpriseName
XPKLogical_Interface_Controlle	clustered, unique, primary key located on PRIMARY	LogicalControllerID

**Fields in Logical\_Interface\_Controller Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
ACDTimeEnabled	Indicate pg to generate all peripheral related historical data based on the ACD time. Default: ‘N’	DBCHAR	NOT NULL
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
ClientType	The type of client the controller provides the interface for.	DBSMALLINT	NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
ConfigParam	String containing information, such as logon information, specific to the interface controller device. For example: -rtuser <i>UserName -rtpswd Password</i>	varchar(255)	NULL
Deleted	Deleted Flag. Stored as a character: <ul style="list-style-type: none"><li>• <b>Y</b> = Yes</li><li>• <b>N</b> = No</li></ul>	DBCHAR	NOT NULL
Description	Additional information about the controller.	DESCRIPTION	NULL
EnterpriseName	An enterprise name for the controller. This name must be unique for all logical controllers in the enterprise.	VNAME32	AK-1 NOT NULL
HistoricalReportingInterval	The value indicates PG to calculate historical data at that interval. Default: 30	DBINT	YES
LogicalControllerID	Unique identifier for this logical controller.	DBSMALLINT	PK NOT NULL
LogicalControllerType	The Interface Controller type: <ul style="list-style-type: none"><li>• <b>2</b> = PG</li><li>• <b>3</b> = NIC</li></ul>	DBSMALLINT	NOT NULL
PrimaryCtiAddress	The address for CTI Server as <i>IP:port</i> (either in dotted-numeric or name format).	varchar(32)	NULL
SecondaryCtiAddress	The address for the backup CTI Server as <i>IP:port</i> (either in dotted-numeric or name format)	varchar(32)	NULL

## Machine\_Info

This table is in the [System category \(page 548\)](#). To see database rules for these tables, click [here \(page 601\)](#).

This table lists the machines in Simplified Configuration deployments.

**Table 124: Indexes for Machine\_Info Table**

index_name	index_description	index_keys
XAK1MachineName	nonclustered, unique, unique key located on PRIMARY	MachineName

**Master\_Script Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XPKMachine_Info	clustered, unique, primary key located on PRIMARY	MachineID

**Fields in Machine\_Info:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
ChangeStamp	The change stamp	CHANGESTAMP	NOT NULL
Description	The description	DESCRIPTION	NULL
IsDeploymentMasterAW	Indicates whether the machine is the 'Deployment Master' Administration & Data Server.  Values are 'Y' (machine <i>is</i> the Deployment Master Administration & Data Server) and 'N' (machine <i>is not</i> the Deployment Master Administration & Data Server).  Default is 'N'.	DBCHAR	NOT NULL
MachineID	Identifier.	DBINT	NOT NULL
MachineName	The machine name or IP address.	varchar(64)	NOT NULL
MachineType	The type or role of the machine in the department.	DBINT	NOT NULL

**Master\_Script Table**

This table is part of the [Script category \(page 539\)](#). For database rules, click [here. \(page 599\)](#)

Each row identifies a routing script or an administrative script. Each master script might have several versions. Information about each version is stored in the Script table. A new Master\_Script record is created whenever you save a script with a new name in the Script Editor.

**Related tables**

[Admin Script Schedule Map \(page 13\)](#) (via MasterScriptID)

[Customer Definition \(page 194\)](#)(via CustomerDefinitionID)

[Business Entity \(page 94\)](#) (via EntityID)

[Call Type Map \(page 121\)](#) (via MasterScriptID)

[Call Type Real Time \(page 142\)](#) (via MasterScriptID)

[Script \(page 377\)](#) (via MasterScriptID)

**Table 125: Indexes for Master\_Script Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XAK1Master_Script	nonclustered, unique, unique key located on PRIMARY	CustomerIdShadow, EntityID, EnterpriseName
XPKMaster_Script	clustered, unique, primary key located on PRIMARY	MasterScriptID

**Fields in Master\_Script Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
CurrentVersion	Specifies the version of the script that is currently available for use.	DBINT	NOT NULL
CustomerDefinitionID	Identifies the customer definition associated with the script.	DBINT	FK NULL
CustomerIdShadow	A "shadow" CustomerDefinitionID that allows multiple scripts with the same EnterpriseName and different customer numbers.	DBINT	AK-1 NOT NULL
Description	Additional information about the script.	DESCRIPTION	NULL
EnterpriseName	An enterprise name for the master script. The name must be unique among all master scripts within the business entity.	varchar(64)	AK-1 NOT NULL
EntityID	If partitioning is enabled, indicates the business entity to which the master script belongs.	DBINT	AK-1, FK NOT NULL
MasterScriptID	Unique identifier for this master script.	DBINT	PK NOT NULL
NextAvailableVersion	The next version number available for the script.	DBINT	NOT NULL
ScriptType	Indicates whether the script is a routing script or an administrative script.	DBSMALLINT	NOT NULL

## Media\_Class Table

This table is part of the [Media Routing category \(page 534\)](#). For database rules, click [here](#). (page 597)

Information in this table defines a type of media class. This table is populated initially with default media classes as listed in the MediaClassID field, below.

### Related Table

[Media Routing Domain \(page 290\)](#) table via the MediaClassID field.

**Media\_Routing\_Domain Table****Table 126: Indexes for Media\_Class Table**

index_name	index_description	index_keys
XAK1Media_Class	nonclustered, unique, unique key located on PRIMARY	EnterpriseName
XPKMedia_Class	clustered, unique, primary key located on PRIMARY	MediaClassID

**Fields in Media\_Class Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
Description	Additional information about this media class.	DESCRIPTION	NULL
EnterpriseName	A unique name for this media class.	VNAME32	AK-1 NOT NULL
MaxTaskDuration	<b>Default: 28800</b>	DBINT	NOT NULL
MediaClassID	Identifies the type of media class. Initially, this ID is set to 4, which is the Cisco Voice media class: <ul style="list-style-type: none"> <li>• <b>1</b> = Cisco_Single_Session_Chat</li> <li>• <b>2</b> = Cisco_Multi_Session_Chat</li> <li>• <b>3</b> = Cisco_Blended_Collaboration</li> <li>• <b>4</b> = Cisco_Voice</li> <li>• <b>5</b> = Cisco_e-mail</li> </ul>	DBINT	PK NOT NULL
TaskLife	<b>Default: 1: 1200; 2: 1200; 3: 1200; 4: 300; 5: 300</b>	DBINT	NOT NULL
TaskStartTimeout	<b>Default: 30</b>	DBINT	NOT NULL

**Media\_Routing\_Domain Table**

This table is part of the [Media Routing category \(page 534\)](#). For database rules, click [here](#). (page 597).

It describes a single implementation of a media class. For example, a media class such as Cisco single-session chat might have one or more Media Routing Domains (MRDs) defined. These MRDs would all be of the same media class. However, they might be on different servers or handle slightly different types of requests (for example, English single-session chat and Spanish single-session chat).

**Related Tables**

<a href="#">Media Class (page 289)</a> (via MediaClassID)	<a href="#">Application Path Member (page 83)</a> (via MRDomainID)	<a href="#">Peripheral Half Hour (page 310)</a> (via MRDomainID)
<a href="#">Skill Group (page 432)</a> (via MRDomainID)	<a href="#">Agent State Trace (page 64)</a> (via MRDomainID)	<a href="#">Agent Event Detail (page 24)</a> (via MRDomainID)
<a href="#">Agent Half Hour (page 25)</a> (via MRDomainID)	<a href="#">Service (page 386)</a> (via MRDomainID)	<a href="#">Agent Real Time (page 34)</a> (via MRDomainID)
<a href="#">Agent Logout (page 33)</a> (via MRDomainID)	<a href="#">Termination Call Detail (page 490)</a> (via MRDomainID)	<a href="#">Peripheral Real Time (page 316)</a> (via MRDomainID)
<a href="#">Peripheral Default Route (page 310)</a> (via MRDomainID)	<a href="#">Dialed Number (page 197)</a> (via MRDomainID)	<a href="#">Service Level Threshold (page 414)</a> (via MRDomainID)

**Note:**

- Media Routing Domain and Device Data: Each Media Routing Domain maps to zero one or more Peripheral Half Hour and Peripheral Real Time rows, Peripheral Default Routes, and Dialed Numbers. Each Peripheral Half Hour and Real Time row, each Peripheral Default Route, and each Dialed Number maps to exactly one Media Routing Domain.
- Media Routing Domain and Skill Target Data: Each Media Routing Domain maps to zero one or more Skill Groups, Agent State Trace rows, Agent Half Hour rows, Services, Agent Real Time rows, Agent Logout rows, and Termination Call Detail rows. Each Skill Group, Agent State Trace row, Agent Half Hour row, Service, Agent Real Time row, Agent Logout row, and Termination Call Detail row maps to exactly one Media Routing Domain.

**Table 127: Indexes for Media\_Routing\_Domain Table**

index_name	index_description	index_keys
XAK1Media_Routing_Domain	clustered, unique, unique key located on PRIMARY	EnterpriseName
XPKMedia_Routing_Domain	nonclustered, unique, primary key located on PRIMARY	MRDomainID

**Fields in Media\_Routing\_Domain Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
Description	Additional information about this media routing domain.	DESCRIPTION	NULL
EnterpriseName	A unique name for this media class. Initially, the EnterpriseName is set to Cisco_Voice.	VNAME32	AK-1 NOT NULL
Interruptible	Specifies whether or not a task can be interrupted by another task:	DBCHAR	NOT NULL

**Media\_Routing\_Domain Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	<ul style="list-style-type: none"> <li>• <b>Y</b> = Task can be interrupted.</li> <li>• <b>N</b> = Task cannot be interrupted.</li> </ul>		
MaxCallsInQueue	The maximum number of calls allowed to be in queue for the selected MRDomainID. Default is NULL.	DBINT	NULL
MaxCallsInQueuePerCallType	The maximum number of calls allowed to be in queue for a call type of the selected MRDomainID. Default is NULL.	DBINT	NULL
MaxTaskDuration	The number of seconds the Unified ICM Open Peripheral Controller (OPC) allows a task to continue. If OPC does not receive an End Task message for a task in the MRD within this time period, it will automatically end the task. Default is NULL.	DBINT	NULL
MaxTimeInQueue	The maximum number of seconds a call is allowed to be in a queue for the selected MRDomainID. Default is NULL.	DBINT	NULL
MediaClassID	Identifies the type of media class. Initially, this ID is set to 4, which is the Cisco Voice media class: <ul style="list-style-type: none"> <li>• <b>1</b> = Cisco_Single_Session_Chat</li> <li>• <b>2</b> = Cisco_Multi_Session_Chat</li> <li>• <b>3</b> = Cisco_Blended_Collaboration</li> <li>• <b>4</b> = Cisco_Voice</li> <li>• <b>5</b> = Cisco_Email</li> </ul>	DBINT	FK NOT NULL
MRDomainID	Unique identifier for this media routing domain. Initially, the MRDomainID is set to 1.	DBINT	PK NOT NULL
ServiceLevelThreshold	The default value of the ServiceLevelThreshold field for services associated with this MRD.	DBINT	NOT NULL
ServiceLevelType	The default value for the ServiceLevelType field for each service associated with this MRD. This indicates how the system software calculates the service level.	DBSMALLINT	NOT NULL
TaskLife	The connection timeout value in seconds. The default value is 300 seconds.	DBINT	NULL
TaskStartTimeout	The timeout value for waiting for a task to start.	DBINT	NULL

## Network\_Event\_Detail Table

This table is in the [Route category \(page 535\)](#). To see database rules for these tables, click [here \(page 529\)](#).

Provides carrier network events associated with calls processed by a Network Applications Manager (NAM). The data in this table includes events related to all call legs that happen under the control of the NIC. This includes the incoming call leg, any temporary call legs (IVR sessions under NIC control), and all outgoing call legs.

This table can become very large. Running custom reporting queries against it while it is on the HDS can degrade performance. To optimize performance, extract the data from the HDS into your own custom database on a separate server (one that is not used for other Unified ICM/Unified CCE components). Use only DBDateTime (date and time of the record that was written to the HDS database) to perform the extraction. The table on the custom database can be indexed according to the custom reporting needs.

**Table 128: Indexes for Network\_Event\_Detail Table**

index_name	index_description	index_keys
XAK1Network_Event_Detail	clustered, unique, unique key located on PRIMARY	RecoveryKey
XIE1Network_Event_Detail	nonclustered, unique, primary key located on PRIMARY	DateTime

### Fields in Network\_Event\_Detail Table:

Field Name:	Description:	Data Type:	Keys and Null Option:
CallLegID	The LegID identifies the calling party the event pertains to. LegIDs are typically numbered starting with 1 (for example: LegID1 = Calling Party) and incremented for the next party (agents are typically LegID2).	DBSMALLINT	NOT NULL
DateTime	Timestamp of receipt of event at the NIC (in UTC)..	DBDATETIME	NOT NULL
Duration	The duration is written for DISCONNECT/UNKNOWN events. Unless an error occurs, the Disconnect event will be written with the duration. If the call ends for a reason other than Disconnect event (e.g. - network aborts call), an Unknown event will be written with the duration.	DBINT	NULL
Event	Valid values are: <ul style="list-style-type: none"> <li>• <b>1</b> = RouteSelectFailure</li> <li>• <b>2</b> = CallPartyBusy</li> <li>• <b>3</b> = NoAnswer</li> </ul>	DBSMALLINT	NULL

**Network\_Target Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	<ul style="list-style-type: none"> <li>• <b>4</b> = Answer</li> <li>• <b>5</b> = Abandon</li> <li>• <b>6</b> = Disconnect</li> <li>• <b>7</b> = Unknown</li> </ul>		
RecoveryDay	Currently not used, set to zero (0).	DBINT	NOT NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL
RouterCallKey	Used with RouterCallKeyDay and RouterCallKeySequenceNumber to identify the Route_Call_Detail record. This value forms the unique portion of the 64-bit key for the call. The system software resets this counter at midnight.	DBINT	NOT NULL
RouterCallKeyDay	Used with the RouterCallKey and RouterCallKeySequenceNumber to identify the related Route_Call_Detail record. Together with RouterCallKey, the RouterCallKeyDay value forms a unique 64-bit key for the call. This field also provide a link to the CustomerID via the DialedNumberID in the Route_Call_Detail record. This link can only be used if CustomerID and Dialed Numbers are implemented on the NAM.	DBINT	NOT NULL
RouterCallKeySequenceNumber	Currently set to zero (0).	DBINT	NULL
TimeZone	The time zone of the Central Controller used for DateTime.	DBINT	NULL
Value1	A value dependent upon the event and interface that provides additional reporting information. This might contain a network-provided releaseCause (for DISCONNECT), failureCause (ROUTE_SELECT_FAILURE), etc.	DBINT	NULL
Value2	Reserved for future use.	varchar(128)	NULL

**Network\_Target Table**

This table is in the [Route category \(page 535\)](#). To see database rules for these tables, click [here \(page 597\)](#).

Each row identifies an announcement, a peripheral target, or a scheduled target.

The system software automatically maintains the Network\_Target table when add or delete an announcement, peripheral target, or scheduled target through Unified ICM Configuration Manager.

### Related tables

[Announcement \(page 72\)](#) (via NetworkTargetID)

[Device Target \(page 196\)](#) (via NetworkTargetID)

[Label \(page 281\)](#) (via NetworkTargetID)

[Network Vru \(page 300\)](#)(via NetworkTargetID)

[Peripheral Target \(page 320\)](#) (via NetworkTargetID)

[Route Call Detail \(page 338\)](#) (via NetworkTargetID)

[Scheduled Target \(page 375\)](#) (via NetworkTargetID)

[Termination Call Detail \(page 490\)](#) (via NetworkTargetID)

**Table 129: Indexes for Network\_Target Table**

index_name	index_description	index_keys
XPKNetwork_Target	clustered, unique, primary key located on PRIMARY	NetworkTargetID

**Fields in Network\_Target Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
NetworkTargetID	Unique identifier for this target.	DBINT	PK NOT NULL
NetworkTargetType	Type of target:  <ul style="list-style-type: none"> <li>• <b>1</b> = Announcement</li> <li>• <b>2</b> = Peripheral target</li> <li>• <b>3</b> = Device target</li> <li>• <b>4</b> = Network VRU Bank (Simplified IPCC)</li> <li>• <b>5</b> = Scheduled target</li> </ul>	DBSMALLINT	NOT NULL

## Network\_Trunk\_Group Table

This is in the [Device \(page 529\)](#) category. For database rules, click [here \(page 595\)](#).

**Network\_Trunk\_Group\_Half\_Hour Table**

Lists the trunk groups understood by the telephone network. A network trunk group may be the same as a trunk group defined at a peripheral or it may be a combination of peripheral trunk groups.

Use Unified ICM Configuration Manager to create, update, and delete network trunk groups.

**Related tables**

[Logical Interface Controller \(page 286\)](#)(via LogicalControllerID)

[Network Trunk Group Half Hour \(page 296\)](#) (via NetworkTrunkGroupID)

[Network Trunk Group Real Time \(page 298\)](#) (via NetworkTrunkGroupID)

[Peripheral \(page 306\)](#) (via PeripheralID)

[Peripheral Target \(page 320\)](#) (via NetworkTrunkGroupID)

[Trunk Group \(page 507\)](#) (via NetworkTrunkGroupID)

**Table 130: Indexes for Network\_Trunk\_Group Table**

index_name	index_description	index_keys
XAK1Network_Trunk_Group	nonclustered, unique, unique key located on PRIMARY	EnterpriseName
XIF126Network_Trunk_Group	nonclustered located on PRIMARY	LogicalControllerID
XPKNetwork_Trunk_Group	clustered, unique, primary key located on PRIMARY	NetworkTrunkGroupID

**Fields in Network\_Trunk\_Group Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
Description	Additional information about the network trunk group.	DESCRIPTION	NULL
EnterpriseName	An enterprise name for the network trunk group. This name must be unique among all network trunk groups in the enterprise.	VNAME32	AK-1 NOT NULL
LogicalControllerID	Identifies the PG associated with the network trunk group.	DBSMALLINT	FK NOT NULL
NetworkTrunkGroupID	A unique identifier for the network trunk group.	DBINT	PK NOT NULL

**Network\_Trunk\_Group\_Half\_Hour Table**

This is in the [Device \(page 529\)](#) category. For database rules, click [here \(page 595\)](#).

Central database only.

Provides statistics for each network trunk group defined in the system. These statistics are updated every 30 minutes.

The system software generates Network\_Trunk\_Group\_Half\_Hour records for each network trunk group.

### Related table

[Network Trunk Group \(page 295\)](#) (via NetworkTrunkGroupID)

**Table 131: Indexes for Network\_Trunk\_Group\_Half\_Hour Table**

index_name	index_description	index_keys
XAK1Network_Trunk_Group_Half_H	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XIE1Network_Trunk_Group_Half_H	nonclustered, unique, primary key located on PRIMARY	DbDateTime
XPKNetwork_Trunk_Group_Half_Ho	clustered, unique, primary key located on PRIMARY	NetworkTrunkGroupID, DateTime, TimeZone

**Fields in Network\_Trunk\_Group\_Half\_Hour Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
AllTrunksBusyToHalf	Total number of seconds for which all trunks in the network trunk group were busy simultaneously during the half-hour interval.	DBINT	NULL
CallsAbandonedToHalf	Number of calls to the network trunk group that were abandoned during the half-hour interval.	DBINT	NULL
CallsInToHalf	Number of inbound calls offered to the network trunk group during the half-hour interval.	DBINT	NULL
CallsOutToHalf	Number of outbound calls sent on the network trunk group during the half-hour interval.	DBINT	NULL
DateTime	The date and time at the start of the half-hour interval.	DBSMALLDATE	PK NOT NULL
DbDateTime	The current date and time stamp when the records are written to the HDS database. The logger database has NULL for this column.	DBDATETIME	IE-1 NULL
InServiceTimeToHalf	Aggregate number of seconds trunks in the group were in service during the half-hour interval.	DBINT	NULL
InUseInboundTimeToHalf	Aggregate number of seconds trunks in the group were in use for inbound calls during the half-hour interval.	DBINT	NULL

**Network\_Trunk\_Group\_Real\_Time Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
InUseOutboundTimeToHalf	Aggregate number of seconds trunks in the group were in use for outbound calls during the half-hour interval.	DBINT	NULL
NetworkTrunkGroupID	Identifies the network trunk group.	DBINT	PK NOT NULL
RecoveryDay	Currently not used, set to zero (0).	DBINT	NOT NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	NOT NULL
TimeZone	The time zone for the date and time. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK NOT NULL
TrunksIdle	Number of idle trunks in the network trunk group at the end of the half-hour interval.	DBINT	NULL
TrunksInService	Number of in-service trunks in the network trunk group at the end of the half-hour interval.	DBINT	NULL

**Network\_Trunk\_Group\_Real\_Time Table**

This is in the [Device \(page 529\)](#) category. For database rules, click [here \(page 595\)](#).

Local database only.

Provides real-time statistics for each network trunk group in the system.

The system software generates a Network\_Trunk\_Group\_Real\_Time record for each network trunk group.

### Related table

[Network Trunk Group \(page 295\)](#) (via NetworkTrunkGroupID)

**Table 132: Indexes for Network\_Trunk\_Group\_Real\_Time Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XPKNetwork_Trunk_Group_Real_Ti	clustered, unique, primary key located on PRIMARY	NetworkTrunkGroupID

### Fields in Network\_Trunk\_Group\_Real\_Time Table:

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
AllTrunksBusyHalf	Total number of seconds that all trunks in the network trunk group have been simultaneously busy during the current half-hour interval.	DBINT	NULL

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
AllTrunksBusyToday	Total number of seconds that all trunks in the network trunk group have been simultaneously busy since midnight.	DBINT	NULL
CallsAbandonedHalf	Number of calls to the network trunk group that were abandoned during the current half-hour interval.	DBINT	NULL
CallsAbandonedToday	Number of calls to the network trunk group that were abandoned since midnight.	DBINT	NULL
CallsInHalf	Number of inbound calls that have been received on the network trunk group during the current half-hour interval.	DBINT	NULL
CallsInNow	Number of inbound calls currently in progress on the network trunk group.	DBINT	NULL
CallsInToday	Number of inbound calls that have been received on the network trunk group since midnight.	DBINT	NULL
CallsOutHalf	Number of outbound calls that have been sent on the network trunk group during the current half-hour interval.	DBINT	NULL
CallsOutNow	Number of outbound calls currently in progress on the network trunk group.	DBINT	NULL
CallsOutToday	Number of outbound calls that have been sent on the network trunk group since midnight.	DBINT	NULL
DateTime	The date and time at which the row was generated.	DBDATETIME	NOT NULL
InServiceTimeHalf	Aggregate number of seconds that trunks in the network trunk group have been in service during the current half-hour interval.	DBINT	NULL
InServiceTimeToday	Aggregate number of seconds that trunks in the network trunk group have been in service since midnight.	DBINT	NULL
InUseInboundTimeHalf	Aggregate number of seconds that trunks in the network trunk group have been used for inbound calls during the current half-hour interval.	DBINT	NULL
InUseInboundTimeToday	Aggregate number of seconds that trunks in the network trunk group have been used for inbound calls since midnight.	DBINT	NULL
InUseOutboundTimeHalf	Aggregate number of seconds that trunks in the network trunk group have been used for outbound calls during the current half-hour interval.	DBINT	NULL

**Network\_Vru Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
InUseOutboundTimeToday	Aggregate number of seconds that trunks in the network trunk group have been used for outbound calls since midnight.	DBINT	NULL
NetworkTrunkGroupID	Identifies the network trunk group.	DBINT	PK, FK NOT NULL
TrunksIdle	Number of trunks currently idle for the network trunk group.	DBINT	NULL
TrunksInService	Number of trunks currently in service for the network trunk group.	DBINT	NULL

**Network\_Vru Table**

This table is in the [Route category \(page 535\)](#). To see database rules for these tables, click [here \(page 597\)](#).

Contains one row for each network VRU. The system software can send a customer call to a network VRU. Use Unified ICM Configuration Manager to create, modify, and delete Network VRU rows.

**Related tables**

[Customer Definition \(page 194\)](#) (via NetworkTargetID)

[ICR Globals \(page 264\)](#)

[Label \(page 281\)](#) (via LabelID)

[Network Target \(page 294\)](#) (via NetworkTargetID)

[Network VRU Script \(page 302\)](#) (via NetworkTargetID)

**Table 133: Indexes for Network\_Vru Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XAK1Network_Vru	nonclustered, unique, unique key located on PRIMARY	EnterpriseName
XPKNetwork_Vru	clustered, unique, primary key located on PRIMARY	NetworkTargetID

**Fields in Network\_Vru Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
Description	Additional information about the network VRU.	DESCRIPTION	NULL
ECCPayloadID	Reserved for future use.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
EnterpriseName	A name that is unique among all network VRUs in the enterprise.	VNAME32	AK-1 NOT NULL
NetworkTargetID	Foreign key from the Network Target table.	DBINT	PK, FK NOT NULL
Type	The type of network VRU. Valid options are: <b>2, 3, 5, 6, 7, and 8.</b> (Types <b>1</b> and <b>4</b> are not implemented.)  To see more on these values, click <a href="#">here (page 567)</a> .	DBINT	PK, FK NOT NULL

## Network\_Vru\_Bank Table

This table is in the [Route category \(page 535\)](#). To see database rules for these tables, click [here \(page 597\)](#).

This table is mainly used for load-balancing calls across multiple IVRs. The trunk group capacity will be the key to the selection of an IVR for queuing.

### Related tables

[Customer Definition \(page 194\)](#) (via CustomerDefinitionID)

[Network Vru \(page 300\)](#) (via NetworkTargetID)

**Table 134: Indexes for Network\_Vru\_Bank Table**

index_name	index_description	index_keys
XAK1Network_Vru_Bank	nonclustered, unique, unique key located on PRIMARY	TrunkGroupID
XPKNetwork_Vru_Bank	clustered, unique, primary key located on PRIMARY	NetworkTargetID

### Fields in Network\_Vru\_Bank Table:

Field Name:	Description:	Data Type:	Keys and Null Option:
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
NetworkTargetID	Unique identifier for the Network VRU member.	DBINT	PK, NOT NULL
NetworkVruNetworkTargetID	Foreign key from the Network Target table. This is pointing at the type-9 Network VRU.	DBINT	FK, NOT NULL
TranslationRouteSkillTargetID	Foreign key from Translation Route.	DBINT	NULL
TrunkGroupID	Foreign key from the Trunk Group table. Indicates the Trunk Group associated with this Network VRU member.	DBINT	FK, NOT NULL

**Network\_Vru\_Script Table****Network\_Vru\_Script Table**

This table is in the [Route category \(page 535\)](#). To see database rules for these tables, click [here \(page 597\)](#).

Each row identifies a script used by a network VRU to handle a call. A VRU script is managed by the VRU itself. It is not stored in the system database or directly managed by the system software. The system software can only direct the VRU to run the script. You can configure a VRU script in the Unified ICM Configuration Manager. You can then reference it in a routing script.

[Customer Definition \(page 194\)](#) (via CustomerDefinitionID)

[Network Vru \(page 300\)](#) (via NetworkTargetID)

**Table 135: Indexes for Network\_Vru\_Script Table**

index_name	index_description	index_keys
XAK1Network_VRU_Script	nonclustered, unique, unique key located on PRIMARY	EnterpriseName
XAK2Network_VRU_Script	nonclustered, unique, unique key located on PRIMARY	VruScriptName, NetworkTargetID
XPKNetwork_VRU_Script	clustered, unique, primary key located on PRIMARY	NetworkVruScriptID

**Fields in Network\_Vru\_Script Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
ConfigParam	An optional string that is sent to the VRU to initialize the script.	varchar(255)	NULL
CustomerDefinitionID	Identifies the customer definition associated with the script.	DBINT	FK NULL
Description	Additional information about the script.	DESCRIPTION	NULL
EnterpriseName	An enterprise name for the VRU script. This name must be unique among all VRU scripts in the enterprise.	VNAME32	AK-1 NOT NULL
Interruptible	Indicates whether the script can be interrupted (for example, if an agent becomes available to handle the call): <ul style="list-style-type: none"> <li>• <b>Y</b> = Interruptible</li> <li>• <b>N</b> = Not interruptible</li> </ul>	DBCHAR	NOT NULL
NetworkTargetID	Identifies the network VRU associated with the script.	DBINT	AK-2, FK NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
NetworkVruScriptID	A unique identifier the system software uses for the script.	DBINT	PK NOT NULL
Overridable	Indicates whether the VRU script itself can override its Interruptible flag: <ul style="list-style-type: none"><li>• <b>Y</b> = Yes, VRU script can override</li><li>• <b>N</b> = No, VRU script cannot override</li></ul>	DBCHAR	NOT NULL
Timeout	Number of seconds for the system software to wait for a response from the routing client after directing it to run the script.	DBINT	NOT NULL
VruScriptName	The name of the script on the VRU.	varchar(40)	AK-2 NOT NULL

## Next\_Available\_Number Table

This table is in the [System category \(page 548\)](#). To see database rules for these tables, click [here \(page 601\)](#).

Each row identifies the next available unique integer ID value for a specific database table. The system software automatically maintains the Next\_Available\_Number table.

**Table 136: Indexes for Next\_Available\_Number Table**

index_name	index_description	index_keys
XAK1Next_Available_Number	nonclustered, unique, unique key located on PRIMARY	TableName

### Fields in Next\_Available\_Number Table:

Field Name:	Description:	Data Type:	Keys and Null Option:
NextAvailableNumber	The next available unique ID value for the table.	DBINT	NOT NULL
TableName	The name of the table associated with the row.	varchar(30)	AK-1 NOT NULL

## Object\_Access\_Xref Table

This table is in the [Security category \(page 543\)](#). To see database rules for these tables, click [here \(page 600\)](#).

Lists the access levels available for each object type.

### Related table

**Object\_List Table**

[Object List \(page 304\)](#) (via ObjectType)

**Table 137: Indexes for Object\_Access\_Xref Table**

index_name	index_description	index_keys
XAK1Object_Access_Xref	nonclustered, unique, unique key located on PRIMARY	AccessLevel, ObjectType
XPKObject_Access_Xref	clustered, unique, primary key located on PRIMARY	ObjectAccessXrefID

**Fields in Object\_Access\_Xref Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
AccessLevel	Indicates an access level supported by the object type. To see values. click <a href="#">here (page 553)</a> .	DBINT	AK-1 NOT NULL
ObjectAccessXrefID	A unique identifier for the record.	DBINT	PK NOT NULL
ObjectType	Identifies the object type.	DBINT	AK-1 NOT NULL

**Object\_List Table**

This table is in the [Security category \(page 543\)](#). To see database rules for these tables, click [here \(page 600\)](#).

Lists the objects that are available.

**Related tables**

[ClassID To ObjectType \(page 191\)](#) (via ObjectType)

[Ids \(page 271\)](#) (via ObjectType)

[Object Access Xref \(page 303\)](#) (via ObjectType)

**Table 138: Indexes for Object\_List Table**

index_name	index_description	index_keys
XAK1Object_List	nonclustered, unique, unique key located on PRIMARY	Name
XPKSecurity__Object	clustered, unique, primary key located on PRIMARY	ObjectType

**Fields in Object\_List Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
Description	Additional information about the object.	DESCRIPTION	NULL
Name	The name of the object.	varchar(30)	AK-1 NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
ObjectType	A unique identifier for the object type.	DBINT	PK NOT NULL

## Object\_Security Table

This table is in the [Security category \(page 543\)](#). To see database rules for these tables, click [here \(page 600\)](#).

Specifies the access level each user or group has to individual objects. The Primary Key (**PK**) is **nonclustered**. The AlternateKey (**AK**) is **clustered**.

### Related tables

[Ids \(page 271\)](#) (via ObjectType)

[User Group \(page 514\)](#) (via UserGroupName)

**Table 139: Indexes for Object\_Security Table**

index_name	index_description	index_keys
XAK1Object_Security	clustered, unique, unique key located on PRIMARY	UserGroupName, ObjectID, ObjectType
XIE1Object_Security	nonclustered, unique, primary key located on PRIMARY	UserGroupName
XPKObject_Security	nonclustered, unique, primary key located on PRIMARY	ObjectSecurityID

### Fields in Object\_Security Table:

Field Name:	Description:	Data Type:	Keys and Null Option:
AccessLevel	Specifies the access level the group has to the object. To see values, click <a href="#">here (page 553)</a> .	DBINT	NOT NULL
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
ObjectID	Identifies the specific object.	DBINT	AK-1 NOT NULL
ObjectSecurityID	A unique identifier for the row.	DBINT	PK NOT NULL
ObjectType	Identifies the type of object.	DBINT	AK-1 NOT NULL
UserGroupName	Identifies the user group.	varchar(64)	AK-1, IE-1 NOT NULL

---

**Peripheral Table**

## Peripheral Table

This table is one of the Peripheral tables in the [Device category \(page 529\)](#). To see database rules for these tables, click [here \(page 595\)](#).

Each row corresponds to an ACD or PBX at a call center. Use the PG Explorer to add, update, and delete Peripheral records.

### Related tables

- [Agent \(page 15\)](#) (via PeripheralID)
- [Agent Desk Settings \(page 18\)](#) (via AgentDeskSettingsID)
- [Agent Distribution \(page 23\)](#) (via PeripheralID)
- [Agent Targeting Rule \(page 67\)](#) (via EnterpriseName)
- [Application Path Member \(page 83\)](#) (via PeripheralID)
- [Dialer \(page 202\)](#) (via PeripheralID)
- [Dialer Detail \(page 206\)](#) (via PeripheralID)
- [All Tables in the Galaxy Category \(page 533\)](#) (via PeripheralID)
- [Logical Interface Controller \(page 286\)](#) (via LogicalControllerID)
- [Network Trunk Group \(page 295\)](#) (via PeripheralID) Network VRU (via NetworkTargetID)
- [Peripheral Default Route \(page 310\)](#) (via PeripheralID)
- [Peripheral Monitor \(page 315\)](#) (via PeripheralID)
- [Peripheral Real Time \(page 316\)](#) (via PeripheralID)
- [Routing Client \(page 357\)](#) (via PeripheralID)
- [Service \(page 386\)](#) (via PeripheralID)
- [Service Level Threshold \(page 414\)](#) (via PeripheralID)
- [Skill Group \(page 432\)](#) (via PeripheralID)
- [Termination Call Detail \(page 490\)](#) (via PeripheralID)
- [Trunk Group \(page 507\)](#) (via PeripheralID)

**Table 140: Indexes for Peripheral Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XAK1Peripheral	nonclustered, unique, unique key located on PRIMARY	EnterpriseName
XIE1Peripheral	nonclustered, unique, primary key located on PRIMARY	PeripheralName
XIE2Peripheral	nonclustered, unique, primary key located on PRIMARY	LogicalControllerID
XIE3Peripheral	nonclustered, unique, primary key located on PRIMARY	AgentDeskSettingsID
XPKPeripheral	clustered, unique, primary key located on PRIMARY	PeripheralID

**Fields in Peripheral Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
AbandonedCallWaitTime	Minimum time in seconds an incoming call must be queued before being considered an abandoned call if the caller hangs up.	DBSMALLINT	NOT NULL
AgentAutoConfig	Specifies whether agent auto- configuration is enabled for the peripheral. Stored as a character:  • <b>Y</b> = Yes  • <b>N</b> = No	DBCHAR	NOT NULL
AgentDeskSettingsID	Optionally, indicates an Agent Desk Settings record associated with the peripheral.	DBINT	FK, IE-3 NULL
AgentEventDetail	Specifies whether or not Agent Event Detail reporting is enabled for a peripheral. Default value is:  • <b>Y</b> for an Unified CCE peripherals  • <b>N</b> for non-Unified CCE peripherals	DBCHAR	NOT NULL
AgentReporting	Specifies whether agent reporting is enabled for the peripheral. Stored as a character:  • <b>Y</b> = Yes  • <b>N</b> = No	DBCHAR	NOT NULL
AgentTargetingMethod	Determines if the Router will target agents based on Rules, Device Targets, or Rules with Device Target confirmations.	DBINT	NOT NULL

**Peripheral Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
AnsweredShortCallsThreshold	Maximum duration, in seconds, for a short call. Any calls with a duration below the threshold are considered short. You might then choose to factor out short calls from handle times you calculate.	DBINT	NULL
AvailableHoldoffDelay	Default value of the AvailableHoldoffDelay field for Skill Groups associated with this peripheral. You can override the default for individual skill groups.	DBSMALLINT	NOT NULL
CallControlVariableMap	String containing the mapping between the peripheral's call control variables and system software variables.	varchar(128)	NULL
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
ClientType	The type of the peripheral. To see Client Type values, click <a href="#">here</a> (page 555).	DBSMALLINT	NOT NULL
ConfigParam	Configuration parameters to be passed to the peripheral.	varchar(255)	NULL
Deleted	Deleted Flag. Stored as a character:  • <b>Y</b> = Yes  • <b>N</b> = No	DBCHAR	NOT NULL
Description	Additional information about the peripheral.	DESCRIPTION	NULL
EnterpriseName	An enterprise name for this peripheral. The name must be unique among all peripherals in the enterprise.	VNAME32	AK-1 NOT NULL
InternalIPTAOnly	Indicates whether this is an 'Unified ICM picks the agent' (IPTA) peripheral..  Either 'Y' or 'N'. Default = 'N'.	DBCHAR	NOT NULL
Location	Peripheral's location.	VNAME32	NULL
LogicalControllerID	Foreign key of the Logical Interface Controller (Peripheral Gateway) that is attached to the switch.	DBSMALLINT	FK, IE-2 NOT NULL
MultilineAgentControl	This setting indicates whether this agent peripheral supports multi-line control for all agents with more than one line configured on the phone.  Values:	DBINT	NOT NULL, default=0

Field Name:	Description:	Data Type:	Keys and Null Option:
	<ul style="list-style-type: none"> <li>• 0 = Single line monitoring and reporting (default)</li> <li>• 1 = Multi line monitoring and reporting</li> </ul>		
MultilineAgentStateBehavior	<p>Indicates how many non-ACD calls the agent initiated on one of the non-ACD line. Only populated when Multi-line feature is enabled.</p> <p>Values:</p> <ul style="list-style-type: none"> <li>• 0 = Agent State is unchanged when agent is on a call on a secondary line</li> <li>• 1 = Agent State is set to NOT READY with a system reason code when agent answers or places a call on a secondary line while in the AVAILABLE or NOT READY state</li> </ul>	DBINT	NOT NULL, default=0
NetworkTargetID	Identifies the network VRU, if any, associated with the peripheral.	DBINT	FK NULL
PeripheralAutoConfig	<p>Used to indicate that the peripheral uses auto-configuration.</p> <p>Default = 'N'.</p>	DBCHAR	NOT NULL
PeripheralID	A unique identifier for this peripheral.	DBSMALLINT	PK NOT NULL
PeripheralName	The name of the peripheral as it is known at the site.	VNAME32	IE-1 NOT NULL
PeripheralServiceLevelType	<p>Default value for the PeripheralServiceLevelType for each service associated with the peripheral. You can override this default for individual services. Valid options for Aspect types are:</p> <ul style="list-style-type: none"> <li>• <b>1</b> = Service Level 1</li> <li>• <b>2</b> = Service Level 2</li> <li>• <b>3</b> = Service Level 3</li> <li>• <b>4</b> = Service Level as Calculated by Call Center.</li> </ul> <p>If this field is 0 for a service, the system software assumes the default specified for the associated peripheral.</p> <p>If the peripheral is not an Aspect ACD, the type must be 4 (calculated by the peripheral).</p>	DBSMALLINT	NOT NULL
SubSkillGroupMask	A series of characters (Y and N) indicating which sub-skill groups to create for each skill group associated with the peripheral.	varchar(64)	NULL

**Peripheral\_Default\_Route Table****Peripheral\_Default\_Route Table**

This table is in the [Device category \(page 529\)](#). To see database rules for these tables, click [here \(page 595\)](#).

Each row specifies the default route to be used for accounting calls at the peripheral that are otherwise not accounted for.

The system software automatically generates a Peripheral\_Default\_Route record for each Peripheral. You can modify the record through the PG Explorer tool.

**Related tables**

[Media Routing Domain \(page 290\)](#) (via MRDomainID)

[Peripheral \(page 306\)](#) (via PeripheralID)

[Route \(page 336\)](#) (via RouteID)

**Table 141: Indexes for Peripheral\_Default\_Route Table**

index_name	index_description	index_keys
XIE1Peripheral_Default_Route	nonclustered, unique, primary key located on PRIMARY	RouteID
XPKPeripheral_Default_Route	clustered, unique, primary key located on PRIMARY	PeripheralID, MRDomainID

**Fields in Peripheral\_Default\_Route Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
MRDomainID	The Media Routing Domain associated with this peripheral default route.	DBINT	PK, FK NOT NULL
PeripheralID	Link to the Peripheral table.	DBSMALLINT	PK, FK NOT NULL
RouteID	Foreign key from the Route table.	DBINT	FK, IE-1 NULL

**Peripheral\_Half\_Hour Table**

This table is one of the Peripheral tables in the [Device category \(page 529\)](#). To see database rules for these tables, click [here \(page 595\)](#).

Central database only. Each row contains statistics for a specific peripheral for a specific half-hour interval.

**Related tables**

[Peripheral \(page 306\)](#) (via PeripheralID)

[Media Routing Domain \(page 290\)](#) (via MRDomainID)

**Table 142: Indexes for Peripheral\_Half\_Hour Table**

index_name	index_description	index_keys
XAK1Peripheral_Half_Hour	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XIE1Peripheral_Half_Hour	nonclustered, unique, primary key located on PRIMARY	DbDateTime
XPKPeripheral_Half_Hour	clustered, unique, primary key located on PRIMARY	DateTime, PeripheralID, TimeZone, MRDomainID

**Note:** The Peripheral\_Interval Table will be populated with 30/15 minute reporting data, depending on the Historical Reporting Interval setting for the PG. The Peripheral\_Half\_Hour Table will not be populated with this data.

**Fields in Peripheral\_Half\_Hour Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ActiveCTIServerTimeToHalf	Number of seconds the associated CTI Server was active during the half-hour interval.	DBINT	NULL
ActivePeripheralDataTimeToHalf	Number of seconds the associated Peripheral Gateway was able to provide peripheral data services to the CallRouter during the half-hour interval.	DBINT	NULL
ActivePeripheralTimeToHalf	Number of seconds the associated Peripheral Gateway's connections to the peripheral were in the Active state during the half-hour interval.	DBINT	NULL
ActiveRoutingClientTimeToHalf	Number of seconds the associated Peripheral Gateway was able to provide routing client support to the CallRouter during the half-hour interval.	DBINT	NULL
CallsOfferedToHalf	<p>Total number of incoming ACD calls and internal ACD calls offered to the peripheral during the half-hour interval.</p> <p>In Unified CCE, if a call Redirection on No Answer (RONAs) to an IVR and is answered later by an agent, this field is incremented as follows:</p> <ul style="list-style-type: none"> <li>• When the call RONAs to the IVR</li> <li>• When the call is sent from the IVR to the agent</li> <li>• When the agent completes the call</li> </ul>	DBINT	NULL

Peripheral\_Half\_Hour Table

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	In Unified CCE with an IPCC System PG, if a call RONAs to an IVR and is answered later by an agent, this field is incremented when the agent completes the call only.		
DateTime	Central Controller date and time at the start of the half-hour interval.	DBSMALLDATE	PK NOT NULL
DbDateTime	The current date and time stamp when the records are written to the HDS database. The logger database has NULL for this column.	DBDATETIME	IE-1 NULL
MaxCallsInProgress	The maximum number of calls in progress at any sample point during the reporting period. This is implemented as the highest value of PeripheralRealTime.CallsInProgress encountered during the above sampling.	DBINT	NULL
MaxNumberLoggedOnAgentsToHalf	The maximum number of concurrent agents .logged on in the half hour interval.	DBINT	YES
MRDomainID	The ID for the Media Routing Domain associated with this peripheral.	DBINT	PK, FK NOT NULL
NumberOfSamples	The number of calls-in-progress sample periods.	DBINT	NULL
PeripheralID	Identifier for the peripheral.	DBSMALLINT	PK, FK NOT NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL
ServiceLevelAbandToHalf	Number of calls to the peripheral abandoned within the service level threshold during the half-hour interval.	DBINT	NULL
ServiceLevelCallsOfferedToHalf	Number of calls to the peripheral that had a service level event during the half-hour interval.	DBINT	NULL
ServiceLevelCallsToHalf	Number of calls to the peripheral answered within the service level threshold during the half-hour interval.	DBINT	NULL
ServiceLevelToHalf	The system software service level for the peripheral during the half-hour interval.	DBFLT4	NULL
ServiceLevelType	Service Level Type used to calculate Service level for this interval.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
TimeZone	The time zone for the date and time. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK NOT NULL
TotalCallsInProgressSamples	The total of PeripheralRealTime. CallsInProgress at all sample points during the half-hour period. For example, if there are 3 samples, and the number of calls in progress at those points in time are 20, 25 and 15, then TotalCallsInProgressSamples is 60.	DBINT	NULL

## Peripheral\_Interval Table

This section describes the Peripheral Interval Table

### ***Fields in Peripheral\_Interval Table:***

Field Name:	Description:	Data Type:	Keys and Null Option:
ActivePeripheralDataTime	Number of seconds the associated Peripheral Gateway was able to provide peripheral data services to the CallRouter during the half-hour interval.	DBINT	YES
ActiveRoutingClientTime	Number of seconds the associated Peripheral Gateway was able to provide routing client support to the CallRouter during the half-hour interval.	DBINT	YES
ActivePeripheralTime	Number of seconds the associated Peripheral Gateways connections to the peripheral were in the Active state during the half-hour interval.	DBINT	YES
ActiveCTIServerTime	Number of seconds the associated CTI Server was active during the half-hour interval.	DBINT	YES
CallsOffered	<p>Total number of incoming ACD calls and internal ACD calls offered to the peripheral during the reporting interval.</p> <p>In Unified CCE, if a call Redirection on No Answer (RONAs) to an IVR and is answered later by an agent, this field is incremented as follows:</p> <ol style="list-style-type: none"> <li>1. When the call RONAs to the IVR</li> <li>2. When the call is sent from the IVR to the agent</li> <li>3. When the agent completes the call</li> </ol>	DBINT	YES

**Peripheral\_Interval Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	In Unified CCE with an IPCC System PG, if a call RONAs to an IVR and is answered later by an agent, this field is incremented when the agent completes the call only.		
DbDateTime	The current date and time stamp when the records are written to the HDS database. The logger database has NULL for this column.	DBDATETIME	IE1, YES
DateTime	Central Controller date and time at the start of the half-hour interval.	DBSMALLDATE	PK1, NOT NULL
MaxNumberLoggedOnAgents	The maximum number of concurrent agents logged on in the half-hour interval.	DBINT	YES
MaxCallsInProgress	The maximum number of calls in progress at any sample point during the reporting period. This is implemented as the highest value of PeripheralRealTime.CallsInProgress encountered during the above sampling.	DBINT	YES
MRDomainID	The ID for the Media Routing Domain associated with this peripheral.	DBINT	PK4, NOT NULL
NumberOfSamples	The number of calls-in-progress sample periods.	DBINT	YES
PeripheralID	Identifier for the peripheral.	DBSMALLINT	PK2, NOT NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK1, NOT NULL
ReportingHalfHour	The value indicates half hour boundary interval (0 - 47). Two 15 minute interval records will have a unique half hour boundary value.	DBINT	IE2, NULL
ReportingInterval	During the upgrade from 7.x to 8.0, this column value will be NULL and it is assumed to be 30 minute interval.	DBINT	IE3, NULL
ServiceLevelCallsOffered	Number of calls to the peripheral that had a service level event during the half-hour interval.	DBINT	YES
ServiceLevelCalls	Number of calls to the peripheral answered within the service level threshold during the half-hour interval.	DBINT	YES
ServiceLevelAband	Number of calls to the peripheral abandoned within the service level threshold during the half-hour interval.	DBINT	YES
ServiceLevel	The system software service level for the peripheral during the half-hour interval.	DBFLT4	YES

Field Name:	Description:	Data Type:	Keys and Null Option:
ServiceLevelType	Service Level Type used to calculate Service level for this interval.	DBINT	YES
TimeZone	The time zone for the date and time. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK3, NOT NULL
TotalCallsInProgressSamples	The total of PeripheralRealTime. CallsInProgress at all sample points during the reporting period. For example, if there are 3 samples, and the number of calls in progress at those points in time are 20, 25 and 15, then TotalCallsInProgressSamples is 60.	DBINT	YES

## Peripheral\_Monitor Table

This table is one of the Peripheral tables in the [Device category \(page 529\)](#). To see database rules for these tables, click [here \(page 595\)](#).

Each row describes an entity to be monitored on a peripheral. Currently this table applies only to the Alcatel 4400, Siemens ACD, the Nortel DMS-100, the Meridian ACD in enhanced CTI mode, and to the Avaya DEFINITY ECS with station monitoring enabled.

Use the PG Explorer tool to add, update, and delete Peripheral\_Monitor records.

### Related table

[Peripheral \(page 306\)](#) (via PeripheralID)

**Table 143: Indexes for Peripheral\_Monitor Table**

index_name	index_description	index_keys
XIE1Peripheral_Monitor	nonclustered, unique, primary key located on PRIMARY	PeripheralID

### Fields in Peripheral\_Monitor Table:

Field Name:	Description:	Data Type:	Keys and Null Option:
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
Extension	For a <b>Siemens ACD</b> , the extension number to be monitored.  For a <b>DMS-100</b> , the Primary ACD DN, Secondary DN, or non-digit character.  For an <b>Alcatel 4400</b> , the DN for a pilot or the agent number for an agent.	varchar(10)	NULL
ParamString	A string passed along with the extension number to start event reporting on the entity.	varchar(32)	NULL

**Peripheral\_Real\_Time Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	<p>For a <b>DMS-100</b>, this value can indicate that the extension is a CDN, can specify a CompuCALL session number, or can specify the mapping of an agent DN to an agent position ID.</p> <p>For a <b>Meridian ACD</b>, this value indicates the position number and, optionally, the associated Individual Directory Number (IDN).</p>		
PeripheralID	Identifies the peripheral associated with the row.	DBSMALLINT	FK, IE-1 NOT NULL
PeripheralMonitorID	A unique identifier for the row.	DBINT	PK NOT NULL
PeripheralMonitorType	<p>The type of entity to monitor:</p> <ul style="list-style-type: none"> <li>• <b>1</b> = RCG</li> <li>• <b>2</b> = VDN</li> <li>• <b>3</b> = ACD DN</li> <li>• <b>4</b> = Meridian Position</li> <li>• <b>5</b> = Station</li> </ul>	DBINT	NOT NULL

**Peripheral\_Real\_Time Table**

This table is one of the Peripheral tables in the [Device category \(page 529\)](#). To see database rules for these tables, click [here \(page 595\)](#).

Local database only. Each row describes the current state of a specific peripheral. The real-time client creates a Peripheral Real Time row for each peripheral in the system and updates that row every 10 seconds.

**Related table**

[Media Routing Domain \(page 290\)](#) (via MRDomainID)

[Peripheral \(page 306\)](#) (via PeripheralID)

[Peripheral Real Time \(page 316\)](#) (via MRDomainID)

**Table 144: Indexes for Peripheral\_Real\_Time Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XPKPeripheral_Real_Time	clustered, unique, primary key located on PRIMARY	PeripheralID, MRDomainID

**Fields in Peripheral\_Real\_Time Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
AgentsLoggedOn	Number of agents currently logged on to the peripheral.	DBINT	NULL
CallsInProgress	Number of calls currently in progress at the peripheral.	DBINT	NULL
CallsOfferedHalf	<p>Number of calls offered to the peripheral during the current half-hour interval.</p> <p>In Unified CCE, if a call Redirection on No Answer (RONAs) to an IVR and is answered later by an agent, this field is incremented as follows:</p> <ul style="list-style-type: none"> <li>• When the call RONAs to the IVR</li> <li>• When the call is sent from the IVR to the agent</li> <li>• When the agent completes the call</li> </ul> <p>In Unified CCE with an IPCC System PG, if a call RONAs to an IVR and is answered later by an agent, this field is incremented when the agent completes the call only.</p>	DBINT	NULL
CallsOfferedToday	<p>Number of calls offered to the peripheral since midnight..</p> <p>In Unified CCE, if a call Redirection on No Answer (RONAs) to an IVR and is answered later by an agent, this field is incremented as follows:</p> <ul style="list-style-type: none"> <li>• When the call RONAs to the IVR</li> <li>• When the call is sent from the IVR to the agent</li> <li>• When the agent completes the call</li> </ul> <p>In Unified CCE with an IPCC System PG, if a call RONAs to an IVR and is answered later by an agent, this field is incremented when the agent completes the call only.</p>	DBINT	NULL
CallsRoutedHalf	Number of calls routed to the peripheral during the current half-hour interval.	DBINT	NULL
CallsRoutedToday	Number of calls routed to the peripheral since midnight.	DBINT	NULL
CTIServerOnline	<p>Indicates the state of the CTI Server, if any, associated with the peripheral:</p> <ul style="list-style-type: none"> <li>• <b>0</b> = Off-line</li> </ul>	DBINT	NULL

**Peripheral\_Real\_Time Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	<ul style="list-style-type: none"> <li>• <b>1</b> = On-line</li> </ul>		
CurrentHalfHour	Date and time at the start of the current half-hour interval.	DBDATETIME	NULL
DateTime	The date and time that this data was last updated.	DBDATETIME	NOT NULL
Mode	<p>Current mode of the peripheral as reported by the PG:</p> <ul style="list-style-type: none"> <li>• <b>0</b> = Off-line</li> <li>• <b>1</b> = Primary</li> <li>• <b>2</b> = Backup</li> </ul>	DBINT	NULL
MRDomainID	The identifier for the Media Routing Domain associated with this peripheral.	DBINT	PK, FK NOT NULL
Online	<p>Current on-line state of the peripheral as determined by the Central Controller:</p> <ul style="list-style-type: none"> <li>• <b>0</b> = Off-line</li> <li>• <b>1</b> = On-line</li> </ul>	DBINT	NOT NULL
PeripheralData1	Peripheral-specific data. For a Galaxy, the ACD hardware status flag.	DBINT	NOT NULL
PeripheralData2	Peripheral-specific data. For a Galaxy, Outcall ATB failures.	DBINT	NOT NULL
PeripheralData3	Peripheral-specific data. For a Galaxy, Terminations Implemented.	DBINT	NOT NULL
PeripheralData4	Peripheral-specific data. For a Galaxy, Terminations Out of Sync.	DBINT	NOT NULL
PeripheralData5	Peripheral-specific data. For a Galaxy, Switch Level Implemented.	DBINT	NOT NULL
PeripheralData6	Peripheral-specific data. For a Galaxy, Switch Level Out of Sync.	DBINT	NOT NULL
PeripheralData7	Peripheral-specific data.	DBINT	NOT NULL
PeripheralData8	Peripheral-specific data.	DBINT	NOT NULL
PeripheralData9	Peripheral-specific data.	DBINT	NOT NULL

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
PeripheralData10	Peripheral-specific data.	DBINT	NOT NULL
PeripheralData11	Peripheral-specific data.	DBINT	NOT NULL
PeripheralData12	Peripheral-specific data.	DBINT	NOT NULL
PeripheralData13	Peripheral-specific data.	DBINT	NOT NULL
PeripheralData14	Peripheral-specific data.	DBINT	NOT NULL
PeripheralData15	Peripheral-specific data.	DBINT	NOT NULL
PeripheralData16	Peripheral-specific data.	DBINT	NOT NULL
PeripheralID	Identifier for the peripheral.	DBSMALLINT	PK, FK NOT NULL
PeripheralTimeOffset	Difference in seconds between the peripheral's time and the Central Controller's time.	DBINT	NOT NULL
PeripheralTimeZone	The time zone at the peripheral. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	NULL
ServiceLevelAbandHalf	Total number of calls to the peripheral abandoned within the service level threshold during the current half-hour interval.	DBINT	NULL
ServiceLevelAbandToday	Cumulative total of calls to the peripheral abandoned within the service level threshold since midnight.	DBINT	NULL
ServiceLevelCallsHalf	Total number of calls to the peripheral answered within the service level threshold during the current half-hour interval. Total number of calls to the peripheral answered within the service level threshold during the current half-hour interval.	DBINT	NULL
ServiceLevelCallsOfferedHalf	Total number of calls to the peripheral that had a service level event during the current half-hour interval.	DBINT	NULL
ServiceLevelCallsOfferedToday	Total number of calls to the peripheral that had a service level event since midnight.	DBINT	NULL
ServiceLevelCallsToday	Number of calls to this service handled within the peripheral service level since midnight.	DBINT	NULL
ServiceLevelHalf	Service level for the peripheral for the current half-hour interval.	DBFLT4	NULL

**Peripheral\_Target Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
ServiceLevelToday	Service level for the peripheral since midnight.	DBFLT4	NULL
Status	Indicates the current failure state of the peripheral. To see the list of status codes, click <a href="#">here (page 573)</a> .	DBINT	NULL
UserControl	Unused.	DBINT	NULL

**Peripheral\_Target Table**

This table is in the [Route category \(page 535\)](#). To see database rules for these tables, click [here \(page 597\)](#).

Each row specifies the peripheral address (network trunk group and DNIS) associated with a route.

Use the PG Explorer tool to add, update, and delete Peripheral\_Target records.

**Related tables**

[Route \(page 336\)](#) (via RouteID)

[Network Target \(page 294\)](#) (via NetworkTargetID)

[Network Trunk Group \(page 295\)](#) (via NetworkTrunkGroupID)

**Table 145: Indexes for Peripheral\_Target Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XAK1Peripheral_Target	nonclustered, unique, unique key located on PRIMARY	NetworkTrunkGroupID, DNIS
XIE1Peripheral_Target	nonclustered, unique, primary key located on PRIMARY	RouteID
XPKPeripheral_Target	clustered, unique, primary key located on PRIMARY	NetworkTargetID

**Fields in Peripheral\_Target Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
DelayBeforeQueue	The number of seconds the peripheral waits before queuing an incoming call to an agent. This time might be used, for example, to play a forced announcement.	DBSMALLINT	NOT NULL
Description	Additional information about the target.	DESCRIPTION	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
DNIS	DNIS digits the routing client sends when addressing this target.	VNAME32	AK-1 NOT NULL
NetworkTargetID	Foreign key from the Network Target table.	DBINT	PK, FK NOT NULL
NetworkTrunkGroupID	Indicates the Network Trunk Group associated with this peripheral target.	DBINT	AK-1, FK NOT NULL
RouteID	Indicates the Route associated with this peripheral target.	DBINT	FK, IE-1 NULL

## Persistent\_Variable Table

This table is part of the [Script category \(page 539\)](#). For database rules, click [here](#). (page 599)

Central database only.

Stores the current value of persistent user variables. User variables are defined in the User\_Variable table.

The CallRouter automatically maintains the Persistent\_Variable table.

### Related table

[User Variable \(page 518\)](#) (via UserVariableID)

**Table 146: Indexes for Persistent\_Variable Table**

index_name	index_description	index_keys
XAK1Persistent_Variable	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XPKPersistent_Variable	clustered, unique, primary key located on PRIMARY	UserVariableID, ForeignKey1

### Fields in Persistent\_Variable Table:

Field Name:	Description:	Data Type:	Keys and Null Option:
ForeignKey1	If the variable is associated with an object type, the key value of the specific object.	DBINT	PK NOT NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL
UserVariableID	Foreign key from the User_Variable table.	DBINT	PK, FK NOT NULL
ValueChar	The value of the variable, if it is a character string.	DESCRIPTION	NULL
ValueDateTime	The value of the variable, if it is a date-time.	DBDATETIME	NULL

**Person Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
ValueFloat	The value of the variable, if it is a floating point number.	DBFLT8	NULL
ValueInt	The value of the variable, if it is an integer..	DBINT	NULL

**Person Table**

This table is in the [Skill Target category \(page 544\)](#). To see database rules for these tables, click [here \(page 600\)](#).

Provides primary identification and authentication for all system users, including both agents and administrators.

**Related table**

[Agent \(page 15\)](#) (via PersonID)

**Table 147: Indexes for Person Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XAK2Person	nonclustered, unique, unique key located on PRIMARY	LoginNameShadow
XIE1Person	nonclustered, unique, primary key located on PRIMARY	FirstName, LastName
XPKPerson	clustered, unique, primary key located on PRIMARY	PersonID

**Fields in Person Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
Deleted	Deleted Flag. Stored as a character:  • <b>Y</b> = Yes  • <b>N</b> = No  Incremented when the record is changed in the central database.	DBCHAR	NOT NULL
Description	Additional information about this person.	DESCRIPTION	NULL
FirstName	The person's first name.	VNAME32	NOT NULL
LastName	The person's last name.	VNAME32	AK-1, IE-1 NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
LoginEnabled	Specifies whether login is allowed for this person: Y: yes, N: no.	DBCHAR	NOT NULL
LoginName	The person's login or user name.	VNAME32	NOT NULL
LoginNameShadow	A duplicate checkpoint for name.	VNAME32	AK-2 NOT NULL
Password	An optional encrypted password.	varchar	NULL
PasswordChangeRequired	Reserved for future use.	DBSMALLINT	NOT NULL
PasswordLastChangedTime	Reserved for future use.	DBDATETIME	NULL
PersonID	A unique identifier.	DBINT	PK NOT NULL

## Physical\_Controller\_Half\_Hour Table

This table is in the [Device category \(page 529\)](#). To see database rules for these tables, click [here \(page 595\)](#).

Each row provides statistics for a single Network Interface Controller (NIC) or Peripheral Gateway (PG).

The system software automatically generates Physical\_Interface\_Controller records.

### Related table

[Physical Interface Controller \(page 324\)](#) (via PhysicalControllerID)

**Table 148: Indexes for Physical\_Controller\_Half\_Hour Table**

index_name	index_description	index_keys
XAK1Physical_Controller_Half_H	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XIE1Physical_Controller_Half_H	nonclustered, unique, primary key located on PRIMARY	DbDateTime
XPKPhysical_Controller_Half_Ho	clustered, unique, primary key located on PRIMARY	DateTime, PhysicalControllerID, TimeZone

### Fields in Physical\_Controller\_Half\_Hour Table:

Field Name:	Description:	Data Type:	Keys and Null Option:
ActivePGAgentSideATimeToHalf	Number of seconds the Peripheral Gateway's Agent process maintained an active connection to the Side A CallRouter.	DBINT	NULL

**Physical\_Interface\_Controller Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
ActivePGAgentSideBTimeToHalf	Number of seconds the Peripheral Gateway's Agent process maintained an active connection to the Side B CallRouter.	DBINT	NULL
DateTime	Central Controller date and time at the start of the half-hour interval.	DBSMALLDATE	PK NOT NULL
DbDateTime	The current date and time stamp when the records are written to the HDS database. The logger database has NULL for this column.	DBDATETIME	IE-1 NULL
DMPInServiceTimeToHalf	Number of seconds the Peripheral Gateway's Device Management Protocol connection to the CallRouter was in service.	DBINT	NULL
PhysicalControllerID	Unique identifier for this physical controller.	DBSMALLINT	PK, FK NOT NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL
TimeZone	The time zone for the date and time. The value is the offset in minutes from GMT.	DBINT	PK NOT NULL

**Physical\_Interface\_Controller Table**

This table is in the [Device category \(page 529\)](#). To see database rules for these tables, click [here \(page 595\)](#).

Describes a single Network Interface Controller (NIC) or Peripheral Gateway (PG). A duplexed NIC has two entries in the Physical Interface Controller table and a single entry in the Logical Interface Controller table. A pair of duplexed PGs share a single entry in the Physical Interface Controller table.

Use the PG or NIC Explorer tools to add, update, and delete Physical\_Interface\_Controller records.

**Related tables**

[Logical Interface Controller \(page 286\)](#) (via LogicalControllerID)

[Routing Client Five Minute \(page 359\)](#) (via PhysicalControllerID)

[Physical Controller Half Hour \(page 323\)](#) (via PhysicalControllerID)

**Table 149: Indexes for Physical\_Interface\_Controller Table**

index_name	index_description	index_keys
XAK1Physical_Interface_Control	nonclustered, unique, unique key located on PRIMARY	EnterpriseName
XIE1Physical_Interface_Control	nonclustered, unique, primary key located on PRIMARY	LogicalControllerID
XPKPhysical_Interface_Controll	clustered, unique, primary key located on PRIMARY	PhysicalControllerID

**Fields in Physical\_Interface\_Controller Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
Deleted	Deleted Flag. Stored as a character: • Y = Yes • N = No	DBCHAR	NOT NULL
Description	Additional information about the controller.	DESCRIPTION	NULL
EnterpriseName	An enterprise name for the controller. This name must be unique for all physical controllers in the enterprise.	VNAME32	AK-1 NOT NULL
LogicalControllerID	Foreign key from Logical Interface Controller table.	DBSMALLINT	FK, IE-1 NOT NULL
PhysicalControllerID	Unique identifier for this physical controller.	DBSMALLINT	PK NOT NULL NULL

## Query\_Rule Table

This table is in the [Blended Agent category \(page 527\)](#). To see database rules for these tables, click [here \(page 593\)](#).

Specifies the association between a query rule clause and an import rule. A query rule works on a particular import rule to select a group of contacts from an overall import list. For example, from a particular import list you might want to select and call all customers that have account numbers greater than 10,000.

**Note:** If Outbound Option was not selected during setup, this table will contain no data.

Use the Outbound Option Configuration option within Unified ICM Configuration Manager to modify Query\_Rule records.

### Related tables

[Campaign Query Rule Real Time \(page 172\)](#) (via QueryRuleID)

**Query\_Rule Table**

[Campaign Query Rule Half Hour \(page 166\)](#) (via QueryRuleID)

[Campaign Query Rule \(page 164\)](#) (via QueryRuleID)

[Dialer Detail \(page 206\)](#) (via QueryRuleID)

[Import Rule \(page 273\)](#) (via ImportRuleID)

**Table 150: Indexes for Query\_Rule Table**

index_name	index_description	index_keys
XAK1Query_Rule	nonclustered, unique, unique key located on PRIMARY	QueryRuleName
XPKQuery_Rule	clustered, unique, primary key located on PRIMARY	QueryRuleID

**Fields in Query\_Rule Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
Deleted	Deleted Flag. Stored as a character:  • <b>Y</b> = Yes  • <b>N</b> = No	DBCHAR	NOT NULL
Description	Description of what the query rule contains or how it is being used.	DESCRIPTION	NULL
Enabled	Setting of query rule within this campaign:  • <b>Y</b> = The query rule is enabled.  • <b>N</b> = the query rule is not enabled.	DBCHAR	NOT NULL
FutureUseInt1	Reserved for future use	DBINT	NULL
FutureUseInt2	Reserved for future use	DBINT	NULL
FutureUseInt3	Reserved for future use	DBINT	NULL
FutureUseInt4	Reserved for future use	DBINT	NULL
FutureUseInt5	Reserved for future use	DBINT	NULL
FutureUseVarchar1	Reserved for future use	varchar(64)	NULL
FutureUseVarchar2	Reserved for future use	varchar(64)	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
FutureUseVarchar3	Reserved for future use	varchar(64)	NULL
ImportRuleID	Identifies (indirectly) the contact list to which this query rule refers. Foreign key from the Import Rule table.	DBINT	FK NOT NULL
QueryRuleID	A unique identifier for this Query rule.	DBINT	PK NOT NULL
QueryRuleName	The customer-entered name for this query rule.	VNAME32	AK-1 NOT NULL

## Query\_Rule\_Clause Table

This table is in the [Blended Agent category \(page 527\)](#). To see database rules for these tables, click [here \(page 593\)](#).

**Note:** If Outbound Option was not selected during setup, this table will contain no data.

Contains the SQL rules associated with each query rule. There is a single row for each configured query rule.

### Related table

[Query Rule \(page 325\)](#) (via QueryRuleID)

**Table 151: Indexes for Query\_Rule\_Clause Table**

index_name	index_description	index_keys
XPKIlist_Rule	clustered, unique, primary key located on PRIMARY	QueryRuleID, SequenceNumber

### Fields in Query\_Rule\_Clause Table:

Field Name:	Description:	Data Type:	Keys and Null Option:
FutureUseInt1	Reserved for future use	DBINT	NULL
FutureUseInt2	Reserved for future use	DBINT	NULL
FutureUseInt3	Reserved for future use	DBINT	NULL
FutureUseInt4	Reserved for future use	DBINT	NULL
FutureUseInt5	Reserved for future use	DBINT	NULL
FutureUseVarchar1	Reserved for future use	varchar(64)	NULL
FutureUseVarchar2	Reserved for future use	varchar(64)	NULL

**Reason\_Code Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
FutureUseVarchar3	Reserved for future use	varchar(64)	NULL
QueryRuleID	The query rule to which this clause belongs. Foreign key from the Query Rule table.	DBINT	PK, FK NOT NULL
RuleData	The rule definition to be used to process each query rule.	varchar(255)	NOT NULL
SequenceNumber	An index for query rule clauses within a given query rule.	DBINT	PK NOT NULL

**Reason\_Code Table**

This table is part of the [Script category \(page 539\)](#). For database rules, click [here](#). (page 599)

Configuration table containing the reason code text to reason code mapping information.

**Table 152: Indexes for Reason\_Code Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XAK1Reason_Code	nonclustered, unique, unique key located on PRIMARY	ReasonCode
XPKReason_Code	clustered, unique, primary key located on PRIMARY	ReasonCodeID

**Fields in Reason\_Code Table :**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
Deleted	Default value is N.	DBCHAR	NOT NULL
Description	The description of the reason code.	DESCRIPTION	NULL
ReasonCode	Reason code used by agents (configurable). [In addition to reason codes that you have defined, the Unified CCE system uses some predefined reason codes. Click <a href="#">here (page 575)</a> .]	DBINT	AK-1 NOT NULL
ReasonCodeID	A unique identifier created by the schema.	DBINT	PK NOT NULL
ReasonText	Text associated with the reason code numeric value.	varchar(40)	NOT NULL

## Recovery Table

This table is in the [System category \(page 548\)](#). To see database rules for these tables, click [here \(page 601\)](#).

Central database only.

Contains internal status information for each table in the database.

**Table 153: Indexes for Recovery Table**

index_name	index_description	index_keys
XAK1Recovery	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XIE1Recovery	nonclustered, unique, primary key located on PRIMARY	DateTime
XPKRecovery	clustered, unique, primary key located on PRIMARY	RecoveryKey

**Fields in Recovery Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
DateTime	Date and time of the checkpoint.	DBDATETIME	IE-1 NOT NULL
EndTime	Ending time.	DBDATETIME	NULL
FromRecoveryKey	Starting recovery key value.	DBFLT8	NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	PK, AK-1 NOT NULL
RowsCopied	Number of rows copied.	DBINT	NULL
StartTime	Starting time.	DBDATETIME	NULL
TableName	Name of the table that caused a checkpoint.	VNAME32	NOT NULL
ToRecoveryKey	Ending recovery key value.	DBFLT8	NOT NULL
Type	Type of record.	VNAME32	NOT NULL

**Recurring\_Schedule\_Map Table****Recurring\_Schedule\_Map Table**

This table is in the [Route category \(page 535\)](#). To see database rules for these tables, click [here \(page 597\)](#).

Each row describes a periodic schedule used, for example, by a scheduled target. Use the Workforce Management Integration System to create, update, and delete recurring schedules.

**Related table**

[Schedule \(page 365\)](#) (via ScheduleID)

**Table 154: Indexes for Recurring\_Schedule\_Map Table**

index_name	index_description	index_keys
XPKRecurring_Schedule_Map	clustered, unique, primary key located on PRIMARY	ScheduleID, SequenceNumber

**Fields in Recurring\_Schedule\_Map Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
Bool1	Reserved for future use.	DBCHAR	NOT NULL
Bool2	Reserved for future use.	DBCHAR	NOT NULL
DayFlags	A bit mask specifying the days on which the schedule is active. To see values, click <a href="#">here (page 558)</a> .	DBINT	NOT NULL
DayOfMonth	Indicates to which day of month the schedule applies. To see values, click <a href="#">here (page 558)</a> .	DBSMALLINT	NOT NULL
DayPosition	In conjunction with DayType, indicates the position of a day within a month. To see values, click <a href="#">here (page 558)</a> .	DBSMALLINT	NOT NULL
DayType	Indicates to which day the schedule applies. To see values, click <a href="#">here (page 558)</a> .	DBSMALLINT	NOT NULL
EndDay	The day of the month on which the schedule expires. The value is <b>0</b> if the schedule has no end date.	DBSMALLINT	NOT NULL
EndHour	The hour of the day at which the schedule expires. The value is <b>0</b> if the schedule has no end time.	DBSMALLINT	NOT NULL
EndMinute	The minute of the hour at which the schedule expires. The value is <b>0</b> if the schedule has no end time.	DBSMALLINT	NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
EndMonth	The month in which the schedule expires. The value is <b>0</b> if the schedule has no end date.	DBSMALLINT	NOT NULL
EndSecond	The second of the minute at which the schedule expires. The value is <b>0</b> if the schedule has no end time.	DBSMALLINT	NOT NULL
EndYear	The year in which the schedule expires. The value is <b>0</b> if the schedule has no end date.	DBINT	NOT NULL
Long1	For scheduled targets, the maximum number of simultaneous calls the target can handle during the schedule period.	DBINT	NULL
Long2	Reserved for future use.	DBINT	NULL
Long3	Reserved for future use.	DBINT	NULL
Long4	Reserved for future use.	DBINT	NULL
MonthOfYear	Indicates to which month the schedule applies: <ul style="list-style-type: none"> <li>• <b>0</b> = Applies to every month.</li> <li>• <b>1- 12</b>= Specifies the month of year.</li> </ul>	DBSMALLINT	NOT NULL
ScheduleID	Identifies the schedule that recurs.	DBINT	PK, FK NOT NULL
SequenceNumber	Index for schedules associated with a specific service.	DBINT	PK, NOT NULL
StartDay	The day of the month on which the schedule goes into effect ( <b>1</b> through <b>31</b> ).	DBSMALLINT	NOT NULL
StartHour	The hour of the day at which the schedule goes into effect.	DBSMALLINT	NOT NULL
StartMinute	The minute of the hour at which the schedule goes into effect.	DBSMALLINT	NOT NULL
StartMonth	The month in which the schedule goes into effect ( <b>1</b> through <b>12</b> ).	DBSMALLINT	NOT NULL
StartSecond	The second of the minute at which the schedule goes into effect.	DBSMALLINT	NOT NULL
StartYear	The year in which the schedule goes into effect.	DBINT	NOT NULL
Type	The type of schedule.	DBSMALLINT	NOT NULL

**Region Table****Region Table**

This table is part of the [Script category \(page 539\)](#). For database rules, click [here](#). (page 599)

Each row defines a region composed of calling line ID prefixes or of other regions.

Use Configuration Manager to create, update, and delete Region rows.

**Related tables**

[Dialed Number Map \(page 200\)](#) (via RegionID)

[Region Member \(page 333\)](#) (via RegionID)

[Region Prefix \(page 333\)](#) (via RegionID)

[Region View Member \(page 335\)](#) (via RegionID)

**Table 155: Indexes for Region Table**

index_name	index_description	index_keys
XAK1Region	nonclustered, unique, unique key located on PRIMARY	EnterpriseName
XPKRegion	clustered, unique, primary key located on PRIMARY	RegionID

**Fields in Region Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
Description	Additional information about the region.	DESCRIPTION	NULL
EnterpriseName	An enterprise name for the region. This name must be unique for all regions in the enterprise.	VNAME32	AK-1 NOT NULL
RegionID	A unique identifier for the region.	DBINT	PK NOT NULL
RegionType	The type of the region.	DBINT	NOT NULL

**Region\_Info Table**

This table is in the [System category \(page 548\)](#). To see database rules for these tables, click [here](#) (page 601).

Specifies which prefixes and regions are predefined by the system software.

Use Configuration Manager to create, update, and delete Region rows.

**Fields in Region\_Info Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
Comment	Any additional information about the pre-defined regions.	DESCRIPTION	NULL
Location	Identifies the types of prefixes and regions pre-defined by the system software.	VNAME32	NOT NULL
MajorVersion	The major version number of the predefined regions.	DBINT	NOT NULL
MinorVersion	The minor version number of the predefined regions.	DBINT	NOT NULL

## Region\_Member Table

This table is part of the [Script category \(page 539\)](#). For database rules, click [here. \(page 599\)](#)

Each row defines the relationship between two regions. A region is composed of calling line ID prefixes or of other regions. Each Region\_Member row associates a region with a parent region.

Use Unified ICM Configuration Manager to create, update, and delete Region Member rows.

### Related table

[Region \(page 332\)](#) (via RegionID and ParentRegionID)

**Table 156: Indexes for Region\_Member Table**

index_name	index_description	index_keys
XIE1Region_Member	nonclustered, unique, primary key located on PRIMARY	ParentRegionID
XPKRegion_Member	clustered, unique, primary key located on PRIMARY	RegionID, ParentRegionID

**Fields in Region\_Member Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ParentRegionID	The larger region.	DBINT	PK, IE-1 NOT NULL
RegionID	The region that is a member of a larger region.	DBINT	PK, FK NOT NULL

## Region\_Prefix Table

This table is part of the [Script category \(page 539\)](#). For database rules, click [here. \(page 599\)](#)

**Region\_View Table**

Each row defines the initial part of a calling line ID and maps it to a region. Any calling line IDs that match the prefix string are assumed to be members of the region.

Use Unified ICM Configuration Manager to create, update, and delete Region Prefix rows.

**Related table**

[Region \(page 332\)](#) (via RegionID)

**Table 157: Indexes for Region\_Prefix Table**

index_name	index_description	index_keys
XAK1Region_Prefix	nonclustered, unique, unique key located on PRIMARY	RegionID, RegionPrefix
XPKRegion_Prefix	clustered, unique, primary key located on PRIMARY	RegionPrefixID

**Fields in Region\_Prefix Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
DaylightSavingsEnabled	Indicates whether daylight savings time is observed.  Values are 'N' and 'Y'.  The default is 'N' - daylight savings time is not observed.	DBCHAR	NOT NULL
UTC (formerly called GMT)	Indicates coordinated universal time, abbreviated UTC (formerly called GMT) delta in minutes.	DBINT	NULL
RegionID	Identifies the associated region.	DBINT	AK-1, FK NOT NULL
RegionPrefix	An initial string to match against calling line IDs.	varchar(32)	AK-1 NOT NULL
RegionPrefixID	A unique identifier for the record.	DBINT	PK NOT NULL

**Region\_View Table**

This table is part of the [Script category \(page 539\)](#). For database rules, click [here](#). (page 599)

Each row defines a graphical display of regions.

Use Configuration Manager to create, update, and delete Region Prefix rows.

**Related table**

[Region View Member \(page 335\)](#) (via RegionViewID)

**Table 158: Indexes for Region\_View Table**

index_name	index_description	index_keys
XAK1Region_View	nonclustered, unique, unique key located on PRIMARY	EnterpriseName
XPKRegion_View	clustered, unique, primary key located on PRIMARY	RegionViewID

**Fields in Region\_View Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
Description	Additional information about the view.	DESCRIPTION	NULL
EnterpriseName	An enterprise name for the region view. This name must be unique for all region views in the enterprise.	VNAME32	AK-1 NOT NULL
RegionViewID	A unique identifier for the record.	DBINT	PK NOT NULL
RegionViewType	The type of the view:  • 1 = Unified ICM-defined  • 2 = Custom	DBINT	NOT NULL

**Region\_View\_Member Table**

This table is part of the [Script category \(page 539\)](#). For database rules, click [here](#). (page 599)

Each row associates a specific region with a region view.

Use Unified ICM Configuration Manager to create, update, and delete Region Prefix rows.

**Related tables**

[Region \(page 332\)](#) (via RegionID)

[Region View \(page 334\)](#) (via RegionViewID)

**Table 159: Indexes for Region\_View\_Member Table**

index_name	index_description	index_keys
XIE1Region_View_Member	nonclustered, unique, primary key located on PRIMARY	RegionID

**Rename Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XPKRegion_View_Member	clustered, unique, primary key located on PRIMARY	RegionViewID, RegionID

**Fields in Region\_View\_Member Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
Color	Identifies the color in which to display the region in the view.	DBINT	NOT NULL
RegionID	Identifies the region.	DBINT	PK, FK, IE-1 NOT NULL
RegionViewID	A unique identifier for the record.	DBINT	PK NOT NULL

**Rename Table**

This table is in the [System category \(page 548\)](#). To see database rules for these tables, click [here \(page 601\)](#).

**Table 160: Indexes for Rename Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XPKRename	clustered, unique, primary key located on PRIMARY	TableName

**Fields in Rename Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
TableName	The name of the historical table.	VNAME32	PK NOT NULL
Buf	The name of the buffer table for swapping.	VNAME32	NULL
Msg	The name of the first temporary historical table.	VNAME32	NULL
Tmp	The name of the second temporary historical table.	VNAME32	NULL

**Route Table**

This table is in the [Route category \(page 535\)](#). To see database rules for these tables, click [here \(page 597\)](#).

Each row represents a possible destination for a call. Use Unified ICM Configuration Manager to add, update, and delete Route records.

**Related tables**

Peripheral Default Route (page 310) (via RouteID)	Peripheral Target (page 320) (via RouteID)	Route Call Detail (page 338) (via RouteID)
Route Five Minute (page 344) (via RouteID)	Route Half Hour (page 347) (via RouteID)	Route Real Time (page 352) (via RouteID)
Service (page 386) (ServiceSkillTargetID maps to Service.SkillTargetID)	Skill Target (page 489) (via SkillTargetID)	Termination Call Detail (page 490) (via RouteID)

**Table 161: Indexes for Route Table**

index_name	index_description	index_keys
XAK1Route	nonclustered, unique, unique key located on PRIMARY	EnterpriseName
X1E1Route	nonclustered located on PRIMARY	SkillTargetID, ServiceSkillTargetID
XPKRoute	clustered, unique, primary key located on PRIMARY	RouteID

**Fields in Route Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
Deleted	Deleted Flag. Stored as a character:  • Y = Yes  • N = No	DBCHAR	NOT NULL
Description	Additional information about the route.	DESCRIPTION	NULL
EnterpriseName	An enterprise name for the route. This must be unique among all routes in the enterprise.	VNAME32	AK-1 NOT NULL
RouteID	Unique identifier for the route.	DBINT	PK NOT NULL
ServiceSkillTargetID	Associated Service.SkillTargetID. Every route that terminates at a peripheral should have a service.	DBINT	FK, IE-1 NULL
SkillTargetID	Foreign key from the Skill Target table that represents the destination of the route. The destination is a Service, Skill Group, Agent, or Translation Route.	DBINT	FK, IE-1 NULL

**Route\_Call\_Detail Table****Route\_Call\_Detail Table**

This table is in the [Route category \(page 535\)](#). To see database rules for these tables, click [here \(page 597\)](#).

This table can become very large. Running custom reporting queries against it while it is on the HDS can degrade performance. To optimize performance, extract the data from the HDS into your own custom database on a separate server (one that is not used for other Unified ICM/Unified CCE components). Use only DBDateTime (date and time of the record that was written to the HDS database) to perform the extraction. The table on the custom database can be indexed according to the custom reporting needs.

Central database only.

Each row records information about a routing request received by the system software and the route it choose for it.

The system software generates a Route\_Call\_Detail record for every routing request it processes.

#### **Related tables**

<a href="#">Call Type (page 95)</a> (via CallTypeID)	<a href="#">Dialed Number (page 197)</a> (via DialedNumberID)	<a href="#">Network Target (page 294)</a> (via NetworkTargetID)
<a href="#">Route (page 336)</a> (via RouteID)	<a href="#">Route Call Variable (page 343)</a> (RecoveryKey maps to Route_Call_Variable.RCDRecoveryKey)	<a href="#">Routing Client (page 357)</a> (via RoutingClientID)
<a href="#">Script (page 377)</a> (via ScriptID)	<a href="#">Script Cross Reference (page 378)</a> (via FinalObjectID)	<a href="#">Termination Call Detail (page 490)</a> (via Day + RouterCallKey)

**Table 162: Indexes for Route\_Call\_Detail Table**

index_name	index_description	index_keys
XIE1Route_Call_Detail	nonclustered, unique, primary key located on PRIMARY	DateTime
XIE2Route_Call_Detail	nonclustered, unique, primary key located on PRIMARY	DbDateTime
XIE3Route_Call_Detail	nonclustered, unique, primary key located on PRIMARY	DateTime, RouterCallKey, RouterCallKeySequenceNumber
XPKRoute_Call_Detail	nonclustered, unique, primary key located on PRIMARY	RecoveryKey

**Fields in Route\_Call\_Detail Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
ANI	Automatic Number Identification, identifies the calling party.	VNAME32	NULL
BeganCallTypeDateTime	A new time stamp that indicates when the call entered the current CallType.	DBDATETIME	NULL
BeganRoutingDateTime	A new time stamp that indicates when the first route request was received for this call.	DBDATETIME	NULL
CallSegmentTime	Time in seconds that the system took to segment a private network call. For example, if the system software handed the caller off to a menu of choices, CallSegmentTime reflects the length of time the caller spent in the menu.	DBINT	NULL
CallTrace	The system software does not populate this field. It is reserved for future use.	image	NULL
CallTypeID	Foreign key from Call Type table. If a script changed the call type, this is the final call type for the call. This unique identifier is generated automatically by the system software.	DBINT	FK NULL
CDPD	Customer Database Provided Digits. Can be used to track the call from the public network to the peripheral. ISDN is required to carry the information to the switch.	varchar(30)	NULL
CED	Caller-Entered Digits.	varchar(30)	NULL
DateTime	The date and time when the call was routed.	DBDATETIME	IE-1 NOT NULL
DbDateTime	The current date and time stamp when the records are written to the HDS database. The logger database has NULL for this column.	DBDATETIME	IE-2 NULL
DialedNumberID	Foreign key from the Dialed Number table.	DBINT	FK NULL
DialedNumberString	The dialed number for the call. If the dialed number for the call is configured, this will be the same as the DialedNumberString of the dialed number specified by DialedNumberID. If the dialed number for the call is not configured, this is the dialed number string and DialedNumberID will be NULL.	VNAME32	NULL
ECCPayloadID	Reserved for future use.	DBINT	NULL
FinalObjectID	Identifies the node ID of the last script node executed to route the call.	DBINT	NULL

## Route\_Call\_Detail Table

Field Name:	Description:	Data Type:	Keys and Null Option:
Label	Identifies the label that was passed to the routing client. For a translation routed call, this is the label for the translation route, not the ultimate destination. If the label passed to the routing client for the call is configured, this will be the same as the Label field of the label specified by LabelID. If the label for the call is not configured, this is the label passed back to the routing client and the LabelID will be NULL.	VNAME32	NULL
LabelID	Identifies the label that was passed to the routing client. For a translation routed call, this is the label for the translation route, not the ultimate destination.	DBINT	FK NULL
MRDomainID	An identifier for the Media Routing Domain in the Unified ICM system configuration	DBINT	NULL
MsgOrigin	The originator of the request:  • - 1 = Unspecified  • 1 = Switch  • 2= CallSim  • 3 = TestCall	DBSMALLINT	NULL
NetQTime	Time in seconds the call spent in a network router queue.  For <b>Unified CCE</b> or <b>translation routed calls</b> , NetQTime is included in the computation of answer wait time.  For <b>legacy ACDS</b> , OPC does nothing with the NetQTime other than put it in the Termination_Call_Detail record.	DBINT	NULL
NetworkTargetID	Identifies the scheduled target, device target, or peripheral target that was chosen by the system software.	DBINT	FK NULL
Originator	The origin of the route request.	varchar(8)	NULL
OriginatorType	Type of originator for a private network route request. A private network route requests is a route request that is sent from the ACD to the system software through the Peripheral Gateway. For a list of valid options, click <a href="#">here (page 568)</a> .	DBSMALLINT	NULL
Priority	The priority that a private network routing client gives to the call. Supported by Lucent ASA1.	DBSMALLINT	NULL
RecoveryDay	Currently not used, set to zero (0).	DBINT	NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL
RequeryResult	The reason for the last Requery operation.	DBINT	NULL
RequestType	Type of request. For the list of values, click <a href="#">here (page 568)</a> .	DBSMALLINT	NOT NULL
RouteID	Foreign key from the Route table. This system software identifier specifies the route where the call was sent. A route is a value returned by a routing script that maps to a target at a peripheral. This target can be a service, skill group, agent, or translation route. The value (for example, 5000), is unique among all routes in the enterprise. It is taken from the Route table in the Unified ICM central database. Route IDs are generated automatically when a route is configured in the Route Configuration window of Unified ICM Configuration Manager.	DBINT	FK NULL
RouterCallKey	A call key counter created and set by the system software. This value forms the unique portion of the 64-bit key for the call. The system software resets this counter at midnight.	DBINT	NOT NULL
RouterCallKeyDay	A value indicating the day that the call was received and the Route_Call_Detail record was created.	DBINT	NOT NULL
RouterCallKeySequenceNumber	A sequence number used for ordering rows for cradle-to-grave call tracking. This number defines the order in which the route requests were created. This <i>is not</i> the order in which the Route_Call_Detail records were created. For PG routing clients, this field defines the Termination_Call_Detail instance that initiated the route request.	DBINT	NULL
RouterErrorCode	Error code from the CallRouter process. For information about a specific Router ErrorCode, refer to the Error Messages section of the <i>Serviceability Best Practices Guide for Cisco Unified ICM/Contact Center Enterprise &amp; Hosted</i> .	DBSMALLINT	NULL
RouterQueueTime	Number of seconds the call was held in the CallRouter queue.	DBINT	NULL
RoutingClientCallKey	Call counter generated by the routing client in a private network. The counter occasionally resets, so duplicate values do occur.	DBINT	NULL
RoutingClientID	Foreign key from the Routing Client table. This is a unique identifier for this routing client. The routing client ID is generated automatically when the routing client is configured in the Routing Client Configuration window of Unified ICM Configuration Manager.	DBSMALLINT	FK NOT NULL

**Route\_Call\_Detail Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
ScriptID	Foreign key from Script table. Indicates the script used to route the call. This unique identifier is generated automatically by the system software.	DBINT	FK NULL
TargetLabel	The label associated with the ultimate target at the switch. For a translation routed call, this is the label of the final destination, not of the translation route itself. If the label for the call is configured, this will be the same as the Label field of the label specified by TargetLabelID. If the label for the call is not configured, this is the final label for the call and TargetLabelID will be NULL.	VNAME32	NULL
TargetLabelID	The label associated with the ultimate target at the switch. For a translation routed call, this is the label of the final destination, not of the translation route itself.	DBINT	NULL
TargetType	A numeric value representing the execution result of the routing script. To see the list of values, click <a href="#">here (page 568)</a> .	DBINT	NULL
TimeZone	The time zone of the Central Controller used for DateTime.	DBINT	NULL
Unused	This field is reserved.	char(4)	NULL
UserToUser	ISDN private network User to User information.	varchar(131)	NULL
Variable1	User defined call variable.	varchar(40)	NULL
Variable2	User defined call variable.	varchar(40)	NULL
Variable3	User defined call variable.	varchar(40)	NULL
Variable4	User defined call variable.	varchar(40)	NULL
Variable5	User defined call variable.	varchar(40)	NULL
Variable6	User defined call variable.	varchar(40)	NULL
Variable7	User defined call variable.	varchar(40)	NULL
Variable8	User defined call variable.	varchar(40)	NULL
Variable9	User defined call variable.	varchar(40)	NULL
Variable10	User defined call variable.	varchar(40)	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
VruProgress	The VRUProgress call variable value.	DBINT	NULL
VruScripts	Number of VRU Script nodes encountered by the call..	DBINT	NULL

## Route\_Call\_Variable Table

This table is in the [Route category \(page 535\)](#). To see database rules for these tables, click [here \(page 597\)](#).

This table can become very large. Running custom reporting queries against it while it is on the HDS can degrade performance. To optimize performance, extract the data from the HDS into your own custom database on a separate server (one that is not used for other Unified ICM/Unified CCE components). Use only DBDateTime (date and time of the record that was written to the HDS database) to perform the extraction. The table on the custom database can be indexed according to the custom reporting needs.

Central database only.

Each row records the value of an expanded call variable for a call routed by the system software. If the expanded call variable is an array, one Route\_Call\_Variable row is generated for each element of the array.

The system software generates a Route\_Call\_Variable record for each enabled expanded call variable for every routing request it processes.

### Related tables

[Expanded Call Variable \(page 234\)](#) (via ExpandedCallVariableID)

[Route Call Detail \(page 338\)](#) (RCDRecoveryKey maps to Route\_Call\_Detail.RecoveryKey)

**Table 163: Indexes for Route\_Call\_Variable Table**

index_name	index_description	index_keys
XAK1Route_Call_Variable	clustered, unique, unique key located on PRIMARY	RCDRecoveryKey, ExpandedCallVariableID, ArrayIndex
XIE1Route_Call_Variable	nonclustered, unique, primary key located on PRIMARY	DateTime
XIE2Route_Call_Variable	nonclustered, unique, primary key located on PRIMARY	DbDateTime
XPKRoute_Call_Variable	nonclustered, unique, primary key located on PRIMARY	RecoveryKey

**Route\_Five\_Minute Table****Fields in Route\_Call\_Variable Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ArrayIndex	If the expanded call variable is an array, this identifies the array element: 0 to N-1, where N is the size of the array.	DBINT	AK-2 NOT NULL
DateTime	The date and time when the call was routed.	DBSMALLDATE	IE-1 NOT NULL
DbDateTime	The current date and time stamp when the records are written to the HDS database. The logger database has NULL for this column.	DBDATETIME	IE-2 NULL
ECCValue	The value of the call variable or array element.	varchar(255)	NULL
ExpandedCallVariableID	Identifies the expanded call variable.	DBSMALLINT	AK-2, FK NOT NULL
RCDRecoveryKey	The RecoveryKey value from the associated Route_Call_Detail row.	DBFLT8	AK-2 NOT NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL

**Route\_Five\_Minute Table**

This table is in the [Route category \(page 535\)](#). To see database rules for these tables, click [here \(page 597\)](#).

Central database only. Each row contains statistics about a route during the most recent five-minute interval. The system software generates Route\_Five\_Minute records for each route.

**Related Table**

[Route \(page 336\)](#) (via RouteID)

**Table 164: Indexes for Route\_Five\_Minute Table**

index_name	index_description	index_keys
XAK1Route_Five_Minute	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XPKRoute_Five_Minute	clustered, unique, primary key located on PRIMARY	DateTime, RouteID, TimeZone

**Fields in Route\_Five\_Minute Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
AgentsTalking	Number of agents in the Talking state for the route at the end of the five-minute interval.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
AvgDelayQAbandTo5	Average delay time of abandoned calls in queue for the route during the five-minute interval.	DBINT	NULL
AvgDelayQNow	Average delay in queue for the route at the end of the five-minute interval.	DBINT	NULL
AvgHandleTimeTo5	Average handle time in seconds for calls to the route ending during the five-minute interval. This includes any HoldTime, TalkTime, and WorkTime associated with the call. The HandleTime and AvgHandleTime values are updated in the database when the after-call work time associated with the call (if any) is completed.	DBINT	NULL
AvgSpeedAnswerTo5	Average answer wait time for all incoming calls to the route during the five-minute interval.	DBINT	NULL
AvgTalkTimeTo5	Average talk time in seconds for calls to the route ending during the five-minute interval. Talk time is populated with the TalkTime and HoldTime associated with call to the route.	DBINT	NULL
CallsAbandQToday	Running total of calls to the route abandoned in queue since midnight.	DBINT	NULL
CallsAnsweredTo5	Number of calls to the route answered during the five-minute DBINTerval.	DBINT	NULL
CallsAnsweredToday	Number of calls to the route answered since midnight.	DBINT	NULL
CallsHandledTo5	<p>Number of calls to the route handled during the five-minute DBINTerval. A call is counted as handled when the call is finished (that is, when any after-call work associated with the call is completed).</p> <p><b>Handled Call</b></p> <ul style="list-style-type: none"> <li>• An incoming ACD call that was answered by an agent, and then completed.</li> <li>• A call associated with Outbound Option that the agent answered, and then completed.</li> <li>• A non-voice task that the agent started working on then completed.</li> </ul> <p>A handled call/task is completed when the agent associated with the call/task finishes the wrap-up work associated with the call/task.</p>	DBINT	NULL

**Route\_Five\_Minute Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
CallsHandledToday	Running total of calls to the route handled at the peripheral since midnight. CallsHandled includes all calls handled by any answering resource for the route (for example, an IVR, agent, or voice mail port).	DBINT	NULL
CallsIncomingToday	Running total of incoming calls to this route since midnight. Incoming calls include only Inbound ACD calls arriving on trunks (that is, calls that are not internally generated).	DBINT	NULL
CallsInProgress	The total number of inbound and outbound calls that had previously been offered (for example, calls being played an announcement, queued calls, or connected calls) and are currently being handled for the route at the end of the five-minute interval.	DBINT	NULL
CallsLeftQTo5	Number of calls to the route that were removed from the queue during the five-minute interval (includes abandoned calls).	DBINT	NULL
CallsOfferedTo5	Number of calls to the route offered in the five-minute interval. The CallsOffered count includes calls that are overflowed and transferred into the service or route. A call is counted as offered as soon as it is associated with a route.	DBINT	NULL
CallsOfferedToday	Running total of incoming calls plus internal calls offered to the route since midnight.	DBINT	NULL
CallsQNow	Calls in queue for the route at the peripheral at the end of the interval.	DBINT	NULL
CallsRoutedToday	Running total of calls the system software sent to the route since midnight.	DBINT	NULL
DateTime	The Central Controller date and time at the start of the five-minute interval.	DBSMALLDATE	PK NOT NULL
LongestCallQ	Length of time that the longest call in the queue for the route had been there at the end of the five-minute interval.	DBINT	NULL
RecoveryDay	Currently not used, set to zero (0).	DBINT	NOT NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL
RouteID	Foreign key from the Route table.	DBINT	PK, FK NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
ServiceLevelAbandTo5	Total of calls to the route abandoned within the service level threshold during the five-minute interval.	DBINT	NULL
ServiceLevelAbandToday	Cumulative total of calls to the route abandoned within the service level threshold since midnight.	DBINT	NULL
ServiceLevelCallsOfferedTo5	Total number of calls to the route that had a service level event during the five-minute interval.	DBINT	NULL
ServiceLevelCallsOfferedToday	Total number of calls to the route that had a service level event since midnight.	DBINT	NULL
ServiceLevelCallsQHeld	Number of calls to the route that had been in queue longer than the service level threshold as of the end of the five-minute interval.	DBINT	NULL
ServiceLevelCallsTo5	Total of calls to the route answered within the service level threshold during the five-minute interval.	DBINT	NULL
ServiceLevelCallsToday	Cumulative total of calls to the route answered within the service level since midnight.	DBINT	NULL
ServiceLevelTo5	Service level for the route for the five-minute interval.	DBFLT4	NULL
ServiceLevelToday	Cumulative service level for this route since midnight. The system software uses the same type of calculation as specified for the service associated with the route.	DBFLT4	NULL
TimeZone	The time zone for the date and time. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK NOT NULL
Unused1	This field is not used.	DBFLT4	NULL

## Route\_Half\_Hour Table

This table is in the [Route category \(page 535\)](#). To see database rules for these tables, click [here \(page 597\)](#).

Central database only. Each row contains statistics for each route during the most recent 30-minute interval. The system software generates Route\_Half\_Hour records for each route.

### Related Table

[Route \(page 336\)](#) (via RouteID)

**Route\_Half\_Hour Table****Table 165: Indexes for Route\_Half\_Hour Table**

index_name	index_description	index_keys
XAK1Route_Half_Hour	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XIE1Route_Half_Hour	nonclustered, unique, primary key located on PRIMARY	DbDateTime
XPKRoute_Half_Hour	clustered, unique, primary key located on PRIMARY	DateTime, RouteID, TimeZone

**Fields in Route\_Half\_Hour Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
AnswerWaitTimeToHalf	Sum of answer wait time in seconds for all incoming calls to the route during the half-hour interval.	DBINT	NULL
AvgDelayQAbandToHalf	Average delay time of calls to the route that were abandoned in queue during the half-hour interval. This value is calculated as follows: <b>DelayQAbandTimeToHalf / CallsAbandQToHalf</b>	DBINT	NULL
AvgDelayQToHalf	Average delay in seconds for calls queued for the route during the half-hour interval. The value is calculated as follows: <b>DelayQTimeToHalf / CallsQToHalf</b>	DBINT	NULL
AvgHandleTimeToHalf	The average handled calls time in seconds for calls counted as handled for the route during the half-hour interval. HandleTime is tracked only for inbound ACD calls that are counted as handled for the service. HandleTime is the time spent from the call being answered by the agent to the time the agent completed after-call work time for the call. This includes any TalkTime, HoldTime, and WorkTime associated with the call. This value is calculated as follows: <b>HandleTimeToHalf / CallsHandledToHalf</b> . The AvgHandleTime value is counted when the after-call work time associated with the call is completed, and the database is updated every half hour.	DBINT	NULL
AvgSpeedAnswerToHalf	Average answer wait time for all incoming calls to the route in the half-hour interval. This value is calculated as follows: <b>AnswerWaitTimeToHalf / CallsAnsweredToHalf</b>	DBINT	NULL
AvgTalkTimeToHalf	The average talk time in seconds for calls to the route. Talk time includes the time that calls were in a talking or hold state. It is populated with the TalkTime and HoldTime associated with call to the route (from Termination_Call_Detail). This value is calculated as follows: <b>TalkTimeToHalf / CallsHandledToHalf</b> . The field is counted when all after-call work associated with the call is completed, and the database is updated every half hour.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
BlindTransfersOutToHalf	The number of calls that were blind transferred out for this route during the half-hour interval.	DBINT	NULL
CallsAbandQToHalf	Number of calls abandoned in queue on this route during the half-hour interval.	DBINT	NULL
CallsAnsweredToHalf	The total number of calls answered by agents, IVRs, or voice-mail ports for the route during the half-hour interval.	DBINT	NULL
CallsHandledToHalf	Total number of calls handled on this route during the half-hour interval. CallsHandled includes all calls handled by any answering resource for the route (for example, an IVR, agent, or voice mail port).  A <b>handled call</b> is: <ul style="list-style-type: none"><li>• An incoming ACD call that was answered by an agent, and then completed.</li><li>• A non-voice task that the agent started working on then completed.</li></ul> A handled call/task is completed when the agent associated with the call/task finishes the wrap-up work associated with the call/task.	DBINT	NULL
CallsIncomingToHalf	Total of incoming calls on this route during the half-hour interval. Incoming calls include only Inbound ACD calls arriving on trunks (that is, calls that are not internally generated).	DBINT	NULL
CallsOfferedToHalf	Total of incoming calls plus internal calls offered on this route during the half-hour interval.	DBINT	NULL
CallsQToHalf	Number of calls to the route in queue during the half-hour interval. A call that queues multiple times is counted as queued once for the route.	DBINT	NULL
CallsRoutedToHalf	Total calls the system software sent to this route during the half-hour interval.	DBINT	NULL
DateTime	The date and time at the start of the half-hour interval.	DBSMALLDATE	PK NOT NULL
DbDateTime	The current date and time stamp when the records are written to the HDS database. The logger database has NULL for this column.	DBDATETIME	IE-1 NULL
DelayQAbandTimeToHalf	The total number of seconds that calls to the route that were abandoned in queue waited during the interval. These are calls that	DBINT	NULL

**Route\_Half\_Hour Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	existed in the queue but were abandoned before being handled by an agent or trunk device.		
DelayQTimeToHalf	Sum of delay time of all calls in queue for the route during the half-hour interval. This field is populated with the LocalQTime from the Termination_Call_Detail record.	DBINT	NULL
ForcedClosedCallsToHalf	The number of calls to the route that were determined to be closed following an interruption in data during the half-hour interval. ForcedClosedCalls are calls that terminated because of errors tracking the call's state transition. Calls may become forced closed if there is lack of events from the ACD's CTI interfaces (for example, a lack of a Disconnect event, or failure on the switch's CTI connection).	DBINT	NULL
HandleTimeToHalf	The total time in seconds that calls were handled for the route during the half-hour interval. Handle time is tracked only for inbound ACD calls that are counted as handled for the route. HandleTime is the time spent from the call being answered by the agent to the time the agent completed after-call work time for the call. This includes any HoldTime, TalkTime, and WorkTime associated with the call. The HandleTime and AvgHandleTime values are updated in the database when the after-call work time associated with the call is completed.	DBINT	NULL
HoldTimeToHalf	Total hold time in seconds for calls to the route that ended during the half-hour interval.	DBINT	NULL
LongestCallAbandTime	The longest time in seconds a call was in queue for the route before being abandoned during the half-hour interval. This includes the LocalQTime, DelayTime, and RingTime.	DBINT	NULL
LongestCallDelayQTime	The longest time in seconds a call was in queue for the route before being answered during the half-hour interval. This includes the LocalQTime for the call.	DBINT	NULL
OverflowInToHalf	Number of calls that the peripheral retargeted, or overflowed, into the route during the half-hour interval. The system software keeps counts of the number of calls moved out of each service or route (overflowed out) and moved into each service or route (overflowed in).	DBINT	NULL
OverflowOutToHalf	Number of calls the peripheral retargeted, or overflowed, out of the route during the half-hour interval. The system software keeps counts of the number of calls moved our of each service or route (overflowed out) and moved into each service or route (overflowed in).	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
RecoveryDay	Currently not used, set to zero (0).	DBINT	NOT NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL
RedirectNoAnsCallsToHalf	Number of calls that rang at an agent's terminal and redirected on failure to answer in this service during the current half-hour interval.	DBINT	NULL
Reserved1	Reserved for future use.	DBINT	NULL
Reserved2	Reserved for future use.	DBINT	NULL
Reserved3	Reserved for future use.	DBINT	NULL
Reserved4	Reserved for future use.	DBINT	NULL
Reserved5	Reserved for future use.	DBFLT4	NULL
RouteID	Foreign key from the Route table.	DBINT	PK, FK NOT NULL
ServiceLevelAbandToHalf	Cumulative total of calls to the route abandoned within the service level during the half-hour interval.	DBINT	NULL
ServiceLevelCallsOfferedToHalf	Number of calls to the route that have had a service level event during the current half-hour interval.	DBINT	NULL
ServiceLevelCallsToHalf	Cumulative total of calls to the route answered within the service level during the half-hour interval.	DBINT	NULL
ServiceLevelToHalf	Cumulative service level for the route during the half-hour interval. The system software uses the same type of service level calculation as specified for the service associated with the route.	DBFLT4	NULL
ServiceLevelType	Service Level Type used to calculate Service level for this interval	DBINT	NULL
ShortCallsTimeToHalf	The time, in seconds, accumulated by calls that were too short to be counted as abandoned during the half-hour interval. These calls were abandoned before the abandoned call wait time expired.	DBINT	NULL
ShortCallsToHalf	The total number of calls to the route that were too short to be considered abandoned during the half-hour interval. A call is determined to be a short call if it is abandoned before the Abandoned Call Wait Time expired. Short calls are not considered abandoned,	DBINT	NULL

**Route\_Real\_Time Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	nor are they accounted for in any of the Unified ICM abandoned calls calculations.		
TalkTimeToHalf	The number of seconds the call was talking plus the number of seconds the call was on hold. TalkTime for routes and services is taken from the TalkTime and HoldTime. It is counted when any after-call work associated with the call is completed, and the database is updated every half hour.	DBINT	NULL
TimeZone	The time zone for the date and time. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	NOT NULL

**Route\_Real\_Time Table**

This table is in the [Route category \(page 535\)](#). To see database rules for these tables, click [here \(page 597\)](#).

Local database only.

Each row contains real time information about a route. The system software generates a Route\_Real\_Time record for each route.

**Related Table**

[Route \(page 336\)](#) (via RouteID)

**Table 166: Indexes for Route\_Real\_Time Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XPKRoute_Real_Time	clustered, unique, primary key located on PRIMARY	RouteID

**Fields in Route\_Real\_Time Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
AgentsTalking	Number of agents for the route currently in the talking state	DBINT	NULL
AnswerWaitTimeHalf	Sum of answer wait time in seconds for all calls offered to the route during the current half-hour interval.	DBINT	NULL
AnswerWaitTimeTo5	Sum of answer wait time in seconds for all calls offered to the route during the rolling five-minute interval.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
AnswerWaitTimeToday	Sum of answer wait time in seconds for all calls offered to the route since midnight.	DBINT	NULL
AvgDelayQAbandTo5	Average delay time of abandoned calls in queue for the route during the rolling five-minute interval: <b>DelayQAbandTimeTo5 / CallsAbandQTo5</b> .	DBINT	NULL
AvgDelayQNow	Average delay for calls to the route currently in queue.	DBINT	NULL
AvgHandleTimeTo5	Average handle time in seconds for calls to the route ending during the rolling five-minute interval: <b>HandleTimeTo5 / CallsHandledTo5</b> .	DBINT	NULL
AvgSpeedAnswerTo5	Average answer wait time for all calls offered to the route during the rolling five-minute interval: <b>AnswerWaitTimeTo5 / CallsAnsweredTo5</b> .	DBINT	NULL
AvgTalkTimeTo5	Average talk time in seconds for calls to the route ending during the rolling five-minute interval: <b>TalkTimeTo5 / CallsHandledTo5</b> .	DBINT	NULL
CallsAbandQHalf	Number of calls to this route abandoned while in queue or ringing during the current half-hour interval.	DBINT	NULL
CallsAbandQTo5	Number of calls to the route abandoned while in queue or ringing during the rolling five-minute interval.	DBINT	NULL
CallsAbandQToday	Number of calls to this route abandoned while in queue or ringing since midnight.	DBINT	NULL
CallsAnsweredHalf	Number of calls to the route answered by agents during the current half-hour interval.	DBINT	NULL
CallsAnsweredTo5	Number of calls to the route answered by agents during the rolling five-minute interval.	DBINT	NULL
CallsAnsweredToday	Number of calls to the route answered by agents since midnight.	DBINT	NULL
CallsHandledHalf	<p>Number of calls handled on the route during the current half-hour interval.</p> <p><b>A handled call</b> is:</p> <ul style="list-style-type: none"> <li>An incoming ACD call that was answered by an agent, and then completed.</li> </ul>	DBINT	NULL

**Route\_Real\_Time Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	<ul style="list-style-type: none"> <li>A call associated with Outbound Option that the agent answered, and then completed.</li> <li>A non-voice task that the agent started working on then completed.</li> </ul> <p>A handled call/task is completed when the agent associated with the call/task finishes the wrap-up work associated with the call/task.</p>		
CallsHandledTo5	<p>Number of calls handled for the route during the rolling five-minute interval.</p> <p>A handled call/task is completed when the agent associated with the call/task finishes the wrap-up work associated with the call/task.</p>	DBINT	NULL
CallsHandledToday	Number of calls handled on the route since midnight.	DBINT	NULL
CallsIncomingHalf	Number of incoming calls on this route during the current half-hour interval.	DBINT	NULL
CallsIncomingToday	Number of incoming calls on this route since midnight.	DBINT	NULL
CallsInProgress	Number of calls in queue or being handled on this route now.	DBINT	NULL
CallsLeftQTo5	Number of calls to the route that were removed from the queue during the rolling five-minute interval (includes abandoned calls).	DBINT	NULL
CallsOfferedHalf	Number of incoming calls plus internal calls offered on this route during the current half-hour interval.	DBINT	NULL
CallsOfferedTo5	Number of calls offered to the route during the rolling five-minute interval.	DBINT	NULL
CallsOfferedToday	Number of incoming calls plus internal calls offered on this route since midnight.	DBINT	NULL
CallsQNow	Number of calls to the route in queue now at the peripheral.	DBINT	NULL
CallsQNowTime	Total queue time in seconds for all calls to the route currently in queue.	DBINT	NULL
CallsRoutedHalf	Number of calls sent on this route during the current half-hour interval.	DBINT	NULL
CallsRoutedToday	Number of calls the system software sent to this route since midnight.	DBINT	NULL

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
DateTime	Date and time that this data was last updated.	DBDATETIME	NOT NULL
DelayQAbandTimeTo5	Sum of delay time of all calls to route abandoned in queue during the rolling five-minute interval.	DBINT	NULL
HandleTimeHalf	Total handle time in seconds for calls to the route ending during the current half-hour interval.	DBINT	NULL
HandleTimeTo5	Total handle time in seconds for calls to the route ending during the rolling five-minute interval.	DBINT	NULL
HandleTimeToday	Total handle time in seconds for calls to the route ending since midnight.	DBINT	NULL
HoldTimeHalf	The total hold time in seconds for calls to the route ending during the current half-hour interval.	DBINT	NULL
HoldTimeTo5	The total hold time in seconds for calls to the route ending during the rolling five-minute interval.	DBINT	NULL
HoldTimeToday	The total hold time in seconds for calls to the route ending since midnight.	DBINT	NULL
LongestCallQ	TTime that the longest call in the queue for the route was put there.	DBDATETIME	NULL
OverflowInNow	Number of overflowed in calls now in queue or in progress for the route.	DBINT	NULL
OverflowOutNow	Number of overflowed out calls for the route now in queue or in progress elsewhere.	DBINT	NULL
RedirectNoAnsCallsHalf	Number of calls that rang at an agent's terminal and redirected on failure to answer in this service during the current half-hour interval.	DBINT	NULL
RedirectNoAnsCallsTo5	Number of calls that rang at an agent's terminal and redirected on failure to answer in this service during the rolling five-minute interval.	DBINT	NULL
RedirectNoAnsCallsToday	Number of calls that rang at an agent's terminal and redirected on failure to answer in this service since midnight.	DBINT	NULL
RouteID	Foreign key from the Route table.	DBINT	PK, FK NOT NULL
ServiceLevelAbandHalf	Number of calls to the route abandoned within the service level threshold during the current half-hour interval.	DBINT	NULL

**Route\_Real\_Time Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
ServiceLevelAbandTo5	Number of calls abandoned within the service level threshold during the rolling five-minute interval.	DBINT	NULL
ServiceLevelAbandToday	Number of calls to the route abandoned within the service level threshold since midnight.	DBINT	NULL
ServiceLevelCallsHalf	Number of calls to the route answered within the service level threshold during the current half-hour interval.	DBINT	NULL
ServiceLevelCallsOfferedHalf	Number of calls to the route that have had a service level event during the current half-hour interval.	DBINT	NULL
ServiceLevelCallsOfferedTo5	Number of calls to the route that have been either answered or abandoned during the rolling five-minute interval.	DBINT	NULL
ServiceLevelCallsOfferedToday	Number of calls to the route that have had a service level event since midnight.	DBINT	NULL
ServiceLevelCallsQHeld	Number of calls to the route currently in queue for longer than the service level threshold.	DBINT	NULL
ServiceLevelCallsTo5	Number of calls to the route answered within the service level threshold during the rolling five-minute interval.	DBINT	NULL
ServiceLevelCallsToday	Number of calls to the route answered within the service level threshold since midnight.	DBINT	NULL
ServiceLevelHalf	Service level for the route during the current half-hour interval.	DBFLT4	NULL
ServiceLevelTo5	Service level for the route during the rolling five-minute interval.	DBFLT4	NULL
ServiceLevelToday	Service level for the route since midnight. The system software uses the same type of calculation as specified for the service associated with the route.	DBFLT4	NULL
TalkTimeHalf	The total talk time in seconds for calls to the route ending during the current half-hour interval.	DBINT	NULL
TalkTimeTo5	The total talk time in seconds for calls to the route ending during the rolling five-minute interval.	DBINT	NULL
TalkTimeToday	The total talk time in seconds for calls to the route ending since midnight.	DBINT	NULL

## Routing\_Client Table

This is in the [Device \(page 529\)](#) category. For database rules, click [here \(page 595\)](#).

Each row corresponds to a routing client; that is, an entity that can submit routing requests to the system software. A routing client can be either a Network Interface Controller (NIC) or a Peripheral Gateway (PG).

Use the NIC Explorer tool to add, update, and delete Routing\_Client records.

### Related tables

[Default Call Type \(page 195\)](#) (via RoutingClientID)

[Dialed Number \(page 197\)](#) (via RoutingClientID)

[Label \(page 281\)](#) (via RoutingClientID)

[Logical Interface Controller \(page 286\)](#)(via LogicalControllerID)

[Peripheral \(page 306\)](#) (via PeripheralID)

[Route Call Detail \(page 338\)](#) (via RoutingClientID)

[Routing Client Five Minute \(page 359\)](#) (via RoutingClientID)

[Translation Route Half\\_Hour \(page 504\)](#) (via RoutingClientID)

**Table 167: Indexes for Routing\_Client Table**

index_name	index_description	index_keys
XAK1Routing_Client	nonclustered, unique, unique key located on PRIMARY	EnterpriseName
XIE1Routing_Client	nonclustered, unique, primary key located on PRIMARY	PeripheralID
XIE2Routing_Client	nonclustered, unique, primary key located on PRIMARY	LogicalControllerID
XPKRouting_Client	clustered, unique, primary key located on PRIMARY	RoutingClientID

### Fields in Routing\_Client Table:

Field Name:	Description:	Data Type:	Keys and Null Option:
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
ClientType	The type of client. For an ICRP NIC, this is the type of the ultimate client on the Network ICM. In all other cases, it is the	DBSMALLINT	NOT NULL

## Routing\_Client Table

Field Name:	Description:	Data Type:	Keys and Null Option:
	same as the Logical Interface Controller's ClientType. To see Client Type values, click <a href="#">here (page 555)</a> .		
ConfigParam	String containing information specific to a routing client device (for example, a subsystem number). A null value indicates no configuration parameters are provided.	varchar(255)	NULL
DefaultMRDomainID	The default Media Routing Domain associated with this routing client.	DBINT	NULL
Deleted	Deleted Flag. Stored as a character: <ul style="list-style-type: none"><li>• Y = Yes</li><li>• N= No</li></ul>	DBCHAR	NOT NULL
Description	Additional information about the routing client.	DESCRIPTION	NULL
DialedNumberLabelMapPresent	• 0 =Not to use DN/Label map • 1 =Use DN/Label map for labels, excluding translation route labels • 2=Use DN/Label map for all labels, including translation route labels	DBSMALLINT	NOT NULL
EnterpriseName	An enterprise name for this routing client. The name must be unique among all routing clients in the enterprise.	VNAME32	AK-1 NOT NULL
LateThreshold	Threshold value, in milliseconds, for classifying responses as late. Any response that exceeds this threshold is considered late even if it does not exceed the TimeoutThreshold.	DBSMALLINT	NOT NULL
LogicalControllerID	Specifies the logical interface controller (PG or NIC) that services the routing client.	DBSMALLINT	FK,, IE-2 NOT NULL
NetworkRoutingClient	A name used to associate routing clients across instances.	VNAME32	NULL
NetworkTransferPreferred	When the target of a call transfer is reachable by both a label defined for the requesting routing client and by another label defined for the network routing client that pre-routed the call, this column indicates which choice is preferred. Stored as a character: <ul style="list-style-type: none"><li>• Y = Network Transfer is preferred</li><li>• N = Network Transfer is not preferred.</li></ul>	DBCHAR	NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
PeripheralID	Indicates which peripheral is acting as the interface to the system software within a private network.	DBSMALLINT	FK, IE-1 NULL
RoutingClientID	Unique identifier for this routing client.	DBSMALLINT	PK NOT NULL
TimeoutLimit	Maximum time, in seconds, for which the routing client waits for a response. If the routing client receives no responses from the system software within this limit, it terminates routing operation.	DBSMALLINT	NOT NULL
TimeoutThreshold	Maximum time, in milliseconds, the routing client can wait for a response to a routing request. The NIC sends a default response slightly before this threshold.	DBSMALLINT	NOT NULL

## Routing\_Client\_Five\_Minute Table

This is in the [Device \(page 529\)](#) category. For database rules, click [here \(page 595\)](#).

Central database only.

Contains statistics for each routing client during the five-minute interval.

The system software generates Routing\_Client\_Five\_Minute records for each routing client.

### Related tables

[Physical Interface Controller \(page 324\)](#)(via PhysicalControllerID)

[Routing Client \(page 357\)](#) (via RoutingClientID)

**Table 168: Indexes for Routing\_Client\_Five\_Minute Table**

index_name	index_description	index_keys
XAK1Routing_Client_Five_Minute	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XPKRouting_Client_Five_Minute	clustered, unique, primary key located on PRIMARY	DateTime, RoutingClientID, PhysicalControllerID, TimeZone

### Fields in Routing\_Client\_Five\_Minute Table:

Field Name:	Description:	Data Type:	Keys and Null Option:
AbandonTo5	Number of Abandoned messages the routing client sent to the system software during the five-minute interval.	DBINT	NULL

**Routing\_Client\_Five\_Minute Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
ActivityTestTo5	Number of Activity Test messages sent during the five-minute interval.	DBINT	NULL
AnnouncementTo5	Number of announcement labels the system software sent to the routing client during the five-minute interval.	DBINT	NULL
AnswerTo5	Number of Answered messages the routing client sent to the system software during the five-minute interval.	DBINT	NULL
CalledPartyBusyTo5	Number of Called Party Busy messages the routing client sent to the system software during the five-minute interval.	DBINT	NULL
CallEventReportTo5	Number of Call Event Report messages the routing client sent to the system software during the five-minute interval.	DBINT	NULL
CallGapTo5	Number of Call Gap messages the system software sent to the routing client during the five-minute interval.	DBINT	NULL
CallRouterQueueTo5	Number of CallRouter queue messages the system software sent to the routing client during the five-minute interval.	DBINT	NULL
CircularRouteResponsesTo5	The number of responses to the routing client during the five-minute interval in which the destination is the same as the source.	DBINT	NOT NULL
ConnectTo5	Number of Connect messages the system software sent to the routing client during the five-minute interval.	DBINT	NULL
DateTime	Central Controller date and time at the start of the five-minute interval.	DBSMALLDATE	PK NOT NULL
DestinationTo5	Number of destination labels the system software sent to the routing client during the five-minute interval.	DBINT	NULL
DialogErrorConfTo5	Number of Dialog Fail Confirm messages the routing client sent to the system software during the five-minute interval.	DBINT	NULL
DialogFailTo5	Number of Dialog Fail messages the system software sent to the routing client during the five-minute interval.	DBINT	NULL
DiscardedCallsTo5	During the five-minute, the number of requests from the routing client discarded because of an internal constraint, such as buffering.	DBINT	NOT NULL

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
DisconnectTo5	Number of Disconnect messages the routing client sent to the system software during the five-minute interval.	DBINT	NULL
Histogram0	The number of calls routed in a 100-millisecond period.	DBINT	NULL
Histogram1	The number of calls routed in a 100-millisecond period.	DBINT	NULL
Histogram2	The number of calls routed in a 100-millisecond period.	DBINT	NULL
Histogram3	The number of calls routed in a 100-millisecond period.	DBINT	NULL
Histogram4	The number of calls routed in a 100-millisecond period.	DBINT	NULL
Histogram5	The number of calls routed in a 100-millisecond period.	DBINT	NULL
Histogram6	The number of calls routed in a 100-millisecond period.	DBINT	NULL
Histogram7	The number of calls routed in a 100-millisecond period.	DBINT	NULL
Histogram8	The number of calls routed in a 100-millisecond period.	DBINT	NULL
Histogram9	The number of calls routed in a 100-millisecond period.	DBINT	NULL
Histogram10	The number of calls routed in a 100-millisecond period.	DBINT	NULL
Histogram11	The number of calls routed in a 100-millisecond period.	DBINT	NULL
Histogram12	The number of calls routed in a 100-millisecond period.	DBINT	NULL
Histogram13	The number of calls routed in a 100-millisecond period.	DBINT	NULL
Histogram14	The number of calls routed in a 100-millisecond period.	DBINT	NULL
Histogram15	The number of calls routed in a 100-millisecond period.	DBINT	NULL
Histogram16	The number of calls routed in a 100-millisecond period.	DBINT	NULL
Histogram17	The number of calls routed in a 100-millisecond period.	DBINT	NULL
Histogram18	The number of calls routed in a 100-millisecond period.	DBINT	NULL
Histogram19	Number of responses to the routing client that exceeded the late threshold but did not timeout.	DBINT	NULL

**Routing\_Client\_Five\_Minute Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
LateCallsTo5	Total number of calls during the five-minute interval that were responded to after the late threshold.	DBINT	NOT NULL
MaxDelay	Maximum delay, in milliseconds, of responses to the routing client during the five-minute interval.	DBINT	NOT NULL
MeanResponseTo5	Mean time, in milliseconds, for the responses to the routing client during the five-minute interval.	DBINT	NOT NULL
NetworkBusyTo5	Number of Busy labels the system software sent to the routing client during the five-minute interval.	DBINT	NULL
NetworkDefaultTo5	Number of Network Default responses the system software sent to the routing client during the five- minute interval.	DBINT	NULL
NetworkPostQueryTo5	Number of Post-Query labels the system software sent to the routing client during the five-minute interval.	DBINT	NULL
NetworkResourceTo5	Number of Network Resource labels the system software sent to the routing client during the five-minute interval.	DBINT	NULL
NetworkRingTo5	Number of Ring labels the system software sent to the routing client during the five-minute interval.	DBINT	NULL
NewCallTo5	Number of New Call messages the routing client sent to the system software during the five-minute interval.	DBINT	NULL
NoAnswerTo5	Number of No Answer messages the routing client sent to the system software during the five-minute interval.	DBINT	NULL
NumAlternateCallConfTo5	Number of Alternate Confirmations sent (NIC) or received (PG) in the five-minute window.	DBINT	NULL
NumAlternateCallReqTo5	Number of Alternate Requests sent (PG) or received (NIC) in the five-minute window.	DBINT	NULL
NumBlindTransferConfTo5	The number of blind transfer confirmation messages the routing client sent during the five-minute interval.	DBINT	NULL
NumCallEstablishedEventTo5	Number of Established Events sent (NIC) or received (PG) in the five-minute window.	DBINT	NULL
NumCallFailedEventTo5	The number of call failure event messages the routing client sent during the five-minute interval.	DBINT	NULL

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
NumCallHeldEventTo5	Number of Held Events sent (NIC) or received (PG) in the five-minute window..	DBINT	NULL
NumCallOriginatedEventTo5	Number of Originated Events sent (NIC) or received (PG) in the five-minute window..	DBINT	NULL
NumCancelInd	The number of cancel indications the VRU routing client sent to the VRU during the five-minute interval.	DBINT	NULL
NumConferenceCallConfTo5	Number of Conference Confirmations sent (NIC) or received (PG) in the five-minute window.	DBINT	NULL
NumConferenceCallReqTo5	Number of Conference Requests sent (PG) or received (NIC) in the five-minute window.	DBINT	NULL
NumConferencedEventTo5	Number of Conferenced Events sent (NIC) or received (PG) in the five-minute window.	DBINT	NULL
NumConnectionClearedEventTo5	Number of Connection Cleared Events sent (NIC) or received (PG) in the five-minute window.	DBINT	NULL
NumConsultConfTo5	Number of Network Consult Confirmations (responses to Connect with operation code Consult) sent (NIC) or received (PG) in the five-minute window..	DBINT	NULL
NumConsultTransferConfTo5	Number of Consultative Transfer Confirmations sent (NIC) or received (PG) in the five-minute window.	DBINT	NULL
NumConsultTransferReqTo5	Number of Consultative Transfer Requests sent (PG) or received (NIC) in the five-minute window.	DBINT	NULL
NumDropConnectionConfTo5	Number of Drop Connection Confirmations sent (NIC) or received (PG) in the five-minute window.	DBINT	NULL
NumDropConnectionReqTo5	Number of Drop Connection Requests sent (PG) or received (NIC) in the five-minute window.	DBINT	NULL
NumReconnectCallConfTo5	Number of Reconnect Confirmations sent (NIC) or received (PG) in the five-minute window.	DBINT	NULL
NumReconnectCallReqTo5	Number of Reconnect Requests sent (PG) or received (NIC) in the five-minute window.	DBINT	NULL
NumRetrievedEventTo5	Number of Retrieved Events sent (NIC) or received (PG) in the five-minute window.	DBINT	NULL

## Routing\_Client\_Five\_Minute Table

Field Name:	Description:	Data Type:	Keys and Null Option:
NumReleaseInd	The number of release indications the VRU routing client sent to the VRU in the five-minute window.	DBINT	NULL
NumTransferEventTo5	The number of transfer event messages the routing client sent during the five-minute interval.	DBINT	NULL
PeripheralQueueTo5	Number of peripheral queue messages the system software sent to the routing client during the rolling five-minute interval.	DBINT	NULL
PhysicalControllerID	Foreign key from Physical Interface Controller table.	DBSMALLINT	PK, FK NOT NULL
RecvInErrorTo5	<p>Number of requests from the routing client that produced errors during the five-minute interval.</p> <p><b>Note:</b> This field will increment only when:</p> <ul style="list-style-type: none"> <li>- A pre-routed (that is, translation-routed) call terminates before reaching its destination target for reasons other than exceeding the late threshold, timing-out, or being discarded.</li> <li>- A post-routed call terminates for reasons other than timing-out, being rejected for carrying duplicate invocation, due to an inactive Routing Client service, or being associated with Network Transfer.</li> </ul>	DBINT	NOT NULL
RecoveryDay	Currently not used, set to zero (0).	DBINT	NOT NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL
ReqInstrTo5	Number of Request Instruction messages the routing client sent to the system software during the five-minute interval.	DBINT	NULL
ReRouteReqTo5	Number of ReRoute Request messages the routing client sent to the system software during the five-minute interval.	DBINT	NULL
ResponsesTo5	Number of route responses to the routing client during the five-minute interval.	DBINT	NOT NULL
RouteSelectFailureTo5	Number of Route Select Failure messages the routing client sent to the system software during the five-minute interval.	DBINT	NULL
RoutingClientID	Foreign key from Routing Client table.	DBSMALLINT	PK, FK NOT NULL
RunScriptTo5	Number of Run Script messages the system software sent to the routing client during the five-minute interval.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
ScriptRespTo5	Number of Script Response messages the routing client sent to the system software during the five minute interval.	DBINT	NULL
TimeoutCallsTo5	Total number of calls during the five-minute interval that were responded to after the timeout threshold.	DBINT	NOT NULL
TimeZone	The time zone for the date and time. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK NOT NULL
TranslationRouteAbortedTo5	Number of translation route requests initiated by the routing client that were aborted during the five-minute interval.	DBINT	NULL
TranslationRouteTimedOutTo5	Number of translation route requests received by the routing client that exceeded the timeout threshold during the rollingfive-minute interval.	DBINT	NULL

## Schedule Table

This table is in the [Schedule category \(page 538\)](#). To see database rules, click [here \(page 598\)](#).

Each row describes a schedule to be imported from an external system. Imported data are stored in the Schedule\_Import and Schedule\_Import\_Real\_Time tables.

Use the Workforce Management System Import tool to create, delete, or modify Schedule rows.

### Related tables

<a href="#">Agent (page 15)</a> (via ScheduleID)	<a href="#">Business Entity (page 94)</a> (via EntityID)	<a href="#">ICR View (page 270)</a> (via ICRViewID)
<a href="#">Import Log (page 272)</a> (via ScheduleID)	<a href="#">Import Schedule (page 281)</a> (via ScheduleID)	Recurring Script Schedule Map (via ScheduleID)
<a href="#">Schedule Import (page 367)</a> (via ScheduleID)	<a href="#">Schedule Import Real Time (page 369)</a> (via ScheduleID)	<a href="#">Schedule Map (page 371)</a> (via ScheduleID)
<a href="#">Schedule Report (page 372)</a> (via ScheduleReportID)	<a href="#">Schedule Source (page 374)</a> (via ScheduleSourceID)	<a href="#">Scheduled Target (page 375)</a> (via ScheduleID)
<a href="#">Service (page 386)</a> (via ScheduleID)	<a href="#">Service Array (page 388)</a> (via ScheduleID)	<a href="#">Skill Group (page 432)</a> (via ScheduleID)

**Schedule Table****Table 169: Indexes for Schedule Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XAK1Schedule	nonclustered, unique, unique key located on PRIMARY	EntityID, EnterpriseName
XIE1Schedule	nonclustered, unique, primary key located on PRIMARY	ScheduleReportID
XIE2Schedule	nonclustered, unique, primary key located on PRIMARY	ScheduleSourceID
XIE3Schedule	nonclustered, unique, primary key located on PRIMARY	ICRViewID
XPKSchedule	clustered, unique, primary key located on PRIMARY	ScheduleID

**Fields in Schedule Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
Deleted	Deleted Flag. Stored as a character:  • Y = Yes  • N=No	DBCHAR	NOT NULL
Description	Additional information about the schedule.	DESCRIPTION	NULL
EnterpriseName	A unique name for the schedule.	VNAME32	AK-1 NOT NULL
EntityID	If partitioning is enabled, indicates the business entity to which the schedule belongs.	DBINT	AK-1, FK NOT NULL
ICRViewID	Foreign key to a description of how the system software interprets the Schedule_Import data for the schedule.	DBINT	FK, IE-3 NULL
ScheduleID	A unique identifier for the schedule.	DBINT	PK NOT NULL
SchedulePeriod	The number of minutes in each scheduling interval. A schedule can contain different data for each interval.	DBINT	NOT NULL
ScheduleReportID	Foreign key to the schedule report.	DBINT	FK, IE-1 NULL
ScheduleSourceID	Foreign key to a description of the source from which the schedule is imported.	DBINT	FK, IE-2 NULL
ScheduleType	The type of the schedule:  • 1 = TCS	DBINT	NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	<ul style="list-style-type: none"> <li>• <b>2</b> = Custom</li> <li>• <b>5</b> = Report Export</li> <li>• <b>6</b> = Periodic</li> </ul>		

## Schedule\_Import Table

This table is in the [Schedule category \(page 538\)](#). To see database rules, click [here \(page 598\)](#).

Contains the schedule data imported from a source system. Only specific fields within this table are meaningful for any schedule type. The meaning of the imported data is described by the ICR\_View and View\_Column tables.

### Related table

[Schedule \(page 365\)](#) (viaScheduleID)

**Table 170: Indexes for Schedule\_Import Table**

index_name	index_description	index_keys
XAK1Schedule_Import	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XPKSchedule_Import	clustered, unique, primary key located on PRIMARY	DateTime, ScheduleID, TimeZone

### Fields in Schedule\_Import Table:

Field Name:	Description:	Data Type:	Keys and Null Option:
Bool1	An imported value.	DBCHAR	NOT NULL
Bool2	An imported value.	DBCHAR	NOT NULL
DateTime	The date and time at which the schedule data in the record becomes effective.	DBDATETIME	PK NOT NULL
DateTime1	An imported value.	DBDATETIME	NULL
DateTime2	An imported value.	DBDATETIME	NULL
DateTime3	An imported value.	DBDATETIME	NULL
Double1	An imported value.	DBFLT8	NULL
Double2	An imported value.	DBFLT8	NULL

**Schedule\_Import Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
Double3	An imported value.	DBFLT8	NULL
Double4	An imported value.	DBFLT8	NULL
Double5	An imported value.	DBFLT8	NULL
Double6	An imported value.	DBFLT8	NULL
Double7	An imported value.	DBFLT8	NULL
Double8	An imported value.	DBFLT8	NULL
Double9	An imported value.	DBFLT8	NULL
Double10	An imported value.	DBFLT8	NULL
Long1	An imported value.	DBINT	NULL
Long2	An imported value.	DBINT	NULL
Long3	An imported value.	DBINT	NULL
Long4	An imported value.	DBINT	NULL
Long5	An imported value.	DBINT	NULL
Long6	An imported value.	DBINT	NULL
Long7	An imported value.	DBINT	NULL
Long8	An imported value.	DBINT	NULL
Long9	An imported value.	DBINT	NULL
Long10	An imported value.	DBINT	NULL
Long11	An imported value.	DBINT	NULL
Long12	An imported value.	DBINT	NULL
Long13	An imported value.	DBINT	NULL
Long14	An imported value.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
Long15	An imported value.	DBINT	NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL
ScheduleID	Foreign key to the Schedule for which the data are imported.	DBINT	PK, FK NOT NULL
String1	An imported value.	DESCRIPTION	NULL
String2	An imported value.	DESCRIPTION	NULL
String3	An imported value.	DESCRIPTION	NULL
String4	An imported value.	DESCRIPTION	NULL
String5	An imported value.	DESCRIPTION	NULL
TimeZone	The time zone for the date and time. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK NOT NULL

## Schedule\_Import\_Real\_Time Table

This table is in the [Schedule category \(page 538\)](#). To see database rules, click [here \(page 598\)](#).

Local database only. The scheduling data for the current time period as imported from an external source.

### Related table

[Schedule \(page 365\)](#) (viaScheduleID)

**Table 171: Indexes for Schedule\_Import\_Real\_Time Table**

index_name	index_description	index_keys
XPKSchedule_Import_Real_Time	clustered, unique, primary key located on PRIMARY	DateTime, ScheduleID, TimeZone

### Fields in Schedule\_Import\_Real\_Time Table:

Field Name:	Description:	Data Type:	Keys and Null Option:
Bool1	An imported value.	DBCHAR	NULL
Bool2	An imported value.	DBCHAR	NULL

**Schedule\_Import\_Real\_Time Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
DateTime	AThe date and time at which the schedule data in the record becomes effective.	DBDATETIME	PK NOT NULL
DateTime1	An imported value.	DBDATETIME	NULL
DateTime2	An imported value.	DBDATETIME	NULL
DateTime3	An imported value.	DBDATETIME	NULL
Double1	An imported value.	DBFLT8	NULL
Double2	An imported value.	DBFLT8	NULL
Double3	An imported value.	DBFLT8	NULL
Double4	An imported value.	DBFLT8	NULL
Double5	An imported value.	DBFLT8	NULL
Double6	An imported value.	DBFLT8	NULL
Double7	An imported value.	DBFLT8	NULL
Double8	An imported value.	DBFLT8	NULL
Double9	An imported value.	DBFLT8	NULL
Double10	An imported value.	DBFLT8	NULL
Long1	An imported value.	DBINT	NULL
Long2	An imported value.	DBINT	NULL
Long3	An imported value.	DBINT	NULL
Long4	An imported value.	DBINT	NULL
Long5	An imported value.	DBINT	NULL
Long6	An imported value.	DBINT	NULL
Long7	An imported value.	DBINT	NULL
Long8	An imported value.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
Long9	An imported value.	DBINT	NULL
Long10	An imported value.	DBINT	NULL
Long11	An imported value.	DBINT	NULL
Long12	An imported value.	DBINT	NULL
Long13	An imported value.	DBINT	NULL
Long14	An imported value.	DBINT	NULL
Long15	An imported value.	DBINT	NULL
ScheduleID	An imported value. Foreign key to the Schedule for which the data are imported.	DBINT	PK, FK NOT NULL
String1	An imported value.	DESCRIPTION	NULL
String2	An imported value.	DESCRIPTION	NULL
String3	An imported value.	DESCRIPTION	NULL
String4	An imported value.	DESCRIPTION	NULL
String5	An imported value.	DESCRIPTION	NULL
TimeZone	The time zone for the date and time. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK NOT NULL

## Schedule\_Map Table

This table is in the [Schedule category \(page 538\)](#). To see database rules, click [here \(page 598\)](#).

Identifies the primary key values from a schedule in the external data source from which it is imported. Each schedule has one Schedule\_Map row for each component of the primary key. If the primary key is a compound key, the schedule has multiple Schedule\_Map rows.

### Related table

[Schedule \(page 365\) \(viaScheduleID\)](#)

**Schedule\_Report Table****Table 172: Indexes for Schedule\_Map Table**

index_name	index_description	index_keys
XIE1Schedule_Map	nonclustered, unique, primary key located on PRIMARY	ScheduleID
XPKSchedule_Map	clustered, unique, primary key located on PRIMARY	ScheduleMapID

**Fields in Schedule\_Map Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
Description	IAdditional information about the key field.	DESCRIPTION	NULL
FieldName	The name of a primary key field.	VNAME32	NOT NULL
FieldValue	The value of the primary key field for the schedule.	DESCRIPTION	NOT NULL
ScheduleID	Foreign key that identifies the schedule.	DBINT	IE-1, FK NOT NULL
ScheduleMapID	A unique identifier for the record.	DBINT	PKNOT NULL

**Schedule\_Report Table**

This table is in the [Schedule category \(page 538\)](#). To see database rules, click [here \(page 598\)](#).

Each row describes a report used to export information from the ICM platform to a workforce management system.

**Related tables**

[Schedule \(page 365\)](#) (via ScheduleReportID)

[Schedule Report Input \(page 373\)](#) (via ScheduleReportID)

**Table 173: Indexes for Schedule\_Report Table**

index_name	index_description	index_keys
XAK1Schedule_Report	nonclustered, unique, unique key located on PRIMARY	EntityID, EnterpriseName
XPKSchedule_Report	clustered, unique, primary key located on PRIMARY	ScheduleReportID

**Fields in Schedule\_Report Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
Description	Additional information about the report.	DESCRIPTION	NULL
EnterpriseName	A name that is unique among all schedule reports defined in the system database.	VNAME32	AK-1 NOT NULL
EntityID	If partitioning is enabled, indicates the business entity to which the schedule belongs.	DBINT	AK-1, FK NOT NULL
PathName	For a SQL report, the UNC name of the file.	varchar(255)	NULL
ReportType	The type of report: <ul style="list-style-type: none"> <li>• <b>8</b> = Based on a template.</li> <li>• <b>9</b> = Based on a SQL report.</li> </ul>	DBINT	NOT NULL
ScheduleReportID	A unique identifier for the report.	DBINT	PK NOT NULL
SystemName	For a SQL report, the name of the system containing the report.	VNAME32	NULL
SystemTimeZone	For a template-based report, the time zone offset to use with the template.	varchar(255)	NULL
TemplateCategory	For a template-based report, the category used to locate the template.	VNAME32	NULL
TemplateName	For a template-based report, the name of the template used to create the report.	varchar(255)	NULL
TemplateOptions	For a template-based report, options used with the template: /H to include the SQL header and column name information; /A to append to the output file	varchar(255)	NULL
TemplateScope	For a template-based report, the scope used to locate the template.	VNAME32	NULL

**Schedule\_Report\_Input Table**

This table is in the [Schedule category \(page 538\)](#). To see database rules, click [here \(page 598\)](#).

Specifies the targets that are used with a template to create a schedule report.

**Related tables**

**Schedule\_Source Table**

[Schedule Report \(page 372\)](#) (via ScheduleReportID)

**Table 174: Indexes for Schedule\_Report\_Input Table**

index_name	index_description	index_keys
XIE1Schedule_Report_Input	nonclustered, unique, primary key located on PRIMARY	ScheduleReportID
XPKSchedule_Report_Input	clustered, unique, primary key located on PRIMARY	ScheduleReportInputID

**Fields in Schedule\_Report\_Input Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
Description	Additional information about the target.	DESCRIPTION	NULL
ForeignKey	Foreign key from a configuration table. This is always an ID field.	DBINT	NOT NULL
ScheduleReportID	Identifies the associated schedule report.	DBINT	FK, IE-1 NOT NULL
ScheduleReportInputID	A unique identifier for the report input row. To see the possible values, click <a href="#">here (page 577)</a> .	DBINT	PK NOT NULL
TargetType	Type of table to which the ForeignKey applies. To see the list of values, click <a href="#">here (page 577)</a> .	DBINT	NOT NULL

**Schedule\_Source Table**

This table is in the [Schedule category \(page 538\)](#). To see database rules, click [here \(page 598\)](#).

Each row indicates the system and path from which the associated schedule data are imported.

**Related table**

[Schedule \(page 365\)](#) (via ScheduleSourceID)

**Table 175: Indexes for Schedule\_Source Table**

index_name	index_description	index_keys
XIE1Schedule_Source	nonclustered, unique, primary key located on PRIMARY	EntityID
XPKSchedule_Source	clustered, unique, primary key located on PRIMARY	ScheduleSourceID

**Fields in Schedule\_Source Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
Description	Additional information about the data source.	DESCRIPTION	NULL
EntityID	If partitioning is enabled, indicates the business entity to which the schedule belongs.	DBINT	FK, IE-1 NULL
FilePath	The full file path from which data are retrieved.	DESCRIPTION	NULL
LoginName	The user name to use when logging into the system.	varchar(64)	NULL
ScheduleSourceID	A unique identifier for the record.	DBINT	PK NOT NULL
SystemName	The name of the system.	VNAME32	NOT NULL
SystemPassword	The password to use when logging into the system.	varchar(32)	NULL
SystemTimeZone	The time zone for the system. The value is the offset in minutes from UTC (formerly called GMT).	varchar(255)	NULL
SystemType	The type of system from which the data are imported.	DBINT	NOT NULL

## Scheduled\_Target Table

This table is in the [Route category \(page 535\)](#). To see database rules for these tables, click [here \(page 597\)](#).

Each row represents a scheduled target. A scheduled target is not associated with a peripheral and the system software has only limited information about it: number of agents scheduled and number of calls in progress. You can route calls to scheduled targets using the Scheduled Select script node.

Use the Scheduled Target Explorer to create, delete, and update scheduled targets.

### Related tables

[Customer Definition \(page 194\)](#) (via CustomerDefinitionID)

[Network Target \(page 294\)](#) (via NetworkTargetID)

[Schedule \(page 365\)](#) (via ScheduleID)

[Scheduled Target Real Time \(page 376\)](#) (via NetworkTargetID)

**Scheduled\_Target\_Real\_Time Table****Table 176: Indexes for Schedule\_Target Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XAK1Scheduled_Target	nonclustered, unique, unique key located on PRIMARY	EnterpriseName
XIE1Scheduled_Target	nonclustered, unique, primary key located on PRIMARY	CustomerDefinitionID
XPKScheduled_Target	clustered, unique, primary key located on PRIMARY	NetworkTargetID

**Fields in Scheduled\_Target Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
CustomerDefinitionID	Identifies the customer definition associated with the scheduled target.	DBINT	FK, IE-1 NULL
Description	Additional information about the scheduled target.	DESCRIPTION	NULL
EnterpriseName	A name that is unique among all scheduled targets defined in the system database.	VNAME32	AK-1 NOT NULL
NetworkTargetID	Identifier that is unique among all announcements, peripheral targets, and scheduled targets in the system.	DBINT	PK, FK NOT NULL
ScheduleID	Identifies the schedule associated with the scheduled target.	DBINT	FK NULL

**Scheduled\_Target\_Real\_Time Table**

This table is in the [Route category \(page 535\)](#). To see database rules for these tables, click [here \(page 597\)](#).

Local database only.

Contains one row for each scheduled target. The system software updates the real-time data each time it sends a call to the target or receives a notification from the routing client that a call has completed. The Administration & Data Server receives updated data every 15 seconds.

**Related table**

[Scheduled Target \(page 375\)](#) (via NetworkTargetID)

**Table 177: Indexes for Scheduled\_Target\_Real\_Time Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XPKScheduled_Target_Real_Time	clustered, unique, primary key located on PRIMARY	NetworkTargetID

**Fields in Scheduled\_Target\_Real\_Time Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
CallsInProgress	The number of calls currently in progress at the scheduled target.	DBINT	NULL
DateTime	The date and time when the row was last updated.	DBDATETIME	NOT NULL
MaxCallsInProgress	The maximum number of simultaneous calls the target can handle for the current time period (based on its schedule).	DBINT	NULL
NetworkTargetID	Identifies the scheduled target.	DBINT	PK, FK NOT NULL
RouterCallsQNow	Number of calls currently queued at the CallRouter for this target.	DBINT	NULL

## Script Table

This table is part of the [Script category \(page 539\)](#). For database rules, click [here. \(page 599\)](#)

Each row represents a version of a routing script or an administrative script. You can save multiple versions of each script. The binary representation of the script version is stored in the Script\_Data table. General information that applies to all versions of a script is stored in the Master Script table.

Use the Script Editor to create and modify scripts.

### Related tables

<a href="#">Call Type Real Time (page 142)</a> (via ScriptID)	<a href="#">Master Script (page 288)</a> (via MasterScriptID)	Route Call Data (via ScriptID)
<a href="#">Script Cross Reference (page 378)</a> (via ScriptID)	<a href="#">Script Data (page 379)</a> (via ScriptID)	<a href="#">Script Five Minute (page 380)</a> (via ScriptID)
<a href="#">Script Print Control (page 381)</a> (via ScriptID)	<a href="#">Script Real Time (page 382)</a> (via ScriptID)	<a href="#">Script Queue Real Time (page 381)</a> (via ScriptID)

**Table 178: Indexes for Script Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XAK1Script	nonclustered, unique, unique key located on PRIMARY	MasterScriptID, Version

**Script\_Cross\_Reference Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XPKScript	clustered, unique, primary key located on PRIMARY	ScriptID

**Fields in Script Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
Author	User name of person who last modified the script version.	VNAME32	NULL
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
DateTime	The date and time when the script version was saved.	DBDATETIME	NOT NULL
Deleted	Deleted Flag. Stored as a character: • <b>Y</b> = Yes • <b>N</b> = No	DBCHAR	NOT NULL
Description	Further information about the script.	DESCRIPTION	NULL
Length	Number of bytes of data in the binary representation of the script.	DBINT	NOT NULL
MasterScriptID	Foreign key from the Master Script table.	DBINT	AK-1, FK NOT NULL
QuickEditBaseVersion	If this version was created by using Quick Edit, this field indicates the previous script version. The metering information from the base version can be carried over to the new version.	DBINT	NULL
ScriptID	Unique identifier for a specific version of a script.	DBINT	PK NOT NULL
Valid	Indicates whether the script was saved in an invalid state.	DBCHAR	NOT NULL
Version	The active version of the master script. The system software uses only the active version.	DBINT	AK-1 NOT NULL

**Script\_Cross\_Reference Table**

This table is part of the [Script category \(page 539\)](#). For database rules, click [here. \(page 599\)](#)

It contains information about which configuration objects each script version references. This information is used to determine whether a script version becomes invalid when configuration information changes.

The system software automatically maintains the Script\_Cross\_Reference table.

**Related tables**

[Route Call Detail \(page 338\)](#) (via LocalID)

[Script \(page 377\)](#) (via ScriptID)

**Table 179: Indexes for Script\_Cross\_Reference Table**

index_name	index_description	index_keys
XIE1Script_Cross_Reference	nonclustered, unique, primary key located on PRIMARY	ForeignKey
XPKScript_Cross_Reference	clustered, unique, primary key located on PRIMARY	ScriptID, LocalID

**Fields in Script\_Cross\_Reference Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ForeignKey	Foreign key from a configuration table. This is always an ID field.	DBINT	IE-1 NOT NULL
LocalID	Local ID in script that cross references a foreign key field in one of the other configuration tables.	DBINT	PK NOT NULL
ScriptID	Foreign key from Script table.	DBINT	PK, FK, NOT NULL
TargetType	Type of table to which the ForeignKey applies. To see the possible values, click <a href="#">here (page 577)</a> .	DBSMALLINT	NOT NULL

## Script\_Data Table

This table is part of the [Script category \(page 539\)](#). For database rules, click [here \(page 599\)](#).

It contains a binary version of a routing script or administrative script. A long script may require multiple Script\_Data rows.

The Script Editor automatically maintains the Script\_Data table.

### Related tables

[Script \(page 377\)](#) (via ScriptID)

**Table 180: Indexes for Script\_Data Table**

index_name	index_description	index_keys
XPKScript_Data	clustered, unique, primary key located on PRIMARY	ScriptID, RowOrder

**Fields in Script\_Data Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
RowOrder	Ordinal number of the rows that apply to a specific script.	DBINT	PK NOT NULL

**Script\_Five\_Minute Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
ScriptData	Internal script representation.	image	NULL
ScriptID	Foreign key from Script table.	DBINT	PK, FK NOT NULL

**Script\_Five\_Minute Table**

This table is part of the [Script category \(page 539\)](#). For database rules, click [here](#). (page 599)

Central database only. Contains statistics about each script version for the most recent five-minute interval. The system software generates Script\_Five\_Minute records for each script.

**Related tables**

[Script \(page 377\)](#) (via ScriptID)

**Table 181: Indexes for Script\_Five\_Minute Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XAK1Script_Five_Minute	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XPKScript_Five_Minute	clustered, unique, primary key located on PRIMARY	ScriptID, DateTime, TimeZone

**Fields in Script\_Five\_Minute Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
CallsIncomingTo5	Number of calls that came into the script during the five-minute interval.	DBINT	NOT NULL
CallsPerNode	An array indicating the number of calls that traversed each node of the script during the five-minute interval. Each element in the array is a short integer. An array for a script with 40 nodes is stored in the database as a varbinary(80) array.	varchar	NOT NULL
CallsRoutedTo5	Number of calls that came into the script during the five-minute interval.	DBINT	NOT NULL
DateTime	Central Controller date and time at start of five-minute interval.	DBSMALLDATE	PK NOT NULL
RecoveryDay	Currently not used, set to zero (0).	DBINT	NOT NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL
ScriptID	Foreign key from the Script table.	DBINT	PK, FK NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
TimeZone	The time zone for the date and time. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK NOT NULL

## Script\_Print\_Control Table

This table is part of the [Script category \(page 539\)](#). For database rules, click [here. \(page 599\)](#)

Each row contains default print settings for a specific script version. The Script Editor automatically maintains the Script\_Print\_Control table.

### Related tables

[Script \(page 377\)](#) (via ScriptID)

**Table 182: Indexes for Script\_Print\_Control Table**

index_name	index_description	index_keys
XAK1Script_Print_Control	nonclustered, unique, unique key located on PRIMARY	ScriptID
XPKScript_Print_Control	clustered, unique, primary key located on PRIMARY	ScriptPrintControlID

### Fields in Script\_Print\_Control Table:

Field Name:	Description:	Data Type:	Keys and Null Option:
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
PrintControlSettings	A string specifying the print settings for the script.	varchar(255)	NULL
ScriptID	Foreign key from Script table.	DBINT	AK-1, FK NOT NULL
ScriptPrintControlID	A unique identifier for the row.	DBINT	PK NOT NULL

## Script\_Queue\_Real\_Time Table

This table is part of the [Script category \(page 539\)](#). For database rules, click [here. \(page 599\)](#)

Local database only. Contains data on how tasks are processed in a script queue.

### Related tables

[Script \(page 377\)](#) (via ScriptID)

**Script\_Real\_Time Table****Table 183: Indexes for Script\_Queue\_Real\_Time Table**

index_name	index_description	index_keys
XPKScript_Queue_Real_Time	clustered, unique, primary key located on PRIMARY	ScriptID, QueueNode

**Fields in Script\_Queue\_Real\_Time Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
DateTime	The data and time at which this data was last updated.	DBDATETIME	NOT NULL
QueueNode	The local script node identifier.	DBINT	PK NOT NULL
ScriptID	The system identifier of the application path with which this row is associated.	DBINT	PK, FK NOT NULL
TasksQueued	The number of tasks queued at this script node.	DBINT	NULL
TimeInQueue	The time in queue for the longest task.	DBDATETIME	NULL

**Script\_Real\_Time Table**

This table is part of the [Script category \(page 539\)](#). For database rules, click [here](#). (page 599)

Local database only.

Contains real time information about each script. The system software updates the real-time data each time it executes a script. The Administration & Data Server receives updated data every 15 seconds. The real-time data for current script versions is updated at midnight.

**Related tables**

[Script \(page 377\)](#) (via ScriptID)

**Table 184: Indexes for Script\_Real\_Time Table**

index_name	index_description	index_keys
XPKScript_Real_Time	clustered, unique, primary key located on PRIMARY	ScriptID

**Fields in Script\_Real\_Time Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
Calls	Number of times the script has executed since midnight. For a routing script, this is the number of calls processed.	DBINT	NOT NULL
CpuTime	CPU time spent processing the script.	DBINT	NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
DateTime	Central Controller date and time that this data was last updated.	DBDATETIME	NOT NULL
ElapsedTime	Elapsed time spent processing the script.	DBINT	NOT NULL
ScriptID	Foreign key from the Script Table.	DBINT	PK, FK NOT NULL
ScriptMeters	Internal real time data for the script.	image	NULL

## Script\_Table Table

This table is part of the [Script category \(page 539\)](#). For database rules, click [here. \(page 599\)](#)

Each row describes a table from an external database that can be queried from within routing scripts or administrative scripts using the optional Gateway SQL feature.

Use Unified ICM Configuration Manager to add, update, and delete Script\_Table records.

### Related tables

[Script Table Column \(page 384\)](#) (via ScriptTableID)

**Table 185: Indexes for Script\_Table Table**

index_name	index_description	index_keys
XAK1Script_Table	nonclustered, unique, unique key located on PRIMARY	EnterpriseName
XPKScript_Table	clustered, unique, primary key located on PRIMARY	ScriptTableID

### Fields in Script\_Table Table:

Field Name:	Description:	Data Type:	Keys and Null Option:
AccessType	Indicates how to query data from the table. Currently only SQL (1) is supported.	DBSMALLINT	NOT NULL
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
Description	Further information about the external table.	DESCRIPTION	NULL
EnterpriseName	A name that is unique among all script tables defined in the system database.	VNAME32	AK-1 NOT NULL
ScriptTableID	A unique identifier for the external table.	DBINT	PK NOT NULL
SideA	The path of the database table as reached by Side A of the Central Controller.	DESCRIPTION	NULL

**Script\_Table\_Column Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
SideB	The path of the database table as reached by Side B of the Central Controller.	DESCRIPTION	NULL

**Script\_Table\_Column Table**

This table is part of the [Script category \(page 539\)](#). For database rules, click [here](#). (page 599)

Each row describes a column in a table from an external database that can be queried from within routing scripts or administrative scripts.

Use Unified ICM Configuration Manager to add, update, and delete Script\_Table\_Column records.

**Related tables**

[Script Table \(page 377\)](#) (via ScriptTableID)

**Table 186: Indexes for Script\_Table\_Column Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XAK1Script_Table_Column	nonclustered, unique, unique key located on PRIMARY	ScriptTableID, ColumnName
XPKScript_Table_Column	clustered, unique, primary key located on PRIMARY	ScriptTableColumnID

**Fields in Script\_Table\_Column Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
ColumnName	The name of the column in the external database.	VNAME32	AK-1 NOT NULL
Description	Additional information about the column.	DESCRIPTION	NULL
ScriptTableColumnID	A unique identifier for this script table column.	DBINT	PK NOT NULL
ScriptTableID	Foreign key from the Script_Table table.	DBINT	AK-1, FK NOT NULL

**Sec\_Group Table**

This table is in the [Security category \(page 543\)](#). To see database rules for these tables, click [here](#) (page 600).

Used internally to track the state of records in the User\_Group table. The Sec\_Group table contains one row for each User\_Group row.

### Related table

[User Group \(page 514\)](#) (via UserGroupID)

**Table 187: Indexes for Sec\_Group Table**

index_name	index_description	index_keys
XPKSec_Group	clustered, unique, primary key located on PRIMARY	UserGroupID

**Fields in Sec\_Group Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
UserGroupID	Foreign key from the User_Group table.	DBINT	PK, FK NOT NULL
UserGroupName	The name of the group.	varchar(64)	NOT NULL

## Sec\_User Table

This table is in the [Security category \(page 543\)](#). To see database rules for these tables, click [here \(page 600\)](#).

Used internally to track the state of users in the User\_Group table. The Sec\_User table contains one row for each User\_Group row that represents a user (rather than a group).

### Related table

[User Group \(page 514\)](#) (via UserGroupID)

**Table 188: Indexes for Sec\_User Table**

index_name	index_description	index_keys
XPKSec_User	clustered, unique, primary key located on PRIMARY	UserGroupID

**Fields in Sec\_User Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
UserGroupID	Foreign key from the User_Group table.	DBINT	PK, FK NOT NULL
UserGroupName	The name of the user.	varchar(64)	NOT NULL

**Service Table****Service Table**

This table is in the [Skill Target category \(page 544\)](#). To see database rules for these tables, click [here \(page 600\)](#).

Each row describes a service available at a peripheral.

Use the Service Explorer tool to add, update, and delete Service records.

**Related tables**

<a href="#">Enterprise Service Member (page 230)</a> (via SkillTargetID)	<a href="#">Galaxy Gate Delayed Call Table (page 248)</a> (via SkillTargetID)	<a href="#">Galaxy Overflow Table (page 251)</a> (via SkillTargetID)
<a href="#">Media Routing Domain (page 290)</a> (via MRDomainID)	<a href="#">Peripheral (page 306)</a> (via PeripheralID)	<a href="#">Route (page 336)</a> (via SkillTargetID)
<a href="#">Schedule (page 365)</a> (via ScheduleID)	<a href="#">Service Array Member (page 389)</a> (SkillTargetID maps to Service_Array_Member.ServiceSkillTargetID)	<a href="#">Service Five Minute (page 390)</a> (via SkillTargetID)
<a href="#">Service Half Hour (page 394)</a> (via SkillTargetID)	<a href="#">Service Member (page 415)</a> (via SkillTargetID)	<a href="#">Service Real Time (page 416)</a> (via SkillTargetID)
<a href="#">Skill Target (page 489)</a> (via SkillTargetID)	Termination Call Detail (page 490)(ServiceSkillTargetID maps to Service.SkillTargetID)	

**Table 189: Indexes for Service Table**

index_name	index_description	index_keys
XAK1Service	nonclustered, unique, unique key located on PRIMARY	EnterpriseName
XAK2Service	nonclustered, unique, unique key located on PRIMARY	PeripheralID, PeripheralNumber
XIE1Service	nonclustered, unique, primary key located on PRIMARY	ScheduleID
XPKService	clustered, unique, primary key located on PRIMARY	SkillTargetID

**Fields in Service Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
ConfigParam	Incremented when the record is changed in the central database.	varchar(255)	NULL
Deleted	Deleted Flag. Stored as a character: <ul style="list-style-type: none"><li>• <b>Y</b> = Yes</li><li>• <b>N</b> = No</li></ul>	DBCHAR	NOT NULL
Description	Additional information about the service.	DESCRIPTION	NULL
EnterpriseName	An enterprise name for the service. This name must be unique among all the services in the enterprise.	VNAME32	AK-1 NOT NULL
Extension	The extension number for the skill group (used by the Definity ECS ACD).	VTELNO10	NULL
MRDomainID	The Media Routing Domain associated with this service.	DBINT	FK NOT NULL
PeripheralID	Foreign key from the Peripheral table.	DBSMALLINT	AK-2, FK NOT NULL
PeripheralName	Service name as known at the peripheral.	VNAME32	NOT NULL
PeripheralNumber	Service number as known at the peripheral. This field together with PeripheralID form an alternate unique key.	DBINT	AK-2 NOT NULL
PeripheralServiceLevelType	Type of service level calculation to be used in the PeriphServiceLevel fields of Service Real Time and Service Half Hour tables. Valid Aspect types are: <ul style="list-style-type: none"><li>• <b>1</b> = Service Level 1</li><li>• <b>2</b> = Service Level 2</li><li>• <b>3</b> = Service Level 3</li><li>• <b>4</b> = Service Level as Calculated by Call Center.  If this field is <b>0</b> for a service, the system software assumes the default specified for the associated peripheral.  If the peripheral is not an Aspect ACD, the type must be 4 (calculated by the peripheral)</li></ul>	DBSMALLINT	NOT NULL
ScheduleID	Identifies an imported schedule associated with the service.	DBINT	FK, IE-1 NULL

**Service\_Array Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
ServiceLevelThreshold	The service level threshold, in seconds, for the service level. If this field is negative, the value of the ServiceLevelThreshold field in the Peripheral table is used.	DBINT	NOT NULL
ServiceLevelType	<p><b>For Non-Unified CCE</b>, indicates how the system software calculates the service level for the service:</p> <ul style="list-style-type: none"> <li>• <b>0</b> = Use the default specified for the associated peripheral.</li> <li>• <b>1</b> = Ignore Abandoned Calls. (Remove the abandoned calls from the calculation.)</li> <li>• <b>2</b> = Abandoned Calls have Negative Impact. (Treat the abandoned calls as though they exceeded the service level threshold.)</li> <li>• <b>3</b> = Abandoned Calls have Positive Impact. (Treat the abandoned calls as though they were answered within the service level threshold.)</li> </ul> <p><b>Note:</b> Regardless of which calculation you choose, the system software always tracks separately the number of calls abandoned before the threshold expired.</p> <p><b>For Unified CCE</b> the value of this field is always <b>1</b> (ignore abandoned calls) for services associated with Unified CM peripherals. This is because calls to a Unified CM peripheral have no service associated with them while they are queued, and therefore calls abandoned while queued cannot affect the computation of service level for a Unified CM service.</p>	DBSMALLINT	NOT NULL
SkillTargetID	An identifier that is unique among all skill targets in the enterprise.	DBINT	PK, FK NOT NULL
UserDeletable	Indicates if the record can be deleted by a user. Default is Y.	DBCHAR	NOT NULL

**Service\_Array Table**

This table is one of the [Enterprise tables \(page 532\)](#). For database rules click [here \(page 596\)](#).

A service array is a collection of service which might be associated with different peripherals, but are all associated with the same Peripheral Gateway (PG). You can route calls to a service array and let the PG choose among the member services.

Use the Service Explorer tool to add, update, and delete Service\_Array records.

### Related tables

[Logical Interface Controller \(page 286\)](#)(via LogicalControllerID)

[Schedule \(page 365\)](#) (via ScheduleID)

[Service Array Member \(page 389\)](#) (via SkillTargetID)

[Skill Group \(page 432\)](#) (via SkillTargetID)

[Skill Target \(page 489\)](#) (via SkillTargetID)

**Table 190: Indexes for Service\_Array Table**

index_name	index_description	index_keys
XAK1Service_Array	nonclustered, unique, unique key located on PRIMARY	EnterpriseName
XIF110Service_Array	nonclustered located on PRIMARY	SkillTargetID
XIF120Service_Array	nonclustered located on PRIMARY	LogicalControllerID
XIF121Service_Array	nonclustered located on PRIMARY	ScheduleID
XPKService_Array	clustered, unique, primary key located on PRIMARY	SkillTargetID

**Fields in Service\_Array Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
Description	Additional information about the service array.	DESCRIPTION	NULL
EnterpriseName	An enterprise name for the service array. This name must be unique among all service arrays in the enterprise.	VNAME32	AK-1 NOT NULL
LogicalControllerID	Identifies the Peripheral Gateway associated with the service array.	DBSMALLINT	FK NOT NULL
ScheduleID	Identifies a schedule associated with the service array.	DBINT	FK NULL
SkillTargetID	An identifier that is unique among all skill targets in the enterprise.	DBINT	PK NOT NULL

## Service\_Array\_Member Table

This table is one of the [Enterprise tables \(page 532\)](#). For database rules click [here \(page 596\)](#).

It maps individual services to a service array. The member services in a service array must all be associated with the same Peripheral Gateway (PG), but may be associated with different peripherals.

Use the Service Explorer tool to add and delete Service\_Array\_Member records.

**Service\_Five\_Minute Table**

Use the Service Explorer tool to add, update, and delete Service\_Array records.

**Related tables**

[Service Array \(page 388\)](#) (ServiceArraySkillTargetID maps to Service\_Array.SkillTargetID)

[Service \(page 386\)](#) (ServiceSkillTargetID maps to Service.SkillTargetID)

**Table 191: Indexes for Service\_Array\_Member Table**

index_name	index_description	index_keys
XIF122Service_Array_Member	nonclustered located on PRIMARY	ServiceArraySkillTargetID
XIF123Service_Array_Member	nonclustered located on PRIMARY	ServiceSkillTargetID
XPKService_Array_Member	clustered, unique, primary key located on PRIMARY	ServiceArraySkillTargetID, ServiceSkillTargetID

**Service\_Array\_Member TableConstraints:**

Constraint:	Field Name:
PK	ServiceArraySkillTargetID
PK	ServiceSkillTargetID
FK	ServiceArraySkillTargetID

**Fields in Service\_Array\_Member Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ServiceArraySkillTargetID	Identifies the service array.	DBINT	PK, FK NOT NULL
ServiceSkillTargetID	Identifies a service that is a member of the service array.	DBINT	PK NOT NULL

**Service\_Five\_Minute Table**

This table is in the [Skill Target category \(page 544\)](#). To see database rules for these tables, click [here \(page 600\)](#).

Central database only.

Contains statistics about each service during the most recent five-minute interval.

The system software generates Service\_Five\_Minute records for each service.

Use the Service Explorer tool to add, update, and delete Service\_Array records.

**Related table**

[Service \(page 386\)](#) (via SkillTargetID)

**Table 192: Indexes for Service\_Five\_Minute Table**

index_name	index_description	index_keys
XAK1Service_Five_Minute	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XPKService_Five_Minute	clustered, unique, primary key located on PRIMARY	DateTime, SkillTargetID, TimeZone

**Fields in Service\_Five\_Minute Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
AgentsTalking	Number of service agents in the talking state at the end of the five-minute interval.	DBINT	NULL
AvgDelayQAbandTo5	Average delay time of abandoned calls in queue for the service during the five-minute interval.	DBINT	NULL
AvgDelayQNow	Average delay for calls currently queued for the service at the end of the five-minute interval.	DBINT	NULL
AvgHandleTimeTo5	The average handled calls time in seconds for calls to the service that ended during the five-minute interval. HandleTime is tracked only for inbound ACD calls that are counted as handled for the service. HandleTime is the time spent from the call being answered by the agent to the time the agent completed after-call work time for the call. This includes any TalkTime, HoldTime, and WorkTime associated with the call. The AvgHandleTime value is updated in the database when the after-call work time associated with the call is completed.	DBINT	NULL
AvgSpeedAnswerTo5	Average answer wait time for all incoming calls to the service during the five-minute interval.	DBINT	NULL
AvgTalkTimeTo5	The average talk time in seconds for calls to the service during the five-minute interval. Talk time includes the time that calls were in a talking or hold state. It is populated with the TalkTime and HoldTime associated with call to the service or route. The field is updated in the database when all after-call work associated with the calls is completed.	DBINT	NULL
CallsAbandQToday	Number of calls to this service abandoned since midnight.	DBINT	NULL
CallsAnsweredTo5	Number of calls to the service answered by agents during the five-minute interval.	DBINT	NULL
CallsAnsweredToday	Number of calls to the service answered by agents since midnight.	DBINT	NULL

Service\_Five\_Minute Table

Field Name:	Description:	Data Type:	Keys and Null Option:
CallsHandledTo5	<p>Number of calls handled for the service ending during the five-minute interval. A <b>handled call</b> is:</p> <ul style="list-style-type: none"> <li>• An incoming ACD call that was answered by an agent, and then completed.</li> <li>• A call associated with Outbound Option that the agent answered, and then completed.</li> <li>• A non-voice task that the agent started working on then completed.</li> </ul> <p>A handled call/task is completed when the agent associated with the call/task finishes the wrap-up work associated with the call/task.</p>	DBINT	NULL
CallsHandledToday	Number of calls handled to completion by the service since midnight.	DBINT	NULL
CallsIncomingToday	Number of incoming calls to this service since midnight. Incoming calls include only Inbound ACD calls arriving on trunks (that is, calls that are not internally generated).	DBINT	NULL
CallsInProgress	Number of inbound and outbound calls that had previously been offered (for example, calls being played an announcement, queued calls, or connected calls) and are currently being handled for the service.	DBINT	NULL
CallsLeftQTo5	Number of calls to the service that were removed from queue during the five-minute interval (used to calculate expected delay).	DBINT	NULL
CallsOfferedTo5	Number of calls offered to the service during the five-minute interval.	DBINT	NULL
CallsOfferedToday	Number of incoming calls plus internal calls offered to this service since midnight.	DBINT	NULL
CallsQNow	Calls in queue for the service at the peripheral at the end of the five-minute interval. A call that queues multiple times will be counted as queued once for the service.	DBINT	NULL
CallsRoutedToday	Number of calls the system software routed to this service since midnight.	DBINT	NULL
DateTime	Date and time at the start of the five-minute interval.	DBSMALLDATE	PK NOT NULL

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
ExpectedDelay	Predicted delay for any new call added to the service queue at the end of the five-minute interval. This is valid only if no agents are available.	DBFLT4	NULL
LongestAvailAgent	Number of seconds the longest available agent for the service had been available as of the end of the five-minute interval. If no agent was available, the value is 0.	DBINT	NULL
LongestCallQ	Length of time that longest call in the queue for the service had been there at the end of the five-minute interval.	DBINT	NULL
OverflowInTo5	Number of calls the peripheral re-targeted, or overflowed, into the service during the five-minute interval. The system software keeps counts of the number of calls moved out of each service or route (overflowed out) and moved into each service or route (overflowed in).	DBINT	NULL
OverflowOutTo5	Number of calls the peripheral retargeted, or overflowed, out of the service during the five-minute interval. The system software keeps counts of the number of calls moved out of each service or route (overflowed out) and moved into each service or route (overflowed in).	DBINT	NULL
PeriphServiceLevelTo5	Service level for the service during the rollingfive-minute interval, as calculated by the peripheral.	DBFLT4	NULL
PeriphServiceLevelToday	Service level for the service since midnight, as calculated by the peripheral.	DBFLT4	NULL
RecoveryDay	Currently not used, set to zero (0).	DBINT	NOT NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL
ServiceLevelAbandTo5	Number of calls to the service abandoned within the service level during the five-minute interval.	DBINT	NULL
ServiceLevelAbandToday	Number of calls to the service abandoned within the service level since midnight.	DBINT	NULL
ServiceLevelCallsOfferedTo5	Number of calls to the service answered or abandoned during the five-minute interval.	DBINT	NULL
ServiceLevelCallsOfferedToday	Number of calls to the service answered or abandoned since midnight.	DBINT	NULL

**Service\_Half\_Hour Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
ServiceLevelCallsQHeld	Number of calls to the service that had been in queue longer than the service level threshold at the end of the five-minute interval.	DBINT	NULL
ServiceLevelCallsTo5	Number of calls to the service handled within the service level during the five-minute interval.	DBINT	NULL
ServiceLevelCallsToday	Number of calls to the service handled within the service level today.	DBINT	NULL
ServiceLevelTo5	Service level during the five-minute interval. This is derived from ServiceLevelCallsTo5 and ServiceLevelCallsHandledTo5.	DBFLT4	NULL
ServiceLevelToday	Cumulative service level for the service since midnight. This is derived from ServiceLevelCallsToday and ServiceLevelCallsOfferedToday.	DBFLT4	NULL
SkillTargetID	Foreign key from the Service table.	DBINT	PK, FK NOT NULL
TimeZone	The time zone for the date and time. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK NOT NULL
Unused1	This field is not currently used.	DBINT	NULL

**Service\_Half\_Hour Table**

This table is in the [Skill Target category \(page 544\)](#). To see database rules for these tables, click [here \(page 600\)](#).

Central database only.

Contains information about each service during the most recent 30-minute interval.

The system software generates Service\_Half\_Hour records for each service.

#### Related table

[Service \(page 386\)](#) (via SkillTargetID)

**Table 193: Indexes for Service\_Half\_Hour Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XAK1Service_Half_Hour	nonclustered, unique, unique key located on PRIMARY	RecoveryKey

index_name	index_description	index_keys
XIE1Service_Half_Hour	nonclustered, unique, primary key located on PRIMARY	DbDateTime
XPKService_Half_Hour	clustered, unique, primary key located on PRIMARY	DateTime, SkillTargetID, TimeZone

**Note:** The Service\_Interval Table will be populated with 30/15 minute reporting data, depending on the Historical Reporting Interval setting for the PG. The Service\_Half\_Hour Table will not be populated with this data.

**Fields in Service\_Half\_Hour Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
AnswerWaitTimeToHalf	<p>The sum of AnswerWaitTime in seconds for all calls answered for the service during the last half-hour interval. AnswerWaitTime is the elapsed time from when the call is offered at the peripheral, to when it is answered. This includes all DelayTime, LocalQTime, and RingTime associated with the call.</p> <p>For multimedia, the sum of the answer wait times of all tasks associated with this service that began in this half-hour interval.</p>	DBINT	NULL
AutoOutCallsOnHoldTimeToHalf	<p>Number of seconds that AutoOut (predictive) calls were placed on hold by this service during the half-hour interval. This data element is based on HoldTime. The value is counted when the after-call work associated with the call (if any) has completed, and the database is updated every half hour.</p> <p>Not currently used for <b>Outbound Option</b>.</p> <p>Not valid for <b>Unified CCE</b>.</p>	DBINT	NULL
AutoOutCallsOnHoldToHalf	<p>Number of ended AutoOut (predictive) calls that this service has placed on hold at least once. The value is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every half hour.</p> <p>Not currently used for <b>Outbound Option</b>.</p> <p>Not valid for <b>Unified CCE</b>.</p>	DBINT	NULL
AutoOutCallsTalkTimeToHalf	<p>Total talk time, in seconds, for AutoOut (predictive) calls handled by the service that ended during the half-hour interval. This value includes the time spent from the call being initiated to the time the agent begins after-call work for the call. It is based on TalkTime. It therefore includes the HoldTime associated with the call. AutoOutCallsTalkTime is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every half hour.</p>	DBINT	NULL

**Service\_Half\_Hour Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	<p>Not currently used for <b>Outbound Option</b>.</p> <p>Not valid for <b>Unified CCE</b>.</p>		
AutoOutCallsTimeToHalf	<p>Total handle time, in seconds, for AutoOut (predictive) calls handled this service that ended during the half-hour interval. Handle time includes WorkTime, TalkTime, and HoldTime. The AutoOutCallsTime value includes the time spent from the call being initiated to the time the agent completes after-call work time for the call. The value is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every half hour.</p> <p>Not currently used for <b>Outbound Option</b>.</p> <p>Not valid for <b>Unified CCE</b>.</p>	DBINT	NULL
AutoOutCallsToHalf	<p>Number of AutoOut (predictive) calls made by this service that ended during the half-hour interval. The value is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every half hour.</p> <p>Not currently used for <b>Outbound Option</b>.</p> <p>Not valid for <b>Unified CCE</b>.</p>	DBINT	NULL
AvgDelayQAbandToHalf	<p>Average delay time of calls to the service abandoned in queue during the half-hour interval. This value is calculated as follows:</p> <p><b>DelayQAbandTimeToHalf / CallsAbandQToHalf</b></p> <p>Not valid for <b>Unified CCE</b>.</p> <p>Not valid for <b>non-voice</b> tasks. Set to zero by OPC.</p> <p><b>Note:</b> When Unified ICM is connected with Unified CCE through an IPCC Gateway PG, this value is incremented by any condition on the child that causes the call to terminate while in the queue.</p>	DBINT	NULL
AvgDelayQToHalf	<p>Average delay in the queue for calls to the service during the half-hour interval:</p> <p><b>DelayQTimeToHalf / CallsQToHalf</b></p> <p>Not valid for <b>Unified CCE</b>.</p> <p>Not valid for <b>non-voice</b> tasks. Set to zero by OPC.</p>	DBINT	NULL

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
AvgHandleTimeToHalf	<p>The average handled calls time in seconds for calls counted as handled by the service during the half-hour interval. HandleTime is tracked only for inbound ACD calls that are counted as handled for the service. HandleTime is the time spent from the call being answered by the agent to the time the agent completed after-call work time for the call. This includes any TalkTime, HoldTime, and WorkTime associated with the call. The AvgHandleTime value is counted when the after-call work time associated with the call is completed. The value is calculated as follows:</p> <p><b>HandleTimeToHalf / CallsHandledToHalf</b></p> <p>Valid for <b>Unified CCE</b>.</p>	DBINT	NULL
AvgSpeedAnswerToHalf	<p>The average answer wait time that all calls offered to the service waited before being answered. This value is calculated as follows:</p> <p><b>AnswerWaitTimeToHalf / CallsAnsweredToHalf</b></p> <p>Valid for <b>Unified CCE</b>.</p>	DBINT	NULL
AvgTalkTimeToHalf	<p>The average handled calls time in seconds for calls counted as handled by the service during the half-hour interval. HandleTime is tracked only for inbound ACD calls that are counted as handled for the service. HandleTime is the time spent from the call being answered by the agent to the time the agent completed after-call work time for the call. This includes any TalkTime, HoldTime, and WorkTime associated with the call. The AvgHandleTime value is counted when the after-call work time associated with the call is completed. The value is calculated as follows:</p> <p><b>HandleTimeToHalf / CallsHandledToHalf</b></p> <p>Valid for <b>Unified CCE</b>.</p>	DBINT	NULL
BlindTransfersOutToHalf	Number of calls that were blind transferred out by agents in this service during the half-hour interval.	DBINT	NULL
CallsAbandQToHalf	<p>Number of calls abandoned in queue for the service during the half-hour interval.</p> <p>Not valid for <b>Unified CCE</b>.</p> <p>Not valid for <b>non-voice tasks</b>. Set to zero by OPC.</p>	DBINT	NULL

**Service\_Half\_Hour Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	<b>Note:</b> When Unified CCE is connected with Unified CCE through an IPCC Gateway PG, this value is incremented by any condition on the child that causes the call to terminate while in the queue.		
CallsAnsweredToHalf	<p>The number of calls answered for the service during the half-hour interval.</p> <p>For <b>multi-media</b>, the number of tasks associated with this service that were ended in this half-hour interval.</p> <p>Valid for <b>Unified CCE</b>.</p>	DBINT	NULL
CallsHandledToHalf	<p>The number of tasks that became associated with this service in this half-hour interval. This is incremented when the Agent PG receives an Offer Task message, and when it receives a Start Task message without having received an Offer Task message.</p> <p><b>A handled call</b> is:</p> <ul style="list-style-type: none"> <li>• An incoming ACD call that was answered by an agent, and then completed.</li> <li>• A non-voice task that the agent started working on then completed.</li> </ul> <p>A handled call/task is completed when the agent associated with the call/task finishes the wrap-up work associated with the call/task.</p> <p>This field is applicable for <b>Unified CCE</b>.</p>	DBINT	NULL
CallsIncomingToHalf	<p>Number of incoming calls to the service during the half-hour interval. Incoming calls include only Inbound ACD calls arriving on trunks (that is, calls that are not internally generated).</p> <p>Valid for <b>Unified CCE</b>.</p>	DBINT	NULL
CallsOfferedToHalf	<p>Number of incoming calls plus internal calls offered to the service during the half-hour interval.</p> <p>Valid for <b>Unified CCE</b>.</p>	DBINT	NULL
CallsOutToHalf	<p>Number of outbound calls placed by agents for the service during the half-hour interval.</p> <p>Not valid for <b>Unified CCE</b>.</p> <p>Not valid for <b>non-voice tasks</b>. Set to zero by OPC.</p>	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
CallsQToHalf	<p>Number of calls to the service in the queue during the half-hour interval. A call that queues multiple times will be counted as queued once for the service.</p> <p>Not valid for <b>Unified CCE</b></p> <p>Not valid for <b>non-voice tasks</b>. Set to zero by OPC.</p>	DBINT	NULL
CallsRoutedToHalf	<p>Number of tasks routed by the system software to the service during the half-hour interval.</p> <p>For <b>multi-media</b>, the number of tasks routed to the service during the half-hour interval.</p> <p>Valid for <b>Unified CCE</b>.</p>	DBINT	NULL
CallsTerminatedOtherToHalf	<p>Number of calls handled by the service but not otherwise accounted for during the half-hour interval. These are calls that do not fit into the criteria for handled, abandoned, or transferred calls. They were terminated for other reasons, which may include drop/no answer, forced busy, or timed out.</p> <p>Not valid for <b>Unified CCE</b>.</p> <p>Not valid for <b>non-voice tasks</b>. Set to zero by OPC.</p>	DBINT	NULL
DateTime	Central Controller date and time at the start of the half-hour interval.	DBSMALLDATE	PK NOT NULL
DbDateTime	The current date and time stamp when the records are written to the HDS database. The logger database has NULL for this column.	DBDATETIME	NULL
DelayQAbandTimeToHalf	<p>Number of seconds that calls for the service that were abandoned in queue waited during the interval. These are calls that existed in the queue but were abandoned before being handled by an agent or trunk device.</p> <p>Not valid for <b>Unified CCE</b>.</p> <p>Not valid for <b>non-voice tasks</b>. Set to zero by OPC.</p> <p><b>Note:</b> When Unified ICM is connected with Unified CCE through an IPCC Gateway PG, this value is incremented by any condition on the child that causes the call to terminate while in the queue.</p>	DBINT	NULL
DelayQTimeToHalf	Sum of delay time of all calls to the service in queue during the half-hour interval. This field is populated from the LocalQTime.	DBINT	NULL

**Service\_Half\_Hour Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	<p>Not valid for <b>Unified CCE</b>.</p> <p>Not valid for <b>non-voice tasks</b>. Set to zero by OPC.</p>		
ForcedClosedCallsToHalf	<p>Number of calls to the service that were determined to be closed following an interruption in data during the half-hour interval. ForcedClosedCalls are calls that terminated because of errors tracking the call's state transition. Calls may become forced closed if there is lack of events from the ACD's CTI interfaces (for example, a lack of a Disconnect event, or failure on the switch's CTI connection).</p> <p>Not valid for <b>Unified CCE</b>.</p>	DBINT	NULL
HandleTimeToHalf	<p>The total time in seconds that calls were handled for the service during the half-hour interval. HandleTime is tracked only for inbound ACD calls that are counted as handled for the service. HandleTime is the time spent from the call being answered by the agent to the time the agent completed after-call work time for the call. This includes any HoldTime, TalkTime, and WorkTime associated with the call (from the Termination_Call_Detail table). The HandleTime value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every half hour.</p> <p>For <b>multi-media</b>, this is <b>TalkTimeToHalf + HoldTimeToHalf + HandledWorkReadyTimeToHalf</b>.</p> <p>Valid for <b>Unified CCE</b>.</p>	DBINT	NULL
HoldTimeToHalf	<p>The total time in seconds for calls to the service that ended during the half-hour interval.</p> <p>For <b>multi-media</b>, the number of seconds that agents spent in the PAUSED state for tasks associated with this service that ended in this half-hour interval.</p> <p>Valid for <b>Unified CCE</b>.</p>	DBINT	NULL
LongestCallAbandTime	<p>Longest time in seconds a call was in queue for the service before being abandoned during the half-hour interval.</p> <p>Not valid for <b>Unified CCE</b>.</p> <p>Not valid for <b>non-voice tasks</b>. Set to zero by OPC.</p> <p><b>Note:</b> When Unified ICM is connected with Unified CCE through an IPCC Gateway PG, this value is incremented by any condition on the child that causes the call to terminate while in the queue.</p>	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
LongestCallDelayQTime	<p>Longest time in seconds a call was in queue for the service before being answered during the half-hour interval.</p> <p>Not valid for <b>Unified CCE</b>.</p> <p>Not valid for <b>non-voice tasks</b>. Set to zero by OPC.</p>	DBINT	NULL
NumMissingTasks	<p>Valid for <b>multi-media</b> only.</p> <p>The number of tasks whose Start Task Timeout Period expired in this half-hour interval.</p>	DBINT	NULL
OverflowInToHalf	<p>Number of calls that the peripheral re-targeted, or overflowed, into this service during the half-hour interval. The system software keeps counts of the number of calls moved out of each service or route (overflowed out) and moved into each service or route (overflowed in).</p> <p>Not valid for <b>Unified CCE</b>.</p>	DBINT	NULL
OverflowOutToHalf	<p>Number of calls that the peripheral re-targeted, or overflowed, out of this service during the half-hour interval. The system software keeps counts of the number of calls moved out of each service or route (overflowed out) and moved into each service or route (overflowed in).</p> <p>Not valid for <b>Unified CCE</b>.</p>	DBINT	NULL
PeriphServiceLevelCallsToHalf	<p>Number of calls to the service answered within the service level, as counted by the peripheral, during the half-hour interval.</p> <p>Not valid for <b>Unified CCE</b>.</p> <p>Not valid for <b>non-voice tasks</b>. Set to zero by OPC.</p>	DBINT	NULL
PeriphServiceLevelOfferToHalf	<p>Number of offered calls used in the peripheral service level calculation for the half-hour interval.</p> <p>Not valid for <b>Unified CCE</b>.</p> <p>Not valid for <b>non-voice tasks</b>. Set to zero by OPC.</p>	DBINT	NULL
PeriphServiceLevelToHalf	<p>Peripheral service level during the half-hour interval.</p> <p>Not valid for <b>Unified CCE</b>.</p>	DBFLT4	NULL

**Service\_Half\_Hour Table**

Field Name:	Description:	Data Type:	Keys and Null Option:
	Not valid for <b>non-voice tasks</b> . Set to zero by OPC.		
PreviewCallsOnHoldTimeToHalf	<p>Number of seconds outbound Preview calls were placed on hold this service during the half-hour interval. This data element is based on HoldTime. The value is counted when the after-call work associated with the call (if any) has completed, and the database is updated every half hour.</p> <p>Not currently used for <b>Outbound Option</b>.</p> <p>Not valid for <b>Unified CCE</b>.</p>	DBINT	NULL
PreviewCallsOnHoldToHalf	<p>Number of ended outbound Preview calls that this service placed on hold at least once. The value is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every half hour.</p> <p>Not currently used for <b>Outbound Option</b>.</p> <p>Not valid for <b>Unified CCE</b>.</p>	DBINT	NULL
PreviewCallsTalkTimeToHalf	<p>Total talk time, in seconds, for outbound Preview calls handled by this service that ended during the half-hour interval. This value includes the time spent from the call being initiated to the time the agent begins after-call work for the call. It is based on TalkTime from Termination_Call_Detail. It therefore includes the HoldTime associated with the call. PreviewCallsTalkTime is counted when the after-call-work time associated with the call (if any) has completed, and the database is updated every half hour.</p> <p>Not currently used for <b>Outbound Option</b>.</p> <p>Not valid for <b>Unified CCE</b>.</p>	DBINT	NULL
PreviewCallsTimeToHalf	<p>Total handle time, in seconds, for outbound Preview calls handled by this service that ended during the half-hour interval. Handle time includes WorkTime, TalkTime, and HoldTime. The PreviewCallsTime value includes the time spent from the call being initiated to the time the agent completes after-call work time for the call. The value is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every half hour.</p> <p>Not currently used for <b>Outbound Option</b>.</p> <p>Not valid for <b>Unified CCE</b>.</p>	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
PreviewCallsToHalf	<p>Number of outbound Preview calls made by this service that ended during the half-hour interval. The value is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every half hour.</p> <p>Not currently used for <b>Outbound Option</b>.</p> <p>Not valid for <b>Unified CCE</b>.</p>	DBINT	NULL
RecoveryDay	Currently not used, set to zero (0).	DBINT	NOT NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL
RedirectNoAnsCallsToHalf	Number of calls that rang at an agent's terminal and redirected on failure to answer in this service during the current half-hour interval.	DBINT	NULL
ReserveCallsOnHoldTimeToHalf	<p>Number of seconds agent reservation calls were placed on hold by this service during the half-hour interval. This data element is based on HoldTime. The value is counted when the after-call work associated with the call (if any) has completed, and the database is updated every half hour.</p> <p>Not currently used for <b>Outbound Option</b>.</p> <p>Not valid for <b>Unified CCE</b>.</p>	DBINT	NULL
ReserveCallsOnHoldToHalf	<p>Number of completed agent reservation calls that this service placed on hold at least once. The value is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every half hour.</p> <p>Not currently used for <b>Outbound Option</b>.</p> <p>Not valid for <b>Unified CCE</b>.</p>	DBINT	NULL
ReserveCallsTalkTimeToHalf	<p>Total talk time, in seconds, for agent reservation calls handled by the service that ended during the half-hour interval. This value includes the time spent from the call being initiated to the time the agent begins after-call work for the call. It is based on TalkTime. It therefore includes the HoldTime associated with the call. ReserveCallsTalkTime is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every half hour.</p> <p>Not currently used for <b>Outbound Option</b>.</p>	DBINT	NULL

**Service\_Half\_Hour Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	Not valid for <b>Unified CCE</b> .		
ReserveCallsTimeToHalf	<p>Total handle time, in seconds, for agent reservation calls handled by this service that ended during the half-hour interval. Handle time includes WorkTime, TalkTime, and HoldTime. The ReserveCallsTime value includes the time spent from the call being initiated to the time the agent completes after-call work time for the call. The value is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every half hour.</p> <p>Not currently used for <b>Outbound Option</b>.</p> <p>Not valid for <b>Unified CCE</b>.</p>	DBINT	NULL
ReserveCallsToHalf	<p>Number of agent reservation calls made by this service that ended during the half-hour interval. The value is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every half hour.</p> <p>Not currently used for <b>Outbound Option</b>.</p> <p>Not valid for <b>Unified CCE</b>.</p>	DBINT	NULL
Reserved1	Reserved for future use.	DBINT	NULL
Reserved2	Reserved for future use.	DBINT	NULL
Reserved3	Reserved for future use.	DBINT	NULL
Reserved4	Reserved for future use.	DBINT	NULL
Reserved5	Reserved for future use.	DBFLT4	NULL
ServiceLevelAbandToHalf	<p>Number of calls to the service abandoned within the service level threshold during the half-hour interval. Set to zero for <b>Unified CCE voice tasks</b> and for <b>non-voice tasks</b>.</p> <p><b>Note:</b> When Unified ICM is connected with Unified CCE through an IPCC Gateway PG, this value is incremented by any condition on the child that causes the call to terminate while in the queue.</p>	DBINT	NULL
ServiceLevelCallsOfferedToHalf	<p>Number of calls to the service that had service level events during the half-hour interval.</p> <p>Not valid for <b>Unified CCE</b>.</p>	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
ServiceLevelCallsToHalf	<p>Number of calls to the service answered within the service level threshold during the half-hour interval.</p> <p>Not valid for <b>Unified CCE</b>.</p>	DBINT	NULL
ServiceLevelToHalf	<p>Service level for the service during the half-hour interval.</p> <p>For <b>non-voice tasks</b> and for <b>Unified CCE</b> calls, the <code>ServiceLevelType</code> is always set to <i>ignore abandoned calls</i>.</p>	DBFLT4	NULL
ServiceLevelType	<p>Service Level Type used to calculate Service level for this interval.</p> <p>Not currently used for <b>Outbound Option</b>.</p> <p>Not valid for <b>Unified CCE</b>.</p>	DBINT	NULL
ShortCallsTimeToHalf	<p>Time, in seconds, accumulated by calls that were too short to be counted as abandoned during the half-hour interval. These calls were abandoned before the abandoned call wait time expired.</p> <p>Not valid for <b>Unified CCE</b>.</p> <p>Not valid for <b>non-voice tasks</b>. Set to zero by OPC.</p>	DBINT	NULL
ShortCallsToHalf	<p>Number of calls to the service during the half-hour interval that were too short to be considered abandoned. A call is determined to be a short call if it is abandoned before the Abandoned Call Wait Time expired. Short calls are not considered abandoned and they are not accounted for in any of the Unified ICM abandoned calls calculations.</p> <p>Not valid for <b>IPCC Enterprise</b>.</p> <p>Not valid for <b>non-voice tasks</b>. Set to zero by OPC.</p>	DBINT	NULL
SkillTargetID	The SkillTargetID of this service. Foreign key from the Service table.	DBINT	PK, FK NOT NULL
TalkTimeToHalf	The number of seconds that agents spent in the ACTIVE state or the PAUSED state for tasks associated with this service that ended in this half-hour interval.	DBINT	NULL
TimeZone	The time zone for the date and time. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK NOT NULL
TransferInCallsToHalf	Number of calls transferred into the service during the half-hour interval. This count includes consultative transfers and blind transfers	DBINT	NULL

**Service\_Interval Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	<p>to the service. The count is populated in the database when the after-call work associated with the call (if any) is finished.</p> <p>Not valid for <b>Unified CCE</b>.</p> <p>Not valid for <b>non-voice tasks</b>. Set to zero by OPC.</p>		
TransferOutCallsToHalf	<p>Number of calls transferred out of the service during the half-hour interval. This count includes consultative transfers and blind transfers made from the service. The count is populated in the database when the after-call work associated with the call (if any) is finished.</p> <p>Not valid for <b>Unified CCE</b>.</p> <p>Not valid for <b>non-voice tasks</b>. Set to zero by OPC.</p>	DBINT	NULL

**Service\_Interval Table**

This section describes the Service Interval Table.

**Note:** When Unified ICM is connected with Unified CCE through an IPCC Gateway PG, this value is incremented by any condition on the child that causes the call to terminate while in the queue.

**Fields in Service\_Interval Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
AutoOutCalls	Number of AutoOut (predictive) calls made by this service that ended during the reporting interval. The value is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every reporting. Not currently used for Outbound Option. Not valid for Unified CCE.	DBINT	YES
AutoOutCallsTime	Total handle time, in seconds, for AutoOut (predictive) calls handled this service that ended during the reporting interval. Handle time includes WorkTime, TalkTime, and HoldTime. The AutoOutCallsTime value includes the time spent from the call being initiated to the time the agent completes after-call work time for the call. The value is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every reporting. Not currently used for Outbound Option. Not valid for Unified CCE.	DBINT	YES

Field Name:	Description:	Data Type:	Keys and Null Option:
AutoOutCallsTalkTime	Total talk time, in seconds, for AutoOut (predictive) calls handled by the service that ended during the reporting interval. This value includes the time spent from the call being initiated to the time the agent begins after-call work for the call. It is based on TalkTime. It therefore includes the HoldTime associated with the call. AutoOutCallsTalkTime is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every reporting. Not currently used for Outbound Option. Not valid for Unified CCE.	DBINT	YES
AutoOutCallsOnHold	Number of ended AutoOut (predictive) calls that this service has placed on hold at least once. The value is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every reporting. Not currently used for Outbound Option. Not valid for Unified CCE.	DBINT	YES
AutoOutCallsOnHoldTime	Number of seconds that AutoOut (predictive) calls were placed on hold by this service during the reporting interval. This data element is based on HoldTime. The value is counted when the after-call work associated with the call (if any) has completed, and the database is updated every reporting. Not currently used for Outbound Option. Not valid for Unified CCE.	DBINT	YES
AvgDelayQ	Average delay in the queue for calls to the service during the reporting interval: DelayQTime / CallsQ. Not valid for Unified CCE. Not valid for non-voice tasks. Set to zero by OPC.	DBINT	YES
AvgDelayQAband	<p>Average delay time of calls to the service abandoned in queue during the reporting interval. This value is calculated as follows: DelayQAbandTime / CallsAbandQ. Not valid for Unified CCE. Not valid for non-voice tasks. Set to zero by OPC.</p> <p><b>Note:</b> When Unified ICM is connected with Unified CCE through an IPCC Gateway PG, this value is incremented by any condition on the child that causes the call to terminate while in the queue.</p>	DBINT	YES
AvgHandleTime	The average handled calls time in seconds for calls counted as handled by the service during the reporting interval. HandleTime is tracked only for inbound ACD calls that are counted as handled for the service. HandleTime is the time spent from the call being answered by the agent to the time the agent completed after-call work time for the call. This includes any TalkTime, HoldTime, and WorkTime associated with the call. The AvgHandleTime value is counted when the after-call work time associated with the call is completed. The value is calculated as follows: HandleTime / CallsHandled. Valid for Unified CCE.	DBINT	YES

**Service\_Interval Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
AvgSpeedAnswer	The average answer wait time that all calls offered to the service waited before being answered. This value is calculated as follows: AnswerWaitTime / CallsAnswered Valid for Unified CCE.	DBINT	YES
AnswerWaitTime	The sum of AnswerWaitTime in seconds for all calls answered for the service during the last reporting interval. AnswerWaitTime is the elapsed time from when the call is offered at the peripheral, to when it is answered. This includes all DelayTime, LocalQTime, and RingTime associated with the call. For multimedia, the sum of the answer wait times of all tasks associated with this service that began in this reporting interval.	DBINT	YES
AvgTalkTime	The average handled calls time in seconds for calls counted as handled by the service during the reporting interval. HandleTime is tracked only for inbound ACD calls that are counted as handled for the service. HandleTime is the time spent from the call being answered by the agent to the time the agent completed after-call work time for the call. This includes any TalkTime, HoldTime, and WorkTime associated with the call. The AvgHandleTime value is counted when the after-call work time associated with the call is completed. The value is calculated as follows: HandleTime / CallsHandled Valid for Unified CCE.	DBINT	YES
BlindTransfersOut	Number of calls that were blind transferred out by agents in this service during the reporting interval.	DBINT	YES
CallsAnswered	The number of calls handled for the service during the reporting interval. For multi-media, the number of tasks associated with this service that were ended in this reporting interval. Valid for Unified CCE.	DBINT	YES
CallsOut	Number of outbound calls placed by agents for the service during the reporting interval. Not valid for Unified CCE. Not valid for non-voice tasks. Set to zero by OPC.	DBINT	YES
CallsTerminatedOther	Number of calls handled by the service but not otherwise accounted for during the reporting interval. These are calls that do not fit into the criteria for handled, abandoned, or transferred calls. They were terminated for other reasons, which may include drop/no answer, forced busy, or timed out. Not valid for Unified CCE. Not valid for non-voice tasks. Set to zero by OPC.	DBINT	YES
CallsOffered	Number of incoming calls plus internal calls offered to the service during the reporting interval. Valid for Unified CCE.	DBINT	YES
CallsIncoming	Number of incoming calls to the service during the reporting interval. Incoming calls include only Inbound ACD calls arriving on trunks (that is, calls that are not internally generated). Valid for Unified ICM and Unified CCE.	DBINT	YES

Field Name:	Description:	Data Type:	Keys and Null Option:
CallsRouted	Number of tasks routed by the system software to the service during the reporting interval. For multi-media, the number of tasks routed to the service during the reporting interval. Valid for Unified CCE.	DBINT	YES
CallsHandled	<p>The number of tasks that became associated with this service in this reporting interval. This is incremented when the Agent PG receives an Offer Task message, and when it receives a Start Task message without having received an Offer Task message.</p> <p>A handled call is:</p> <ol style="list-style-type: none"> <li>1. An incoming ACD call that was answered by an agent, and then completed.</li> <li>2. A call associated with Outbound Option that the agent answered, and then completed.</li> <li>3. A non-voice task that the agent started working on then completed.</li> </ol> <p>A handled call/task is completed when the agent associated with the call/task finishes the wrap-up work associated with the call/task. This field is applicable for Unified CCE.</p>	DBINT	YES
CallsAbandQ	<p>Number of calls abandoned in queue for the service during the reporting interval. Not valid for Unified CCE. Not valid for non-voice tasks. Set to zero by OPC.</p> <p><b>Note:</b> When Unified ICM is connected with Unified CCE through an IPCC GatewayPG, this value is incremented by any condition on the child that causes the call to terminate while in the queue.</p>	DBINT	YES
CallsQ	Number of calls to the service in the queue during the reporting interval. A call that queues multiple times will be counted as queued once for the service. Not valid for Unified CCE Not valid for non-voice tasks. Set to zero by OPC.	DBINT	YES
DateTime	Central Controller date and time at the start of the reporting interval.	DBSMALLDATE	PK1, NOT NULL
DbDateTime	The current date and time stamp when the records are written to the HDS database. The logger database has NULL for this column.	DBDATETIME	IE1, YES
DelayQTime	Sum of delay time of all calls to the service in queue during the reporting interval. This field is populated from the LocalQTime. Not valid for Unified CCE . Not valid for non-voice tasks. Set to zero by OPC.	DBINT	YES

**Service\_Interval Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
DelayQAbandTime	Number of seconds that calls for the service that were abandoned in queue waited during the interval. These are calls that existed in the queue but were abandoned before being handled by an agent or trunk device. Not valid for Unified CCE. Not valid for non-voice tasks. Set to zero by OPC.	DBINT	YES
ForcedClosedCalls	Number of calls to the service that were determined to be closed following an interruption in data during the reporting interval. ForcedClosedCalls are calls that terminated because of errors tracking the call's state transition. Calls may become forced closed if there is lack of events from the ACD CTI interfaces (for example, a lack of a Disconnect event, or failure on the switch CTI connection). Not valid for Unified CCE.	DBINT	YES
HandleTime	The total time in seconds that calls were handled for the service during the reporting interval. HandleTime is tracked only for inbound ACD calls that are counted as handled for the service. HandleTime is the time spent from the call being answered by the agent to the time the agent completed after-call work time for the call. This includes any HoldTime, TalkTime, and WorkTime associated with the call (from the Termination_Call_Detail table). The HandleTime value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every reporting. For multi-media, this is TalkTime + HoldTime + HandledWorkReadyTime. Valid for Unified CCE.	DBINT	YES
HoldTime	The total time in seconds for calls to the service that ended during the reporting interval. For multi-media, the number of seconds that agents spent in the PAUSED state for tasks associated with this service that ended in this reporting interval. Valid for Unified CCE.	DBINT	YES
LongestCallAbandTime	Longest time in seconds a call was in queue for the service before being abandoned during the reporting interval. Not valid for Unified CCE. Not valid for non-voice tasks. Set to zero by OPC.	DBINT	YES
LongestCallDelayQTime	Longest time in seconds a call was in queue for the service before being abandoned during the reporting interval. Not valid for Unified CCE. Not valid for non-voice tasks. Set to zero by OPC.	DBINT	YES
NumMissingTasks	Valid for multi-media only. The number of tasks whose Start Task Timeout Period expired in this reporting interval.	DBINT	YES
OverflowIn	Number of calls that the peripheral re-targeted, or overflowed, into this service during the reporting interval. The system software keeps counts of the number of calls moved out of each service or route (overflowed out) and moved into each service or route (overflowed in). Not valid for Unified CCE.	DBINT	YES

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
OverflowOut	Number of calls that the peripheral re-targeted, or overflowed, out of this service during the reporting interval. The system software keeps counts of the number of calls moved out of each service or route (overflowed out) and moved into each service or route (overflowed in). Not valid for Unified CCE.	DBINT	YES
PeriphServiceLevelOffer	Number of offered calls used in the peripheral service level calculation for the reporting interval. Not valid for Unified CCE. Not valid for non-voice tasks. Set to zero by OPC.	DBINT	YES
PeriphServiceLevel	Peripheral service level during the reporting interval. Not valid for Unified CCE. Not valid for non-voice tasks. Set to zero by OPC.	DBFLT4	YES
PeriphServiceLevelCalls	Number of calls to the service answered within the service level, as counted by the peripheral, during the reporting interval. Not valid for Unified CCE. Not valid for non-voice tasks. Set to zero by OPC.	DBINT	YES
PreviewCalls	Number of outbound Preview calls made by this service that ended during the reporting interval. The value is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every reporting. Not currently used for Outbound Option. Not valid for Unified CCE.	DBINT	YES
PreviewCallsTime	Total handle time, in seconds, for outbound Preview calls handled by this service that ended during the reporting interval. Handle time includes WorkTime, TalkTime, and HoldTime. The PreviewCallsTime value includes the time spent from the call being initiated to the time the agent completes after-call work time for the call. The value is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every reporting. Not currently used for Outbound Option. Not valid for Unified CCE.	DBINT	YES
PreviewCallsTalkTime	Total talk time, in seconds, for outbound Preview calls handled by this service that ended during the reporting interval. This value includes the time spent from the call being initiated to the time the agent begins after-call work for the call. It is based on TalkTime from Termination_Call_Detail. It therefore includes the HoldTime associated with the call. PreviewCallsTalkTime is counted when the after-call-work time associated with the call (if any) has completed, and the database is updated every reporting. Not currently used for Outbound Option. Not valid for Unified CCE.	DBINT	YES
PreviewCallsOnHold	Number of ended outbound Preview calls that this service placed on hold at least once. The value is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every	DBINT	YES

**Service\_Interval Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	reporting. Not currently used for Outbound Option. Not valid for Unified CCE.		
PreviewCallsOnHoldTime	Number of seconds outbound Preview calls were placed on hold this service during the reporting interval. This data element is based on HoldTime. The value is counted when the after-call work associated with the call (if any) has completed, and the database is updated every reporting. Not currently used for Outbound Option. Not valid for Unified CCE.	DBINT	YES
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK1, NOT NULL
RecoveryDay	Currently not used, set to zero (0).	DBINT	NOT NULL
ReportingHalfHour	The value indicates Half Hour boundary interval (0 - 47). Two 15 minute interval records will have a unique half hour boundary value.	DBINT	IE2, NULL
ReportingInterval	During the upgrade from 7.x to 8.0, this column value will be NULL and it is assumed to be 30 minute interval.	DBINT	IE3, NULL
ReserveCalls	Number of agent reservation calls made by this service that ended during the reporting interval. The value is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every reporting. Not currently used for Outbound Option. Not valid for Unified CCE.	DBINT	YES
ReserveCallsTime	Total handle time, in seconds, for agent reservation calls handled by this service that ended during the reporting interval. Handle time includes WorkTime, TalkTime, and HoldTime. The ReserveCallsTime value includes the time spent from the call being initiated to the time the agent completes after-call work time for the call. The value is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every reporting. Not currently used for Outbound Option. Not valid for Unified CCE.	DBINT	YES
ReserveCallsTalkTime	Total talk time, in seconds, for agent reservation calls handled by the service that ended during the reporting interval. This value includes the time spent from the call being initiated to the time the agent begins after-call work for the call. It is based on TalkTime. It therefore includes the HoldTime associated with the call. ReserveCallsTalkTime is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every reporting. Not currently used for Outbound Option. Not valid for Unified CCE.	DBINT	YES

Field Name:	Description:	Data Type:	Keys and Null Option:
ReserveCallsOnHold	Number of completed agent reservation calls that this service placed on hold at least once. The value is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every reporting. Not currently used for Outbound Option. Not valid for Unified CCE.	DBINT	YES
ReserveCallsOnHoldTime	Number of seconds agent reservation calls were placed on hold by this service during the reporting interval. This data element is based on HoldTime. The value is counted when the after-call work associated with the call (if any) has completed, and the database is updated every reporting. Not currently used for Outbound Option. Not valid for Unified CCE.	DBINT	YES
RedirectNoAnsCalls	Number of calls that rang at an agent's terminal and redirected on failure to answer in this service during the current reporting interval.	DBINT	YES
Reserved1	Reserved for future use.	DBINT	YES
Reserved2	Reserved for future use.	DBINT	YES
Reserved3	Reserved for future use.	DBINT	YES
Reserved4	Reserved for future use.	DBINT	YES
Reserved5	Reserved for future use.	DBFLT4	YES
SkillTargetID	The SkillTargetID of this service. Foreign key from the Service table.	DBINT	PK2, NOT NULL
ServiceLevel	Service level for the service during the reporting interval. For non-voice tasks and for Unified CCE calls, the ServiceLevelType is always set to ignore abandoned calls.	DBFLT4	YES
ServiceLevelCalls	Number of calls to the service answered within the service level threshold during the reporting interval. Not valid for Unified CCE.	DBINT	YES
ServiceLevelAband	Number of calls to the service abandoned within the service level threshold during the reporting interval. Set to zero for Unified CCE voice tasks and for non-voice tasks.	DBINT	YES
ServiceLevelCallsOffered	Number of calls to the service that had service level events during the reporting interval. Not valid for Unified CCE.	DBINT	YES
ShortCalls	Number of calls to the service during the reporting interval that were too short to be considered abandoned. A call is determined to be a short call if	DBINT	YES

**Service\_Level\_Threshold Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	it is abandoned before the Abandoned Call Wait Time expired. Short calls are not considered abandoned and they are not accounted for in any of the Unified ICM abandoned calls calculations. Not valid for Unified CCE. Not valid for non-voice tasks. Set to zero by OPC.		
ShortCallsTime	Time, in seconds, accumulated by calls that were too short to be counted as abandoned during the reporting interval. These calls were abandoned before the abandoned call wait time expired. Not valid for Unified CCE. Not valid for non-voice tasks. Set to zero by OPC.	DBINT	YES
ServiceLevelType	Service Level Type used to calculate Service level for this interval. Not currently used for Outbound Option. Not valid for Unified CCE.	DBINT	YES
TimeZone	The time zone for the date and time. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK3, NOT NULL
TransferInCalls	Number of calls transferred into the service during the reporting interval. This count includes consultative transfers and blind transfers to the service. The count is populated in the database when the after-call work associated with the call (if any) is finished. Not valid for Unified CCE. Not valid for non-voice tasks. Set to zero by OPC.	DBINT	YES
TransferOutCalls	Number of calls transferred out of the service during the reporting interval. This count includes consultative transfers and blind transfers made from the service. The count is populated in the database when the after-call work associated with the call (if any) is finished. Not valid for Unified CCE. Not valid for non-voice tasks. Set to zero by OPC.	DBINT	YES
TalkTime	The number of seconds that agents spent in the ACTIVE state or the PAUSED state for tasks associated with this service that ended in this reporting interval.	DBINT	YES

**Service\_Level\_Threshold Table**

This is in the [Device \(page 529\)](#) category. For database rules, click [here \(page 595\)](#).

The Service Level Threshold table specifies how the Unified ICM calculates service level for a particular peripheral. Each row in this table contains specific default values for a PeripheralID-Media Routing Domain pair.

**Related tables**

[Media Routing Domain \(page 290\)](#) (via MRDomainID)

[Peripheral \(page 306\)](#) (via PeripheralID)

**Table 194: Indexes for Service\_Level\_Threshold Table**

index_name	index_description	index_keys
XPKService_Level_Threshold	clustered, unique, primary key located on PRIMARY	PeripheralID, MRDomainID

**Fields in Service\_Level\_Threshold Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
MRDomainID	Foreign key from the Media_Routing_Domain table.	DBINT	PK NOT NULL
PeripheralID	The ICM ID of the peripheral with which this row is associated.	DBSMALLINT	PK, FK NOT NULL
ServiceLevelThreshold	The default value of the ServiceLevelThreshold field for services associated with this peripheral and media routing domain.	DBINT	NOT NULL
ServiceLevelType	<p>The default value for the ServiceLevelType field for each service associated with this peripheral and media routing domain. This value indicates how the system software calculates the service level.</p> <p><b>For Unified CCE</b> the value of this field is always 1 (ignore abandoned calls) for Unified CM peripherals. This is because calls to a Unified CM peripheral have no service associated with them while they are queued, and therefore calls abandoned while queued cannot affect the computation of service level for a Unified CM service.</p>	DBSMALLINT	NOT NULL

## Service\_Member Table

This table is in the [Skill Target category \(page 544\)](#). To see database rules for these tables, click [here \(page 600\)](#).

The Service Member table maps skill groups to services. Each service contains one or more member skill groups. Each skill group can be a member of one or more services.

Use the Service Explorer tool to add, update, and delete Service\_Member records.

### Related tables

[Service \(page 386\)](#) (ServiceSkillTargetID maps to Service.SkillTargetID)

[Skill Group \(page 432\)](#) (SkillGroupSkillTargetID maps to Skill\_Group.SkillTargetID)

**Service\_Real\_Time Table****Table 195: Indexes for Service\_Member Table**

index_name	index_description	index_keys
XIE1Service_Member	nonclustered, unique, primary key located on PRIMARY	SkillGroupSkillTargetID
XPKService_Member	clustered, unique, primary key located on PRIMARY	ServiceSkillTargetID, SkillGroupSkillTargetID

**Fields in Service\_Member Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
Priority	The priority level of the specified service for the specified skill group:  • 1 = Primary  • 2= Secondary  Any number of skill entries can be of any priority--not all need to be entered.	DBSMALLINT	NOT NULL
ServiceSkillTargetID	SkillTargetID of the service.	DBINT	PK, FK NOT NULL
SkillGroupSkillTargetID	SkillTargetID of the skill group that is associated with the service.	DBINT	PK, FK NOT NULL

**Service\_Real\_Time Table**

This table is in the [Skill Target category \(page 544\)](#). To see database rules for these tables, click [here \(page 600\)](#).

**Note:** When Unified ICM is connected with Unified CCE through an IPCC Gateway PG, this value is incremented by any condition on the child that causes the call to terminate while in the queue.

Local database only. Contains real time information about each service.

The system software automatically generates a Service\_Real\_Time record for each service.

**Related table**

[Service \(page 386\)](#) (via SkillTargetID)

**Table 196: Indexes for Service\_Real\_Time Table**

index_name	index_description	index_keys
XPKService_Real_Time	clustered, unique, primary key located on PRIMARY	SkillTargetID

**Fields in Service\_Real\_Time Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
AgentsTalking	Number of service agents currently in the talking state.	DBINT	NULL
AnswerWaitTimeHalf	Sum of answer wait time in seconds for all incoming calls to the service during the current half-hour interval.	DBINT	NULL
AnswerWaitTimeTo5	Sum of answer wait time in seconds for all incoming calls to the service during the rolling five-minute interval.	DBINT	NULL
AnswerWaitTimeToday	Sum of answer wait time in seconds for all incoming calls to the service since midnight.	DBINT	NULL
AutoOutCallsHalf	Number of AutoOut (predictive) calls made by agents for this service that ended during the current half-hour interval. The value is updated in the database when the after-call work time associated with the call (if any) has completed.  Unsupported for <b>Outbound Option</b> .	DBINT	NULL
AutoOutCallsNow	Number of agents currently talking on AutoOut (predictive) calls for the service.  Unsupported for <b>Outbound Option</b> .	DBINT	NULL
AutoOutCallsOnHoldHalf	Number of ended AutoOut (predictive) calls that agents in the service have placed on hold at least once during the current half-hour interval. The value is updated in the database when the after-call work time associated with the call (if any) has completed.  Unsupported for <b>Outbound Option</b> .	DBINT	NULL
AutoOutCallsOnHoldTimeHalf	Number of seconds that AutoOut (predictive) calls were placed on hold by agents in the skill group during the current half-hour interval. This data element is based on HoldTime. The value is updated in the database when the after-call work associated with the call (if any) has completed.  Unsupported for <b>Outbound Option</b> .	DBINT	NULL
AutoOutCallsOnHoldTimeTo5	Total handle time, in seconds, for AutoOut (predictive) calls handled by agents for this service that ended in the rolling five-minute window. Handle time includes WorkTime, TalkTime, and HoldTime. The value is updated in the database when the after-call work time associated with the call (if any) has completed.  Unsupported for <b>Outbound Option</b> .	DBINT	NULL

## Service\_Real\_Time Table

Field Name:	Description:	Data Type:	Keys and Null Option:
AutoOutCallsOnHoldTimeToday	<p>Number of seconds AutoOut (predictive) calls were placed on hold by agents for this service since midnight. This data element is based on HoldTime. The value is updated in the database when the after-call work associated with the call (if any) has completed.</p> <p>Unsupported for <b>Outbound Option</b>.</p>	DBINT	NULL
AutoOutCallsOnHoldTo5	<p>Total number of AutoOut (predictive) calls made for this service that ended in the rolling five-minute window. The value is updated in the database when the after-call work time associated with the call (if any) has completed.</p> <p>Unsupported for <b>Outbound Option</b>.</p>	DBINT	NULL
AutoOutCallsOnHoldToday	<p>Number of ended AutoOut (predictive) calls that agents for this service have placed on hold at least since midnight. The value is updated in the database when the after-call work time associated with the call (if any) has completed.</p> <p>Unsupported for <b>Outbound Option</b>.</p>	DBINT	NULL
AutoOutCallsTalkTimeHalf	<p>Total talk time, in seconds, for AutoOut (predictive) calls handled by the service that ended during the current half-hour interval. This value includes the time spent from the call being initiated to the time the agent begins after-call work for the call. It is based on TalkTime. It therefore includes the HoldTime associated with the call. AutoOutCallsTalkTime is updated in the database when the after-call work time associated with the call (if any) has completed..</p> <p>Unsupported for <b>Outbound Option</b>.</p>	DBINT	NULL
AutoOutCallsTalkTimeTo5	<p>Total talk time, in seconds, for complete Unsupported for <b>Outbound Option</b>. AutoOut (predictive) calls handled by the service during the rolling five-minute interval. This value includes the time spent from the call being initiated to the time the agent begins after-call work for the call. It is based on TalkTime. It therefore includes the HoldTime associated with the call. AutoOutCallsTalkTime is updated in the database when the after-call work time associated with the call (if any) has completed.</p> <p>Unsupported for <b>Outbound Option</b>.</p>	DBINT	NULL
AutoOutCallsTalkTimeToday	<p>Total talk time, in seconds, for AutoOut (predictive) calls handled by agents for this service that ended since midnight. This value includes the time spent from the call being initiated to the time the agent begins after-call work for the call. It is based on TalkTime from Termination_Call_Detail. It therefore includes the HoldTime associated</p>	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	with the call. AutoOutCallsTalkTime is updated in the database when the after-call work time associated with the call (if any) has completed.  <b>Unsupported for Outbound Option.</b>		
AutoOutCallsTimeHalf	Total handle time, in seconds, for AutoOut (predictive) calls handled by the service that ended during the current half-hour interval. Handle time includes WorkTime, TalkTime, and HoldTime. The AutoOutCallsTime value includes the time spent from the call being initiated to the time the agent completes after-call work time for the call. The value is updated in the database when the after-call work time associated with the call (if any) has completed.  <b>Unsupported for Outbound Option.</b>	DBINT	NULL
AutoOutCallsTimeTo5	Total handle time, in seconds, for AutoOut (predictive) calls handled by this service that ended during the rolling five-minute window. Handle time includes WorkTime, TalkTime, and HoldTime. The AutoOutCallsTime value includes the time spent from the call being initiated to the time the agent completes after-call work time for the call. The value is updated in the database when the after-call work time associated with the call (if any) has completed.  <b>Unsupported for Outbound Option.</b>	DBINT	NULL
AutoOutCallsTimeToday	Total handle time, in seconds, for AutoOut (predictive) calls handled by agents for this service that ended since midnight. Handle time includes WorkTime, TalkTime, and HoldTime, all of which are taken from the Termination_Call_Detail records. The AutoOutCallsTime value includes the time spent from the call being initiated to the time the agent completes after-call work time for the call. The value is updated in the database when the after-call work time associated with the call (if any) has completed.  <b>Unsupported for Outbound Option.</b>	DBINT	NULL
AutoOutCallsTo5	Number of AutoOut (predictive) calls made by agents for the service that ended during the rolling five-minute interval. The value is updated in the database when the after-call work time associated with the call (if any) has completed.  <b>Unsupported for Outbound Option.</b>	DBINT	NULL
AutoOutCallsToday	Total number of AutoOut (predictive) calls made for this service that ended since midnight. The value is updated in the database when the after-call work time associated with the call (if any) has completed.	DBINT	NULL

Service\_Real\_Time Table

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	Unsupported for <b>Outbound Option</b> .		
AvgDelayQAbandTo5	Average delay time of abandoned calls in queue during the rolling five-minute interval. This value is calculated as follows:  <b>DelayQAbandTimeTo5 / CallsAbandQTo5.</b>	DBINT	NULL
AvgDelayQNow	Average delay for calls currently in queue for the service.	DBINT	NULL
AvgHandleTimeTo5	Average handle time in seconds for calls to the service during the rolling five-minute interval. The value is calculated as follows:  <b>HandleTimeTo5 / CallsHandledTo5</b>  HandleTime is tracked only for inbound ACD calls that are counted as handled for the service. HandleTime is the time spent from the call being answered by the agent to the time the agent completed after-call work time for the call. This includes any TalkTime, HoldTime, and WorkTime associated with the call. The AvgHandleTime value is updated in the database when the after-call work time associated with the call has completed.	DBINT	NULL
AvgSpeedAnswerTo5	Average answer wait time for all calls offered to the service during the rolling five-minute interval: AnswerWaitTimeTo5 / CallsAnsweredTo5.	DBINT	NULL
AvgTalkTimeTo5	Average talk time in seconds for calls to the service ending during the rolling five-minute interval. The value is calculated as follows:  <b>TalkTimeTo5 / CallsHandledTo5</b>  Talk time includes the time that calls were in a talking or hold state. It is populated with the TalkTime and HoldTime associated with call to the service or route. The field is updated in the database when all after-call work associated with the calls is completed.	DBINT	NULL
CallsAbandQHalf	Number of calls to the service abandoned while in queue or ringing during the current half-hour interval.	DBINT	NULL
CallsAbandQTo5	Number of calls to the service abandoned while in queue or ringing during the rolling five-minute interval.	DBINT	NULL
CallsAbandQToday	Number of calls to the service abandoned while in queue or ringing since midnight.	DBINT	NULL
CallsAnsweredHalf	Number of calls to the service answered by agents during the current half-hour interval.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
CallsAnsweredTo5	Number of calls to the service answered by agents during the rolling five-minute interval.	DBINT	NULL
CallsAnsweredToday	Number of calls answered by service agents since midnight.	DBINT	NULL
CallsHandledHalf	<p>Number of calls handled for this service during the current half-hour interval.</p> <p>A handled call is:</p> <ul style="list-style-type: none"> <li>• An incoming ACD call that was answered by an agent, and then completed.</li> <li>• A call associated with Outbound Option that the agent answered, and then completed.</li> <li>• A non-voice task that the agent started working on then completed.</li> </ul> <p>A handled call/task is completed when the agent associated with the call/task finishes the wrap-up work associated with the call/task.</p>	DBINT	NULL
CallsHandledTo5	Number of calls to the service handled during the rolling five-minute interval.	DBINT	NULL
CallsHandledToday	Number of calls handled for this service since midnight.	DBINT	NULL
CallsIncomingHalf	Number of incoming calls for this service during the current half-hour interval. Incoming calls include only Inbound ACD calls arriving on trunks (that is, calls that are not internally generated).	DBINT	NULL
CallsIncomingTo5	Number of incoming calls to the service during the rolling five-minute interval. Incoming calls include only Inbound ACD calls arriving on trunks (that is, calls that are not internally generated).	DBINT	NULL
CallsIncomingToday	Number of incoming calls for this service since midnight. Incoming calls include only Inbound ACD calls arriving on trunks (that is, calls that are not internally generated).	DBINT	NULL
CallsInNow	Number of incoming calls for the service currently in progress.	DBINT	NULL
CallsInProgress	Number of inbound and outbound calls currently that had previously been offered (for example, calls being played an announcement, queued calls, or connected calls) and are currently being handled for the service.	DBINT	NULL
CallsLeftQTo5	Number of calls to the service that were removed from queue during the rolling five-minute interval (used to calculate expected delay).	DBINT	NULL

**Service\_Real\_Time Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
CallsOfferedHalf	Number of incoming calls plus internal calls offered to this service during the current half-hour interval.	DBINT	NULL
CallsOfferedTo5	Number of calls offered to the service during the rolling five-minute interval.	DBINT	NULL
CallsOfferedToday	Number of incoming calls plus internal calls offered to this service since midnight.	DBINT	NULL
CallsOutHalf	Number of outbound calls made by agents for the service during the current half-hour interval.	DBINT	NULL
CallsOutNow	Number of outbound calls by agents for the service that are currently in progress.	DBINT	NULL
CallsOutTo5	Number of outbound calls made by agents for the service during the rolling five-minute interval.	DBINT	NULL
CallsOutToday	Number of outbound calls made by agents for the service since midnight.	DBINT	NULL
CallsQNow	Number of calls in queue for the service now at the peripheral.	DBINT	NULL
CallsQNowTime	Total time of all calls to the service currently in queue.	DBINT	NULL
CallsRoutedHalf	Number of calls routed to this service by the system software for the current half-hour interval.	DBINT	NULL
CallsRoutedToday	Number of calls routed to this service by the system software since midnight.	DBINT	NULL
CallsTerminatedOtherHalf	Number of calls offered to the service but not otherwise accounted for during the current half-hour interval. These are calls that do not fit into the criteria for handled, abandoned, or transferred calls. They were terminated for other reasons, which may include drop/no answer, forced busy, or timed out.	DBINT	NULL
CallsTerminatedOtherTo5	Number of calls offered to the service but not otherwise accounted for during the rolling five-minute interval. These are calls that do not fit into the criteria for handled, abandoned, or transferred calls. They were terminated for other reasons, which may include drop/no answer, forced busy, or timed out.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
CallsTerminatedOtherToday	Number of offered to the service but not otherwise accounted for since midnight. These are calls that do not fit into the criteria for handled, abandoned, or transferred calls. They were terminated for other reasons, which may include drop/no answer, forced busy, or timed out.	DBINT	NULL
DateTime	Central Controller date and time that this data was last updated.	DBDATETIME	NOT NULL
DelayQAbandTimeTo5	Sum of delay time of all calls to the service abandoned in queue during the rolling five-minute interval.	DBINT	NULL
ExpectedDelay	Predicted delay for any new call added to the service queue. This is valid only if no agents are available.	DBFLT4	NULL
HandleTimeHalf	Total handle time in seconds for calls to the service ending during the current half-hour interval.	DBINT	NULL
HandleTimeTo5	Total handle time in seconds for calls to the service ending during the rolling five-minute interval.	DBINT	NULL
HandleTimeToday	Total handle time in seconds for calls to the service since midnight.	DBINT	NULL
HoldTimeHalf	The total hold time in seconds for calls to the service that ended during the current half-hour interval.	DBINT	NULL
HoldTimeTo5	The total hold time in seconds for calls to the service that ended during the rolling five-minute interval.	DBINT	NULL
HoldTimeToday	The total hold time in seconds for calls to the service that ended since midnight.	DBINT	NULL
LongestAvailAgent	Time that the longest available agent for the service became available.	DBDATETIME	NULL
LongestCallQ	Time that the longest call in the queue for the service was put there.	DBDATETIME	NULL
OverflowInHalf	Number of calls the peripheral overflowed into this service during the current half-hour interval.	DBINT	NULL
OverflowInMode	The service accepts overflow in calls if the delay for the longest delayed call is less than this value. If 0, the service always accepts overflow in calls; if 127, the service never accepts overflow in calls.	DBTINYINT	NULL
OverflowInNow	Number of calls overflowed into this service that are currently queued or in progress.	DBINT	NULL

Service\_Real\_Time Table

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
OverflowInTo5	Number of calls the peripheral overflowed into this service during the rolling five-minute interval.	DBINT	NULL
OverflowInToday	Number of calls overflowed into this service since midnight.	DBINT	NULL
OverflowOutHalf	Number of calls overflowed out of this service during the current half-hour interval.	DBINT	NULL
OverflowOutMode	The service attempts to overflow out calls if the delay for the longest delayed call is greater than this value. If 0, the service attempts to overflow out all calls; if 127, the service never attempts to overflow out calls.	DBTINYINT	NULL
OverflowOutNow	The number of tasks that have overflowed out of this service to some other service (call it service X) and have <b>not overflowed out of service X</b> .	DBINT	NULL
OverflowOutTo5	Number of calls overflowed out of this service during the rolling five-minute interval.	DBINT	NULL
OverflowOutToday	Number of calls overflowed out of this service since midnight.	DBINT	NULL
PeriphServiceLevelCallsHalf	Number of calls to the service handled within the peripheral service level during the current half-hour interval.	DBINT	NULL
PeriphServiceLevelCallsToday	Number of calls to this service handled within the peripheral service level since midnight.	DBINT	NULL
PeriphServiceLevelHalf	Service level for the service calculated by the peripheral during the current half-hour interval.	DBFLT4	NULL
PeriphServiceLevelOfferHalf	Number of offered calls used to calculate the peripheral service level for the current half-hour interval.	DBINT	NULL
PeriphServiceLevelOfferToday	Number of offered calls used to calculate the peripheral service level since midnight.	DBINT	NULL
PeriphServiceLevelTo5	Service level for the service calculated by the peripheral during the rolling five-minute interval.	DBFLT4	NULL
PeriphServiceLevelToday	Service level for the service calculated by the peripheral since midnight.	DBFLT4	NULL
PreviewCallsHalf	Number of outbound Preview calls made by agents for this service that ended during the current half-hour interval. The value is updated in the	DBINT	NULL

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	database when the after-call work time associated with the call (if any) has completed.  Unsupported for <b>Outbound Option.</b>		
PreviewCallsNow	Number of agents currently talking on outbound Preview calls for the service.  Unsupported for <b>Outbound Option.</b>	DBINT	NULL
PreviewCallsOnHoldHalf	In the current half-hour interval, the number of ended outbound Preview calls that agents for the service have placed on hold at least once. The value is updated in the database when the after-call work time associated with the call (if any) has completed.  Unsupported for <b>Outbound Option.</b>	DBINT	NULL
PreviewCallsOnHoldTimeHalf	Number of seconds outbound Preview calls were placed on hold by agents for this service during the current half-hour interval. This data element is based on HoldTime. The value is updated in the database when the after-call work associated with the call (if any) has completed.  Unsupported for <b>Outbound Option.</b>	DBINT	NULL
PreviewCallsOnHoldTimeTo5	Number of seconds outbound Preview calls were placed on hold by agents for this service during the rolling five-minute interval. This data element is based on HoldTime. The value is updated in the database when the after-call work associated with the call (if any) has completed.  Unsupported for <b>Outbound Option.</b>	DBINT	NULL
PreviewCallsOnHoldTimeToday	Number of seconds outbound Preview calls were placed on hold by agents for this service since midnight. This data element is based on HoldTime. The value is updated in the database when the after-call work associated with the call (if any) has completed.  Unsupported for <b>Outbound Option.</b>	DBINT	NULL
PreviewCallsOnHoldTo5	Number of outbound Preview calls that agents for this service have placed on hold at least once during the rolling five-minute interval. The value is updated in the database when the after-call work time associated with the call (if any) has completed.  Unsupported for <b>Outbound Option.</b>	DBINT	NULL
PreviewCallsOnHoldToday	Number of Outbound Preview calls made by agents in the skill group that ended during the half-hour interval. The value is updated in the	DBINT	NULL

Service\_Real\_Time Table

Field Name:	Description:	Data Type:	Keys and Null Option:
	database when the after-call work time associated with the call (if any) has completed.  <b>Unsupported for Outbound Option.</b>		
PreviewCallsTalkTimeHalf	Total talk time, in seconds, for outbound Preview calls handled by the service that ended during the current half-hour interval. This value includes the time spent from the call being initiated to the time the agent begins after-call work for the call. It is based on TalkTime. It therefore includes the HoldTime associated with the call. PreviewCallsTalkTime is updated in the database when the after-call work time associated with the call (if any) has completed.  <b>Unsupported for Outbound Option.</b>	DBINT	NULL
PreviewCallsTalkTimeTo5	Total talk time, in seconds, for outbound Preview calls handled by the service that ended during the rolling five-minute interval. This value includes the time spent from the call being initiated to the time the agent begins after-call work for the call. It is based on TalkTime. It therefore includes the HoldTime associated with the call. PreviewCallsTalkTime is updated in the database when the after-call work time associated with the call (if any) has completed.  <b>Unsupported for Outbound Option.</b>	DBINT	NULL
PreviewCallsTalkTimeToday	Total talk time, in seconds, for outbound Preview calls handled by agents for this service that ended since midnight. This value includes the time spent from the call being initiated to the time the agent begins after-call work for the call. It is based on TalkTime. It therefore includes the HoldTime associated with the call. PreviewCallsTalkTime is updated in the database when the after-call work time associated with the call (if any) has completed.  <b>Unsupported for Outbound Option.</b>	DBINT	NULL
PreviewCallsTimeHalf	Total handle time, in seconds, for outbound Preview calls handled by this service that ended during the current half-hour DBINTerval. Handle time includes WorkTime, TalkTime, and HoldTime. The PreviewCallsTime value includes the time spent from the call being initiated to the time the agent completes after-call work time for the call. The value is updated in the database when the after-call work time associated with the call (if any) has completed.  <b>Unsupported for Outbound Option.</b>	DBINT	NULL
PreviewCallsTimeTo5	Total handle time, in seconds, for outbound Preview calls handled by the service that ended during the rolling five-minute DBINTerval.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	<p>Handle time includes WorkTime, TalkTime, and HoldTime, all of which are taken from the Termination_Call_Detail records. The PreviewCallsTime value includes the time spent from the call being initiated to the time the agent completes after-call work time for the call. The value is updated in the database when the after-call work time associated with the call (if any) has completed.</p> <p>Unsupported for <b>Outbound Option</b>.</p>		
PreviewCallsTimeToday	<p>Total handle time, in seconds, for outbound Preview calls handled by agents for this service that ended since midnight. Handle time includes WorkTime, TalkTime, and HoldTime. The PreviewCallsTime value includes the time spent from the call being initiated to the time the agent completes after-call work time for the call. The value is updated in the database when the after-call work time associated with the call (if any) has completed.</p> <p>Unsupported for <b>Outbound Option</b>.</p>	DBINT	NULL
PreviewCallsTo5	<p>Number of outbound Preview calls made by agents for the service during the rolling five-minute interval. The value is updated in the database when the after-call work time associated with the call (if any) has completed.</p> <p>Unsupported for <b>Outbound Option</b>.</p>	DBINT	NULL
PreviewCallsToday	<p>Number of outbound Preview calls made by agents for this service since midnight. The value is updated in the database when the after-call work time associated with the call (if any) has completed.</p> <p>Unsupported for <b>Outbound Option</b>.</p>	DBINT	NULL
RedirectNoAnsCallsHalf	<p>Number of calls that rang at an agent's terminal and redirected on failure to answer in this service during the current half-hour interval.</p>	DBINT	NULL
RedirectNoAnsCallsTo5	<p>Number of calls that rang at an agent's terminal and redirected on failure to answer in this service during the rolling five-minute interval.</p>	DBINT	NULL
RedirectNoAnsCallsToday	<p>Number of calls that rang at an agent's terminal and redirected on failure to answer in this service since midnight.</p>	DBINT	NULL
ReserveCallsHalf	<p>Number of agent reservation calls made by agents for the service that ended during the current half-hour interval. The value is updated in the database when the after-call work time associated with the call (if any) has completed.</p>	DBINT	NULL

Service\_Real\_Time Table

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	Unsupported for <b>Outbound Option.</b>		
ReserveCallsNow	<p>Number of agents currently talking on agent reservation calls for the service.</p> <p>Unsupported for <b>Outbound Option.</b></p>	DBINT	NULL
ReserveCallsOnHoldHalf	<p>Number of ended agent reservation calls that agents for the service have placed on hold at least once. The value is updated in the database when the after-call work time associated with the call (if any) has completed.</p> <p>Unsupported for <b>Outbound Option.</b></p>	DBINT	NULL
ReserveCallsOnHoldTimeHalf	<p>Number of seconds agent reservation calls were placed on hold by agents for the service during the current half-hour interval. This data element is based on HoldTime from the Termination_Call_Detail record. The value is updated in the database when the after-call work associated with the call (if any) has completed.</p> <p>Unsupported for <b>Outbound Option.</b></p>	DBINT	NULL
ReserveCallsOnHoldTimeTo5	<p>Number of seconds agent reservation calls were placed on hold by agents for this service during the rolling five-minute interval. This data element is based on HoldTime. The value is updated in the database when the after-call work associated with the call (if any) has completed.</p> <p>Unsupported for <b>Outbound Option.</b></p>	DBINT	NULL
ReserveCallsOnHoldTimeToday	<p>Number of agent reservation calls were placed on hold by agents for this service since midnight. This data element is based on HoldTime. The value is updated in the database when the after-call work associated with the call (if any) has completed.</p> <p>Unsupported for <b>Outbound Option.</b></p>	DBINT	NULL
ReserveCallsOnHoldTo5	<p>Number of agent reservation calls that agents for this service have placed on hold at least once during the rolling five-minute interval. The value is updated in the database when the after-call work time associated with the call (if any) has completed.</p> <p>Unsupported for <b>Outbound Option.</b></p>	DBINT	NULL
ReserveCallsOnHoldToday	<p>Number of ended agent reservation calls that agents for this service have placed on hold since midnight. The value is updated in the database when the after-call work time associated with the call (if any) has completed.</p>	DBINT	NULL

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	<b>Unsupported for Outbound Option.</b>		
ReserveCallsTalkTimeHalf	<p>Total talk time, in seconds, for agent reservation calls handled by the service that ended during the current half-hour interval. This value includes the time spent from the call being initiated to the time the agent begins after-call work for the call. It is based on TalkTime from Termination_Call_Detail. It therefore includes the HoldTime associated with the call. ReserveCallsTalkTime is updated in the database when the after-call work time associated with the call (if any) has completed.</p> <p><b>Unsupported for Outbound Option.</b></p>	DBINT	NULL
ReserveCallsTalkTimeTo5	<p>Total talk time, in seconds, for agent reservation calls handled by agents for the service that ended during the rolling five-minute interval. This value includes the time spent from the call being initiated to the time the agent begins after-call work for the call. It is based on TalkTime. It therefore includes the HoldTime associated with the call. ReserveCallsTalkTime is updated in the database when the after-call work time associated with the call (if any) has completed.</p> <p><b>Unsupported for Outbound Option.</b></p>	DBINT	NULL
ReserveCallsTalkTimeToday	<p>Total talk time, in seconds, for agent reservation calls handled by agents for this service that ended since midnight. This value includes the time spent from the call being initiated to the time the agent begins after-call work for the call. It is based on TalkTime. It therefore includes the HoldTime associated with the call. ReserveCallsTalkTime is updated in the database when the after-call work time associated with the call (if any) has completed.</p> <p><b>Unsupported for Outbound Option.</b></p>	DBINT	NULL
ReserveCallsTimeHalf	<p>Total handle time, in seconds, for agent reservation calls handled by the service that ended during the current half-hour interval. Handle time includes WorkTime, TalkTime, and HoldTime, all of which are taken from the Termination_Call_Detail records. The ReserveCallsTime value includes the time spent from the call being initiated to the time the agent completes after-call work time for the call. The value is updated in the database when the after-call work time associated with the call (if any) has completed.</p> <p><b>Unsupported for Outbound Option.</b></p>	DBINT	NULL
ReserveCallsTimeTo5	<p>Total handle time, in seconds, for agent reservation calls handled by agents for the service that ended during the rolling five-minute interval. Handle time includes WorkTime, TalkTime, and HoldTime. The ReserveCallsTime value includes the time spent from the call being</p>	DBINT	NULL

**Service\_Real\_Time Table**

Field Name:	Description:	Data Type:	Keys and Null Option:
	<p>initiated to the time the agent completes after-call work time for the call. The value is updated in the database when the after-call work time associated with the call (if any) has completed.</p> <p><b>Unsupported for Outbound Option.</b></p>		
ReserveCallsTimeToday	<p>Total handle time, in seconds, for agent reservation calls handled by agents for this service that ended since midnight. Handle time includes WorkTime, TalkTime, and HoldTime. The ReserveCallsTime value includes the time spent from the call being initiated to the time the agent completes after-call work time for the call. The value is updated in the database when the after-call work time associated with the call (if any) has completed.</p> <p><b>Unsupported for Outbound Option.</b></p>	DBINT	NULL
ReserveCallsTo5	<p>Number of agent reservation calls made by agents for this service during the rolling five-minute interval. The value is updated in the database when the after-call work time associated with the call (if any) has completed.</p> <p><b>Unsupported for Outbound Option.</b></p>	DBINT	NULL
ReserveCallsToday	<p>Number of agent reservation calls made by agents for this service since midnight. The value is updated in the database when the after-call work time associated with the call (if any) has completed.</p> <p><b>Unsupported for Outbound Option.</b></p>	DBINT	NULL
ServiceLevelAbandHalf	Number of calls to the service abandoned within the service level threshold during the current half-hour interval.	DBINT	NULL
ServiceLevelAbandTo5	Number of calls to the service abandoned within the service level threshold during the rolling five-minute interval.	DBINT	NULL
ServiceLevelAbandToday	Number of calls to the service abandoned within the service level threshold since midnight.	DBINT	NULL
ServiceLevelCallsHalf	Number of calls to the service answered within the service level threshold during the current half-hour interval.	DBINT	NULL
ServiceLevelCallsOfferedHalf	Number of calls to the service for which a service level event occurred during the current half-hour interval.	DBINT	NULL
ServiceLevelCallsOfferedTo5	Number of calls to the service for which a service level event occurred during the rolling five-minute interval.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
ServiceLevelCallsOfferedToday	Number of calls to the service for which a service level event occurred since midnight.	DBINT	NULL
ServiceLevelCallsQHeld	Number of calls to the service currently queued for longer than the service level threshold.	DBINT	NULL
ServiceLevelCallsTo5	Number of calls to the service answered within the service level during the rolling five-minute interval.	DBINT	NULL
ServiceLevelCallsToday	Number of calls to the service that were answered within the service level threshold since midnight.	DBINT	NULL
ServiceLevelHalf	Service level for the service during the current half-hour interval.	DBFLT4	NULL
ServiceLevelTo5	Service level during the rolling five-minute interval.	DBFLT4	NULL
ServiceLevelToday	Service level for the service since midnight.	DBFLT4	NULL
ServiceModeIndicator	<p>The current mode of the service:</p> <ul style="list-style-type: none"> <li>• <b>1</b> = Day service</li> <li>• <b>2</b> = Night service</li> <li>• <b>3</b> = Closed with answer</li> <li>• <b>4</b> = Closed, no answer</li> <li>• <b>5</b> = Transition</li> <li>• <b>6</b> = Open</li> <li>• <b>13</b> = Pilot Status Other.</li> </ul> <p><b>Note:</b> This field may also be used to encode overflow information for a Galaxy ACD.</p>	DBINT	NULL
SkillTargetID	Foreign key from Service table.	DBINT	PK, FK NOT NULL
TalkTimeHalf	Total talk time in seconds for calls to the service ending during the current half-hour interval.	DBINT	NULL
TalkTimeTo5	Total talk time in seconds for calls to the service ending during the rolling five-minute interval.	DBINT	NULL
TalkTimeToday	Total talk time in seconds for calls to the service ending since midnight.	DBINT	NULL

**Shift Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
TransferInCallsHalf	Number of calls transferred into the service during the current half-hour interval.	DBINT	NULL
TransferInCallsTo5	Number of calls transferred into the service during the rolling five-minute interval.	DBINT	NULL
TransferInCallsToday	Number of calls transferred into the service since midnight.	DBINT	NULL
TransferOutCallsHalf	Number of calls transferred out of the service during the current half-hour interval.	DBINT	NULL
TransferOutCallsTo5	Number of calls transferred out of the service during the rolling five-minute interval.	DBINT	NULL
TransferOutCallsToday	Number of calls transferred out of the service since midnight.	DBINT	NULL

**Shift Table**

Provides the name, start time, and end time of the current shift.

**Table 197: Indexes for Shift Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XPKShift	nonclustered, unique, primary key located on PRIMARY	ShiftName

**Fields in Shift Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
ShiftName	Name of the Shift scheduled.	VNAME32	PK NOT NULL
StartTime	Shift start time.	SMALLDATETIME	NOT NULL
StopTime	Shift end time.	SMALLDATETIME	NOT NULL

**Skill\_Group Table**

This table is in the [Skill Target category \(page 544\)](#). To see database rules for these tables, click [here \(page 600\)](#).

Each row describes a skill group associated with a peripheral. A skill group is a collection of agents who have common skills.

**Note: Clarification Regarding the DefaultEntry field:** If you look at the Skill\_Group table for a skill group that you have created, the DefaultEntry field will have the value 0 (even if this skill group has sub-skill groups). If a default skill group has been created (for example, a default skill group is automatically created when you establish Peripheral Gateways for an Unified CCE system), and you look at the Skill\_Group table for this skill group, then--provided that this skill group has no sub-skill groups--the DefaultEntry field will have the value 1. For additional information, see the description of the DefaultEntry field.

Use the Skill Group Explorer tool to add, update, and delete Skill\_Group records.

### Related tables

- [Dialer Detail \(page 206\)](#) (via SkillTargetID)
- [Dialer Skill Group Half Hour \(page 223\)](#) (SkillGroupSkillTargetID maps to Skill\_Group.SkillTargetID)
- [Dialer Skill Group Real Time \(page 226\)](#) (SkillGroupSkillTargetID maps to Skill\_Group.SkillTargetID)
- [Enterprise Skill Group Member \(page 232\)](#) (via SkillTargetID)
- [Media Routing Domain \(page 290\)](#) (via MRDomainID)
- [Peripheral \(page 306\)](#) (via PeripheralID)
- [Schedule \(page 365\)](#) (via ScheduleID)
- [Service Array \(page 388\)](#) (via SkillTargetID)
- [Service Member \(page 415\)](#) (via SkillTargetID)
- [Skill Group Five Minute \(page 436\)](#) (via SkillTargetID)
- [Skill Group Half Hour \(page 439\)](#) (via SkillTargetID)
- [Skill Group Member \(page 477\)](#) (via SkillTargetID)
- [Skill Group Real Time \(page 477\)](#) (via SkillTargetID)
- [Skill Target \(page 489\)](#) (via SkillTargetID)
- [Termination Call Detail \(page 490\)](#) (SkillGroupSkillTargetID maps to Skill\_Group.SkillTargetID)

**Table 198: Indexes for Skill\_Group Table**

index_name	index_description	index_keys
XAK1Skill_Group	nonclustered, unique, unique key located on PRIMARY	EnterpriseName
XAK2Skill_Group	nonclustered, unique, unique key located on PRIMARY	PeripheralID, PeripheralNumber, Priority

**Skill\_Group Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XIE1Skill_Group	nonclustered, unique, primary key located on PRIMARY	ScheduleID
XIE2Skill_Group	nonclustered, unique, primary key located on PRIMARY	BaseSkillTargetID
XPKSkill_Group	clustered, unique, primary key located on PRIMARY	SkillTargetID

**Fields in Skill\_Group Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
AvailableHoldoffDelay	Number of seconds before an agent becomes available after a call terminates. If this value is 0xFFFF, then the default value from the Peripheral record is used.	DBSMALLINT	NOT NULL
BaseSkillTargetID	If Priority is not 0, indicates the base group for the skill. If this record is for the base group, Priority is 0 and this field is NULL.	DBINT	FK, IE-2 NULL
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
ConfigParam	A string of parameters the system software sends to the peripheral to initialize the skill group.	varchar(255)	NULL
DefaultEntry	Normal entries are 0 (zero). Any records with DefaultEntry value > (greater than) 0 will be considered a default skill group for configuration purposes. Records having a DefaultEntry value of 1 are used by OPC as the default target skill group. Where only a base default skill group is created, it has a DefaultEntry value of 1. If sub-skill group records are created, the primary sub-group has a DefaultEntry value of 1, while the others have a DefaultEntry value of 2.  <b>Note:</b> An automatic DefaultEntry is created with each possible combination of Peripheral and MRDomain (PeripheralID and MRDomainID) in the system. These entries are visible to configuration applications but cannot be directly modified.	DBINT	NOT NULL
Deleted	Deleted Flag. Stored as a character:  • <b>Y</b> = Yes  • <b>N</b> = No	DBCHAR	NOT NULL
Description	Additional information about the group.	DESCRIPTION	NULL
EnterpriseName	An enterprise name for the skill group. This name must be unique among all skill groups in the enterprise.	VNAME32	AK-1 NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
Extension	The extension number for the service (used by Lucent DEFINITY ECS).	VTELNO10	NULL
IPTA	Indicates whether or not this is an 'Unified ICM picks the agent (IPTA)' skill group:  • Y = Yes, this is an IPTA skill group.  • N = No, this is not an IPTA skill group.	DBCHAR	NOT NULL
MRDomainID	The Media Routing Domain with which this skill group is associated. The default value is 1.	DBINT	FK NOT NULL
PeripheralID	Foreign key from Peripheral table.	DBSMALLINT	AK-2, FK NOT NULL
PeripheralName	Skill group name as known by the peripheral.	VNAME32	NOT NULL
PeripheralNumber	Skill group number as known by the peripheral.	DBINT	AK-2 NOT NULL
Priority	The routing priority of this group for the skill:  • 1 = primary  • 2 = secondary  • 3= tertiary; etc.  <b>Note:</b> The value 0 indicates a base skill group.	DBSMALLINT	AK-2 NOT NULL
ScheduleID	Identifies an imported schedule associated with the skill group.	DBINT	FK, IE-1 NULL
ServiceLevelThreshold	The service level threshold, in seconds, for the service level.  If this field is negative, the value of the ServiceLevelThreshold field in the Service_Level_Threshold table (for this Peripheral/MRD pair) is used.  The default value is -1 which means SL computation is disabled for this SG.	DBINT	NOT NULL
ServiceLevelType	Indicates how the system software calculates the service level for the skillgroup.  If this field is 0, Unified ICM uses the default specified for the associated Peripheral/MRD pair in the Service_Level_Threshold table.	DBSMALLINT	NOT NULL

**Skill\_Group\_Five\_Minute Table**

Field Name:	Description:	Data Type:	Keys and Null Option:
	Possible values: <ul style="list-style-type: none"><li>• 0 = Use Default</li><li>• 1 = Ignore Abandoned Calls</li><li>• 2 = Abandoned Call Has Negative Impact:</li><li>• 3 = Abandoned Call Has Positive Impact:</li></ul>		
SkillTargetID	An identifier that is unique among all skill targets in the enterprise.	DBINT	PK, FK, NOT NULL
SubGroupMaskType	Indicates whether to use the SubSkillGroupMask field for the skill group or to use the peripheral default: <ul style="list-style-type: none"><li>• 0 = Use peripheral default.</li><li>• 1 = Override the peripheral default.</li></ul>	DBSMALLINT	NOT NULL
SubSkillGroupMask	A series of characters (Y and N) indicating which sub-skill groups to create for the skill group. Ignored if SubGroupMaskType is 0.	varchar(64)	NULL
UserDeletable	Indicates if the record can be deleted by a user. Default is Y.	DBCHAR	NOT NULL

**Skill\_Group\_Five\_Minute Table**

This table is in the [Skill Target category \(page 544\)](#). To see database rules for these tables, click [here \(page 600\)](#).

Central database only.

Contains statistics about each skill group during the five-minute interval.

The Unified ICM generates Skill\_Group\_Five\_Minute records for each skill group.

#### Related table

[Skill Group \(page 432\)](#) (via SkillTargetID)

**Table 199: Indexes for Skill\_Group\_Five\_Minute Table**

index_name	index_description	index_keys
XAK1Skill_Group_Five_Minute	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XPKSkill_Group_Five_Minute	clustered, unique, primary key located on PRIMARY	DateTime, SkillTargetID, TimeZone

**Fields in Skill\_Group\_Five\_Minute Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
Avail	Number of agents in group in the Available state at the end of the five-minute interval.	DBINT	NULL
AvailTimeTo5	The total time, in seconds, that agents in the skill group were in the Available state for any skill group during the five-minute interval. AvailTime is included in the calculation of LoggedOnTime.	DBINT	NULL
AvgHandledCallsTalkTimeTo5	Average talk time in seconds for calls counted as handled by the skill group during the five-minute window. This value is calculated as follows: <b>HandledCallsTalkTimeTo5 / CallsHandledTo5</b>  AvgHandledCallsTalkTime is calculated only for handled calls, which are calls that are finished (that is, any after-call work associated with the call has been completed). This field is updated in the database when any after-call work associated with the call is completed.	DBINT	NULL
AvgHandledCallsTimeTo5	Average talk time in seconds for calls counted as handled by the skill group during the five-minute window. This value is calculated as follows: <b>HandledCallsTalkTimeTo5 / CallsHandledTo5</b>  The AvgHandledCallsTime value is updated in the database when any after-call work time associated with the call is completed.	DBINT	NULL
BusyOther	Number of agents in the BusyOther state at the end of the five-minute interval.	DBINT	NULL
BusyOtherTimeTo5	Number of seconds agents spent in the BusyOther state during the five-minute window. BusyOtherTime is included in the calculation of LoggedOnTime.	DBINT	NULL
CallsAnsweredTo5	Number of calls answered by agents in the skill group during the five-minute window. The count for CallsAnswered is updated at the time the call is answered.	DBINT	NULL
CallsHandledTo5	Calls that have been answered and have completed wrap-up by the skill group during the five-minute window.  A handled call is: <ul style="list-style-type: none"><li>• An incoming ACD call that was answered by an agent, and then completed.</li><li>• A call associated with Outbound Option that the agent answered, and then completed.</li></ul>	DBINT	NULL

**Skill\_Group\_Five\_Minute Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	<ul style="list-style-type: none"> <li>• A non-voice task that the agent started working on then completed.</li> </ul> <p>A handled call/task is completed when the agent associated with the call/task finishes the wrap-up work associated with the call/task.</p>		
DateTime	Central Controller date and time at the start of the five-minute interval.	DBSMALLDATE	PK NOT NULL
LoggedOn	Number of agents in the skill group logged on at the end of the five-minute interval.	DBINT	NULL
LongestAvailAgent	Time in seconds that the longest available agent for the skill group has been available.	DBINT	NULL
NotReady	Number of agents in the skill group in the Not Ready state at the end of the five-minute interval.	DBINT	NULL
NotReadyTimeTo5	The total time in seconds that agents in the skill group were in the Not Ready state for any skill group during the five-minute window. NotReadyTime is included in the calculation of LoggedOnTime.	DBINT	NULL
PercentUtilizationTo5	Percentage of Ready time that agents in the skill group spent talking or doing call work during the five-minute window. This is the percentage of time agents spend working on calls versus the time agents were ready.	DBFLT4	NULL
Ready	Number of agents in the skill group in the Ready state at the end of the five-minute interval.	DBINT	NULL
RecoveryDay	Currently not used, set to zero (0).	DBINT	NOT NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL
ReservedStateTimeTo5	Time agents in the skill group spent in the Reserved state during the five-minute window. ReservedStateTime is included in the calculation of LoggedOnTime.	DBINT	NULL
SkillTargetID	The SkillTargetID of the agent. Together with the SkillGroupSkillTargetID, identifies the skill group member. Foreign key from skill group table.	DBINT	PK, FK NOT NULL
TalkingIn	Number of agents in the skill group talking on inbound calls at the end of the five-minute interval. Inbound calls are ACD calls arriving on trunks (that is, calls that are not internally generated).	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
TalkingOther	Number of agents in the skill group talking on internal calls (neither inbound nor outbound) at the end of the five-minute interval. Examples of "other calls include agent-to-agent transfers and supervisor calls.	DBINT	NULL
TalkingOut	Number of agents in the skill group talking on outbound calls at the end of the five-minute interval.	DBINT	NULL
TalkTimeTo5	Number of seconds agents in the skill group were in the Talking state during the five-minute window.  This field is applicable for <b>Unified ICM</b> , <b>Unified CCE</b> and <b>Outbound Option</b> .	DBINT	NULL
TimeZone	The time zone for the date and time. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK, NOT NULL
Unused1	This field is not used.	DBINT	NULL
WorkNotReady	Number of agents in the skill group in the Work Not Ready state at the end of the five-minute interval.	DBINT	NULL
WorkNotReadyTimeTo5	Number of seconds agents in the skill group were in the Work Not Ready state during the five-minute window. WorkNotReadyTime is included in the calculation of LoggedOnTime.	DBINT	NULL
WorkReady	Number of agents in the skill group in the Work Ready state at the end of the five-minute interval.	DBINT	NULL
WorkReadyTimeTo5	Number of seconds agents in the skill group were in the Work Ready state during the five-minute interval. WorkReadyTime is included in the calculation of LoggedOnTime.	DBINT	NULL

## Skill\_Group\_Half\_Hour Table

This table is in the [Skill Target category \(page 544\)](#). To see database rules for these tables, click [here \(page 600\)](#).

Central database only. Contains statistics about each skill group during the last 30-minute interval.

The Unified ICM generates Skill\_Group\_Half\_Hour records for each skill group.

### Related table

**Skill\_Group\_Half\_Hour Table**

[Skill Group \(page 432\)](#) (via SkillTargetID)

**Note:** ServiceLevelCallsAbandToHalf should be matched to RouterCallsAbandQToHalf + RouterCallsAbandToAgentToHalf.

ServiceLevelCallsAbandToHalf does not match RouterCallsAbandQToHalf + AbandonRingCallsToHalf, because of the way that AbandonRingCallsToHalf is determined.

See the detailed description of these fields in the table below.

**Note:**

- For blind conferences in Unified CCE with an IPCC System PG, this field is updated when the call that was blind conferenced to an IVR is subsequently answered by another agent. For this call scenario this field is not updated in **Unified CCE without an IPCC System PG**.
- In an IPCC Enterprise Gateway deployment, Unified ICM (parent) connected with an Unified CCE with an IPCC System PG (child) or Cisco Unified Contact Center Express (child) through IPCC Gateway PG, network queuing data is not available in the child or in the child agent/supervisor desktop. The time spent in the network queue is not included in the reporting metrics in the child. A call center manager who would normally only look at the Unified CCE child reports will need to also look at the parent Unified ICM reports for network queuing data.
- Because of rounding, the various time element data such as AgentOutCallsTimeToHalf, HoldTimeToHalf, LoggedOnTimeToHalf (and so on) in the Agent\_Skill\_Group\_Half\_Hour table may differ slightly from the comparable data in the Skill\_Group\_Half\_Hour table. The data in the latter are more exact.

**Table 200: Indexes for Skill\_Group\_Half\_Hour Table**

index_name	index_description	index_keys
XAK1Skill_Group_Half_Hour	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XIE1Skill_Group_Half_Hour	nonclustered, unique, primary key located on PRIMARY	DbDateTime
XPKSkill_Group_Half_Hour	clustered, unique, primary key located on PRIMARY	DateTime, SkillTargetID, TimeZone

**Note:** The Skill\_Group\_Interval Table will be populated with 30/15 minute reporting data, depending on the Historical Reporting Interval setting for the PG. The Skill\_Group\_Half\_Hour Table will not be populated with this data.

**Fields in Skill\_Group\_Half\_Hour Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
AbandonHoldCallsOutToHalf	The number of outbound calls that abandon while on hold. This will be reported by OPC.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
AbandonHoldCallsToHalf	The total number of ACD calls to the skill group that abandoned while being held at an agent's position. The value is counted at the time the call disconnects, and the database is updated every half hour.	DBINT	NULL
AbandonRingCallsToHalf	Total number of ACD calls to the skill group that were abandoned while ringing at an agent's position. The value is counted at the time the call disconnects, and the database is updated every half hour.	DBINT	NULL
AbandonRingTimeToHalf	Total ring time associated with ACD calls to the skill group that were abandoned while alerting an agent's position. RingTime occurs after any DelayTime and LocalQTime. The value is counted at the time the call disconnects, and the database is updated every half hour.	DBINT	NULL
AgentOutCallsOnHoldTimeToHalf	Total number of seconds outbound ACD calls were placed on hold by agents associated with this skill group. This value updated in the database when after-call work associated with the call (if any) is completed.	DBINT	NULL
AgentOutCallsOnHoldToHalf	The total number of outbound ACD calls an agent associated with this skill group that ended during the current half-hour interval that were placed on hold at least once during the life of the call. The value is counted when the after-call work associated with the call (if any) is completed, and the database is updated every half hour.	DBINT	NULL
AgentOutCallsTalkTimeToHalf	Total talk time, in seconds, outbound ACD calls handled by agents associated with this skill group that ended during the half-hour interval. The value includes the time spent from the call being initiated by the agent to the time the agent begins after call work for the call. This includes HoldTime associated with the call. The value is counted when the after-call-work time associated with the call (if any) is completed, and the database is updated every half hour.	DBINT	NULL
AgentOutCallsTimeToHalf	The total handle time, in seconds, for outbound ACD calls handled by the skill group that ended during the half-hour interval. Handle time includes WorkTime, TalkTime, and HoldTime. The AgentOutCallsTime value includes the time spent from the call being initiated by the agent to the time the agent completes after-call work time for the call. The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every half hour.	DBINT	NULL
AgentOutCallsToHalf	The total number of outbound ACD calls made by agents in the skill group that ended during a half-hour interval. The value is counted when any after-call work time associated with the call is completed, and the database is updated every half hour.	DBINT	NULL

**Skill\_Group\_Half\_Hour Table**

Field Name:	Description:	Data Type:	Keys and Null Option:
AgentTerminatedCallsToHalf	Not currently used.	DBINT	NULL
AnswerWaitTimeToHalf	<p>The sum of the answer wait times of all tasks agents associated with the skill group answered during this half-hour interval. It is counted at the time the call is answered, and the database is updated every half hour.</p> <p>It is the current half-hour interval total of:</p> <ul style="list-style-type: none"> <li>• In ICM, the time in seconds from when the call first arrives at the ACD to when the agent answers the call.</li> </ul> <p>AnswerWaitTime is based on the following:</p> <ul style="list-style-type: none"> <li>- <i>DelayTime</i></li> <li>- <i>LocalQTime</i></li> <li>- <i>RingTime</i></li> </ul> <ul style="list-style-type: none"> <li>• In <b>Unified CCE</b>, the number of seconds calls spent between first being queued to the skillgroup through Select (LAA) or Queue to Skillgroup nodes to when they were answered by an agent.</li> </ul> <p>AnswerWaitTime is based on the following:</p> <ul style="list-style-type: none"> <li>- <i>DelayTime</i></li> <li>- <i>LocalQTime</i></li> <li>- <i>RingTime</i></li> <li>- <i>NetworkQTime</i></li> </ul> <p><b>Note:</b> With the existence of a network VRU, in an Cisco Unified Intelligent Contact Management Enterprise (Unified ICME) deployment with an IPCC System PG, this value will not include time spent in the network VRU.</p>	DBINT	NULL
AutoOutCallsOnHoldTimeToHalf	The total number of seconds that AutoOut (predictive) calls were placed on hold by agents associated with this skill group during the half-hour interval. The value is counted when the after-call work associated with the call (if any) has completed, and the database is updated every half hour.	DBINT	NULL
AutoOutCallsOnHoldToHalf	The total number of ended AutoOut (predictive) calls that agents associated with this skill group have placed on hold at least once.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	The value is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every half hour.		
AutoOutCallsTalkTimeToHalf	<p>Total talk time, in seconds, for AutoOut (predictive) calls handled by agents associated with this skill group that ended during the half-hour interval. This value includes the time spent from the call being initiated to the time the agent begins after-call work for the call. It includes the HoldTime associated with the call.</p> <p>AutoOutCallsTalkTime is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every half hour.</p>	DBINT	NULL
AutoOutCallsTimeToHalf	The total handle time, in seconds, for AutoOut (predictive) calls handled by agents associated with this skill group that ended during the half-hour interval. Handle time includes WorkTime, TalkTime, and HoldTime. The AutoOutCallsTime value includes the time spent from the call being initiated to the time the agent completes after-call work time for the call. The value is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every half hour.	DBINT	NULL
AutoOutCallsToHalf	The total number of AutoOut (predictive) calls made by agents associated with this skill group that ended during the half-hour interval. The value is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every half hour.	DBINT	NULL
AvailTimeToHalf	Total time in seconds agents associated with this skill group were in the Not_Active state with respect to this skill group during the half-hour interval. AvailTime is included in the calculation of LoggedOnTime.	DBINT	NULL
AvgHandledCallsTalkTimeToHalf	<p>Average talk time in seconds for inbound calls associated with the skill group that were handled during the half-hour interval. This value is calculated as follows:</p> <p><b>HandledCallsTalkTimeToHalf / CallHandledToHalf</b></p> <p>AvgHandledCallsTalkTime is calculated only for handled calls, which are calls that are finished (that is, any after-call work associated with the call has been completed). This field is counted when any after-call work associated with the call is completed, and the database is updated every half hour.</p>	DBINT	NULL

**Skill\_Group\_Half\_Hour Table**

Field Name:	Description:	Data Type:	Keys and Null Option:
AvgHandledCallsTimeToHalf	<p>Average handle time in seconds for inbound calls associated with the skill group that were handled during the half-hour interval. This value is calculated as follows:</p> <p><b>HandledCallsTimeToHalf / CallsHandledToHalf</b></p> <p>The AvgHandledCallsTime value is counted when any after-call work time associated with the call is completed, and the database is updated every half hour.</p>	DBINT	NULL
BargeInCallsToHalf	<p>The number of calls associated with this skill group barged in on either by the supervisor or by the agent.</p> <p>This field is applicable for <b>Unified CCE only</b>.</p>	DBINT	NULL
BusyOtherTimeToHalf	<p>Number of seconds agents have spent in the BusyOther state with respect to this skill group during the half-hour interval.</p> <p>BusyOtherTime is included in the calculation of LoggedOnTime.</p>	DBINT	NULL
CallbackMessagesTimeToHalf	<p>Number of seconds the skill group spent processing callback messages during the half-hour interval.</p>	DBINT	NULL
CallbackMessagesToHalf	<p>Number of callback messages processed by the skill group during the half-hour interval.</p>	DBINT	NULL
CallsAnsweredToHalf	<p>Number of calls answered by agents associated with this skill group during the half-hour interval.</p> <p>This value is set by the PG.</p> <p>The count for CallsAnswered is counted at the time the call is answered, and the database is updated every half hour.</p>	DBINT	NULL
CallsHandledToHalf	<p>The number of inbound ACD calls answered and wrap-up completed by agents associated with this skill group during the half-hour interval.</p> <p>This field is applicable for Unified ICME and Unified CCE.</p> <p><b>A handled call is:</b></p> <ul style="list-style-type: none"> <li>• An incoming ACD call that was answered by an agent, and then completed.</li> <li>• A non-voice task that the agent started working on then completed.</li> </ul>	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	A handled call/task is completed when the agent associated with the call/task finishes the wrap-up work associated with the call/task.		
CallsOfferedToHalf	<p>The number of calls received by this skill group for the current half-hour interval.</p> <p>In Unified CCE <b>with</b> an IPCC System PG, a call is counted as offered as soon as it is sent to a skill group.</p> <p>In Unified CCE <b>without</b> an IPCC System PG, a call is counted as offered only when it is answered.</p> <p><b>Note:</b> For consistent values, in Unified CCE regardless of whether or not there is an IPCC System PG, use RouterCallsOfferedToHalf.</p>	DBINT	NULL
CallsQueuedToHalf	<p>The number of calls queued to this skill group by the ACD in the current half-hour interval.</p> <p>In Unified CCE with an IPCC System PG, this field is applicable and is updated when a call is queued to the skill group.</p> <p><b>Note:</b> Not applicable for Unified CCE without an IPCC System PG and is not updated.</p> <p>For consistent values, in Unified CCE regardless of whether or not there is an IPCC System PG, use RouterQueueCallsToHalf.</p>	DBINT	NULL
CampaignID	For skill groups assigned to campaigns only per the Campaign Skill Group. As skill groups are often re-used for new campaigns, this provides a historical trail for proper reporting. Filled in by the CallRouter.	DBINT	NULL
ConferencedInCallsTimeToHalf	<p>The number of seconds agents associated with this skill group were involved in incoming conference calls. Conferenced in calls include both ACD and non-ACD. The value is counted when the agent drops off the call or the call becomes a simple two-party call, and the database is updated every half hour.</p> <p>For blind conferences in Unified CCE, the value is counted when an agent blind conferences the call to an IVR, and the database is updated every half hour.</p> <p>For blind conferences in Unified CCE with an IPCC System PG, the value is not updated in the database until the call that was blind conferenced to an IVR is subsequently answered by another agent.</p>	DBINT	NULL

**Skill\_Group\_Half\_Hour Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
ConferencedInCallsToHalf	The number of incoming calls skill group agents were conferenced into. Incoming calls include ACD and non-ACD calls. The value is counted when the agent drops off the call or the call becomes a simple two-party call, and the database is updated every half hour.	DBINT	NULL
ConferencedOutCallsTimeToHalf	The number of seconds that agents spent on conference calls that they initiated. This includes time spent on both ACD and non-ACD conference calls initiated by the agent. The value is counted when the agent drops off the call or the call becomes a simple two-party call, and the database is updated every half hour.	DBINT	NULL
ConferencedOutCallsToHalf	The number of conference calls that the skill group agents initiated. The conferenced out calls include ACD and non-ACD calls. The value is counted when the agent drops off the call or the call becomes a simple two-party call, and the database is updated every half hour.	DBINT	NULL
ConsultativeCallsTimeToHalf	The number of seconds agents associated with this skill group spent handling a consultative call. The value is counted when the after-call work time associated with the consultative call (if any) is completed, and the database is updated every half hour.	DBINT	NULL
ConsultativeCallsToHalf	The number of consultative calls agents associated with the skill group that ended in this half-hour. The count is counted when the after-call work time associated with the consultative call (if any) is completed, and the database is updated every half hour.	DBINT	NULL
DateTime	The date and time at the start of the half-hour interval.	DBSMALLDATE	PK NOT NULL
DbDateTime	The current date and time stamp when the records are written to the HDS database. The logger database has NULL for this column.	DBDATETIME	IE-1 NULL
EmergencyAssistsToHalf	<p>The number of emergency assist requests either by the agent or by the supervisor.</p> <p>This field is applicable for <b>Unified CCE only</b>.</p>	DBINT	NULL
HandledCallsTalkTimeToHalf	<p>The number of seconds that agents spent in TalkTime for calls associated with this skill group that ended in this half-hour interval.</p> <p>This field is applicable for both <b>Unified ICM</b>, <b>Unified CCE</b> and <b>Outbound Option</b>.</p>	DBINT	NULL
HandledCallsTimeToHalf	The time in seconds agents spent on calls that were handled within the half-hour interval.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	This field is applicable for both <b>Unified ICM</b> , <b>Unified CCE</b> and <b>Outbound Option</b> .		
HoldTimeToHalf	Number of seconds where all calls to an agent are on hold during the half-hour interval. HoldTime is counted only while the agent is doing no other call-related activity. HoldTime is included in the calculation of LoggedOnTime.	DBINT	NULL
IncomingCallsOnHoldTimeToHalf	Total number of seconds that inbound ACD calls calls that agents associated with the skill group placed on hold that ended during the half-hour interval. The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every half hour.	DBINT	NULL
IncomingCallsOnHoldToHalf	The total number of inbound ACD calls that agents associated with the skill group placed on hold at least once during the half-hour interval. The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every half hour.	DBINT	NULL
InterceptCallsToHalf	The number of calls intercepted either by the supervisor or by the agent.  This field is applicable for <b>Unified CCE only</b> .	DBINT	NULL
InternalCallsOnHoldTimeToHalf	The total number of seconds internal calls agents associated with the skill group ended in this half-hour ever put on hold. The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every half hour.	DBINT	NULL
InternalCallsOnHoldToHalf	The total number of internal calls that agents associated with the skill group ended in this half-hour that were ever placed on hold. The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every half hour.	DBINT	NULL
InternalCallsRcvdTimeToHalf	Number of seconds spent on internal calls received by the agent during the half-hour interval. The value is incremented when the after-call-work time associated with the call has completed.	DBINT	NULL
InternalCallsRcvdToHalf	Number of internal calls associated with this skill group that were received by an agent and that ended during this half-hour interval. The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every half hour.	DBINT	NULL

**Skill\_Group\_Half\_Hour Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
InternalCallsTimeToHalf	Number of seconds spent on internal calls initiated by the agent during the half-hour interval. The value is incremented when the after-call-work time associated with the call has completed.	DBINT	NULL
InternalCallsToHalf	Number of internal calls agents associated with this skill group ended during the half-hour interval. The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every half hour.	DBINT	NULL
InterruptedTimeToHalf	This field not currently supported.	DBINT	NULL
LoggedOnTimeToHalf	Total time, in seconds, agents associated with this skill group were logged on during the half-hour interval.  This field is applicable for both <b>Unified ICM</b> , <b>Unified CCE</b> and <b>Outbound Option</b> .	DBINT	NULL
MonitorCallsToHalf	The number of calls monitored either by the supervisor or by the agent.  This field is applicable for <b>Unified CCE only</b> .	DBINT	NULL
NetConferencedOutCallsToHalf	The number of seconds that agents spent on Network conference calls that they initiated.  This only includes time spent on Network conference calls initiated by the agent.  This database element uses ConferenceTime from the Termination_Call_Detail table.  The value is counted when the agent drops off the call or the call becomes a simple two-party call, and the database is updated every half hour.	DBINT	NULL
NetConfOutCallsTimeToHalf	The number of Network conference calls that the skill group agents initiated. The conferenced out calls only include Network conference calls.  The value is counted when the agent drops off the call or the call becomes a simple two-party call, and the database is updated every half hour.	DBINT	NULL
NetConsultativeCallsTimeToHalf	The number of seconds agents in the skill group spent handling a Network consultative call with at least one call on hold.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	The value is counted when the after-call work time associated with the consultative call (if any) is completed, and the database is updated every half hour.		
NetConsultativeCallsToHalf	The number of Network consultative calls completed by agents in the skill group with at least one call on hold. The count is counted when the after-call work time associated with the consultative call (if any) is completed, and the database is updated every half hour.	DBINT	NULL
NetTransferOutCallsToHalf	Number of calls Network (Blind and Consultative) transferred out of the skill group during the half-hour interval. The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every half hour.	DBINT	NULL
NotReadyTimeToHalf	Total seconds agents were in the Not Ready state with respect to this skill group during the half-hour interval. NotReadyTime is included in the calculation of LoggedOnTime.	DBINT	NULL
PercentUtilizationToHalf	Percentage of Ready time that agents associated with this skill group spent talking or doing call work during the half-hour interval. This is the percentage of time these agents spent working on calls versus the time agents were ready.	DBFLT4	NULL
PreviewCallsOnHoldTimeToHalf	The total number of seconds outbound Preview calls were placed on hold by agents associated with this skill group during the half-hour interval. The value is counted when the after-call work associated with the call (if any) has completed, and the database is updated every half hour.	DBINT	NULL
PreviewCallsOnHoldToHalf	The total number of ended outbound Preview calls that agents associated with this skill group have placed on hold at least once during the half-hour interval. The value is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every half hour.	DBINT	NULL
PreviewCallsTalkTimeToHalf	Total talk time, in seconds, for outbound Preview calls handled by agents associated with this skill group that ended during the half-hour interval. This value includes the time spent from the call being initiated to the time the agent begins after-call work for the call. It therefore includes the HoldTime associated with the call. PreviewCallsTalkTime is counted when the after-call work time associated with the call (if any) has completed. This field is applicable for both Unified ICM and Unified CCE, and the database is updated every half hour.	DBINT	NULL

**Skill\_Group\_Half\_Hour Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
PreviewCallsTimeToHalf	Total handle time, in seconds, for outbound Preview calls handled by agents associated with this skill group that ended during the half-hour interval. Handle time includes WorkTime, TalkTime, and HoldTime. The PreviewCallsTime value includes the time spent from the call being initiated to the time the agent completes after-call work time for the call. The value is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every half hour.	DBINT	NULL
PreviewCallsToHalf	Total number of outbound Preview calls made by agents associated with this skill group that ended during the half-hour interval. The value is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every half hour.	DBINT	NULL
RecoveryDay	Currently not used, set to zero (0).	DBINT	NOT NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL
RedirectNoAnsCallsTimeToHalf	The number of seconds ACD calls to the skill group rang at an agent's terminal before being redirected on failure to answer. The value is counted at the time the call is diverted to another device, and the database is updated every half hour.	DBINT	NULL
RedirectNoAnsCallsToHalf	The number of ACD calls to the skill group that rang at an agent's terminal and redirected on failure to answer. The value is counted at the time the call is diverted to another device, and the database is updated every half hour.	DBINT	NULL
ReserveCallsOnHoldTimeToHalf	The time the reservation call has been on hold during the half-hour interval.	DBINT	NULL
ReserveCallsOnHoldToHalf	The total number of reservation calls placed on hold at least once during the half-hour interval.	DBINT	NULL
ReserveCallsTalkTimeToHalf	This is the talk time for the reservation call. It should be either zero or a few seconds. This is counted using Call State.	DBINT	NULL
ReserveCallsTimeToHalf	This is the sum of the above two columns. This is counted using Call State.	DBINT	NULL
ReserveCallsToHalf	Number of reservation calls. This should always equal to the ReserveCallsOnHoldToHalf.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
Reserved1	Reserved for future use.	DBINT	NULL
Reserved2	Reserved for future use.	DBINT	NULL
Reserved3	Reserved for future use.	DBINT	NULL
Reserved4	Reserved for future use.	DBINT	NULL
Reserved5	Reserved for future use.	DBFLT4	NULL
ReservedStateTimeToHalf	How long an agent is in Reserved state. This is counted using Agent State.	DBINT	NULL
RouterCallsAbandQToHalf	Number of calls queued to the group by the CallRouter that were abandoned during the half-hour interval. This field is set by the CallRouter.	DBINT	NULL
RouterCallsAbandDequeuedToHalf	The number of calls that were abandoned and de-queued from this skill group. When a call is queued to multiple RouterCallsAbandDequeued skill groups and abandoned, the RouterCallsAbandQ field is incremented for one skill group and RouterCallsAbandDequeued is incremented for all of the other skill groups. The group that is charged with the abandon is the group to which the call had been continuously queued to the longest at the time of the abandon. Normally, this would be the first group the script queued the call to, unless a more complicated dequeue, queue, or requeue scenario changes the order. The term "continuously queued" means that if a call is queued to a group, later dequeued, and still later requeued, the earliest time in queue is not used in determining which group the abandon is charged against. This field is applicable to Unified CCE environments and to Unified ICM environments where calls are translation-routed to SkillGroups.	DBINT	YES
RouterCallsAbandToAgentToHalf	In the half-hour interval, the number of calls abandoned after they have been routed to the agent desktop and before they have been answered (for example, Abandon Ringing)..  This field is applicable for <b>Unified CCE systems</b> and for <b>systems where calls are translation-routed to Skill Groups</b> .	DBINT	NULL
RouterQueueCallsToHalf	Number of calls queued to the group by the CallRouter during the half-hour interval. This field is set by the CallRouter.	DBINT	NULL

## Skill\_Group\_Half\_Hour Table

Field Name:	Description:	Data Type:	Keys and Null Option:
RouterCallsDequeuedToHalf	<p>The number of calls that were de-queued from this skill group to be routed to another skill group in the half-hour interval.</p> <p>This field is also incremented when a call is de-queued via Cancel Queue node.</p> <p>This field is applicable to <b>Unified CCE environments</b> and to <b>Unified ICM environments where calls are translation-routed</b> to Skill Groups.</p>	DBINT	NULL
RouterCallsOfferedToHalf	<p>The number of calls routed or queued for the Skill Group in the half-hour interval. This value is set by the Call Router.</p> <p>This value is incremented by:</p> <ul style="list-style-type: none"> <li>• CallType short calls, which are counted as abandoned for Skill Groups. (There is no short call count in the Skill_Group_Real_Time table.)</li> <li>• Calls that are cancelled by Cancel Queue node and re-queued to the same Skill Group</li> <li>• Calls that are routed to a Skill Group, re-queried, and re-queued to the same Skill Group</li> </ul> <p>This field does not include local ACD calls, not routed by Unified ICM. Such calls are counted in the CallsOffered field of Skill_Group tables.</p> <p><b>Note:</b> RouterCallsOffered = RouterCallsAbandToAgent + CallsHandled + RouterCallsDequeued + RedirectNoAns+ RouterError+ RouterCallsAbandQ.</p> <p>This field is applicable to <b>Unified CCE environments</b> and to <b>Unified ICM environments where calls are translation-routed</b> to Skill Groups.</p>	DBINT	NULL
RouterErrorToHalf	<p>The number of calls that resulted in an error condition in the half hour interval.</p> <p>This field is applicable to <b>Unified CCE environments</b> and to <b>Unified ICM environments where calls are translation-routed</b> to Skill Groups.</p>	DBINT	NULL
ServiceLevelCallsAbandToHalf	The number of calls that abandoned within the skill group ServiceLevel threshold in the half-hour interval.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	<p>Calls may abandon while in the Skill Group queue, or they may abandon after they have been routed to a Skill Group.</p> <p>Calls that abandon after they are routed to a Skill Group are identified by TCD records with abandoned call disposition.</p> <p>If the call is queued and abandons before it is routed to any Skill Groups (within the ServiceLevel threshold), the Router will increment this value for ALL the Skill Groups this call was queued for.</p> <p>If the call abandons after it was routed to a Skill Group, that Skill Group will have ServiceLevelCallsAband incremented. Other Skill Groups will have ServiceLevelCallsDequeued incremented.</p> <p>Dequeuing the call via Cancel Node has no impact on ServiceLevelCallsAband.</p> <p><b>Note:</b> This field is relevant to the <b>Unified CCE environment</b> only.</p> <p><b>Note:</b> With the existence of a network VRU, this value includes time in the network queue.</p>		
ServiceLevelCallsDequeueToHalf	<p>The number of queued calls de-queued from a skill group within the skill ServiceLevel threshold in the half-hour interval.</p> <p>Calls may be de-queued via Cancel Queue node or de-queued from this Skill Group to be routed to a different Skill Group.</p> <p><b>Note:</b> This field is relevant to the <b>Unified CCE environment</b> only.</p> <p><b>Note:</b> With the existence of a network VRU, this value includes time in the network queue.</p>	DBINT	NULL
ServiceLevelCallsOfferedToHalf	<p>The number of calls routed to a skill group or queued for a skill group in the half hour interval.</p> <p>Includes these categories of calls</p> <ul style="list-style-type: none"> <li>• Calls that are answered within the ServiceLevel threshold</li> <li>• Calls that are abandoned within the ServiceLevel threshold</li> <li>• Calls that are redirected within the ServiceLevel threshold (this is consistent with Call Type ServiceLevel)</li> <li>• Calls that are not complete after the ServiceLevel threshold has passed (that is, calls queued longer than the Service Level threshold).</li> </ul>	DBINT	NULL

## Skill\_Group\_Half\_Hour Table

Field Name:	Description:	Data Type:	Keys and Null Option:
	<p><b>Note:</b> In the ServicelevelCallsOffered field, calls that encountered an error are counted, irrespective of how the calls ended (within or beyond the threshold). You can use the RouterError field to exclude all the erroneous calls and ServiceLevelError field to exclude erroneous calls before threshold.</p> <p><b>Note:</b> This field is relevant to the <b>Unified CCE environment</b> only.</p> <p><b>Note:</b> With the existence of a network VRU, this value includes time in the network queue.</p>		
ServiceLevelCallsToHalf	<p>The value of this field represents the number of calls answered within the service level.</p> <p>Calls may abandon while in the Skill Group queue, or they may abandon after they have been routed to a Skill Group.</p> <p>Calls that abandon after they are routed to a Skill Group are identified by TCD records with abandoned call disposition flag.</p> <p>If the call is queued and abandons before it is routed to any Skill Groups (within the ServiceLevel threshold), the Router will increment this value for ALL the Skill Groups this call was queued for.</p> <p>If the call abandons after it was routed to a Skill Group, that Skill Group will have ServiceLevelCallsAband incremented.</p> <p><b>Note:</b> This field is relevant to the <b>Unified CCE environment</b> only.</p>	DBINT	NULL
ServiceLevelErrorToHalf	<p>The calls that ended in Error state within the skill group Service Level threshold during the half-hour interval</p> <p><b>Note:</b> This field is relevant to the <b>Unified CCE environment</b> only.</p>	DBINT	NULL
ServiceLevelRONAToHalf	<p>The calls that redirected on no answer within the Service Level threshold during the half-hour interval.</p> <p>These calls are part of the ServiceLevelCallsOffered.</p> <p><b>Note:</b> This field is relevant to the <b>Unified CCE environment</b> only.</p>	DBINT	NULL
ServiceLevelToHalf	<p>Service Level for the skill group during the half-hour interval.</p> <p>This value is computed based on the ServiceLevelCalls, ServiceLevelCallsoffered, ServiceLevelCallsAband and CallsDequeued.</p>	DBFLT4	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	<p>There are three types of service level calculations, and they are determined by the Service Level type chosen in configuration.</p> <ul style="list-style-type: none"> <li>• <b>Ignore Abandoned Calls</b></li> </ul> $\text{ServiceLevel} = \text{ServiceLevelCalls} / (\text{ServiceLevelCallsoffered} - \text{ServiceLevelCallsAband} - \text{RouterCallsDequeued})$ <ul style="list-style-type: none"> <li>• <b>Abandoned Calls have Negative Impact</b></li> </ul> $\text{ServiceLevel} = \text{ServiceLevelCalls} / (\text{ServiceLevelCallsoffered} - \text{RouterCallsDequeued})$ <ul style="list-style-type: none"> <li>• <b>Abandoned Calls have Positive Impact</b></li> </ul> $\text{ServiceLevel} = (\text{ServiceLevelCalls} + \text{ServiceLevelCallsAband}) / (\text{ServiceLevelCallsoffered} - \text{RouterCallsDequeued})$ <p><b>Note:</b> This field is relevant to the <b>Unified CCE environment</b> only.</p>		
ShortCallsToHalf	The number of calls answered by agents associated with this skill group where the duration of the calls falls short of the AnsweredShortCalls threshold. You might choose to factor these calls out of handle time statistics. Short calls are considered handled, not abandoned.	DBINT	NULL
SkillTargetID	The SkillTargetID of the skill group. Together with the SkillGroupSkillTargetID, identifies the skill group member.	DBINT	PK, FK NOT NULL
SupervAssistCallsTimeToHalf	<p>Number of seconds agents associated with this skill group spent on supervisor-assisted calls during the half-hour interval. The value is counted when the supervisor-assisted call completes, and the database is updated every half hour.</p> <p>This field is applicable for <b>Unified CCE</b>.</p>	DBINT	NULL
SupervAssistCallsToHalf	<p>Number of calls for which agents received supervisor assistance during the half-hour interval. The value is counted when the supervisor-assisted call completes, and the database is updated every half hour.</p> <p>This field is applicable for <b>Unified CCE</b>.</p>	DBINT	NULL
TalkAutoOutTimeToHalf	Number of seconds the agent spent talking on AutoOut (predictive) calls during the half-hour interval. TalkAutoOutTimeToHalf is included in the calculation of LoggedOnTimeToHalf.	DBINT	NULL

**Skill\_Group\_Half\_Hour Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
TalkInTimeToHalf	Number of seconds agents associated with this skill group spent talking on inbound ACD calls (neither internal nor outbound) during the half-hour interval. TalkInTime is included in the calculation of TalkTime and LoggedOnTime.	DBINT	NULL
TalkOtherTimeToHalf	Number of seconds agents spent talking on other calls (neither inbound nor outbound) during the half-hour interval. Examples of "other calls include agent-to-agent transfers and supervisor calls. TalkOtherTime is included in the calculation of TalkTime and LoggedOnTime.	DBINT	NULL
TalkOutTimeToHalf	Number of seconds agents associated with this skill group spent talking on external outbound or consultive transfer calls during the half-hour interval. TalkOutTime is included in the calculation of TalkTime and LoggedOnTime.	DBINT	NULL
TalkPreviewTimeToHalf	Number of seconds the agent spent talking on outbound Preview calls during the half-hour interval. TalkAutoOutTimeToHalf is included in the calculation of LoggedOnTimeToHalf.	DBINT	NULL
TalkReserveTimeToHalf	Number of seconds the agent spent talking on agent reservation calls during the half-hour interval. TalkReserveTimeToHalf is included in the calculation of LoggedOnTimeToHalf.	DBINT	NULL
TalkTimeToHalf	<p>Total seconds agents associated with this skill group were in the Talking state during the half-hour interval.</p> <p>This value is based on the following:</p> <ul style="list-style-type: none"> <li>• <b>TalkInTimeToHalf</b></li> <li>• <b>TalkOutTimeToHalf</b></li> <li>• <b>TalkOtherTimeToHalf</b></li> <li>• <b>TalkAutoOutTime</b></li> <li>• <b>TalkPreviewTime</b></li> <li>• <b>TalkReservedTime</b></li> </ul>	DBINT	NULL
TimeZone	The time zone for the date and time. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK NOT NULL
TransferInCallsTimeToHalf	Number of seconds agents associated with this skill group spent handling transferred in calls that ended during this half-hour interval.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every half hour.		
TransferInCallsToHalf	<p>Number of calls transferred into the skill group during the half-hour interval. The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every half hour.</p> <p>In Unified CCE with an IPCC System PG, a call is counted as offered as soon as it is sent to a skill group.</p> <p>In Unified CCE, a call is counted as offered only when it is answered.</p> <p>This field is applicable for both <b>Unified ICM</b> and <b>Unified CCE</b>.</p>	DBINT	NULL
TransferOutCallsToHalf	Number of calls transferred out of the skill group during the half-hour interval. The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every half hour.	DBINT	NULL
WhisperCallsToHalf	<p>The number of calls coached either by the supervisor or by the agent.</p> <p>This field is applicable for <b>Unified CCE only</b>.</p>	DBINT	NULL
WorkNotReadyTimeToHalf	Total time in seconds agents associated with this skill group were in the WORK_NOT_READY state during the half-hour interval. WorkNotReadyTime is included as in the calculation of LoggedOnTime.	DBINT	NULL
WorkReadyTimeToHalf	Total seconds agents in the skill group were in the WORK_READY state for tasks associated with this skill group that ended during this half-hour interval. WorkReadyTime is included in the calculation of LoggedOnTime.	DBINT	NULL

## Skill\_Group\_Interval Table

This section describes the Skill Group Interval Table

**Note:** In the Skill\_Group\_Interval table, the *Hold time* is calculated based on the agent state.

**Skill\_Group\_Interval Table****Fields in Skill\_Group\_Interval Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
AbandonHoldCallsOut	The number of outbound calls that abandon while on hold. This will be reported by OPC.	DBINT	YES
AvgHandledCallsTalkTime	<p>Average talk time in seconds for inbound calls associated with the skill group that were handled during the reporting interval. This value is calculated as follows: <b>HandledCallsTalkTime / CallHandled</b></p> <p><b>AvgHandledCallsTalkTime</b> is calculated only for handled calls, which are calls that are finished (that is, any after-call work associated with the call has been completed). This field is counted when any after-call work associated with the call is completed, and the database is updated every reporting.</p> <p><b>Note:</b> In an IPCC Enterprise Gateway deployment, Unified ICM (parent) connected with an Unified CCE with an IPCC System PG (child) or Cisco Unified Contact Center Express (child) through IPCC Gateway PG, network queuing data is not available in the child or in the child agent/supervisor desktop. The time spent in the network queue is not included in the reporting metrics in the child. A call center manager who would normally only look at the Unified CCE child reports will need to also look at the parent Unified ICM reports for network queuing data.</p>	DBINT	YES
AnswerWaitTime	<p>The sum of the answer wait times of all tasks agents associated with the skill group answered during this reporting interval. It is counted at the time the call is answered, and the database is updated every reporting.</p> <p>It is the current reporting interval total of:</p> <ol style="list-style-type: none"> <li>1. In Unified ICM, the time in seconds from when the call first arrives at the ACD to when the agent answers the call.</li> </ol> <p><b>AnswerWaitTime</b> is based on the following:</p> <ul style="list-style-type: none"> <li>– DelayTime</li> <li>– LocalQTime</li> <li>– RingTime</li> </ul> <ol style="list-style-type: none"> <li>2. In Unified CCE, the number of seconds calls spent between first being queued to the skillgroup through Select (LAA) or Queue to Skillgroup nodes to when they were answered by an agent.</li> </ol> <p><b>AnswerWaitTime</b> is based on the following:</p> <ul style="list-style-type: none"> <li>– DelayTime</li> <li>– LocalQTime</li> </ul>	DBINT	YES

Field Name:	Description:	Data Type:	Keys and Null Option:
	<ul style="list-style-type: none"> <li>– RingTime</li> <li>– NetworkQTime</li> </ul> <p><b>Note:</b> With the existence of a network VRU, in an Unified ICME deployment with an IPCC System PG, this value will not include time spent in the network VRU.</p>		
AbandonRingCalls	Total number of ACD calls to the skill group that were abandoned while ringing at an agent's position. The value is counted at the time the call disconnects, and the database is updated every reporting.	DBINT	YES
AbandonRingTime	Total ring time associated with ACD calls to the skill group that were abandoned while alerting an agent's position. RingTime occurs after any DelayTime and LocalQTime. The value is counted at the time the call disconnects, and the database is updated every reporting.	DBINT	YES
AbandonHoldCalls	The total number of ACD calls to the skill group that abandoned while being held at an agents position. The value is counted at the time the call disconnects, and the database is updated every reporting.	DBINT	YES
AgentOutCallsTalkTime	Total talk time, in seconds, outbound ACD calls handled by agents associated with this skill group that ended during the reporting interval. The value includes the time spent from the call being initiated by the agent to the time the agent begins after call work for the call. This includes HoldTime associated with the call. The value is counted when the after-call-work time associated with the call (if any) is completed, and the database is updated every reporting.	DBINT	YES
AgentOutCallsOnHold	The total number of outbound ACD calls an agent associated with this skill group that ended during the current reporting interval that were placed on hold at least once during the life of the call. The value is counted when the after-call work associated with the call (if any) is completed, and the database is updated every reporting.	DBINT	YES
AgentOutCallsOnHoldTime	Total number of seconds outbound ACD calls were placed on hold by agents associated with this skill group. This value updated in the database when after-call work associated with the call (if any) is completed.	DBINT	YES
AgentTerminatedCalls	Not currently used.	DBINT	YES
AvgHandledCallsTime	Average handle time in seconds for inbound calls associated with the skill group that were handled during the reporting interval. This value is calculated as follows: HandledCallsTime / CallsHandled. The	DBINT	YES

**Skill\_Group\_Interval Table**

Field Name:	Description:	Data Type:	Keys and Null Option:
	AvgHandledCallsTime value is counted when any after-call work time associated with the call is completed, and the database is updated every reporting.		
AutoOutCalls	The total number of AutoOut (predictive) calls made by agents associated with this skill group that ended during the reporting interval. The value is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every reporting.	DBINT	YES
AutoOutCallsTime	The total handle time, in seconds, for AutoOut (predictive) calls handled by agents associated with this skill group that ended during the reporting interval. Handle time includes WorkTime, TalkTime, and HoldTime. The AutoOutCallsTime value includes the time spent from the call being initiated to the time the agent completes after-call work time for the call. The value is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every reporting.	DBINT	YES
AutoOutCallsTalkTime	Total talk time, in seconds, for AutoOut (predictive) calls handled by agents associated with this skill group that ended during the reporting interval. This value includes the time spent from the call being initiated to the time the agent begins after-call work for the call. It includes the HoldTime associated with the call. AutoOutCallsTalkTime is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every reporting.	DBINT	YES
AutoOutCallsOnHold	The total number of ended AutoOut (predictive) calls that agents associated with this skill group have placed on hold at least once. The value is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every reporting.	DBINT	YES
AutoOutCallsOnHoldTime	The total number of seconds that AutoOut (predictive) calls were placed on hold by agents associated with this skill group during the reporting interval. The value is counted when the after-call work associated with the call (if any) has completed, and the database is updated every reporting.	DBINT	YES
AgentOutCallsTime	The total handle time, in seconds, for outbound ACD calls handled by the skill group that ended during the reporting interval. Handle time includes WorkTime, TalkTime, and HoldTime. The AgentOutCallsTime value includes the time spent from the call being initiated by the agent to the time the agent completes after-call work time for the call. The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every reporting.	DBINT	YES
AgentOutCalls	The total number of outbound ACD calls made by agents in the skill group that ended during a reporting interval. The value is counted when any	DBINT	YES

Field Name:	Description:	Data Type:	Keys and Null Option:
	after-call work time associated with the call is completed, and the database is updated every reporting.		
AvailTime	Total time in seconds agents associated with this skill group were in the Not_Active state with respect to this skill group during the reporting interval. AvailTime is included in the calculation of LoggedOnTime.	DBINT	YES
BargeInCalls	The number of calls associated with this skill group barged in on either by the supervisor or by the agent. This field is applicable for Unified CCE only.	DBINT	YES
BucketIntervalID	The ID of Bucket Intervals from the Bucket_Interval table used to generate the following RouterAnsInterval and RouterAbandInterval fields in this record.	DBINT	NULL
BusyOtherTime	Number of seconds agents have spent in the BusyOther state with respect to this skill group during the reporting interval. BusyOtherTime is included in the calculation of LoggedOnTime.	DBINT	YES
CampaignID	For skill groups assigned to campaigns only per the Campaign Skill Group. As skill groups are often re-used for new campaigns, this provides a historical trail for proper reporting. Filled in by the CallRouter.	DBINT	YES
CallbackMessages	Number of callback messages processed by the skill group during the reporting interval.	DBINT	YES
CallbackMessagesTime	Number of seconds the skill group spent processing callback messages during the reporting interval.	DBINT	YES
CallsHandled	<p>The number of inbound ACD calls answered and wrap-up completed by agents associated with this skill group during the reporting interval.</p> <p>This field is applicable for Unified ICM, Unified CCE and Outbound Option. A handled call is:</p> <ol style="list-style-type: none"> <li>1. An incoming ACD call that was answered by an agent, and then completed.</li> <li>2. A call associated with Outbound Option that the agent answered, and then completed.</li> <li>3. A non-voice task that the agent started working on then completed.</li> </ol> <p>A handled call/task is completed when the agent associated with the call/task finishes the wrap-up work associated with the call/task.</p>	DBINT	YES

## Skill\_Group\_Interval Table

Field Name:	Description:	Data Type:	Keys and Null Option:
CallsAnswered	<p>Number of calls answered by agents associated with this skill group during the reporting interval. This value is set by the PG. The number of calls answered includes only handled calls and internal calls received, which are tracked in the CallsHandled and InternalCallsReceived fields, respectively. The count for CallsAnswered is counted at the time the call is answered, and the database is updated every reporting.</p> <p><b>Note:</b> With the existence of a network VRU, in an Unified ICME deployment with an IPCC System PG, this value will not include time spent in the network VRU.</p>	DBINT	YES
ConsultOutCalls	The number of external consult calls the agents in this skill group completed during this interval.	DBINT	NULL
ConsultOutCallsTime	Time the agents in this skill group spent on consult external calls. It will include talk, hold, and wrap time. Time is counted when the call ends. This time	DBINT	NULL
ConsultativeCalls	The number of consultative calls agents associated with the skill group that ended in this reporting. The count is counted when the after-call work time associated with the consultative call (if any) is completed, and the database is updated every reporting.	DBINT	YES
ConsultativeCallsTime	The number of seconds agents associated with this skill group spent handling a consultative call. The value is counted when the after-call work time associated with the consultative call (if any) is completed, and the database is updated every reporting.	DBINT	YES
CallsOffered	<p>The number of calls received by this skill group for the current reporting interval. In Unified CCE with an IPCC System PG, a call is counted as offered as soon as it is sent to a skill group. In Unified CCE without an IPCC System PG, a call is counted as offered only when it is answered.</p> <p><b>Note:</b> For consistent values, in Unified CCE regardless of whether or not there is an IPCC System PG, use RouterCallsOffered.</p>	DBINT	YES
CallsQueued	<p>The number of calls queued to this skill group by the ACD in the current reporting interval. In Unified CCE with an IPCC System PG, this field is applicable and is updated when a call is queued to the skill group.</p> <p><b>Note:</b> Not applicable for Unified CCE without an IPCC System PG and is not updated.</p> <p>For consistent values, in Unified CCE regardless of whether or not there is an IPCC System PG, use RouterQueueCalls.</p>	DBINT	YES

Field Name:	Description:	Data Type:	Keys and Null Option:
ConferencedInCalls	<p>The number of incoming calls skill group agents were conferenced into. Incoming calls include ACD and non-ACD calls. The value is counted when the agent drops off the call or the call becomes a simple two-party call, and the database is updated every reporting.</p> <p><b>Note:</b> For blind conferences in Unified CCE with an IPCC System PG, this field is updated when the call that was blind conferenced to an IVR is subsequently answered by another agent. For this call scenario this field is not updated in Unified CCE without an IPCC System PG.</p>	DBINT	YES
ConferencedInCallsTime	<p>The number of seconds agents associated with this skill group were involved in incoming conference calls. Conferenced in calls include both ACD and non-ACD. The value is counted when the agent drops off the call or the call becomes a simple two-party call, and the database is updated every reporting. For blind conferences in Unified CCE, the value is counted when an agent blind conferences the call to an IVR, and the database is updated every reporting. For blind conferences in Unified CCE with an IPCC System PG, the value is not updated in the database until the call that was blind conferenced to an IVR is subsequently answered by another agent.</p> <p><b>Note:</b> For blind conferences in Unified CCE with an IPCC System PG, this field is updated when the call that was blind conferenced to an IVR is subsequently answered by another agent. For this call scenario this field is not updated in Unified CCE without an IPCC System PG.</p>	DBINT	YES
ConferencedOutCalls	The number of conference calls that the skill group agents initiated. The conferenced out calls include ACD and non-ACD calls. The value is counted when the agent drops off the call or the call becomes a simple two-party call, and the database is updated every reporting.	DBINT	YES
ConferencedOutCallsTime	The number of seconds that agents spent on conference calls that they initiated. This includes time spent on both ACD and non-ACD conference calls initiated by the agent. The value is counted when the agent drops off the call or the call becomes a simple two-party call, and the database is updated every reporting.	DBINT	YES
DateTime	The date and time at the start of the reporting interval.	DBSMALLDATE	PK1, NOT NULL
DbDateTime	The current date and time stamp when the records are written to the HDS database. The logger database has NULL for this column.	DBDATETIME	IE1, YES
EmergencyAssists	The number of emergency assist requests either by the agent or by the supervisor. This field is applicable for Unified CCE only.	DBINT	YES

**Skill\_Group\_Interval Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
HoldTime	Number of seconds where all calls to an agent are on hold during the reporting interval. HoldTime is counted only while the agent is doing no other call-related activity. HoldTime is included in the calculation of LoggedOnTime.	DBINT	YES
HandledCallsTalkTime	The number of seconds that agents spent in TalkTime for calls associated with this skill group that ended in this reporting interval. This field is applicable for both Unified ICM, Unified CCE and Outbound Option.	DBINT	YES
HandledCallsTime	The time in seconds agents spent on calls that were handled within the reporting interval. This field is applicable for both Unified ICM, Unified CCE and Outbound Option.	DBINT	YES
IncomingCallsOnHoldTime	Total number of seconds that inbound ACD calls calls that agents associated with the skill group placed on hold that ended during the reporting interval. The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every reporting.	DBINT	YES
IncomingCallsOnHold	The total number of inbound ACD calls that agents associated with the skill group placed on hold at least once during the reporting interval. The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every reporting.	DBINT	YES
InternalCallsOnHoldTime	The total number of seconds internal calls agents associated with the skill group ended in this reporting ever put on hold. The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every reporting.	DBINT	YES
InternalCallsOnHold	The total number of internal calls that agents associated with the skill group ended in this reporting that were ever placed on hold. The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every reporting.	DBINT	YES
InternalCallsRcvdTime	Number of seconds spent on internal calls received by the agent during the reporting interval. The value is incremented when the after-call-work time associated with the call has completed.	DBINT	YES
InternalCallsRcvd	Number of internal calls associated with this skill group that were received by an agent and that ended during this reporting interval. The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every reporting.	DBINT	YES
InternalCalls	Number of internal calls agents associated with this skill group ended during the reporting interval. The value is counted when the after-call work	DBINT	YES

Field Name:	Description:	Data Type:	Keys and Null Option:
	time associated with the call (if any) is completed, and the database is updated every reporting.		
InternalCallsTime	Number of seconds spent on internal calls initiated by the agent during the reporting interval. The value is incremented when the after-call-work time associated with the call has completed.	DBINT	YES
InterruptedTime	This field is currently supported.	DBINT	YES
InterceptCalls	The number of calls intercepted either by the supervisor or by the agent. This field is applicable for Unified CCE only.	DBINT	YES
LoggedOnTime	<p>Total time, in seconds, agents associated with this skill group were logged on during the reporting interval. This field is applicable for both Unified ICM, Unified CCE and Outbound Option.</p> <p>This value is based on the following:</p> <ol style="list-style-type: none"> <li>1. HoldTime</li> <li>2. TalkInTime</li> <li>3. TalkOutTime</li> <li>4. TalkOtherTime</li> <li>5. NotReadyTime</li> <li>6. WorkReadyTime</li> <li>7. WorkNotReadyTime</li> <li>8. BusyOtherTime</li> <li>9. ReservedStateTime</li> <li>10. TalkAutoOutTime</li> <li>11. TalkPreviewTime</li> <li>12. TalkReservedTime</li> </ol>	DBINT	YES
MonitorCalls	The number of calls monitored either by the supervisor or by the agent. This field is applicable for Unified CCE only.	DBINT	YES
NetConsultativeCalls	The number of Network consultative calls completed by agents in the skill group with at least one call on hold. The count is counted when the	DBINT	YES

**Skill\_Group\_Interval Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	after-call work time associated with the consultative call (if any) is completed, and the database is updated every reporting.		
NetConsultativeCallsTime	The number of seconds agents in the skill group spent handling a Network consultative call with at least one call on hold. The value is counted when the after-call work time associated with the consultative call (if any) is completed, and the database is updated every reporting.	DBINT	YES
NetConferencedOutCalls	The number of Network conference calls that the skill group agents initiated. The conferenced out calls only include Network conference calls. The value is counted when the agent drops off the call or the call becomes a simple two-party call, and the database is updated every reporting.	DBINT	YES
NetConfOutCallsTime	The number of seconds that agents spent on Network conference calls that they initiated. This only includes time spent on Network conference calls initiated by the agent. This database element uses ConferenceTime from the Termination_Call_Detail table. The value is counted when the agent drops off the call or the call becomes a simple two-party call, and the database is updated every reporting.	DBINT	YES
NetTransferOutCalls	Number of calls Network (Blind and Consultative) transferred out of the skill group during the reporting interval. The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every reporting.	DBINT	YES
NotReadyTime	Total seconds agents were in the Not Ready state with respect to this skill group during the reporting interval. NotReadyTime is included in the calculation of LoggedOnTime.	DBINT	YES
PercentUtilization	Percentage of Ready time that agents associated with this skill group spent talking or doing call work during the reporting interval. This is the percentage of time these agents spent working on calls versus the time agents were ready.	DBFLT4	YES
PreviewCalls	Total number of outbound Preview calls made by agents associated with this skill group that ended during the reporting interval. The value is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every reporting.	DBINT	YES
PreviewCallsTime	Total handle time, in seconds, for outbound Preview calls handled by agents associated with this skill group that ended during the reporting interval. Handle time includes WorkTime, TalkTime, and HoldTime. The PreviewCallsTime value includes the time spent from the call being initiated to the time the agent completes after-call work time for the call. The value	DBINT	YES

Field Name:	Description:	Data Type:	Keys and Null Option:
	is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every reporting.		
PreviewCallsTalkTime	Total talk time, in seconds, for outbound Preview calls handled by agents associated with this skill group that ended during the reporting interval. This value includes the time spent from the call being initiated to the time the agent begins after-call work for the call. It therefore includes the HoldTime associated with the call. PreviewCallsTalkTime is counted when the after-call work time associated with the call (if any) has completed. This field is applicable for both Unified ICM and Unified CCE, and the database is updated every reporting.	DBINT	YES
PreviewCallsOnHold	The total number of ended outbound Preview calls that agents associated with this skill group have placed on hold at least once during the reporting interval. The value is counted when the after-call work time associated with the call (if any) has completed, and the database is updated every reporting.	DBINT	YES
PreviewCallsOnHoldTime	The total number of seconds outbound Preview calls were placed on hold by agents associated with this skill group during the reporting interval. The value is counted when the after-call work associated with the call (if any) has completed, and the database is updated every reporting.	DBINT	YES
ReserveCalls	Number of reservation calls. This should always equal to the ReserveCallsOnHold.	DBINT	YES
ReserveCallsTime	This is the sum of the above two columns. This is counted using Call State.	DBINT	YES
ReserveCallsTalkTime	This is the talk time for the reservation call. It should be either zero or a few seconds. This is counted using Call State.	DBINT	YES
ReserveCallsOnHold	The total number of reservation calls placed on hold at least once during the reporting interval.	DBINT	YES
ReserveCallsOnHoldTime	The time the reservation call has been on hold during the reporting interval.	DBINT	YES
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK1, NOT NULL
RedirectNoAnsCalls	The number of ACD calls to the skill group that rang at an agent's terminal and redirected on failure to answer. The value is counted at the time the call is diverted to another device, and the database is updated every reporting.	DBINT	YES

**Skill\_Group\_Interval Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
RedirectNoAnsCallsTime	The number of seconds ACD calls to the skill group rang at an agent's terminal before being redirected on failure to answer on failure to answer. The value is counted at the time the call is diverted to another device, and the database is updated every reporting.	DBINT	YES
RouterAbandInterval1	<p>Number of calls abandoned within interval 1.</p> <p>This column is applicable to both third party ACDs and CCEnterprise with the following exception: the column is not incremented if the call abandons after it is routed to a standard ACD unless the call was translation routed.</p> <p><b>Note:</b> In an IPCC Enterprise Gateway deployment, Unified ICM (parent) connected with an Unified CCE with an IPCC System PG (child) or Cisco Unified Contact Center Express (child) through IPCC Gateway PG, network queuing data is not available in the child or in the child agent/supervisor desktop. The time spent in the network queue is not included in the reporting metrics in the child. A call center manager who would normally only look at the Unified CCE child reports will need to also look at the parent Unified ICM reports for network queuing data.</p>	DBINT	NULL
RouterAbandInterval2	<p>Number of calls abandoned within interval 2.</p> <p><b>Note:</b> See AbandInterval1</p>	DBINT	NULL
RouterAbandInterval3	<p>Number of calls abandoned within interval 3.</p> <p><b>Note:</b> See AbandInterval1</p>	DBINT	NULL
RouterAbandInterval4	<p>Number of calls abandoned within interval 4.</p> <p><b>Note:</b> See AbandInterval1</p>	DBINT	NULL
RouterAbandInterval5	<p>Number of calls abandoned within interval 5.</p> <p><b>Note:</b> See AbandInterval1</p>	DBINT	NULL
RouterAbandInterval6	<p>Number of calls abandoned within interval 6.</p> <p><b>Note:</b> See AbandInterval1</p>	DBINT	NULL
RouterAbandInterval7	<p>Number of calls abandoned within interval 7.</p> <p><b>Note:</b> See AbandInterval1</p>	DBINT	NULL
RouterAbandInterval8	Number of calls abandoned within interval 8.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	<b>Note:</b> See AbandInterval1		
RouterAbandInterval9	Number of calls abandoned within interval 9.  <b>Note:</b> See AbandInterval1	DBINT	NULL
RouterAbandInterval10	Number of calls abandoned within interval 10.  <b>Note:</b> See AbandInterval1	DBINT	NULL
RouterAnsInterval1	Number of calls answered within interval 1.  This column is applicable to both third party ACDs and CC Enterprise with the following exception: the column is not incremented if the call is answered by an agent on a third party ACD unless the call was translation routed.  <b>Note:</b> In an IPCC Enterprise Gateway deployment, Unified ICM (parent) connected with an Unified CCE with an IPCC System PG (child) or Cisco Unified Contact Center Express (child) through IPCC Gateway PG, network queuing data is not available in the child or in the child agent/supervisor desktop. The time spent in the network queue is not included in the reporting metrics in the child. A call center manager who would normally only look at the Unified CCE child reports will need to also look at the parent Unified ICM reports for network queuing data.  <b>Note:</b> With the existence of a network VRU, for Unified CCE and for Unified ICM systems in which calls are translation-routed, the measurement of Service Level begins when the call arrives at the routing script, or when its call type is changed. This means that if self-service is performed on a call before the call is queued to an agent, the routing script must be set up to change the call type of the call when self-service is completed. Otherwise, the time spent in self-service will negatively impact the Service Level	DBINT	NULL
RouterAnsInterval2	Number of calls answered within interval 2.  <b>Note:</b> See AnsInterval1	DBINT	NULL
RouterAnsInterval3	Number of calls answered within interval 3.  <b>Note:</b> See AnsInterval1	DBINT	NULL
RouterAnsInterval4	Number of calls answered within interval 4.  <b>Note:</b> See AnsInterval1	DBINT	NULL

**Skill\_Group\_Interval Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
RouterAnsInterval5	Number of calls answered within interval 5.  <b>Note:</b> See AnsInterval1	DBINT	NULL
RouterAnsInterval6	Number of calls answered within interval 6.  <b>Note:</b> See AnsInterval1	DBINT	NULL
RouterAnsInterval7	Number of calls answered within interval 7.  <b>Note:</b> See AnsInterval1	DBINT	NULL
RouterAnsInterval8	Number of calls answered within interval 8.  <b>Note:</b> See AnsInterval1	DBINT	NULL
RouterAnsInterval9	Number of calls answered within interval 9.  <b>Note:</b> See AnsInterval1	DBINT	NULL
RouterAnsInterval10	Number of calls answered within interval 10.  <b>Note:</b> See AnsInterval1	DBINT	NULL
RouterCallsAbandQ	Number of calls queued to the group by the CallRouter that were abandoned during the half-hour interval. This field is set by the CallRouter.	DBINT	YES
RouterDelayQAbandTime	This field is reserved for future use. It will represent the total time spent by callers waiting in a queue with this skill group that abandon before being routed to an agent.	DBINT	
RouterMaxCallsQueued	The maximum number of calls queued for this skill group during this interval. Calls queued against multiple skill groups will be included in the count for each skill group it was queued to.	DBINT	NULL
RouterMaxCallWaitTime	The longest a call had to wait before being answered, abandoned, or otherwise ended. This includes time in the network queue, local queue, and ringing at the agent if applicable.	DBINT	NULL
RouterQueueCalls	Number of calls queued to the group by the CallRouter during the reporting interval. This field is set by the CallRouter.	DBINT	YES
RecoveryDay	Currently not used, set to zero (0).	DBINT	NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
ReportingHalfHour	The value indicates Half Hour boundary interval (0 - 47). Two 15 minute interval records will have a unique half hour boundary value.	DBINT	IE2, NULL
ReportingInterval	During the upgrade from 7.x to 8.0, this column value will be NULL and it is assumed to be 30 minute interval.	DBINT	IE3, NULL
ReservedStateTime	How long an agent is in Reserved state. This is counted using Agent State.	DBINT	YES
RouterCallsOffered	<p>The number of calls routed or queued for the Skill Group in the reporting interval. This value is set by the Call Router.</p> <p>This fields does not include local ACD calls, not routed by Unified ICM. Such calls are counted in the CallsOffered field of Skill_Group tables.</p> <p>Note: RouterCallsOffered = RouterCallsAbandToAgent + CallsHandled + RouterCallsDequeued + RedirectNoAns+ RouterError+ RouterCallsAbandQ.</p> <p>This field is applicable to Unified CCE environments and to Unified ICM environments where calls are translation-routed to Skill Groups.</p> <p>This value is incremented by:</p> <ol style="list-style-type: none"> <li>1. CallType short calls, which are counted as abandoned for Skill Groups. (There is no short call count in the Skill_Group_Real_Time table.)</li> <li>2. Calls that are cancelled bis Cancel Queue node and re-queued to the same Skill Group.</li> <li>3. Calls that are routed to a Skill Group, re-queried, and re-queued to the same Skill Group.</li> </ol>	DBINT	YES
RouterCallsAbandToAgent	In the reporting interval, the number of calls abandoned after they have been routed to the agent desktop and before they have been answered (for example, Abandon Ringing). This field is applicable for Unified CCE systems and for systems where calls are translation-routed to Skill Groups.	DBINT	YES
RouterCallsDequeued	The number of calls that were de-queued from this skill group to be routed to another skill group in the reporting interval. This field is also incremented when a call is de-queued via Cancel Queue node. This field is applicable to Unified CCE environments and to ICM environments where calls are translation-routed to Skill Groups.	DBINT	YES
RouterError	The number of calls that resulted in an error condition in the reporting interval. This field is applicable to Unified CCE environments and to	DBINT	YES

**Skill\_Group\_Interval Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	Unified ICM environments where calls are translation-routed to Skill Groups.		
RouterCallsAbandDequeued	The number of calls that were abandoned and de-queued from this skill group. When a call is queued to multiple skill groups and abandoned, the RouterCallsAbandQ field is incremented for one skill group and RouterCallsAbandDequeued is incremented for all of the other skill groups. The group that is charged with the abandon is the group to which the call had been continuously queued to the longest at the time of the abandon. Normally, this would be the first group the script queued the call to, unless a more complicated dequeue, queue, or requeue scenario changes the order. The term "continuously queued" means that if a call is queued to a group, later dequeued, and still later requeued, the earlier time in queue is not used in determining which group the abandon is charged against. This field is applicable to Unified CCE environments and to Unified ICM environments where calls are translation-routed to Skill Groups.	DBINT	YES
Reserved1	Reserved for future use.	DBINT	YES
Reserved2	Reserved for future use.	DBINT	YES
Reserved3	Reserved for future use.	DBINT	YES
Reserved4	Reserved for future use.	DBINT	YES
Reserved5	Reserved for future use.	DBFLT4	YES
SkillTargetID	The SkillTargetID of the skill group. Together with the SkillGroupSkillTargetID, identifies the skill group member.	DBINT	PK2, NOT NULL
SupervAssistCalls	Number of calls for which agents received supervisor assistance during the reporting interval. The value is counted when the supervisor-assisted call completes, and the database is updated every reporting. This field is applicable for Unified CCE.	DBINT	YES
SupervAssistCallsTime	Number of seconds agents associated with this skill group spent on supervisor-assisted calls during the reporting interval. The value is counted when the supervisor-assisted call completes, and the database is updated every reporting. This field is applicable for Unified CCE.	DBINT	YES
ShortCalls	The number of calls answered by agents associated with this skill group where the duration of the calls falls short of the AnsweredShortCalls threshold. You might choose to factor these calls out of handle time statistics. Short calls are considered handled, not abandoned.	DBINT	YES

Field Name:	Description:	Data Type:	Keys and Null Option:
ServiceLevel	<p>Service Level for the skill group during the reporting interval. This value is computed based on the ServiceLevelCalls, ServiceLevelCallsoffered, ServiceLevelCallsAband and CallsDequeued.</p> <p>There are three types of service level calculations, and they are determined by the Service Level type chosen in configuration.</p> <p>They are:</p> <ol style="list-style-type: none"> <li>1. <b>Ignore Abandoned Calls</b> <math>\text{ServiceLevel} = \text{ServiceLevelCalls} / (\text{ServiceLevelCallsoffered} - \text{ServiceLevelCallsAband} - \text{RouterCallsDequeued})</math></li> <li>2. <b>Abandoned Calls have Negative Impact</b> <math>\text{ServiceLevel} = \text{ServiceLevelCalls} / \text{ServiceLevelCallsoffered} - \text{RouterCallsDequeued}</math></li> <li>3. <b>Abandoned Calls have Positive Impact</b> <math>\text{ServiceLevel} = (\text{ServiceLevelCalls} + \text{ServiceLevelCallsAband}) / (\text{ServiceLevelCallsoffered} - \text{RouterCallsDequeued})</math></li> </ol> <p><b>Note:</b> This field is relevant to the Unified CCE environment only.</p>	DBFLT4	YES
ServiceLevelCalls	<p>Calls may abandon while in the Skill Group queue, or they may abandon after they have been routed to a Skill Group. Calls that abandon after they are routed to a Skill Group are identified by TCD records with abandoned call disposition flag. If the call is queued and abandons before it is routed to any Skill Groups (within the ServiceLevel threshold), the Router will increment this value for ALL the Skill Groups this call was queued for. If the call abandons after it was routed to a Skill Group, that Skill Group will have ServiceLevelCallsAband incremented.</p> <p><b>Note:</b> This field is relevant to the Unified CCE environment only.</p>	DBINT	YES
ServiceLevelCallsAband	<p>The number of calls that abandoned within the skill group ServiceLevel threshold in the reporting interval. Calls may abandon while in the Skill Group queue, or they may abandon after they have been routed to a Skill Group. Calls that abandon after they are routed to a Skill Group are identified by TCD records with abandoned call disposition. If the call is queued and abandons before it is routed to any Skill Groups (within the ServiceLevel threshold), the Router will increment this value for ALL the Skill Groups this call was queued for. If the call abandons after it was routed to a Skill Group, that Skill Group will have ServiceLevelCallsAband incremented. Other Skill Groups will have ServiceLevelCallsDequeued incremented. Dequeuing the call via Cancel Node has no impact on ServiceLevelCallsAband.</p>	DBINT	YES

**Skill\_Group\_Interval Table**

Field Name:	Description:	Data Type:	Keys and Null Option:
	<p><b>Note:</b> This field is relevant to the Unified CCE environment only.</p> <p><b>Note:</b> With the existence of a network VRU, this value includes time in the network queue.</p>		
ServiceLevelCallsDequeue	<p>The number of queued calls de-queued from a skill group within the skill ServiceLevel threshold in the reporting interval. Calls may be de-queued via Cancel Queue node or de-queued from this Skill Group to be routed to a different Skill Group.</p> <p><b>Note:</b> This field is relevant to the Unified CCE environment only.</p> <p><b>Note:</b> With the existence of a network VRU, this value includes time in the network queue.</p>	DBINT	YES
ServiceLevelError	<p>The calls that ended in Error state within the skill group Service Level threshold during the reporting interval.</p> <p><b>Note:</b> This field is relevant to the Unified CCE environment only.</p> <p><b>Note:</b> With the existence of a network VRU, this value includes time in the network queue.</p>	DBINT	YES
ServiceLevelRONA	<p>The calls that redirected on no answer within the Service Level threshold during the reporting interval. These calls are part of the ServiceLevelCallsOffered.</p> <p><b>Note:</b> This field is relevant to the Unified CCE environment only.</p> <p><b>Note:</b> With the existence of a network VRU, this value includes time in the network queue.</p>	DBINT	YES
ServiceLevelCallsOffered	<p>The number of calls routed to a skill group or queued for a skill group in the reporting interval.</p> <p>Includes the following categories of calls:</p> <ol style="list-style-type: none"> <li>1. Calls that are answered within the ServiceLevel threshold</li> <li>2. Calls that are abandoned within the ServiceLevel threshold</li> <li>3. Calls that are redirected within the ServiceLevel threshold (this is consistent with Call Type ServiceLevel)</li> <li>4. Calls that are not complete after the ServiceLevel threshold has passed (that is, calls queued longer than the Service Level threshold).</li> </ol>	DBINT	YES

Field Name:	Description:	Data Type:	Keys and Null Option:
	<p><b>Note:</b> ServicelevelCallsOffered field, calls that encountered an error are counted, irrespective of how the calls ended (within or beyond the threshold). You can use the RouterError field to exclude all the erroneous calls and ServiceLevelError field to exclude erroneous calls before threshold.</p> <p><b>Note:</b> This field is relevant to the Unified CCE environment only.</p> <p><b>Note:</b> With the existence of a network VRU, this value includes time in the network queue.</p>		
TimeZone	The time zone for the date and time. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK3, NOT NULL
TalkInTime	Number of seconds agents associated with this skill group spent talking on inbound ACD calls (neither internal nor outbound) during the reporting interval. TalkInTime is included in the calculation of TalkTime and LoggedOnTime.	DBINT	YES
TalkOutTime	Number of seconds agents associated with this skill group spent talking on external outbound or consultive transfer calls during the reporting interval. TalkOutTime is included in the calculation of TalkTime and LoggedOnTime.	DBINT	YES
TalkOtherTime	Number of seconds agents spent talking on other calls (neither inbound nor outbound) during the reporting interval. Examples of other calls include agent-to-agent transfers and supervisor calls. TalkOtherTime is included in the calculation of TalkTime and LoggedOnTime.	DBINT	YES
TransferInCalls	<p>Number of calls transferred into the skill group during the reporting interval. The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every reporting. In Unified CCE with an IPCC System PG, a call is counted as offered as soon as it is sent to a skill group. In Unified CCE, a call is counted as offered only when it is answered. This field is applicable for both Unified ICM and Unified CCE.</p> <p><b>Note:</b> For blind transfers in Unified CCE with an IPCC System PG, this field is updated when the call that was blind transferred to an IVR is subsequently transferred to another agent and the agent answers the call. For this call scenario this field is not updated in Unified CCE without an IPCC System PG.</p>	DBINT	YES
TalkTime	Total seconds agents associated with this skill group were in the Talking state during the reporting interval.	DBINT	YES

**Skill\_Group\_Interval Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	<p>This value is based on the following:</p> <ol style="list-style-type: none"> <li>1. TalkInTime</li> <li>2. TalkOutTime</li> <li>3. TalkOtherTime</li> <li>4. TalkAutoOutTime</li> <li>5. TalkPreviewTime</li> <li>6. TalkReservedTime</li> </ol>		
TransferInCallsTime	<p>Number of seconds agents associated with this skill group spent handling transferred in calls that ended during this reporting interval. The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every reporting.</p> <p><b>Note:</b> For blind transfers in Unified CCE with an IPCC System PG, this field is updated when the call that was blind transferred to an IVR is subsequently transferred to another agent and the agent answers the call. For this call scenario this field is not updated in Unified CCE without an IPCC System PG.</p>	DBINT	YES
TransferOutCalls	<p>Number of calls transferred out of the skill group during the reporting interval. The value is counted when the after-call work time associated with the call (if any) is completed, and the database is updated every reporting.</p>	DBINT	YES
TalkAutoOutTime	<p>Number of seconds the agent spent talking on AutoOut (predictive) calls during the reporting interval. TalkAutoOutTime is included in the calculation of LoggedOnTime.</p>	DBINT	YES
TalkPreviewTime	<p>Number of seconds the agent spent talking on outbound Preview calls during the reporting interval. TalkAutoOutTime is included in the calculation of LoggedOnTime.</p>	DBINT	YES
TalkReserveTime	<p>Number of seconds the agent spent talking on agent reservation calls during the reporting interval. TalkReserveTime is included in the calculation of LoggedOnTime.</p>	DBINT	YES
WorkNotReadyTime	<p>Total time in seconds agents associated with this skill group were in the WORK_NOT_READY state during the reporting interval.</p> <p>WorkNotReadyTime is included as in the calculation of LoggedOnTime.</p>	DBINT	YES

Field Name:	Description:	Data Type:	Keys and Null Option:
WorkReadyTime	Total seconds agents in the skill group were in the WORK_READY state for tasks associated with this skill group that ended during this reporting interval. WorkReadyTime is included in the calculation of LoggedOnTime.	DBINT	YES
WhisperCalls	The number of calls coached either by the supervisor or by the agent. This field is applicable for Unified CCE only.	DBINT	YES

## Skill\_Group\_Member Table

This table is one of the Skill Group Member Detail tables in the [Skill Target category \(page 544\)](#). To see database rules for these tables, click [here \(page 600\)](#).

The Skill Group Member table maps agents to skill groups. Each skill group contains one or more member agents. Each agent can be a member of one or more skill groups.

Use the Skill Group Route Explorer tool to add, update, and delete Skill\_Group\_Member records.

### Related tables

[Agent \(page 15\)](#) (AgentSkillTargetID maps to Agent.SkillTargetID)

[Skill Group \(page 432\)](#) (SkillGroupSkillTargetID maps to Skill\_Group.SkillTargetID)

**Table 201: Indexes for Skill\_Group\_Member Table**

index_name	index_description	index_keys
XIE1Skill_Group_Member	nonclustered, unique, primary key located on PRIMARY	AgentSkillTargetID
XPKSkill_Group_Members	clustered, unique, primary key located on PRIMARY	SkillGroupSkillTargetID, AgentSkillTargetID

### Fields in Skill\_Group\_Member Table:

Field Name:	Description:	Data Type:	Keys and Null Option:
AgentSkillTargetID	The agent's SkillTargetID value.	DBINT	PK, FK, IE-1 NOT NULL
SkillGroupSkillTargetID	The skill group's SkillTargetID value.	DBINT	PK, FK NOT NULL

## Skill\_Group\_Real\_Time Table

This table is in the [Skill Target category \(page 544\)](#). To see database rules for these tables, click [here \(page 600\)](#).

**Skill\_Group\_Real\_Time Table**

**Note:** In an IPCC Enterprise Gateway deployment, Unified ICM (parent) connected with an Unified CCE with an IPCC System PG (child) or Cisco Unified Contact Center Express (child) through IPCC Gateway PG, network queuing data is not available in the child or in the child agent/supervisor desktop. The time spent in the network queue is not included in the reporting metrics in the child. A call center manager who would normally only look at the Unified CCE child reports will need to also look at the parent Unified ICM reports for network queuing data.

Local database only. Contains real time information about each skill group.

The system software generates a Skill\_Group\_Real\_Time record for each skill group.

### Related table

[Skill Group \(page 432\)](#) (via SkillTargetID)

**Table 202: Indexes for Skill\_Group\_Real\_Time Table**

index_name	index_description	index_keys
XPKSkill_Group_Real_Time	clustered, unique, primary key located on PRIMARY	SkillTargetID

**Fields in Skill\_Group\_Real\_Time Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
AgentOutCallsTimeTo5	The total handle time, in seconds, for outbound ACD calls associated with this skill group that ended during the rolling five-minute interval. Handle time includes WorkTime, TalkTime, and HoldTime. The AgentOutCallsTime value includes the time spent from the call being initiated by the agent to the time the agent completes after-call work time for the call. The value is updated in the database when the after-call work time associated with the call (if any) is completed.	DBINT	NULL
AgentOutCallsTo5	The total number of outbound ACD calls associated with this skill group that ended during the current five-minute interval. The value is updated in the database when the after-call work time associated with the call (if any) is completed.	DBINT	NULL
AnswerWaitTimeTo5	<p>It is the current (rolling) five-minute interval total of:</p> <ul style="list-style-type: none"> <li>In <b>Unified ICM</b>, the time in seconds from when the call first arrives at the ACD to when the agent answers the call.</li> </ul> <p><i>AnswerWaitTime</i> is calculated from the following:</p> <ul style="list-style-type: none"> <li>– <i>DelayTime</i></li> <li>– <i>LocalQTime</i></li> <li>– <i>RingTime</i></li> </ul>	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	<ul style="list-style-type: none"> <li>• In <b>Unified CCE</b>, the number of seconds calls spent between first queued being queued to the skillgroup through Select (LAA) or Queue to Skillgroup nodes to when they were answered by an agent.</li> </ul> <p><i>AnswerWaitTime</i> is calculated from the following:</p> <ul style="list-style-type: none"> <li>– <i>DelayTime</i></li> <li>– <i>LocalQTime</i></li> <li>– <i>RingTime</i></li> <li>– <i>NetworkQTime</i></li> </ul> <p><b>Note:</b> With the existence of a network VRU, in an Unified CCE deployment with an IPCC System PG, this value will not include time spent in the network VRU.</p>		
ApplicationAvailable	<p>The number of agents belonging to this skill group who are currently <i>ApplicationAvailable</i> with respect to the MRD to which the skill group belongs.</p> <p>An agent is <i>Application available</i> if the agent is Not Routable and Available for the MRD. This means that the agent can be routed a task by the Unified WIM or Unified EIM.</p>	DBINT	NULL
AutoOutCallsTalkTimeTo5	<p>Total talk time, in seconds, for AutoOut (predictive) calls handled by agents in the skill group that ended during the current five-minute interval. This value includes the time spent from the call being initiated to the time the agent begins after-call work for the call. It includes the HoldTime associated with the call. AutoOutCallsTalkTime is updated in the database when the after-call work time associated with the call (if any) has completed.</p>	DBINT	NULL
AutoOutCallsTimeTo5	<p>Total handle time, in seconds, for AutoOut (predictive) calls handled by agents in the skill group that ended during the current five-minute interval. Handle time includes WorkTime, TalkTime, and HoldTime. The AutoOutCallsTime value includes the time spent from the call being initiated to the time the agent completes after-call work time for the call. The value is updated in the database when the after-call work time associated with the call (if any) has completed.</p>	DBINT	NULL
AutoOutCallsTo5	<p>Total number of AutoOut (predictive) calls made by agents in the skill group that ended during the current five-minute interval. The value is updated in the database when the after-call-work time associated with the call (if any) has completed.</p>	DBINT	NULL

## Skill\_Group\_Real\_Time Table

Field Name:	Description:	Data Type:	Keys and Null Option:
Avail	Number of agents for the skill group in Not_Active state with respect to this skill group.	DBINT	NULL
AvailTimeTo5	Total seconds agents in the skill group have been in the Not_Active state during the current five-minute interval. AvailTime is included in the calculation of LoggedOnTime.	DBINT	NULL
AvgHandledCallsTalkTimeTo5	<p>Average talk time in seconds for calls counted as handled by the skill group during the rolling five-minute interval. This value is calculated as follows:</p> <p><b>HandledCallsTalkTimeTo5 / CallHandledTo5</b></p> <p>AvgHandledCallsTalkTime is calculated only for calls counted as handled. This field is updated in the database when any after-call work associated with the call is completed.</p>	DBINT	NULL
AvgHandledCallsTimeTo5	<p>Average handle time in seconds for calls counted as handled by the skill group during the rolling five-minute interval. The value is calculated as follows:</p> <p><b>HandledCallsTalkTimeTo5 / CallHandledTo5</b></p> <p>The AvgHandledCallsTime value is updated in the database when the after-call work time associated with the call is completed.</p>	DBINT	NULL
BusyOther	Number of agents currently in the BusyOther state with respect to this skill group.	DBINT	NULL
BusyOtherTimeTo5	Number of seconds agents have spent in the BusyOther state during the rolling five-minute interval. BusyOtherTime is included in the calculation of LoggedOnTime.	DBINT	NULL
CallsAnsweredTo5	The number of calls that were answered by the skill group during the rolling five-minute interval.	DBINT	NULL
CallsHandledTo5	<p>The number of calls that were handled by the skill group during the rolling five-minute interval.</p> <p>This field is applicable for both <b>Unified ICM</b>, <b>Unified CCE</b> and <b>Outbound Option</b>.</p> <p><b>A handled call is:</b></p> <ul style="list-style-type: none"> <li>* An incoming ACD call that was answered by an agent, and then completed.</li> </ul>	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	<ul style="list-style-type: none"> <li>* A call associated with Outbound Option that the agent answered, and then completed.</li> <li>* A non-voice task that the agent started working on then completed.</li> </ul> <p>A handled call/task is completed when the agent associated with the call/task finishes the wrap-up work associated with the call/task.</p>		
CallsInProgress	The total number of ongoing non-voice tasks associated with this skill group. This field populates for non-voice tasks only.	DBINT	NULL
CallsOfferedTo5	<p>Number of calls offered to the skill group during the rolling five-minute interval. A call is counted only when it is answered.</p> <p>This field represents local queue counts at the ACD. It is incremented only in the event of local queueing. In the event of Network Queueing, the field incremented in RouterCallsOfferedTo5.</p>	DBINT	NULL
CallsQueuedNow	<p>The number of calls currently queued to this skill group by the ACD.</p> <p>This field represents local queue counts at the ACD. It is incremented only in the event of local queueing. In the event of Network Queueing, the field incremented in RouterCallsQNow.</p>	DBINT	NULL
DateTime	Central Controller date and time that this data was last updated.	DBDATETIME	NOT NULL
HandledCallsTalkTimeTo5	Total talk time, in seconds, for calls counted as handled by the skill group during the rolling five-minute interval. It is updated in the database when the after-call work time associated with the call (if any) is completed.	DBINT	NULL
FutureUseInt1	Reserved for future use	DBINT	NULL
FutureUseInt2	Reserved for future use	DBINT	NULL
FutureUseInt3	Reserved for future use	DBINT	NULL
FutureUseInt4	Reserved for future use	DBINT	NULL
FutureUseInt5	Reserved for future use	DBINT	NULL
HandledCallsTimeTo5	Total handle time, in seconds, for calls counted as handled by the skill group during the rolling five-minute interval. HandledCallsTime is the time spent from the call being answered by the agent to the time the agent completed after-call work associated with the call.	DBINT	NULL

## Skill\_Group\_Real\_Time Table

Field Name:	Description:	Data Type:	Keys and Null Option:
	HandledCallsTime is based on HoldTime, WorkTime, and TalkTime. The value is updated in the database when the after-call work time associated with the call (if any) is completed.		
Hold	The number of agents that have all active calls on hold. The agent is not in the Hold state with one call on hold and talking on another call (for example, a consultative call). The agent must have <b>all</b> active calls on hold.	DBINT	NULL
HoldTimeTo5	Number of seconds where all calls to the agent are on hold during the rolling five-minute interval. HoldTime is counted only while the agent is doing no other call related activity. HoldTime is included in the calculation of LoggedOnTime.	DBINT	NULL
IcmAvailable	The number of agents belonging to this skill group who are currently <i>ICMAvailable</i> with respect to the MRD to which the skill group belongs. An agent is <i>ICM available</i> if s/he is Routable and Available for the MRD. This means that the agent can be routed a task by system software.	DBINT	NULL
InterruptedTimeTo5	Not currently supported.	DBINT	NULL
LoggedOn	Number of agents that are currently logged on to the skill group. This count is updated each time an agent logs on and each time an agent logs off.	DBINT	NULL
LoggedOnTimeTo5	<p>Total time, in seconds, agents were logged on to the skill group during the current (rolling) five-minute interval. This value is based on the following:</p> <ul style="list-style-type: none"> <li>• <b>HoldTimeTo5</b></li> <li>• <b>TalkInTimeTo5</b></li> <li>• <b>TalkOutTimeTo5</b></li> <li>• <b>TalkOtherTimeTo5</b></li> <li>• <b>AvailTimeTo5</b></li> <li>• <b>NotReadyTimeTo5</b></li> <li>• <b>WorkReadyTimeTo5</b></li> <li>• <b>WorkNotReadyTimeTo5</b></li> <li>• <b>BusyOtherTimeTo5</b></li> </ul>	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	<ul style="list-style-type: none"> <li>• <b>ReservedStateTimeTo5</b></li> <li>• <b>TalkAutoOutTimeTo5</b></li> <li>• <b>TalkPreviewTimeTo5</b></li> <li>• <b>TalkReservedTimeTo5</b></li> </ul> <p>This field is applicable for both <b>Unified ICM</b>, <b>Unified CCE</b> and <b>Outbound Option</b>.</p>		
LongestAvailAgent	A date and time value that specifies the time that the longest available agent for the skill group became available. If no agent was available, the value is 0	DBDATETIME	NULL
LongestCallQ	<p>The date and time that the longest call in the queue for the skill group was placed in the queue.</p> <p><b>Note:</b> This field is not applicable to <b>Unified CCE</b>.</p> <p><b>Note:</b> Not applicable for Unified CCE <b>without</b> an IPCC System PG and is not updated. In Unified CCE <b>with</b> an IPCC System PG, this field is applicable and is updated when a call is queued to the skill group. For consistent values, in <b>Unified CCE</b> regardless of whether or not there is an IPCC System PG, use <b>RouterLongestCallInQ</b>.</p>	DBDATETIME	NULL
NotReady	Number of agents in the Not Ready state for the skill group.	DBINT	NULL
NotReadyTimeTo5	Total seconds agents in the skill group have been in the Not Ready state during the rolling five-minute interval. NotReadyTime is included in the calculation of LoggedOnTime.	DBINT	NULL
NumAgentsInterruptedNow	The number of agents whose state with respect to this skill group is currently Interrupted.	DBINT	NULL
PercentUtilizationTo5	Percentage of Ready time that agents in the skill group spent talking or doing call work during the rolling five-minute interval. This is the percentage of time agents spend working on calls versus the time agents were ready.	DBFLT4	NULL
PreviewCallsTalkTimeTo5	Total handle time, in seconds, for outbound Preview calls handled by agents in the skill group that ended during the rolling five-minute interval. Handle time includes WorkTime, TalkTime, and HoldTime. The PreviewCallsTime value includes the time spent from the call being initiated to the time the agent completes after-call work time for the call.	DBINT	NULL

**Skill\_Group\_Real\_Time Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	The value is updated in the database when the after-call work time associated with the call (if any) has completed.		
PreviewCallsTimeTo5	Total handle time, in seconds, for outbound Preview calls handled by agents in the skill group that ended during the current five-minute interval. Handle time includes WorkTime, TalkTime, and HoldTime. The PreviewCallsTime value includes the time spent from the call being initiated to the time the agent completes after-call work time for the call. The value is updated in the database when the after-call work time associated with the call (if any) has completed.	DBINT	NULL
PreviewCallsTo5	Total number of outbound Preview calls made by agents in the skill group that ended during the rolling five-minute interval. The value is updated in the database when the after-call work time associated with the call (if any) has completed.	DBINT	NULL
Ready	The number of agents who are Routable with respect to the MRD associated with this skill group, and whose state with respect to this skill group is currently something other than NOT_READY or WORK_NOT_READY.	DBINT	NULL
ReserveCallsTalkTimeTo5	This is the talk time for the reservation call. It should be either zero or a few seconds. This is counted using Call State.	DBINT	NULL
RedirectNoAnsCallsTo5	In the rolling five-minute interval, the number of ACD calls to the skill group that rang at an agent's terminal and redirected on failure to answer.	DBINT	NULL
ReserveCallsTimeTo5	This is the sum of the total number of reservation calls placed on hold and the talk time for the reservation call. This is counted using Call State.	DBINT	NULL
ReserveCallsTo5	Number of reservation calls. This should always equal to the ReserveCallsOnHoldToHalf.	DBINT	NULL
ReservedAgents	Number of agents for the skill group currently in the Reserved state.	DBINT	NULL
ReservedStateTimeTo5	How long an agent is in Reserved state. This is counted using Agent State.	DBINT	NULL
RouterCallsAbandQTo5	The number of calls that abandoned while queued in the router to this agent, in the rolling five-minute interval.	DBINT	NULL
RouterCallsAbandToAgentTo5	In the rolling five-minute interval, the number of calls abandoned after they have been routed to the agent desktop and before they have been answered (for example, Abandon Ringing)..	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	This field is applicable for <b>Unified CCE systems</b> and for <b>systems where calls are translation-routed to Skill Groups</b> .		
RouterCallsAbandDequeuedTo5	<p>The number of calls that were de-queued from this skill group, and had to be routed to another skill group in the rolling five-minute interval.</p> <p>This field is incremented when a call is de-queued through the Cancel Queue node.</p>	DBINT	NULL
RouterCallsDequeuedTo5	<p>The number of calls that were de-queued from this skill group to be routed to another skill group in the rolling five-minute interval.</p> <p>This field is also incremented when a call is de-queued via Cancel Queue node.</p>	DBINT	NULL
RouterCallsOfferedTo5	<p>The number of calls received by this skill group in the rolling five-minute interval. This value is set by the Call Router. A call is counted as offered as soon as it is sent to a Skill Group.</p> <p>This value is incremented by:</p> <ul style="list-style-type: none"> <li>• CallType short calls, which are counted as abandoned for Skill Groups. (There is no short call count in the Skill_Group_Real_Time table.)</li> <li>• Calls that are cancelled by Cancel Queue node and re-queued to the same Skill Group</li> <li>• Calls that are routed to a Skill Group, re-queried, and re-queued to the same Skill Group</li> </ul> <p>This field does not include local ACD calls, not routed by Unified ICM. Such calls are counted in the CallsOfferedTo5 field of Skill_Group tables.</p>	DBINT	NULL
RouterCallsQNow	<p>Number of calls currently queued for the skill group at the CallRouter.</p> <p>This field does not include local ACD calls, not routed by Unified ICM. Such calls are counted in the CallsQueuedNow field of Skill_Group tables.</p>	DBINT	NULL
RouterLongestCallInQ	The time when the longest call in queue was queued for this skill group.	DBDATETIME	NULL
ServiceLevelCallsAbandTo5	<p>The count of calls that abandon within the skill group SL threshold in rolling five-minute interval.</p> <p>Calls may abandon while in the Skill Group queue, or they may abandon after they have been routed to a Skill Group.</p>	DBINT	NULL

## Skill\_Group\_Real\_Time Table

Field Name:	Description:	Data Type:	Keys and Null Option:
	<p>Calls that abandon after they are routed to a Skill Group are identified by TCD records with abandoned call disposition.</p> <p>If the call is queued and abandons before it is routed to any Skill Groups (within the ServiceLevel threshold), the Router will increment this value for ALL the Skill Groups this call was queued for.</p> <p>If the call abandons after it was routed to a Skill Group, that Skill Group will have ServiceLevelCallsAband incremented.</p> <p>Dequeueing the call via Cancel Node has no impact on ServiceLevelCallsAband.</p> <p>Calls may be de-queued via Cancel Queue node or de-queued from this Skill Group to be routed to a different Skill Group.</p> <p><b>Note:</b> This field is applicable to the <b>Unified CCE environment</b> only.</p> <p><b>Note:</b> With the existence of a network VRU, this value includes time in the network queue.</p>		
ServiceLevelCallsDequeuedTo5	<p>The number of calls de-queued from a skill group, within the skill group Service Level threshold, in rolling five-minute interval.</p> <p><b>Note:</b> This field is applicable to the <b>Unified CCE environment</b> only.</p> <p><b>Note:</b> With the existence of a network VRU, this value includes time in the network queue.</p>	DBINT	NULL
ServiceLevelCallsOfferedTo5	<p>The number of calls that are routed to a skill group or queued for a the skill group in the rolling five-minute interval</p> <p>Includes these categories of calls</p> <ul style="list-style-type: none"> <li>• Calls that are answered within the ServiceLevel threshold</li> <li>• Calls that are abandoned within the ServiceLevel threshold</li> <li>• Calls that are redirected within the ServiceLevel threshold (this is consistent with Call Type ServiceLevel)</li> <li>• Calls that are not complete after the ServiceLevel threshold has passed (that is, calls queued longer than the Service Level threshold).</li> </ul> <p><b>Note:</b> Calls that end in error state within SL threshold are not counted as ServiceLevelCallsOffered.</p> <p><b>Note:</b> This field is applicable to the <b>Unified CCE environment</b> only.</p>	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	<b>Note:</b> With the existence of a network VRU, this value includes time in the network queue.		
ServiceLevelCallsTo5	The number of calls that are answered by the skill group within the Service Level threshold in the rolling five-minute interval.  <b>Note:</b> This field is applicable to the <b>Unified CCE environment</b> only.	DBINT	NULL
ServiceLevelTo5	Service Level for the skill group in rolling five-minute interval.  <b>Note:</b> This field is applicable to the <b>Unified CCE environment</b> only.	DBFLT4	NULL
ServiceLevelRONATo5	The calls that redirected on no answer within Service Level threshold within the rolling five-minute interval.  These calls are part of the ServiceLevelCallsOffered.  <b>Note:</b> This field is applicable to the <b>Unified CCE environment</b> only.	DBINT	NULL
SkillTargetID	Foreign key from the Skill Group table. The SkillTargetID of the agent. Together with the SkillGroupSkillTargetID, identifies the skill group member.	DBINT	PK, FK NOT NULL
TalkAutoOutTimeTo5	Number of seconds agents in the skill group spent talking on AutoOut (predictive) calls during the rolling five-minute interval.	DBINT	NULL
TalkingAutoOut	Number of agents in the skill group currently talking on AutoOut (predictive) calls.	DBINT	NULL
TalkingIn	Number of agents in the skill group currently talking on inbound calls.	DBINT	NULL
TalkingOther	Number of agents in the skill group currently talking on internal (neither inbound nor outbound) calls. Examples of "other calls include agent-to-agent transfers and supervisor calls.	DBINT	NULL
TalkingOut	Number of agents in the skill group currently talking on outbound calls.	DBINT	NULL
TalkingPreview	Number of agents in the skill group currently talking on outbound Preview calls.	DBINT	NULL
TalkingReserve	Number of agents in the skill group currently talking on agent reservation calls.	DBINT	NULL

**Skill\_Group\_Real\_Time Table**

Field Name:	Description:	Data Type:	Keys and Null Option:
TalkInTimeTo5	Total seconds agents spent talking on inbound calls for the skill group during the rolling five-minute interval. TalkInTime is included in the calculation of TalkTime and LoggedOnTime.	DBINT	NULL
TalkOtherTimeTo5	Total seconds agents spent talking on other calls (neither inbound nor outbound) for the skill group during the rolling five-minute interval. TalkOtherTime is included in the calculation of TalkTime and LoggedOnTime.	DBINT	NULL
TalkOutTimeTo5	Total seconds agents spent talking on outbound calls for the skill group during the rolling five-minute interval. TalkOutTime is included in the calculation of TalkTime and LoggedOnTime.	DBINT	NULL
TalkPreviewTimeTo5	Number of seconds agents in the skill group spent talking on outbound Preview calls during the current five-minute interval.	DBINT	NULL
TalkReserveTimeTo5	Number of seconds agents in the skill group spent talking on agent reservation calls during the rolling five-minute interval.	DBINT	NULL
TalkTimeTo5	Total seconds agents in the skill group have been in the Talking state during the rolling five-minute interval. This value is calculated as follows:  <b>TalkInTimeTo5 + TalkOutTimeTo5 + TalkOtherTimeTo5</b>	DBINT	NULL
TransferInCallsTimeTo5	Total number of seconds agents spent on calls transferred into the skill group that ended during the rolling five-minute interval. The value is updated in the database when the after-call work time associated with the call (if any) is completed.  <b>Note:</b> For blind transfers in Unified CCE with an IPCC System PG, this field is updated when the call that was blind transferred to an IVR is subsequently transferred to another agent and the agent answers the call. For this call scenario this field is not updated in <b>Unified CCE without an IPCC System PG</b> .	DBINT	NULL
TransferInCallsTo5	Number of calls transferred into the skill group that ended during the current five-minute interval. The value is updated in the database when the after-call work time associated with the call (if any) is completed.  For blind transfers in Unified CCE, the value is updated in the database when an agent blind transfers the call to an IVR.  For blind transfers in Unified CCE with an IPCC System PG, the value is not updated in the database until the call that was blind transferred to an IVR is subsequently transferred to another agent.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	<b>Note:</b> For blind transfers in Unified CCE with an IPCC System PG, this field is updated when the call that was blind transferred to an IVR is subsequently transferred to another agent and the agent answers the call. For this call scenario this field is not updated in <b>Unified CCE without an IPCC System PG</b> .		
TransferOutCallsTo5	Number of calls transferred out of the skill group that ended during the rolling five-minute interval. The value is updated in the database when the after-call work time associated with the call (if any) is completed.	DBINT	NULL
WorkNotReady	Number of agents in the skill group in the Work Not Ready state.	DBINT	NULL
WorkNotReadyTimeTo5	Total seconds agents have been in the Work Not Ready state during the rolling five-minute interval. WorkNotReadyTime is included in the calculation of LoggedOnTime.	DBINT	NULL
WorkReady	Number of agents in the skill group in the Work Ready state.	DBINT	NULL
WorkReadyTimeTo5	Total seconds agents have been in the Work Ready state during the rolling five-minute interval. WorkReadyTime is included in the calculation of LoggedOnTime.	DBINT	NULL

## Skill\_Target Table

This table is in the [Skill Target category \(page 544\)](#). To see database rules for these tables, click [here \(page 600\)](#).

Establishes a unique identifier for every agent, skill group, service, service array, and translation route in the enterprise.

The Skill Group Explorer maintains the Skill\_Target table when you create or delete agents, skill groups, services, service arrays, or translation routes.

### Related tables

[Agent \(page 15\)](#) (via SkillTargetID)

[Route \(page 336\)](#) (via SkillTargetID)

[Service \(page 386\)](#) (via SkillTargetID)

[Service Array \(page 388\)](#) (via SkillTargetID)

[Skill Group \(page 432\)](#) (via SkillTargetID)

**Termination\_Call\_Detail Table**

[Translation Route \(page 503\)](#) (via SkillTargetID)

**Table 203: Indexes for Skill\_Target Table**

index_name	index_description	index_keys
XPKSkill_Target	clustered, unique, primary key located on PRIMARY	SkillTargetID

**Fields in Skill\_Target Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
SkillTargetID	A unique identifier for the skill target.	DBINT	PK NOT NULL
SkillTargetType	Type of target:  • <b>1</b> = Service • <b>2</b> = Skill Group • <b>3</b> = Agent • <b>4</b> = Translation Routes • <b>5</b> = Service Array	DBSMALLINT	NOT NULL

**Termination\_Call\_Detail Table**

This table is in the [Route category \(page 535\)](#). To see database rules for these tables, click [here \(page 597\)](#).

Central database only.

Contains information about how each call was handled at a peripheral.

The system software generates a Termination\_Call\_Detail record for each call that arrives at the peripheral.

This table can become very large. Running custom reporting queries against it while it is on the HDS can degrade performance. To optimize performance, extract the data from the HDS into your own custom database on a separate server (one that is not used for other Unified ICM/Unified CCE components). Use only DBDateTime (date and time of the record that was written to the HDS database) to perform the extraction. The table on the custom database can be indexed according to the custom reporting needs.

**Related Tables**

[Agent \(page 15\)](#) (AgentSkillTargetID maps to Agent.SkillTargetID. SourceAgentSkillTargetID maps to Agent.SkillTargetID)

[Call Type Table \(page 95\)](#) (via CallTypeID)

- [Media Routing Domain \(page 290\)](#) (via MRDomainID)
- [Network Target \(page 294\)](#) (via NetworkTargetID)
- [Peripheral \(page 306\)](#) (via PeripheralID)
- [Route \(page 336\)](#) (via RouteID)
- [Route Call Detail \(page 338\)](#) (via Day + RouterCallKey)
- [Service \(page 386\)](#) (ServiceSkillTargetID maps to Service.SkillTargetID)
- [Skill Group \(page 432\)](#) (SkillGroupSkillTargetID maps to Skill\_Group.SkillTargetID)
- [Termination Call Variable \(page 502\)](#) (RecoveryKey maps to Termination\_Call\_Variable.TCDRecoveryKey)

**Table 204: Indexes for Termination\_Call\_Detail Table**

index_name	index_description	index_keys
XAK2Termination_Call_Detail	clustered, unique, unique key located on PRIMARY	DateTime, PeripheralID, ICRCallKey
XIE1Termination_Call_Detail	nonclustered, unique, primary key located on PRIMARY	DateTime
XIE2Termination_Call_Detail	nonclustered, unique, primary key located on PRIMARY	DbDateTime
XPKTermination_Call_Detail	nonclustered, unique, primary key located on PRIMARY	RecoveryKey
XIE3Termination_Call_Detail	nonclustered, unique, primary key located on PRIMARY	CallTypeReportingDateTime
XIE4Termination_Call_Detail	nonclustered, unique, primary key located on PRIMARY	CallReferenceID
XIE5Termination_Call_Detail	nonclustered, unique, primary key located on PRIMARY	RouterCallKey, RouterCallKeyDay
XIE6Termination_Call_Detail	nonclustered, unique, primary key located on PRIMARY	PeripheralCallKey
XIE7Termination_Call_Detail	nonclustered, unique, primary key located on PRIMARY	StartTimeUTC

**Fields in Termination\_Call\_Detail Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
AgentPeripheralNumber	<p>The peripheral number of the agent who handled the call.</p> <p><b>Note:</b> The field can be NULL when the source or destination party is unmonitored or if the agent is not logged in.</p>	varchar(32)	NULL

**Termination\_Call\_Detail Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
AgentSkillTargetID	<p>Identifies which agent handled the call. This value (for example, 5001), is unique among all skill targets in the enterprise. It is taken from the Agent table in the Unified ICM central database. AgentSkillTargetIDs are generated automatically when the agent is first configured in the Agent Configuration window of Unified ICM Configuration Manager.</p> <p>The AgentSkillTargetID is used only if agents are configured. If agents are not configured, the value for AgentSkillTargetID is null. If agents are not configured, you can use the AgentPeripheralNumber to determine the peripheral number for the agent that handled the call.</p>	DBINT	NULL
ANI	The ANI value for the call.	varchar(32)	NULL
AnsweredWithinServiceLevel	<p>Indicates whether the call was answered with the service level defined for the service:</p> <ul style="list-style-type: none"> <li>• <b>Y</b> = yes</li> <li>• <b>N</b> = no</li> </ul>	DBCHAR	NULL
ApplicationData	Additional data passed in the End Task message for this task.	varchar(100)	NULL
ApplicationTaskDisposition	A field passed in the End Task message for this task. This is an application-specific code that indicates why the task was ended. For example, Unified EIM might use the ApplicationTaskDisposition field to indicate that the task ended because an agent closed an e-mail without responding to it.	DBINT	NULL
BadCallTag	<p>Indicates whether the call was marked as bad by the agent. Stored as a character:</p> <ul style="list-style-type: none"> <li>• <b>Y</b> = the call was marked "bad"</li> <li>• <b>N</b> = the call was not marked "bad"</li> </ul>	DBCHAR	NULL
BillRate	Reserved for future use.	DBSMALLINT	NULL
CallDisposition	<p>The final disposition of call (or how the call terminated). To see the list of values, click <a href="#">here (page 579)</a>.</p> <p>As long as the call leg has conference time accrued, and the peripheral call type isn't Conference (15), the Call Disposition will be conferenced.</p>	DBSMALLINT	NOT NULL
CallDispositionFlag	A series of flags providing detail on the call disposition. To see the list of values, click <a href="#">here (page 579)</a> .	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
CallSegmentTime	Time, in seconds, that the system took to segment a private network call. For example, if the system software handed the caller off to a menu of choices, CallSegmentTime reflects how long the caller spent in the menu.	DBINT	NULL
CallTypeID	<p>In <b>Unified ICM</b> and <b>Unified CCE</b>, indicates which call type, and therefore which routing script, was used to route this call.</p> <p><b>Note:</b> This field contains a value only if the call was translation-routed or sent to an <b>Unified CCE agent</b>.</p>	DBINT	NULL
CallTypeReportingDateTime	This value indicates interval date time that Router used TCD record to calculate Call Type related historical data.	DBDATETIME	IE3, NULL
CallReferenceID	This value uniquely identify the instance of a call in a Unified CM cluster.	Varchar(32)	IE4, NULL
CallGUID	Globally unique call identifier.	Varchar(32)	NULL, IE8
CED	<p>The Caller Entered Digits (CED) associated with the call. This is filled for Outbound Option Reservation or Personal Callback Calls. The values are:</p> <ul style="list-style-type: none"> <li>• ICM_BA_Reservation_Call - Reservation call</li> <li>• Callback - Personal Callback customer call</li> </ul> <p>This field is applicable for <b>Unified ICM</b> and <b>Unified CCE</b>.</p>	varchar(30)	NULL
ConferenceTime	<p>The cumulative number of seconds that the call was in conference with more than two parties. ConferenceTime is recorded for both ACD and non-ACD calls. The value includes any HoldTime associated with the call. It is updated when the agent drops off the call or the call becomes a simple two-party call.</p> <p>Depending on who initiated the call, ConferenceTime from Termination_Call_Detail is used in the following Skill Group and Agent Skill Group tables:</p> <ul style="list-style-type: none"> <li>• ConferencedOutCallsTimeToHalf</li> <li>• ConferencedInCallsTimeToHalf</li> </ul>	DBINT	NULL
DateTime	The date/time that the Termination_Call_Detail table record is generated by the Peripheral Gateway (PG). The Termination_Call_Detail table record is generated by the PG when the call has either physically left the PG (for example, IVR routes the call to an agent) or when wrap-up	DBDATETIME	AK-2, IE-1 NOT NULL

## Termination\_Call\_Detail Table

Field Name:	Description:	Data Type:	Keys and Null Option:
	is completed for the call after the call has left the agent device (either by disconnect, or through transfer completion).		
DbDateTime	The current date and time stamp when the records are written to the HDS database. The logger database has NULL for this column.	DBDATETIME	IE-2 NULL
DelayTime	<p>The time in seconds that the call is active on the switch but not queued to a skill group or trunk resource. For example, if a call arrives at an ACD and an announcement is played before the call is queued, from the time the call arrives at the ACD to the time the call gets queued is the DelayTime. DelayTime includes all time the call spent on announcements. For ACDs that can de-queue calls, a call can go back into the delay state and DelayTime can begin accumulating again.</p> <p>DelayTime is used to calculate Duration in the Termination_Call_Detail record. It is also used to calculate the following fields in the Service and Route Half Hour tables:</p> <ul style="list-style-type: none"> <li>• DelayQAbandTimeToHalf</li> <li>• LongestCallAbandTimeToHalf</li> <li>• AnswerWaitTimeToHalf</li> </ul>	DBINT	NULL
DigitsDialed	<p>The digits dialed for an outbound call initiated on the ACD. These digits are not provided by all ACDs. Currently, only IVRs, the Aspect CallCenter, and the DEFINITY ECS provide values in the DigitsDialed field. In addition, if a call is translation routed, the receiving PG also reports this field even though the call is inbound.</p> <p>This field is set for <b>Unified CCE</b>.</p>	varchar(40)	NULL
DNIS	The DNIS value, provided by the ACD, that arrives with the call.	VNAME32	NULL
Duration	<p>Duration of the call in seconds. This is the time that the switch is processing the call. The Duration field comprises several fields of the Termination_Call_Detail table:</p> <p><b>LocalQTime + RingTime + TalkTime + WorkTime + HoldTime + DelayTime + NetQTime</b></p>	DBINT	NULL
ECCPayloadID	Reserved for future use.	DBINT	NULL
EnterpriseQueueTime	This field indicates the amount of time spent by the call in the queue, on the parent Unified CCE system in CVP/another network queuing platform.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	<p><b>Note:</b> If you are using an 8.0 child system that has the EnterpriseQueueTime field in the Termination_Call_Detail Table, the parent system must also be an 8.0 system, so that the field gets populated. If the child system is a 7.5 or 7.6 system, and if the parent system is 8.0, then there would be NO EnterpriseQueueTime field in the Termination_Call_Detail Table, and the field is not populated.</p> <p><b>Note:</b> The EnterpriseQueueTime does not factor into the AnswerWaitTime or Service Level computations on the child system.</p>		
HoldTime	<p>The cumulative time, in seconds, that the call was put on hold by at least one agent device. A call may be put on hold by more than one agent device during its duration. The call might be finished by being abandoned, transferred, handled to completion, etc.</p> <p><b>Note:</b> This is used in CallHandleTimeHalf field of the Call_Type_Half_Hour table only when there is a valid CallTypeID in the Termination_Call_Detail table.</p>	DBINT	NULL
ICRCallKey	A unique number generated at the PG. Values are reused after about 250 million calls.	DBINT	AK-2 NOT NULL
ICRCallKeyChild	Link to the ICRCallKey field of a child call (used for transfers and multiple-way conference calls).	DBINT	NULL
ICRCallKeyParent	Link to the ICRCallKey field of a parent call (used for transfers and conference calls).	DBINT	NULL
InstrumentPortNumber	<p>Instrument number or extension number of the device that handled the call at the peripheral.</p> <p>This field is also populated for outbound calls.</p>	DBINT	NULL
LocalQTime	<p><b>ICM 5.x:</b> Measures the cumulative time, in seconds, that the call spent queued at the local ACD and the time the call spent queued in the network VRU.</p> <p><b>ICM 6.x and 7.x:</b> Measures only the cumulative time, in seconds, that the call spent queued at the local ACD. <b>NetQTime</b> (see below) measures the time the call spends queued in the network VRU.</p> <p><b>Both:</b> During its duration, a call can be queued to multiple answering resources (for example, a trunk, voice port, skill group, etc.). LocalQTime includes time the call spent queued to any of these resources.</p>	DBINT	NULL

**Termination\_Call\_Detail Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	<p>LocalQTime does not include any DelayTime (before the call is queued), or RingTime (after the call leaves the queue). LocalQTime is a completed call time, not an agent state time.</p> <p>LocalQTime is used in the calculation of Duration in Termination_Call_Detail, and to calculate the following Service and Route values:</p> <ul style="list-style-type: none"> <li>• LongestCallDelayQTime</li> <li>• LongestCallAbandTime</li> <li>• DelayQAbandTime</li> <li>• DelayQTime</li> <li>• AnswerWaitTime</li> </ul> <p>LocalQTime is also used to calculate the AnswerWaitTime in the Skill Group and Agent Skill Group tables.</p>		
LocationParamPKID	Globally unique location identifier.	Varchar(128)	NULL
LocationParamName	Location name.	Varchar(50)	NULL
MRDomainID	An identifier for the Media Routing Domain in the Unified ICM system configuration.	DBINT	FK NULL
NetQTime	Represents the time the call spent on Network Queue in the CallRouter. The LocalQTime field is used for local ACD queuing.	DBINT	NULL
NetworkTargetID	The identifier of the peripheral target to which the call was delivered.	DBINT	FK NULL
NetworkTime	The number of seconds between the PG receiving a "pre-call message from the CallRouter for the task and an Offer Task (or Start Task, if an Offer Task is not sent) message for the task.	DBINT	NULL
NetworkSkillGroupQTime	Represents the time the call is queued for the skill group identified by the RoutedSkillGroupSkillTargetID field in the network VRU. It is the time when the call is queued to the specific skill group until the call is routed by the router. The router resets the time when the call is requeued.	DBINT	NULL
NewTransaction	Call has been re-classified via transfer, overflow, or new transaction. Indicates that there is at least one more row in Termination Call Detail for this call.	DBCHAR	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
Originated	Indicates which Unified CCE component initiates the call. 'D' - originated from Dialer.	char(1)	NULL
PeripheralCallKey	An identifier assigned to the call by the peripheral (ACD, IVR). The range and type of value used in this field varies depending on the type of peripheral. Some ACDs might view an original call, a transfer, and a consultative call as three separate calls (e.g., Call IDs 1001, 1002, 1003); other ACDs might view all three calls as a continuation of the same call (e.g., Call IDs 1001, 1001, 1001); others might view the original and transfer as the same call, but the consultative call as a second call (e.g., Call IDs 1001, 1002, 1001); and still other ACDs might view the original call as one call and the original and transfer as another call (e.g., Call IDs 1001, 1002, 1002).  In addition, the values used may not be unique, depending on the peripheral's implementation. For example, the Aspect CallCenter and the DEFINITY ECS ACDs reuse identifiers in this field.	DBINT	NULL
PeripheralCallType	Type of call reported by the peripheral. To see valid settings for this field, click <a href="#">here (page 589)</a> .	DBSMALLINT	NULL
PeripheralID	Identifies which peripheral handled the call. This value (for example, 5002), is unique among all peripherals in the enterprise. It is taken from the Peripheral table in the Unified ICM central database. Peripheral IDs are generated automatically when a peripheral is configured in the Peripheral Configuration window of Unified ICM Configuration Manager.	DBSMALLINT	FK, AK-2 NOT NULL
Priority	Used by the DEFINITY ECS to indicate the priority of the call.	DBSMALLINT	NULL
ProtocolID	Internal reference ID used to identify the component class (PBX/VRU/ACD)  The possible values are: <ul style="list-style-type: none"><li>• NULL for all TCDs prior 8.0 upgrade.</li><li>• 0 = LEGACY_TDM</li><li>• 1 = JTAPI</li><li>• 2 = GED125_CVP</li><li>• 3 = GED125_IPIVR</li><li>• 4 = GED125_OTHER</li></ul>	DBINT	NULL

**Termination\_Call\_Detail Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	<ul style="list-style-type: none"> <li>• 5 = GED188_ACMI_CCX</li> <li>• 6 = GED188_ACMI_CCE</li> <li>• 7 = GED188_ACMI_EXPERT_ADVISOR</li> <li>• 8 = GED188_ACMI_ERS</li> <li>• 9 = ARI</li> <li>• 10 = MEDIA_ROUTING</li> <li>• 11 = Other</li> </ul>		
PstnTrunkGroupID	The Trunk Group ID on which the call arrived on the IOS Gateway.	Varchar(32)	NULL
PstnTrunkGroupChannelNumber	The Trunk Group Channel Number on which the call arrived on the IOS Gateway.	DBINT	NULL
RecoveryDay	Currently not used, set to zero (0).	DBINT	NOT NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL
RingTime	<p>The number of seconds that the call spent ringing at the agent's teleset before it was answered. Ring time occurs after any DelayTime and LocalQTime. For diverted calls (that is, calls that rang at an agent's teleset before being redirected on failure to answer), RingTime is the sum of the time that the call spent ringing at each teleset.</p> <p>RingTime is added to Skill Group Half Hour and Agent Skill Group half-hour tables when the call completes.</p> <p>RingTime is also used to compute the following Route and Service half-hour values:</p> <ul style="list-style-type: none"> <li>• DelayQAbandTimeToHalf</li> <li>• LongestCallDelayQTimeToHalf</li> <li>• LongestCallAbandTimeToHalf</li> </ul>	DBINT	NULL
RouteID	Identifies the route where the call was sent. The value (for example, 6), is unique among all routes in the enterprise. It is taken from the Route table in the Unified ICM central database. Route IDs are generated automatically when a route is configured in the Route Configuration window of Unified ICM Configuration Manager.	DBINT	FK NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
RouterCallKey	<p>This value is created by the system software and forms the unique portion of the 64-bit key for the call. The Unified ICM resets this counter at midnight.</p> <p><b>Note:</b> This field contains a value only if the call was translation-routed or sent to an Unified CCE agent.</p>	DBINT	NULL
RouterCallKeyDay	<p>The day that the call was taken and the Termination_Call_Detail record was created. This field contains a value only for calls that were translation-routed or post-routed to or from an ACD.</p> <p>Together with RouterCallKey, the Day value forms a unique 64-bit key for the call. The PG might not have this information for all calls, but if it does, it allows you to track all states of a call between the Route_Call_Detail and the Termination_Call_Detail tables by using the cradle-to-grave call tracking facility. (For calls that span a day, the day may not correspond to the day specified in the DateTime field.)</p> <p><b>Note:</b> This field contains a value only if the call was translation-routed, post-routed to/from an ACD, or sent to an IPCC Enterprise agent.</p>	DBINT	NULL
RouterCallKeySequenceNumber	<p>A sequence number used for ordering rows for cradle-to-grave call tracking.</p> <p>This number is a best effort to describe the order in which call legs were created and bears no relation to the order in which calls ended.</p> <p>This <b>is not</b> the order in which the Termination_Call_Detail records were created. (This field also exists in the Route_Call_Detail table, where it defines the order in which the route requests were created.)</p> <p>There are a few scenarios where the RouterCallKeySequenceNumber may not be unique for a given RouterCallKey (specifically when translation routing to a Service Controlled IVR).</p>	DBINT	NULL
RoutedSkillGroupSkillTargetID	Foreign key from skill group table.	DBINT	NULL
RoutedServiceSkillTargetID	Foreign key from service table.	DBINT	NULL
RoutedAgentSkillTargetID	Foreign key from agent table.	DBINT	NULL
ServiceSkillTargetID	<p>Identifies which service handled the call. This value (for example, 5004) is unique among all skill targets in the enterprise. It is taken from the Service table in the Unified ICM central database.</p> <p>ServiceSkillTargetIDs are generated automatically when a service is configured in the Service Configuration window of Unified ICM Configuration Manager. If the call is handled by a non-configured</p>	DBINT	FK NULL

## Termination\_Call\_Detail Table

Field Name:	Description:	Data Type:	Keys and Null Option:
	service, this field is set to null. In addition, if the call is not associated with a service, the field is set to null (for example, in the case of non-ACD calls).		
SkillGroupSkillTargetID	<p>Identifies which skill group handled the call. This value (for example, 5010) is unique among all skill targets in the enterprise. It is taken from the Skill_Group table in the Unified ICM central database.</p> <p>SkillGroupSkillTargetIDs are generated automatically when a skill group is configured in the Skill Group Configuration window of Unified ICM Configuration Manager.</p> <p>If the call is handled by a non-configured skill group, this field is set to null.</p>	DBINT	FK NULL
SourceAgentPeripheralNumber	<p>Peripheral number of agent that initiated the call.</p> <p><b>Note:</b> The field can be NULL when the source or destination party is unmonitored or if the agent is not logged in.</p>	varchar(32)	NULL
SourceAgentSkillTargetID	The identifier for the agent that initiated the call. This value is set only if the agent associated with SourceAgentPeripheralNumber is configured in the system software.	DBINT	NULL
StartTimeUTC	The date/time in UTC that the call was first seen at the Peripheral Gateway (PG), e.g. ingress call arrival, agent initiated call, new call resulting from a call transfer.	DBDATETIME	Indexed IE7, NULL
TalkTime	<p>The cumulative time, in seconds, that the call was in a talking state on the destination device. TalkTime is a completed call time, not an agent state time.</p> <p>TalkTime is used in the calculation of Duration in the Termination_Call_Detail record. It is also used to calculate TalkTime in the Services and Route tables.</p> <p><b>Note:</b> In the Termination_Call_Detail, Skill_Group, and Agent_Skill_Group tables, TalkTime <b>does not</b> include HoldTime; however, in the Services and Route tables, TalkTime <b>does</b> include HoldTime.</p>	DBINT	NULL
TimeToAband	The elapsed time in seconds before the call was abandoned. This can include DelayTime, LocalQTime, and RingTime, depending on when the call was abandoned. This value is set only when the call is not answered by an agent or trunk resource.	DBINT	NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
TimeZone	The time zone used for DateTime. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	NULL
Trunk	The number (as known to the peripheral) of the trunk on which the call arrived.	DBINT	NULL
TrunkGroupID	The identifier of the trunk group on which the call arrived at the peripheral.	DBINT	FK NULL
UserToUser	ISDN User to User information for a private network call.	varchar(131)	NULL
Variable1	First of five variables used for call segmentation. Can also contain data entered during call wrap-up. (Maps to Aspect variable A.)	varchar(40)	NULL
Variable2	Call segmentation variable (maps to Aspect variable B).	varchar(40)	NULL
Variable3	Call segmentation variable (maps to Aspect variable C).	varchar(40)	NULL
Variable4	Call segmentation variable (maps to Aspect variable D).	varchar(40)	NULL
Variable5	Call segmentation variable (maps to Aspect variable E).	varchar(40)	NULL
Variable6	Call segmentation variable.	varchar(40)	NULL
Variable7	Call segmentation variable.	varchar(40)	NULL
Variable8	Call segmentation variable.	varchar(40)	NULL
Variable9	Call segmentation variable.	varchar(40)	NULL
Variable10	Call segmentation variable.	varchar(40)	NULL
WorkTime	<p>The cumulative number of seconds of after-call work time associated with the call. After-call work includes post-call activities such as completing paperwork or consulting with associates. Work time is a completed call time, not an agent state time.</p> <p>WorkTime is used to calculate Duration in the Termination_Call_Detail table and HandleTime in the Unified ICM Service, Route, and Call_Type tables.</p>	DBINT	NULL
WrapupData	Data entered by the agent during call wrap- up.	varchar(40)	NULL

**Termination\_Call\_Variable Table**

Field Name:	Description:	Data Type:	Keys and Null Option:
	WorkTime is used to calculate Duration in the Termination_Call_Detail table and HandleTime in the Unified ICM Service, Route, and Call_Type tables.		

**Termination\_Call\_Variable Table**

This table is in the [Route category \(page 535\)](#). To see database rules for these tables, click [here \(page 597\)](#).

Central database only.

Each row records the value of an expanded call variable for a call handled at a peripheral. If the expanded call variable is an array, one Termination\_Call\_Variable row is generated for each element of the array.

The system software generates a Termination\_Call\_Variable record for each enabled expanded call variable for every call processed at a peripheral.

This table can become very large. Running custom reporting queries against it while it is on the HDS can degrade performance. To optimize performance, extract the data from the HDS into your own custom database on a separate server (one that is not used for other Unified ICM/Unified CCE components). Use only DBDateTime (date and time of the record that was written to the HDS database) to perform the extraction. The table on the custom database can be indexed according to the custom reporting needs.

### Related tables

[Expanded Call Variable \(page 234\)](#) (via ExpandedCallVariableID)

[Termination Call Detail \(page 490\)](#)(TCDRecoveryKey maps to Termination\_Call\_Detail.RecoveryKey)

**Table 205: Indexes for Termination\_Call\_Variable Table**

index_name	index_description	index_keys
XAK1Termination_Call_Variable	clustered, unique, unique key located on PRIMARY	TCDRecoveryKey, ExpandedCallVariableID, ArrayIndex
XIE1Termination_Call_Variable	nonclustered, unique, primary key located on PRIMARY	DateTime
XIE2Termination_Call_Variable	nonclustered, unique, primary key located on PRIMARY	DbDateTime
XPKTermination_Call_Variable	nonclustered, unique, primary key located on PRIMARY	RecoveryKey

**Fields in Termination\_Call\_Variable Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ArrayIndex	If the expanded call variable is an array, this identifies the array element: 0 to N-1, where N is the size of the array.	DBINT	AK-2 NOT NULL
DateTime	The date and time when the call was routed.	DBSMALLDATE	IE-1 NOT NULL
DbDateTime	The current date and time stamp when the records are written to the HDS database. The logger database has NULL for this column.	DBDATETIME	IE-2 NULL
ECCValue	The value of the call variable or array element.	varchar(255)	NULL
ExpandedCallVariableID	Identifies the expanded call variable.	DBSMALLINT	AK-2, FK NOT NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL
TCDRecoveryKey	The date and time when the call was routed.	DBFLT8	AK-2 NOT NULL

## Translation\_Route Table

This table is in the [Skill Target category \(page 544\)](#). To see database rules for these tables, click [here \(page 600\)](#).

Each row defines a special route that is used for sending additional information with the call. When the peripheral receives a call targeted at a translation route, it requests the true route from the CallRouter process.

Use the Translation Route Explorer or Translation Route Wizard to add, update, and delete Translation\_Route records.

### Related tables

[Logical Interface Controller \(page 286\)](#) (via LogicalControllerID)

[Skill Target \(page 489\)](#) (via SkillTargetID)

[Translation Route Half Hour \(page 504\)](#) (TranslationRouteSkillTargetID maps to Translation\_Route.SkillTargetID)

**Table 206: Indexes for Translation\_Route Table**

index_name	index_description	index_keys
XAK1Translation_Route	nonclustered, unique, unique key located on PRIMARY	EnterpriseName

**Translation\_Route\_Half\_Hour Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XIE1Translation_Route	nonclustered, unique, primary key located on PRIMARY	LogicalControllerID
XPKTranslation_Route	clustered, unique, primary key located on PRIMARY	SkillTargetID

**Fields in Translation\_Route Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
Description	Additional information about the translation route.	DESCRIPTION	NULL
EnterpriseName	An enterprise name for the translation route. This name must be unique among all translation routes in the enterprise.	VNAME32	AK-1 NOT NULL
LogicalControllerID	The Logical Interface Controller associated with the translation route.	DBSMALLINT	FK, IE-1 NOT NULL
SkillTargetID	An identifier that is unique among all skill targets in the enterprise.	DBINT	PK, FK NOT NULL
Type	The type of translation route: <ul style="list-style-type: none"><li>• <b>1</b> = DNIS</li><li>• <b>2</b> = CDPD</li></ul>	DBINT	NOT NULL

**Translation\_Route\_Half\_Hour Table**

This table is in the [Skill Target category \(page 544\)](#). To see database rules for these tables, click [here \(page 600\)](#).

Provides statistics for each translation route. These statistics are updated every 30 minutes.

**Related tables**

[Routing Client \(page 357\)](#) (via RoutingClientID)

[Translation Route \(page 503\)](#) (via TranslationRouteSkillTargetID)

**Table 207: Indexes for Translation\_Route\_Half\_Hour Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XAK1Translation_Route_Half_Hour	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XIE1Translation_Route_Half_Hour	nonclustered, unique, primary key located on PRIMARY	DbDateTime

index_name	index_description	index_keys
XPKTranslation_Route_Half_Hour	clustered, unique, primary key located on PRIMARY	DateTime, RoutingClientID, TranslationRouteSkillTargetID, TimeZone

**Fields in Translation\_Route\_Half\_Hour Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
AvgRoutesInUseToHalf	Average number of routes in use in the last half hour.	DBINT	NULL
AvgRouteTimeToHalf	Average time (in seconds) to successfully complete a translation route for a routing client.	DBINT	NULL
ConfigErrorsToHalf	The number of times the router finds configuration error during a translation route for a routing client.	DBINT	NULL
DateTime	The central controller date and time at the start of the interval.	DBSMALLDATE	PK NOT NULL
DbDateTime	The current date and time stamp when the records are written to the database.	DBDATETIME	IE1-Indexed NULL
MaxRoutesInUseToHalf	Maximum number of routes used in a translation routing for a routing client in the half hour interval.	DBINT	NULL
MaxRouteTimeToHalf	Maximum time (in seconds) to successfully complete a translation route for a routing client.	DBINT	NULL
PGTimeOutsToHalf	The number of times PG times out the translation route for a routing client. Not applicable for translation route to VRU.	DBINT	NULL
RecoveryKey	Unique record identifier.	DBFLT8	AK1 NOT NULL
RoutedToHalf	The number of times translation route is completed successfully.	DBINT	NULL
RouterTimeOutToHalf	The number of times router times out the translation route for a routing client.	DBINT	NULL
RoutingClientID	The unique identifier of the routing client.	DBSMALLINT	PK, FK NOT NULL
TimeZone	The Time Zone for the date and time. The value is the offset in minutes from UTC (formerly GMT).	DBINT	PK NOT NULL
TranslationRouteSkillTargetID	The unique identifier of the translation route.	DBINT	PK, FK NOT NULL
UnAvailableToHalf	The number of times router cannot find available route in a translation route for a routing client.	DBINT	NULL

**Trunk Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
UsedToHalf	The number of times translation route is used to send calls to VRU or agent peripheral to a routing client.	DBINT	NULL

**Trunk Table**

This is in the [Device \(page 529\)](#) category. For database rules, click [here \(page 595\)](#).

Each row describes a trunk associated with a peripheral. Trunks are grouped by the Trunk Group table.

Use the Trunk bulk configuration tools to add, update, and delete Trunk records.

**Related table**

[Galaxy Single Trunk Table \(page 257\)](#) (via TrunkID)

[Galaxy Trunk Call Count Table \(page 259\)](#) (via TrunkID)

[Trunk Group \(page 507\)](#) (via TrunkGroupID)

[Vru Port Map \(page 524\)](#) (via TrunkID)

**Table 208: Indexes for Trunk Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XAKTrunk	nonclustered, unique, unique key located on PRIMARY	TrunkGroupID, TrunkNumber
XPKTrunk	clustered, unique, primary key located on PRIMARY	TrunkID

**Fields in Trunk Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
CircuitProvider	The carrier that provides the circuit.	VNAME32	NULL
TrunkGroupID	Foreign key from the Trunk Group table.	DBINT	AK-1, FK NOT NULL
TrunkID	A unique identifier for the trunk.	DBINT	PK NOT NULL
TrunkNumber	Trunk number as understood by the peripheral.	DBINT	AK-1 NOT NULL
TrunkType	Type of trunk. To see the list of values, click <a href="#">here (page 591)</a> .	DBSMALLINT	NOT NULL

## Trunk\_Group Table

This is in the [Device \(page 529\)](#) category. For database rules, click [here \(page 595\)](#).

Each row defines a group of trunks. A peripheral determines how to handle a call based on the DNIS and the trunk group on which it arrives.

Use the Trunk Group bulk configuration tools to add, update, and delete Trunk\_Group records.

### Related tables

[Network Trunk Group \(page 295\)](#) (via NetworkTrunkGroupID)

[Peripheral \(page 306\)](#) (via PeripheralID)

[Trunk Group Five Minute \(page 508\)](#) (via TrunkGroupID)

[Trunk Group Half Hour \(page 509\)](#) (via TrunkGroupID)

[Trunk Group Real Time \(page 511\)](#) (via TrunkGroupID)

[Trunk \(page 506\)](#) (via TrunkGroupID)

**Table 209: Indexes for Trunk\_Group Table**

index_name	index_description	index_keys
XAK1Trunk_Group	nonclustered, unique, unique key located on PRIMARY	EnterpriseName
XAK2Trunk_Group	nonclustered, unique, unique key located on PRIMARY	PeripheralID, PeripheralNumber
XIE1Trunk_Group	nonclustered, unique, primary key located on PRIMARY	NetworkTrunkGroupID
XPKTrunk_Group	clustered, unique, primary key located on PRIMARY	TrunkGroupID

### Fields in Trunk\_Group Table:

Field Name:	Description:	Data Type:	Keys and Null Option:
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
ConfigParam	A string of parameters the system software sends to the peripheral to initialize the trunk group.	varchar	NULL
Deleted	Deleted Flag. Stored as a character: <ul style="list-style-type: none"><li>• Y = Yes</li><li>• N = No</li></ul>	DBCHAR	NOT NULL

**Trunk\_Group\_Five\_Minute Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
Description	Additional information about the trunk group.	DESCRIPTION	NULL
EnterpriseName	An enterprise name for the trunk group. This must be unique among all trunk groups in the enterprise.	VNAME32	AK-1 NOT NULL
Extension	The extension number for the trunk group (used by the Definity ECS ACD).	VTELNO10	NULL
NetworkTrunkGroupID	Optionally, the network trunk group to which this trunk group belongs.	DBINT	FK, NULL
PeripheralID	Foreign key from the Peripheral table.	DBSMALLINT	AK-2, FK NOT NULL
PeripheralName	Trunk group name as given by the peripheral.	VNAME32	NOT NULL
PeripheralNumber	Trunk group number as given by the peripheral.	DBINT	AK-2 NOT NULL
TrunkCount	The number of trunks in the trunk group. If the value is -1 (the <b>default</b> ), the system software determines the number of trunks in the group dynamically by examining the Trunk table. Do not change this value unless the Trunk data are not reliable.	DBINT	NOT NULL
TrunkGroupID	Unique identifier for this trunk group.	DBINT	PK NOT NULL

**Trunk\_Group\_Five\_Minute Table**

This is in the [Device \(page 529\)](#) category. For database rules, click [here \(page 595\)](#).

Central database only.

Contains information about a trunk group collected during each five-minute interval.

The system software generates Trunk\_Group\_Five\_Minute records for each trunk group.

#### **Related table**

[Trunk Group \(page 507\)](#) (via TrunkGroupID)

**Table 210: Indexes for Trunk\_Group\_Five\_Minute Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XAK1Trunk_Group_Five_Minute	nonclustered, unique, unique key located on PRIMARY	RecoveryKey

index_name	index_description	index_keys
XPKTrunk_Group_Five_Minute	clustered, unique, primary key located on PRIMARY	DateTime, TrunkGroupID, TimeZone

**Fields in Trunk\_Group\_Five\_Minute Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
AllTrunksBusyToHalf	Total time, in seconds, during the current half-hour interval that all trunks in the group were busy.	DBINT	NULL
DateTime	Central Controller date and time at the start of the five-minute interval.	DBSMALLDATE	PK NOT NULL
RecoveryDay	Currently not used, set to zero (0).	DBINT	NOT NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL
TimeZone	The time zone for the date and time. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK NOT NULL
TrunkGroupID	Foreign key from the Trunk Group table.	DBINT	PK, FK NOT NULL
TrunksIdle	Number of non-busy trunks in the group at the end of the five-minute interval.	DBINT	NULL
TrunksInService	Number of trunks in this trunk group in service at the end of the five-minute interval.	DBINT	NULL

## Trunk\_Group\_Half\_Hour Table

This is in the [Device \(page 529\)](#) category. For database rules, click [here \(page 595\)](#).

Central database only.

Contains information about a trunk group collected during each 30-minute interval.

The system software generates Trunk\_Group\_Half\_Hour records for each trunk group.

### Related table

[Trunk Group \(page 507\)](#) (via TrunkGroupID)

**Trunk\_Group\_Half\_Hour Table****Table 211: Indexes for Trunk\_Group\_Half\_Hour Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XAK1Trunk_Group_Half_Hour	nonclustered, unique, unique key located on PRIMARY	RecoveryKey
XIE1Trunk_Group_Half_Hour	nonclustered, unique, primary key located on PRIMARY	DbDateTime
XPKTrunk_Group_Half_Hour	clustered, unique, primary key located on PRIMARY	DateTime, TrunkGroupID, TimeZone

**Fields in Trunk\_Group\_Half\_Hour Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
AllTrunksBusyToHalf	Total time, in seconds, during the half-hour interval that all trunks in the group were busy.	DBINT	NULL
CallsAbandonedToHalf	Number of calls to the trunk group abandoned during the current half-hour interval.	DBINT	NULL
CallsInToHalf	Number of incoming calls received on the trunk group during the half-hour interval.	DBINT	NULL
CallsOutToHalf	Number of outbound calls sent on the trunk group during the half-hour interval.	DBINT	NULL
DateTime	Central Controller date and time at the start of the half-hour interval.	DBSMALLDATE	PK NOT NULL
DbDateTime	The current date and time stamp when the records are written to the HDS database. The logger database has NULL for this column.	DBDATETIME	IE-1 NULL
InServiceTimeToHalf	Aggregate number of seconds trunks in the group were in service during the half-hour interval.	DBINT	NULL
InUseInboundTimeToHalf	Aggregate number of seconds trunks in the group were used for inbound calls during the half-hour interval.	DBINT	NULL
InUseOutboundTimeToHalf	Aggregate number of seconds trunks in the group were used for outbound calls during the half-hour interval.	DBINT	NULL
RecoveryDay	Currently not used, set to zero (0).	DBINT	NOT NULL
RecoveryKey	A unique ID assigned to each record and used internally by the Unified ICM/Unified CCE software to track the record.	DBFLT8	AK-1 NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
TimeZone	The time zone for the date and time. The value is the offset in minutes from UTC (formerly called GMT).	DBINT	PK NOT NULL
TrunkGroupID	Foreign key from the Trunk Group table.	DBINT	PK, FK NOT NULL
TrunksIdle	Number of non-busy trunks in the group at the end of the half-hour interval.	DBINT	NULL
TrunksInService	Number of trunks in the group in service at the end of the half-hour interval.	DBINT	NULL

## Trunk\_Group\_Real\_Time Table

This is in the [Device \(page 529\)](#) category. For database rules, click [here \(page 595\)](#).

Local database only.

Contains real time information about each trunk group.

The system software generates a Trunk\_Group\_Real\_Time record for each trunk group.

### Related table

[Trunk Group \(page 507\)](#) (via TrunkGroupID)

**Table 212: Indexes for Trunk\_Group\_Real\_Time Table**

index_name	index_description	index_keys
XPKTrunk_Group_Real_Time	nonclustered, unique, primary key located on PRIMARY	TrunkGroupID

### Fields in Trunk\_Group\_Real\_Time Table:

Field Name:	Description:	Data Type:	Keys and Null Option:
AllTrunksBusyHalf	Total number of seconds during the current half-hour interval that all trunks in the group were busy.	DBINT	NULL
AllTrunksBusyToday	Total number of seconds since midnight that all trunks in the group were busy.	DBINT	NULL
CallsAbandonedHalf	Number of calls to the trunk group abandoned in queue during the current half-hour interval.	DBINT	NULL
CallsAbandonedToday	Number of calls to the trunk group abandoned in queue since midnight.	DBINT	NULL

**Trunk\_Group\_Real\_Time Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
CallsInHalf	Number of inbound calls received on the trunk group during the current half-hour interval.	DBINT	NULL
CallsInNow	Number of inbound calls currently in progress on the trunk group.	DBINT	NULL
CallsInToday	Number of inbound calls received on the trunk group since midnight.	DBINT	NULL
CallsOutHalf	Number of outbound calls received on the trunk group during the current half-hour interval.	DBINT	NULL
CallsOutNow	Number of outbound calls currently in progress on the trunk group.	DBINT	NULL
CallsOutToday	Number of outbound calls received on the trunk group since midnight.	DBINT	NULL
DateTime	Central Controller date and time that this data was last updated.	DBDATETIME	NOT NULL
InServiceTimeHalf	Aggregate number of seconds trunks in the group have been in service during the current half-hour interval.	DBINT	NULL
InServiceTimeToday	Aggregate number of seconds trunks in the group have been in service since midnight.	DBINT	NULL
InUseInboundTimeHalf	Aggregate number of seconds trunks in the group have been in use for inbound calls during the current half-hour interval.	DBINT	NULL
InUseInboundTimeToday	Aggregate number of seconds trunks in the group have been in use for inbound calls since midnight.	DBINT	NULL
InUseOutboundTimeHalf	Aggregate number of seconds trunks in the group have been in use for outbound calls during the current half-hour interval.	DBINT	NULL
InUseOutboundTimeToday	Aggregate number of seconds trunks in the group have been in use for outbound calls since midnight.	DBINT	NULL
TrunkGroupID	Foreign key from the Trunk Group table.	DBINT	PK, FK NOT NULL
TrunksIdle	Number of non-busy trunks in the group now.	DBINT	NULL
TrunksInService	Number of trunks in the trunk group in service now.	DBINT	NULL

## User\_Formula Table

This table is part of the [Script category \(page 539\)](#). For database rules, click [here. \(page 599\)](#)

Each row describes a custom function. A custom function is a shorthand for an expression. It may, optionally, accept parameters. The expression associated with the function is stored in the User\_Formula\_Equation table.

Use the Script Editor to create, modify, and delete custom functions.

### Related table

[User Formula Equation \(page 513\)](#) (via UserFormulaID)

**Table 213: Indexes for User\_Formula Table**

index_name	index_description	index_keys
XAK1User_Formula	clustered, unique, unique key located on PRIMARY	EnterpriseName
XPKUser_Formula	nonclustered, unique, primary key located on PRIMARY	UserFormulaID

### Fields in User\_Formula Table:

Field Name:	Description:	Data Type:	Keys and Null Option:
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
Description	Additional information about the function.	DESCRIPTION	NULL
EnterpriseName	An enterprise name for the function. Custom function names always begin with "user".	VNAME32	AK-1 NOT NULL
Length	The number of bytes in the expression for the function.	DBINT	NOT NULL
ParamCount	The number of parameters the function accepts.	DBINT	NOT NULL
UserFormulaID	A unique identifier for the function.	DBINT	PK NOT NULL

## User\_Formula\_Equation Table

This table is part of the [Script category \(page 539\)](#). For database rules, click [here. \(page 599\)](#)

Each row contains all or part of the expression associated with a custom formula.

Use the Script Editor to add, modify, and delete custom formulas.

**User\_Group Table****Related table**

[User Formula Table \(page 513\)](#) (via UserFormulaID)

**Table 214: Indexes for User\_Formula\_Equation Table**

index_name	index_description	index_keys
XPKUser_Formula_Equation	clustered, unique, primary key located on PRIMARY	UserFormulaID, RowOrder

**Fields in User\_Formula\_Equation Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
EquationString	The expression string.	varchar(255)	NULL
RowOrder	Specifies the order of strings for a formula. A formula may have one or more strings.	DBINT	PK NOT NULL
UserFormulaID	Foreign key from the User_Formula table.	DBINT	PK, FK NOT NULL

**User\_Group Table**

This table is in the [Security category \(page 543\)](#). To see database rules for these tables, click [here \(page 600\)](#).

Lists the groups of users to which specific access rights apply. A record in this table can represent a group of users (with multiple associated records in the User\_Group\_Member table) or a single user (with a single associated record in the User\_Group\_Member table).

Use Configuration Manager to create, update, and delete user groups.

**Related tables**

<a href="#">Class Security (page 190)</a> (via UserGroupName)	<a href="#">Customer Definition (page 194)</a> (via CustomerDefinitionID)	<a href="#">Feature Control Set (page 236)</a> (via FeatureSetID)
<a href="#">Global Security Control</a> (via UserGroupID)	<a href="#">Object Security (page 305)</a> (via UserGroupName)	<a href="#">Sec Group (page 384)</a> (via UserGroupID)
<a href="#">Sec User (page 385)</a> (via UserGroupID)	<a href="#">User Group Member (page 516)</a> (via UserGroupName)	<a href="#">User Supervisor Map (page 517)</a> (via UserGroupID)

**Table 215: Indexes for User\_Group Table**

index_name	index_description	index_keys
XAK1User_Group	clustered, unique, unique key located on PRIMARY	UserGroupName

index_name	index_description	index_keys
XIE1User_Group	nonclustered, unique, primary key located on PRIMARY	CustomerDefinitionID
XPKUser_Group	nonclustered, unique, primary key located on PRIMARY	UserGroupID

**Fields in User\_Group Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
CustomerDefinitionID	Identifies the customer associated with the user group.	DBINT	FK, IE-1 NULL
Description	Additional information about the group.	DESCRIPTION	NULL
DomainName	DNS format of the Active Directory domain name.	VARCHAR(64)	NULL
FeatureSetID	Identifies a feature set from the Feature_Control_Set Table.	DBINT	FK NULL
ReadOnly	Valid options include: <ul style="list-style-type: none"><li>• Y = Read-only user</li><li>• N = Normal user</li></ul>	DBCHAR	NOT NULL
ServiceProvider	Valid options include: <ul style="list-style-type: none"><li>• Y = Service provider or normal customer</li><li>• N = Service bureau customer.</li></ul> <b>Note:</b> This field is no longer used.	DBCHAR	NOT NULL
UserGroupID	A unique identifier for the group.	DBINT	PK NOT NULL
UserGroupName	The name of a user or a group.	varchar(64)	AK-1 NOT NULL
UserGroupType	The type of the group: <ul style="list-style-type: none"><li>• U = for an individual user</li><li>• G = for a group of users.</li></ul>	char(1)	NOT NULL
UserGuid	Unique ID for an Active Directory user.	VARCHAR (64)	NULL
UserName	Active Directory user logon name.	VARCHAR (64)	NULL

**User\_Group\_Member Table****User\_Group\_Member Table**

This table is in the [Security category \(page 543\)](#). To see database rules for these tables, click [here \(page 600\)](#).

Lists the specific users that are members of each user group. If the group is of type "U" then it has a single User\_Group\_Member record. If the group is of type 'G' is can have multiple User\_Group\_Member records. A single user can be a member of multiple user groups.

Use Configuration Manager to create, update, and delete User Group Member records.

**Related table**

[User Group \(page 514\)](#) (via UserGroupID)

**Table 216: Indexes for User\_Group\_Member Table**

index_name	index_description	index_keys
XAK1User_Group_Member	clustered, unique, unique key located on PRIMARY	UserName, UserGroupName
XIE1User_Group_Member	nonclustered, unique, primary key located on PRIMARY	UserName
XPKUser_Group_Member	nonclustered, unique, primary key located on PRIMARY	UserGroupMemberID

**Fields in User\_Group\_Member Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
UserGroupMemberID	A unique identifier for the record.	DBINT	PK NOT NULL
UserGroupName	The group to which the member belongs.	varchar(64)	AK-1 NOT NULL
UserName	The username as registered with SQL Server.	varchar(64)	AK-1, IE-1 NOT NULL

**User\_Security\_Control Table**

This table is in the [Security category \(page 543\)](#). To see database rules for these tables, click [here \(page 600\)](#).

Specifies the security access that individual users have to specific objects. The system software builds this table from the data in the other security tables.

**Related tables**

[Ids \(page 271\)](#) (via ObjectType + ObjectID)

[User Group Member \(page 516\)](#) (via UserName)

**Table 217: Indexes for User\_Security\_Control Table**

index_name	index_description	index_keys
XIE1User_Security_Control	nonclustered located on PRIMARY	UserName
XIE2User_Security_Control	nonclustered, unique, primary key located on PRIMARY	UserGroupID
XPKUser_Security_Control	clustered, unique, primary key located on PRIMARY	ObjectType, ObjectID, UserName

**Fields in User\_Security\_Control Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
AccessLevel	The level of access that the user has for the object. To see values. click <a href="#">here (page 553)</a> .	DBINT	NOT NULL
ObjectID	Together with ObjectType, identifies the object.	DBINT	PK NOT NULL
ObjectType	Together with ObjectID, identifies the object.	DBINT	PK, FK NOT NULL
UserGroupID	Foreign key from the User_Group table.	DBINT	IE-2 NOT NULL
UserName	The SQL Server username of the user.	varchar(64)	PK, IE-1 NOT NULL

## User\_Supervisor\_Map Table

This table is in the [Security category \(page 543\)](#). To see database rules for these tables, click [here \(page 600\)](#).

Used to allow an agent to log in as a Supervisor. When an agent logs in as a Supervisor, an entry for the agent is created in the User Group table to allow the agent login.

### Related table

[User Group \(page 514\)](#) (via UserGroupID)

**Table 218: Indexes for User\_Supervisor\_Map Table**

index_name	index_description	index_keys
XAK1UserSupervisorMap	nonclustered, unique, unique key located on PRIMARY	AgentSkillTargetID
XPKUserSupervisorMap	clustered, unique, primary key located on PRIMARY	UserGroupID, AgentSkillTargetID

**User\_Variable Table****Fields in User\_Supervisor\_Map Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
AgentSkillTargetID	The identifier for the SkillTargetID for an agent that is a supervisor.  <b>Note:</b> The SupervisorAgent field for this agent must be Y.	DBINT	PK, AK-1 NOT NULL
UserGroupID	The identifier for the user.  <b>Note:</b> The UserGroupType for this user must be U.	DBINT	PK, FK NOT NULL

**User\_Variable Table**

This table is part of the [Script category \(page 539\)](#). For database rules, click [here. \(page 599\)](#)

Contains the definitions of user variables. You can optionally associate a variable with an object type (such as service or skill group). The system software then creates an instance of the variable for each object of that type (for example, for each service or each skill group). You can set and reference variables within scripts. If a variable is persistent, its value is stored in the [Persistent\\_Variable](#) table.

Use the User Variable list tool to create, update, and delete definitions of user variables.

**Related table**

[Persistent Variable \(page 321\)](#) (via UserVariableID)

**Table 219: Indexes for User\_Variable Table**

index_name	index_description	index_keys
XAK1User_Variable	nonclustered, unique, unique key located on PRIMARY	ObjectType, VariableName
XPKUser_Variable	clustered, unique, primary key located on PRIMARY	UserVariableID

**Fields in User\_Variable Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
DataType	Indicates the type of the variable:  <ul style="list-style-type: none"> <li>• 0 = Long</li> <li>• 1 = Float</li> <li>• 2 = Char</li> <li>• 3 = Date</li> </ul>	DBSMALLINT	NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
Description	Additional information about the variable.	DESCRIPTION	NULL
Instance	Not currently used.	DBCHAR	NOT NULL
ObjectType	The type of object with which the variable is associated. For the list of values, click <a href="#">here (page 572)</a> .	DBSMALLINT	AK-1 NOT NULL
Persistent	Indicates whether to preserve the value of the variable between script invocations. Stored as a character: <ul style="list-style-type: none"><li>• Y = yes</li><li>• N = no</li></ul>	DBCHAR	NOT NULL
ReportingMethod	Not currently used.	DBSMALLINT	NOT NULL
UserVariableID	A unique identifier for the variable.	DBINT	PK NOT NULL
VariableName	The name of the variable. User variable names must begin with "user".	VNAME32	AK-1 NOT NULL

## Version Table

This table is in the [System category \(page 548\)](#). To see database rules for these tables, click [here \(page 601\)](#).

A system table containing a single row which indicates the current version of the system database schema installed in the central and local databases. This table is maintained by the system software installation process.

**Table 220: Indexes for Version Table**

index_name	index_description	index_keys
XIE1Version	nonclustered, unique, primary key located on PRIMARY	Major

### Fields in Version Table:

Field Name:	Description:	Data Type:	Keys and Null Option:
AWMinor	The incremental version number of the local database schema on the AW. For example, if the version is 1.3, this value is 3.	DBINT	NOT NULL
CCMinor	The incremental version number of the central database schema. For example, if the version is 1.2, this value is 2.	DBINT	NOT NULL

**View\_Column Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
IPCCMinor	Control version of preconfigured items for Simplified Unified CCE Deployments.	DBINT	NOT NULL
Major	The number of the major version; for example, if the version is 1.2, this value is 1.	DBINT	IE-1 NOT NULL

**View\_Column Table**

This table is in the [Schedule category \(page 538\)](#). To see database rules, click [here \(page 598\)](#).

Describes how the system software interprets one column of imported schedule data.

**Related table**

[ICR View \(page 270\)](#) (via ICRViewID)

**Table 221: Indexes for View\_Column Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XAK1View_Column	nonclustered, unique, unique key located on PRIMARY	ICRViewID, ColumnNumber
XAK2View_Column	nonclustered, unique, unique key located on PRIMARY	ICRViewID, ViewName
XPKView_Column	clustered, unique, primary key located on PRIMARY	ViewColumnID

**Fields in View\_Column Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
BaseName	The name used for the column in the system from which it imported.	VNAME32	NULL
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
ColumnNumber	Indicates the position of the column within the Schedule Import table.	DBINT	AK-1 NOT NULL
Description	Additional information about the column.	DESCRIPTION	NULL
Edit	Indicates whether the View_Column record can be modified. Stored as a character: <ul style="list-style-type: none"><li>• Y = yes</li><li>• N = no</li></ul>	DBCHAR	NOT NULL
ICRViewID	Identifies the view to which the column belongs.	DBINT	AK-1, AK-2, FK NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
Mask	Indicates which bit positions to use in the value. An AND operation is applied to the mask value and the field value.	DBINT	NULL
Shift	The number of bit positions to shift the value to the left.	DBINT	NULL
ViewColumnID	A unique identifier for the column.	DBINT	PK NOT NULL
ViewName	The name used for the column within the system software.	VNAME32	AK-2 NOT NULL

## Vru\_Currency Table

This is one of the [VRU\\_Micro\\_Application \(page 551\)](#) tables. For database rules, click [here \(page 603\)](#).

This table contains a list of currencies supported by VRU micro-applications.

### Related table

[VRU Defaults \(page 522\)](#) (via CurrencyID)

**Table 222: Indexes for Vru\_Currency Table**

index_name	index_description	index_keys
XAK1Vru_Currency	nonclustered, unique, unique key located on PRIMARY	CurrencyName
XPKVru_Currency	clustered, unique, primary key located on PRIMARY	CurrencyID

### Fields in Vru\_Currency Table:

Field Name:	Description:	Data Type:	Keys and Null Option:
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
CurrencyID	A unique identifier.	DBINT	PK NOT NULL
CurrencyName	Specifies the currency supported by the VRU micro-application: <ul style="list-style-type: none"><li>• <b>1</b> = U.S. Dollar (default)</li><li>• <b>2</b> = Euro</li><li>• <b>3</b> = Pound Sterling</li><li>• <b>4</b> = French franc</li><li>• <b>5</b> = Deutschmark</li></ul>	varchar(10)	AK-1 NOT NULL

**Vru\_Defaults Table**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
	<ul style="list-style-type: none"> <li>• <b>6</b> = Lira</li> <li>• <b>7</b> = Peseta</li> <li>• <b>0</b> = Other</li> </ul>		

**Vru\_Defaults Table**

This is one of the [VRU\\_Micro\\_Application \(page 551\)](#) tables. For database rules, click [here \(page 603\)](#).

This table contains a single row of data that contains the default values for a particular VRU micro-application.

**Related tables**

[VRU Locale \(page 524\)](#) (via LocaleID)

[VRU Currency \(page 521\)](#) (via CurrencyID)

**Table 223: Indexes for View\_Defaults Table**

<b>index_name</b>	<b>index_description</b>	<b>index_keys</b>
XAK1Vru_Defaults	nonclustered, unique, unique key located on PRIMARY	EnterpriseName
XPKVru_Defaults	clustered, unique, primary key located on PRIMARY	VruDefaultsID

**Fields in Vru\_Defaults Table:**

<b>Field Name:</b>	<b>Description:</b>	<b>Data Type:</b>	<b>Keys and Null Option:</b>
AppMediaLib	A path to library of application media files/prompts specific to a set of related Unified ICM scripts. (Example: customer menus.) The <b>default</b> entry is <b>app</b> .	varchar(255)	NULL
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
CurrencyID	The currency supported by VRU micro-applications. The <b>default</b> value is <b>1, CURRENCY_DOLLAR</b> .	DBINT	FK NOT NULL
Description	A description of the row. There is no default value in this field.	DESCRIPTION	NULL
DTMFTermKey	DTMF Termination key: <b>0-9</b> (digits)	char(1)	NOT NULL

Field Name:	Description:	Data Type:	Keys and Null Option:
	* (asterisk)  # (pound sign, the default)  N (no termination key)		
EnterpriseName	A unique name for the enterprise.	VNAME32	AK-1 NOT NULL
InterDigitTimeout	The number of seconds a caller is allowed between entering digits. If exceeded, the system times-out. Valid options are the digits 1-99 (default: 3).	DBINT	NOT NULL
InvalidEntryTries	Number of times ISN repeats the Get Digits cycle when the caller enters invalid data. (Total includes the first cycle.) Valid options are the digits 1-9 (default: 3).	DBINT	NOT NULL
LocaleID	A combination of language and country specifying the language the VRU micro-application executes in:  • <b>en-us</b> = U.S. English (default)  • <b>en-gb</b> = Great Britain English  • <b>es-es</b> = European Spanish  • <b>es-mx</b> = Mexican Spanish	DBINT	FK NOT NULL
MediaServerSet	Base URL for all media files used in the VRU script. The default value is file:../MediaFiles	varchar(255)	NOT NULL
NoEntryTimeout	The number of seconds a caller is allowed to begin entering digits. If exceeded, the system times-out.  Valid options are the digits 0-99 (default: 5).	DBINT	NOT NULL
NoEntryTries	Number of times ISN repeats the Get Digits cycle when a caller doesn't enter any data after being given the prompt. (Total includes first cycle.)  Valid options are the digits 1-9 (default: 3).	DBINT	NOT NULL
SystemMediaLib	A path to library of system media files/prompts for individual digits, months, default error messages, etc. The default entry is sys.	varchar(255)	NULL
VruDefaultsID	A unique identifier.	DBINT	PK NOT NULL

**Vru\_Locale Table****Vru\_Locale Table**

This is one of the [VRU\\_Micro\\_Application \(page 551\)](#) tables. For database rules, click [here \(page 603\)](#).

This table contains a list of locales (a locale is a combination of language and country) supported by VRU micro-applications.

**Related table**

[VRU Defaults \(page 522\)](#) (via LocaleID)

**Table 224: Indexes for Vru\_Locale Table**

index_name	index_description	index_keys
XAK1Vru_Locale	nonclustered, unique, unique key located on PRIMARY	Locale
XPKVru_Locale	clustered, unique, primary key located on PRIMARY	LocaleID

**Fields in Vru\_Locale Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ChangeStamp	Incremented when the record is changed in the central database.	CHANGESTAMP	NOT NULL
Locale	A combination of language and country specifying the language the VRU micro-application executes in: <ul style="list-style-type: none"> <li>• <b>en-us</b> = U.S. English (default)</li> <li>• <b>en-gb</b> = Great Britain English</li> <li>• <b>es-es</b> = European Spanish</li> <li>• <b>es-mx</b> = Mexican Spanish</li> </ul>	varchar(10)	AK-1 NOT NULL
LocaleID	A unique identifier.	DBINT	PK NOT NULL

**Vru\_Port\_Map Table**

This is in the [Device \(page 529\)](#) category. For database rules, click [here \(page 595\)](#).

In cases where ACD and VRU PIMs are controlled by the same PG, the VRU\_Port\_Map table is used to specify how VRU ports map to ACD ports or trunks.

Use the VRU Port Map and Bulk Insert tool to map VRU ports to ACD ports or trunks.

**Related table**

[Trunk \(page 506\)](#) (via TrunkID)


**Table 225: Indexes for Vru\_Port\_Map Table**

index_name	index_description	index_keys
XPKVru_Port_Map	clustered, unique, primary key located on PRIMARY	TrunkID

**Fields in Vru\_Port\_Map Table:**

Field Name:	Description:	Data Type:	Keys and Null Option:
ACDPeripheralID	The ID of ACD peripheral if Type is 1.	DBSMALLINT	NULL
ACDPort	The ACD port if Type is 1.	VNAME32	NULL
ACDTrunkID	The ID of the ACD trunk if Type is 0.	DBINT	NULL
TrunkID	The ID of the VRU trunk to be mapped.	DBINT	PK, FK NOT NULL
Type	The type of VRU-to-ACD mapping: <ul style="list-style-type: none"> <li>• <b>0</b> = A VRU trunk-to-ACD trunk mapping</li> <li>• <b>1</b> = A VRU trunk-to-ACD port mapping.</li> </ul>	DBINT	NOT NULL

**Vru\_Port\_Map Table**

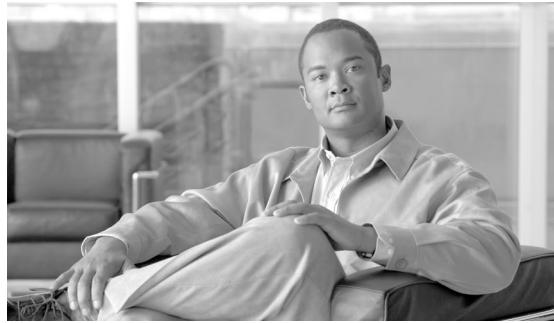

# Chapter 3

## Tables by Group

---

### Overview

This section explains major areas of the schema. Tables are arranged in logical groups based on their domains and interrelationships.

For each section, you can find:

- an illustration that maps the connections among tables in that group
- links to detailed information on each individual table in the group
- a link to the database rules for the group

For details on the columns in each table, see [All Tables \(page 13\)](#).

### Blended Agent (Outbound Option)


This figure depicts the tables in the Blended Agent (Outbound Option) category and their connections.

In this graphic:

- A single box represents a single table.
- A stack of boxes represents several tables in another category of the schema.
- A single arrowhead indicates a one-to-one relationship, and a double arrowhead indicates a one-to-many relationship.

**Blended Agent (Outbound Option)**

Figure 3: Blended Agent Tables

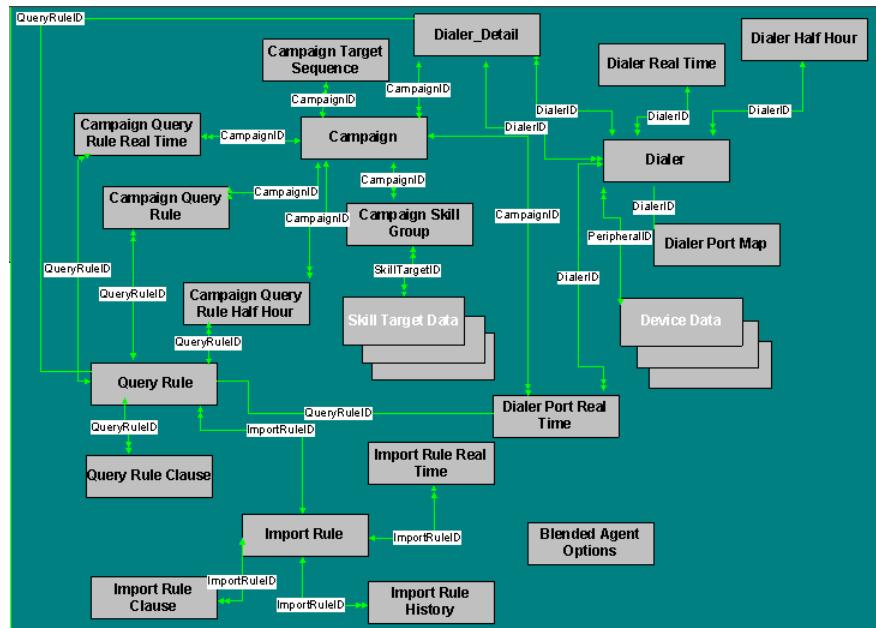

To see database rules for tables in the Blended Agent group, click [here \(page 593\)](#).

Tables that hold **Blended Agent (Outbound Option)** data are listed below.

- [Blended Agent Options \(page 90\)](#)
- [Campaign \(page 155\)](#)
- [Campaign Half Hour \(page 163\)](#)
- [Campaign Query Rule \(page 164\)](#)
- [Campaign Query Rule Half Hour \(page 166\)](#)
- [Campaign Query Rule Real Time \(page 172\)](#)
- [Campaign Skill Group \(page 180\)](#)
- [Campaign Target Sequence \(page 182\)](#)
- [Dialer \(page 202\)](#)
- [Dialer Detail \(page 206\)](#)
- [Dialer Half Hour \(page 211\)](#)
- [Dialer Port Map \(page 217\)](#)
- [Dialer Port Real Time \(page 218\)](#)
- [Dialer Skill Group Half Hour \(page 223\)](#)

- Dialer\_Skill\_Group\_Real\_Time (page 226)
- Import Rule (page 273)
- Import Rule Clause (page 277)
- Import Rule History (page 278)
- Import Rule Real Time (page 279)
- Query Rule (page 325)
- Query Rule Clause (page 327)


## Device

This figure depicts the tables in this category and their connections.

In this graphic:

- A single box represents a single table.
- A box with a + plus sign represents a subcategory of table with related detail: Peripheral and Trunk Group.
- A stack of boxes represents several tables in another category of the schema.
- A single arrowhead indicates a one-to-one relationship, and a double arrowhead indicates a one-to-many relationship.

*Figure 4: Device Tables*

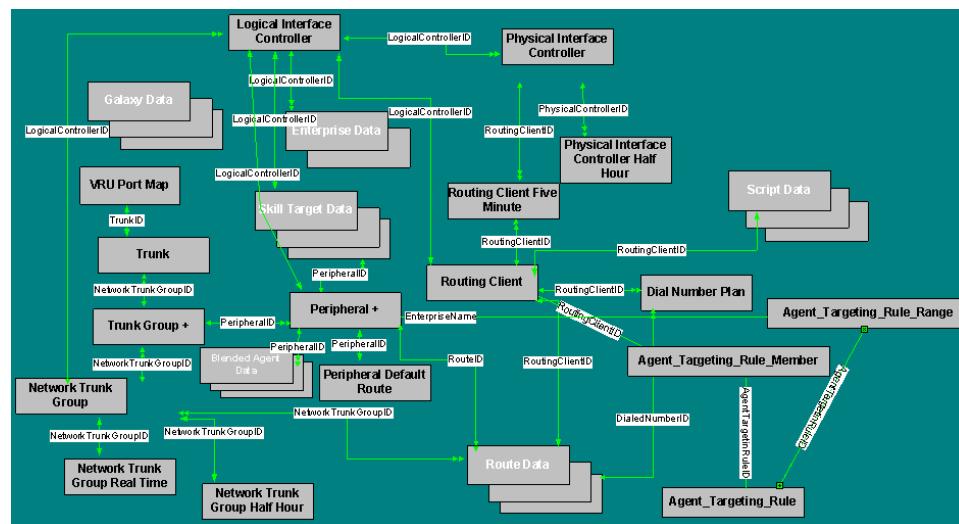

To see **database rules** for these tables, click [here \(page 595\)](#).

**Device**


Tables in the **Device** category include the following:

- [Agent\\_Targeting\\_Rule \(page 67\)](#)
- [Agent\\_Targeting\\_Rule\\_Member \(page 68\)](#)
- [Agent\\_Targeting\\_Rule\\_Range \(page 69\)](#)
- [Dial Number Plan \(page 201\)](#)
- [Logical Interface Controller \(page 286\)](#)
- [Network Trunk Group \(page 295\)](#)
- [Network Trunk Group Half Hour \(page 296\)](#)
- [Network Trunk Group Real Time \(page 298\)](#)
- [Peripheral \(page 306\)](#) See the section below for Peripheral Detail tables.
- [Peripheral Default Route \(page 310\)](#)
- [Physical Controller Half Hour \(page 323\)](#)
- [Physical Interface Controller \(page 324\)](#)
- [Routing Client \(page 357\)](#)
- [Routing Client Five Minute \(page 359\)](#)
- [Trunk \(page 506\)](#)
- [Trunk Group \(page 507\)](#) See the section below for Trunk Group Detail tables.
- [VRU Port Map \(page 524\)](#)

## Peripheral Detail

The figure below illustrates the tables in the Peripheral Detail subcategory.

Figure 5: Peripheral Detail Tables

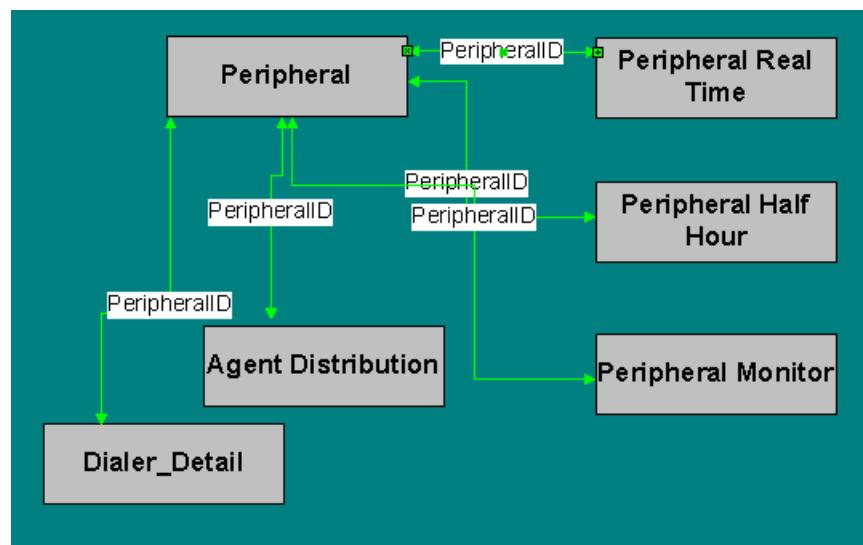


These tables are:

- [Agent Distribution \(page 23\)](#)
- [Dialer Detail \(page 206\)](#)
- [Peripheral \(page 306\)](#)
- [Peripheral Half Hour \(page 310\)](#)
- [Peripheral Monitor \(page 315\)](#)
- [Peripheral Real Time \(page 316\)](#)

## Trunk Group Detail

The figure below illustrates the tables in the Trunk Detail subcategory.

Figure 6: Trunk Detail Tables

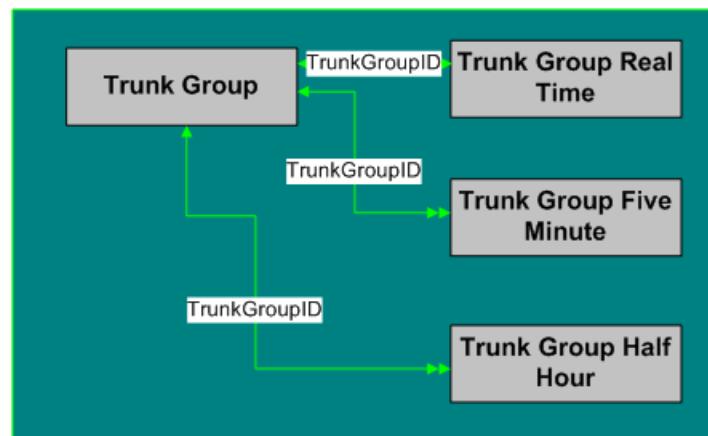

**Enterprise**

These tables are:


- Trunk Group (page 507)
- Trunk Group Five Minute (page 508)
- Trunk Group Half Hour (page 509)
- Trunk Group Real Time (page 511)

**Enterprise**

The figure below shows the relationships among tables in the Enterprise category.

- A single box represents a single table.
- A stack of boxes represents several tables in another category of the schema.
- A single arrowhead indicates a one-to-one relationship, and a double arrowhead indicates a one-to-many relationship.

*Figure 7: Enterprise Tables*

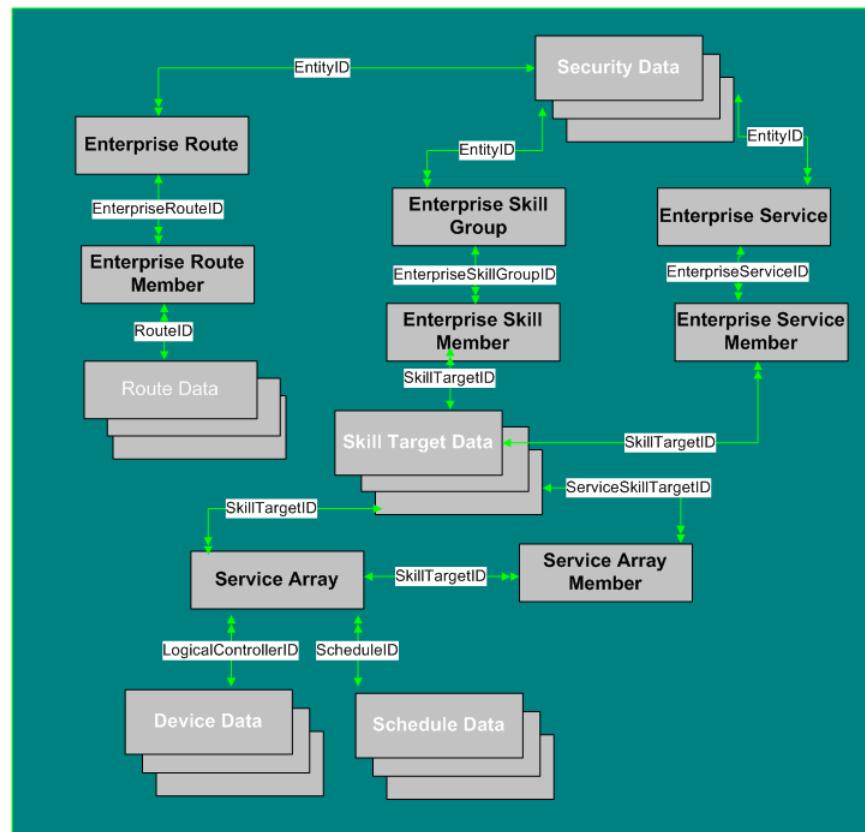

To see **database rules** for these tables, click [here](#) (page 596).


Tables that hold **Enterprise** data are listed below.

- Enterprise Route (page 228)
- Enterprise Route Member (page 229)
- Enterprise Skill Group (page 231)
- Enterprise Skill Group Member (page 232)
- Enterprise Service (page 229)
- Enterprise Service Member (page 230)
- Service Array (page 388)
- Service Array Member (page 389)

## Galaxy

This figure shows the tables in the Galaxy group.

*Figure 8: Galaxy Tables*

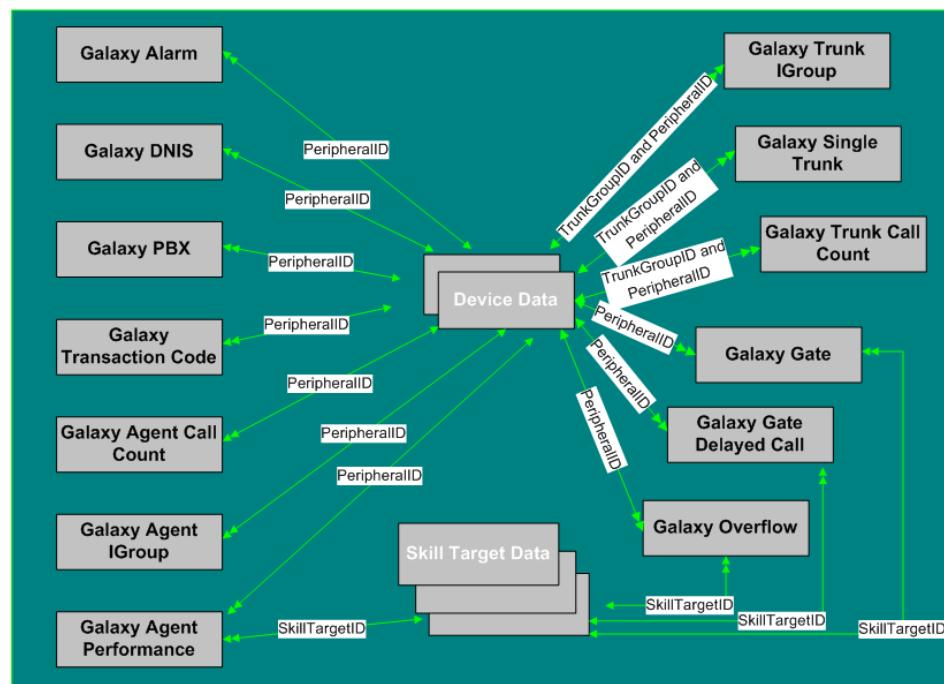

To see database rules for Galaxy tables, click [here \(page 596\)](#).

**Galaxy Tables** are listed below:

- [Galaxy Agent Call Count \(page 237\)](#)

**Media Routing**


- [Galaxy Agent IGroup \(page 238\)](#)
- [Galaxy Agent Performance \(page 240\)](#)
- [Galaxy Alarm Table \(page 242\)](#)
- [Galaxy DNIS Table \(page 243\)](#)
- [Galaxy Gate Table \(page 245\)](#)
- [Galaxy Gate Delayed Call Table \(page 248\)](#)
- [Galaxy Overflow Table \(page 251\)](#)
- [Galaxy PBX Table \(page 255\)](#)
- [Galaxy Single Trunk Table \(page 257\)](#)
- [Galaxy Transaction Code Table \(page 258\)](#)
- [Galaxy Trunk Call Count Table \(page 259\)](#)
- [Galaxy Trunk IGroup Table \(page 260\)](#)

## Media Routing

The figure below shows the relationships among the tables in the Media Routing category.

- A single box represents a single table.
- A stack of boxes represents several tables in another category of the schema.
- A single arrowhead indicates a one-to-one relationship, and a double arrowhead indicates a one-to-many relationship.

Figure 9: Media Routing Tables

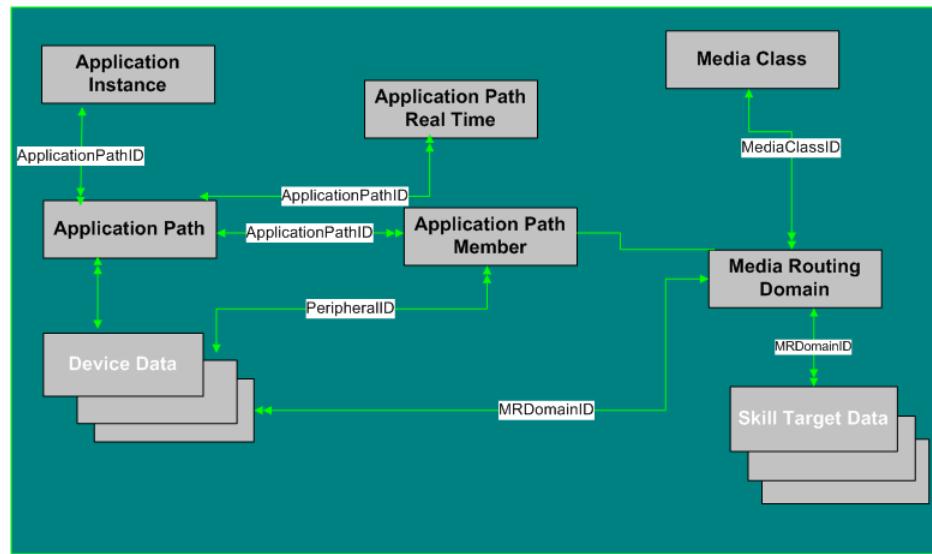

To see **Database rules** for the Media Routing tables, click [here \(page 597\)](#).

**Media Routing Tables** are listed below:

- [Application Instance \(page 81\)](#)
- [Application Path \(page 82\)](#)
- [Application Path Member \(page 83\)](#)
- [Application Path Real Time \(page 84\)](#)
- [Media Class \(page 289\)](#)
- [Media Routing Domain \(page 290\)](#)

## Route


This figure depicts the tables in this category and their connections.

In this graphic:

- A single box represents a single table.
- A box with a + plus sign represents a subcategory of table with related detail: Route Detail.
- A stack of boxes represents several tables in another category of the schema.
- A single arrowhead indicates a one-to-one relationship, and a double arrowhead indicates a one-to-many relationship.

**Route**

Figure 10: Route Tables

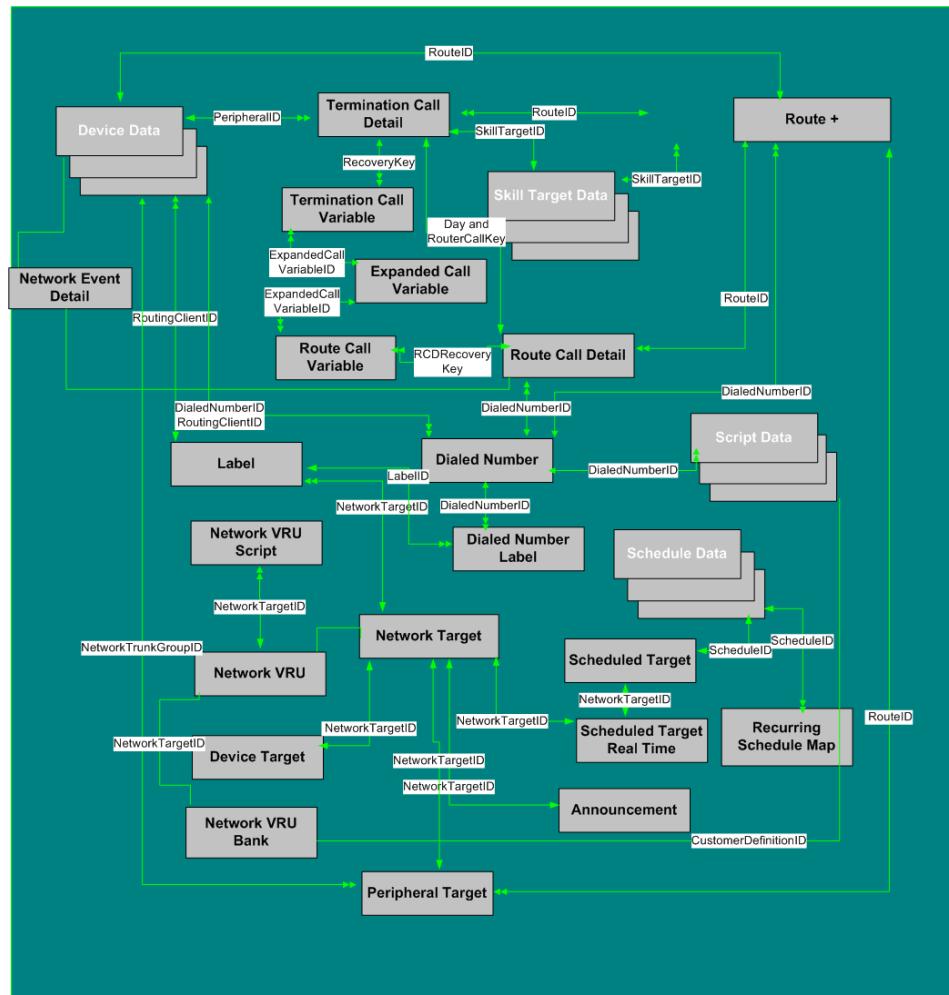

To see **Database Rules** for Route Tables, click [here](#) (page 597).

Tables that hold **Route** data are listed below.


- [Announcement](#) (page 72)
- [Device Target](#) (page 196)
- [Dialed Number](#) (page 197)
- [Dialed Number Label](#) (page 199)
- [Expanded Call Variable](#) (page 234)
- [Label](#) (page 281)
- [Network Event Detail](#) (page 293)
- [Network Target](#) (page 294)
- [Network VRU](#) (page 300)

- Network VRU Bank (page 301)
- Network VRU Script (page 302)
- Peripheral Target (page 320)
- Recurring Schedule Map
- Route (page 336)
- Route Call Detail (page 338)
- Route Call Variable (page 343)
- Scheduled Target (page 375)
- Scheduled Target Real Time (page 376)
- Termination Call Detail (page 490)
- Termination Call Variable (page 502)

### Route Detail Tables

The figure below illustrates the tables in the Route Details subcategory.

Figure 11: Route Detail Tables

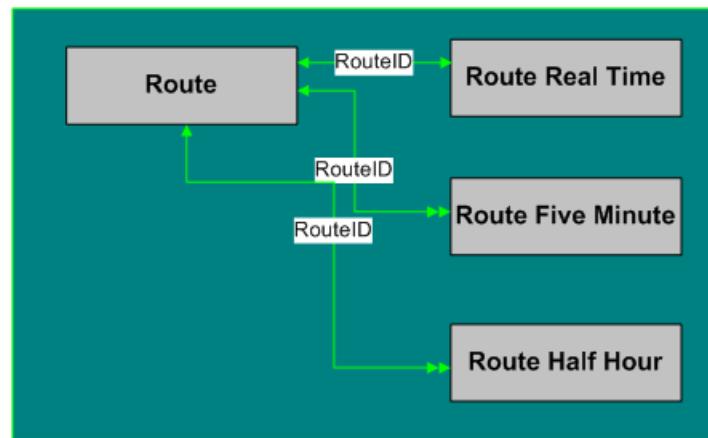

Route Detail Tables are:

- Route (page 336)
- Route Real Time (page 352)
- Route Five Minute (page 344)
- Route Half Hour (page 347)

**Schedule**


## Schedule

This figure depicts the tables in this category.

In this graphic:

- A single box represents a single table.
- A stack of boxes represents several tables in another category of the schema.
- A single arrowhead indicates a one-to-one relationship, and a double arrowhead indicates a one-to-many relationship.

*Figure 12: Schedule Table*

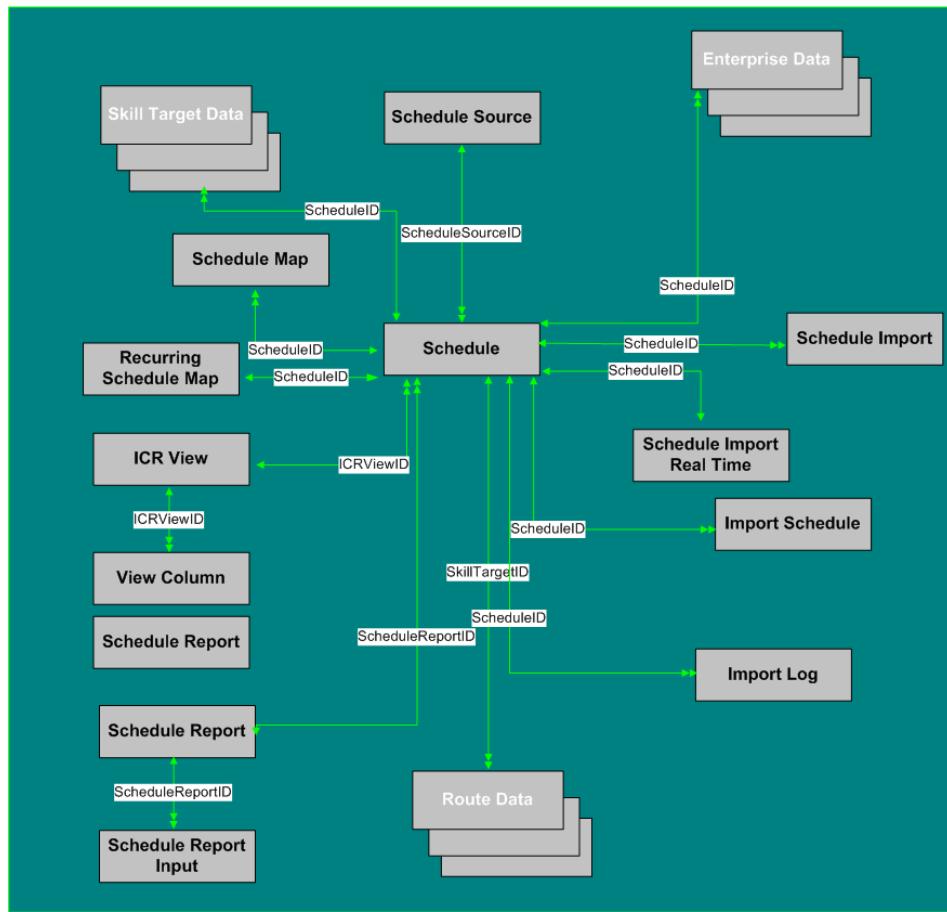

To see **Database Rules** for Schedule Tables, click [here \(page 598\)](#).

Tables that hold **Schedule** data are listed below.

- [Schedule \(page 365\)](#)

- [Schedule Source \(page 374\)](#)
- [Schedule Map \(page 371\)](#)
- Recurring Schedule Map
- [Schedule Report \(page 372\)](#)
- [Schedule Report Input \(page 373\)](#)
- [Schedule Import \(page 367\)](#)
- [Schedule Import Real Time \(page 369\)](#)
- [Schedule Source \(page 374\)](#)
- [Import Schedule \(page 281\)](#)
- [Import Log \(page 272\)](#)
- [ICR View \(page 270\)](#)
- [View Column \(page 520\)](#)

## Script


This figure depicts the tables in this category.

In this graphic:

- A single box represents a single table.
- A box with a + plus sign represents a subcategory of table with related detail: Call Type, Region, and Script.
- A stack of boxes represents several tables in another category of the schema.
- A single arrowhead indicates a one-to-one relationship, and a double arrowhead indicates a one-to-many relationship.

**Script**

Figure 13: Script Tables

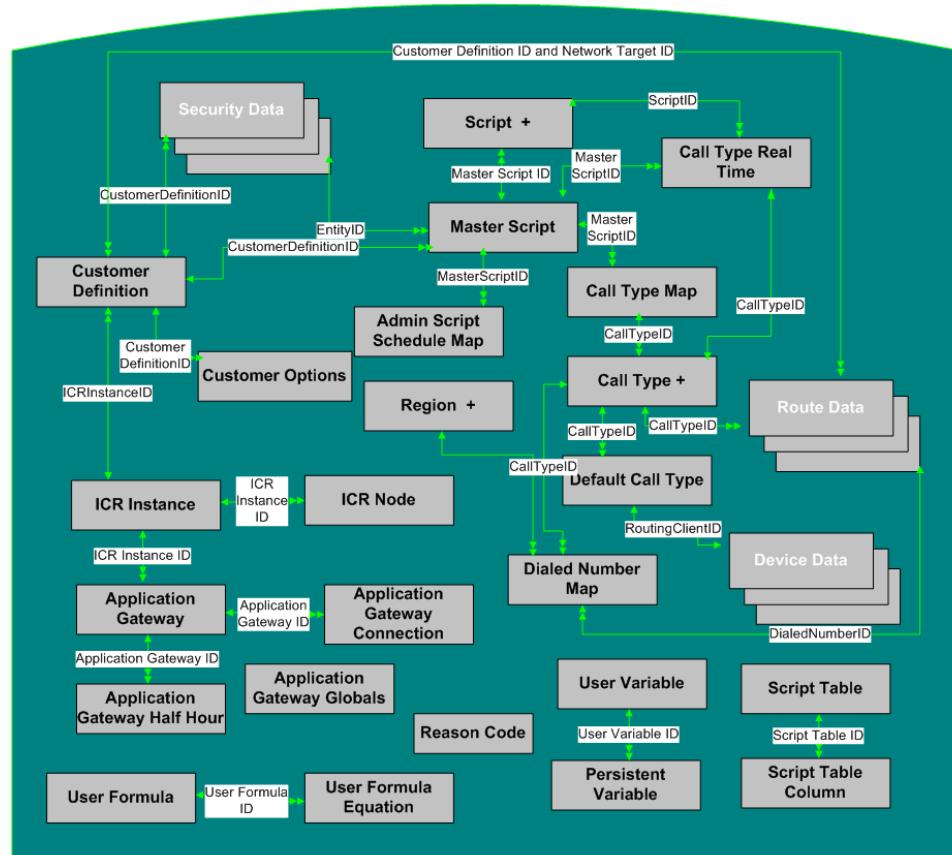

To see **database rules** for these tables, click [here](#) (page 599).

### Script Tables


- [Admin Script Schedule Map](#) (page 13)
- [Application Gateway](#) (page 75)
- [Application Gateway Connection](#) (page 76)
- [Application Gateway Half Hour](#) (page 80)
- [Application Gateway Globals](#) (page 78)
- [Call Type](#) (page 95)
- [Call Type Map](#) (page 121)
- [Call Type Real Time](#) (page 142)
- [Customer Definition](#) (page 194)
- [Customer Options](#) (page 195)
- [Default Call Type](#) (page 195)

- Dialed Number Map (page 200)
- ICR Instance (page 267)
- ICR Node (page 269)
- Master Script (page 288)
- Persistent Variable (page 321)
- Region (page 332)
- Script (page 377)
- Script Table (page 377)
- Script Table Column (page 384)
- User Formula (page 513)
- User Formula Equation (page 513)
- User Variable (page 518)

## Call Type Detail

The figure below illustrates the tables in the Call Type subcategory.

*Figure 14: Call Type Tables*

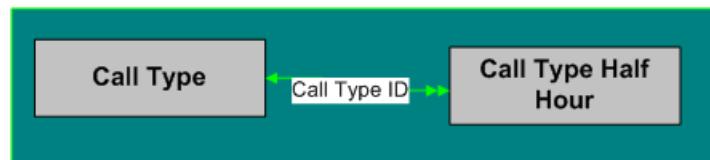

These tables are:


- Call Type (page 95)
- Call Type Half Hour (page 96)

## Region Detail

The figure below illustrates the tables in the Region Detail subcategory.

**Script**

Figure 15: Region Detail Tables

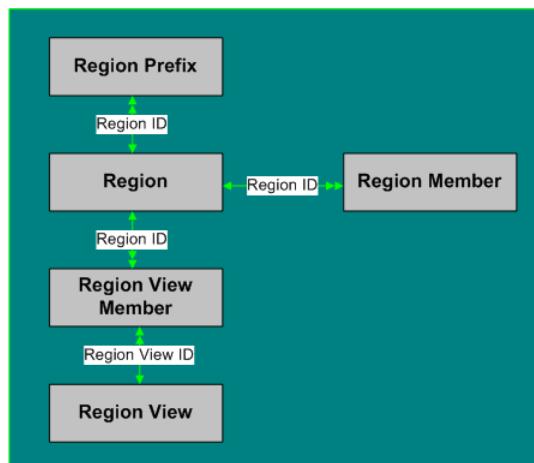


**Region Detail Tables** are listed below:

- [Region \(page 332\)](#)
- [Region Member \(page 333\)](#)
- [Region Prefix \(page 333\)](#)
- [Region View Member \(page 335\)](#)
- [Region View \(page 334\)](#)

**Script Detail**

The figure below illustrates the tables in the Script Detail subcategory.

Figure 16: Script Detail

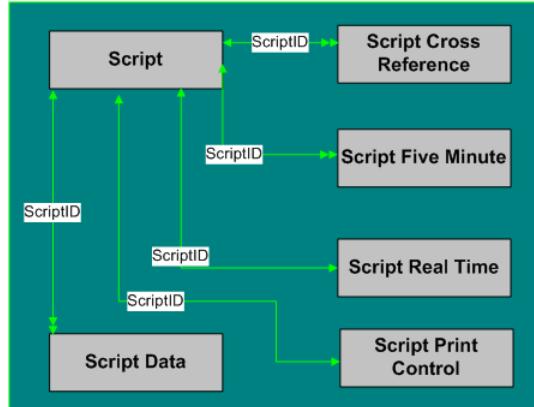

**Script Detail Tables** are listed below:

- [Script \(page 377\)](#)


- Script Cross Reference (page 378)
- Script Data (page 379)
- Script Five Minute (page 380)
- Script Print Control (page 381)
- Script Real Time (page 382)

## Security

The figure below shows the relationships among tables in the Security category.

- A single box represents a single table.
- A stack of boxes represents several tables in another category of the schema.
- A single arrowhead indicates a one-to-one relationship, and a double arrowhead indicates a one-to-many relationship.

*Figure 17: Security Tables*

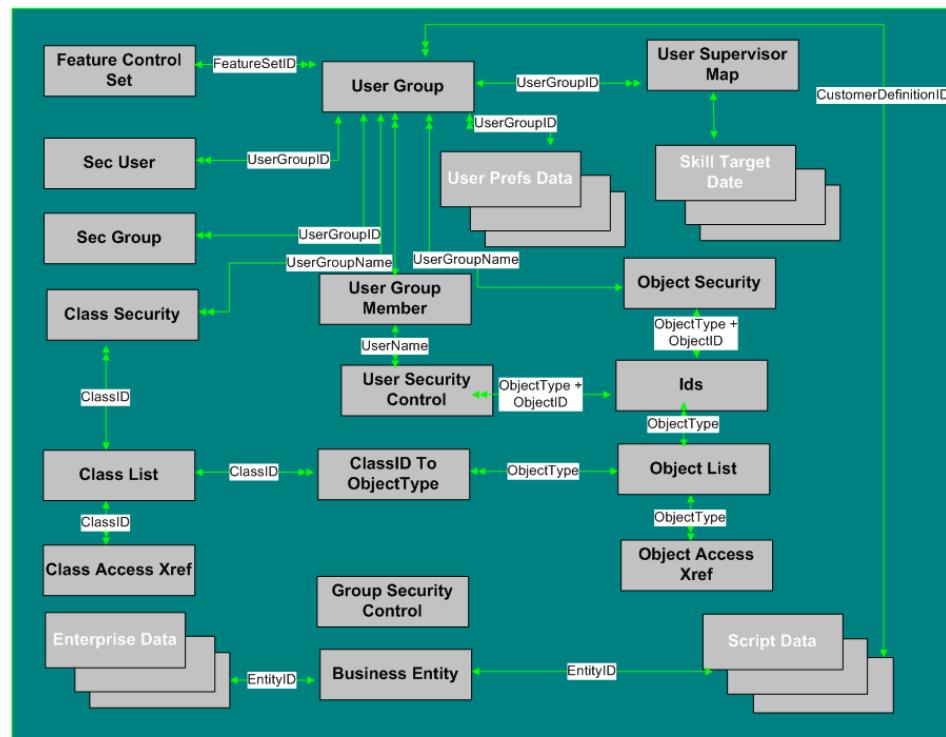

To see **database rules** for these tables, click [here \(page 600\)](#).

Tables that hold **Security** data are listed below.

## Skill Target

- [Business Entity \(page 94\)](#)
- [Class Access Xref \(page 189\)](#)
- [ClassID To Object Type \(page 191\)](#)
- [Class List \(page 190\)](#)
- [Class Security \(page 190\)](#)
- [Feature Control Set \(page 236\)](#)
- [Group Security Control \(page 263\)](#)
- [Ids \(page 271\)](#)
- [Object Access Xref \(page 303\)](#)
- [Object List \(page 304\)](#)
- [Object Security \(page 305\)](#)
- [Sec Group \(page 384\)](#)
- [Sec User \(page 385\)](#)
- [User Group \(page 514\)](#)
- [User Group Member \(page 516\)](#)
- [User Security Control \(page 516\)](#)
- [User Supervisor Map \(page 517\)](#)

## Skill Target


This figure shows the relationships among tables in the Skill Target category. The Agent, Service, Skill Group, and Skill Group Member tables each have related tables, as indicated by the + (plus signs) in the illustration.

In this graphic:

- A single box represents a single table.
- A box with a + plus sign represents a subcategory of table with related detail: Agent, Service, Skill Group, and Skill Group Member.
- A stack of boxes represents several tables in another category of the schema.

- A single arrowhead indicates a one-to-one relationship, and a double arrowhead indicates a one-to-many relationship.

Figure 18: Skill Target Tables

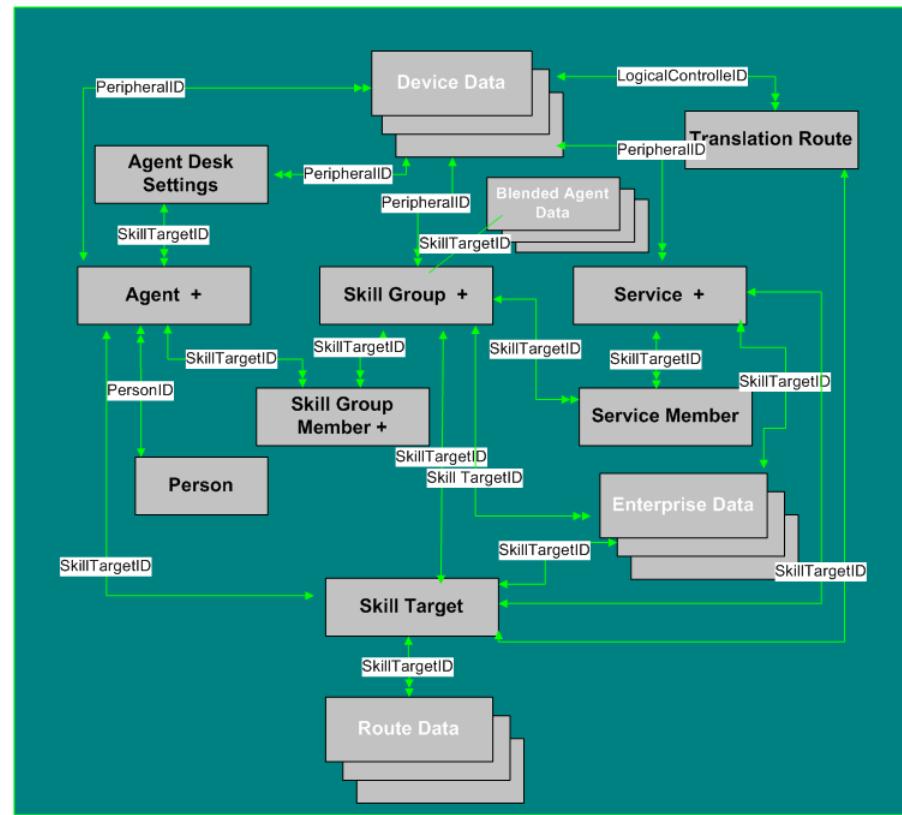

To see **database rules** for Skill Target tables, click [here \(page 600\)](#).

**Skill Target** tables include the following:

- Agent Table. See the Agent Detail section, below.
- [Agent Desk Settings \(page 18\)](#)
- [Agent Interval \(page 29\)](#)
- [Person \(page 322\)](#)
- Service Tables. See the Service Detail section, below.
- [Service Member \(page 415\)](#)
- Skill Group and Skill Group Member Tables. See the Skill Group Detail Section, below.
- [Skill Target \(page 489\)](#)
- [Translation Route \(page 503\)](#)


**Skill Target**

- Translation Route Half Hour (page 504)

**Agent Detail**

The figure below illustrates tables in the Agent subcategory.

*Figure 19: Agent Tables*

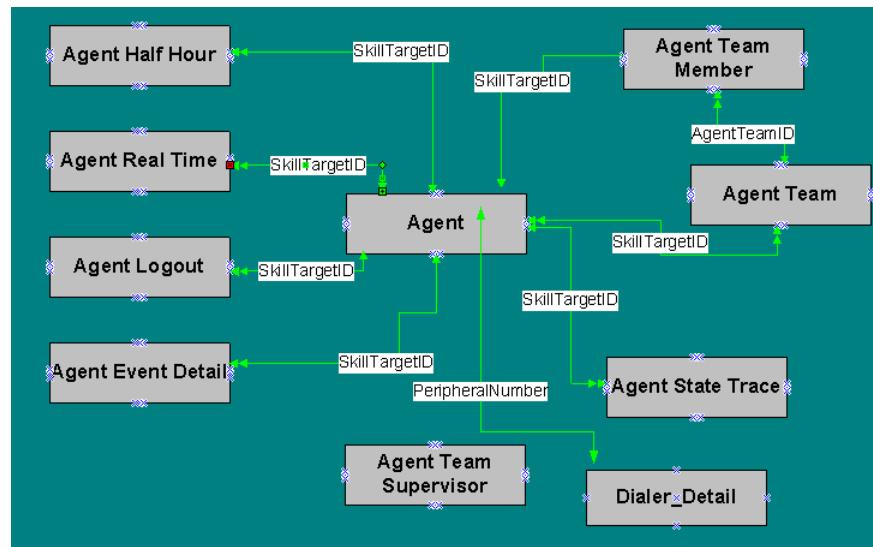


**Agent Detail** tables are listed below:

- [Agent Table](#) (page 15)
- [Agent Half Hour](#) (page 25)
- [Agent Interval](#) (page 29)
- [Agent Real Time](#) (page 34)
- [Agent Event Detail](#) (page 24)
- [Agent State Trace](#) (page 64)
- [Agent Team](#) (page 70)
- [Agent Team Member](#) (page 71)
- [Agent Team Supervisor](#) (page 71)
- [Dialer Detail](#) (page 206)

**Service Detail**

The figure below illustrates tables in the Service subcategory.

Figure 20: Service Tables

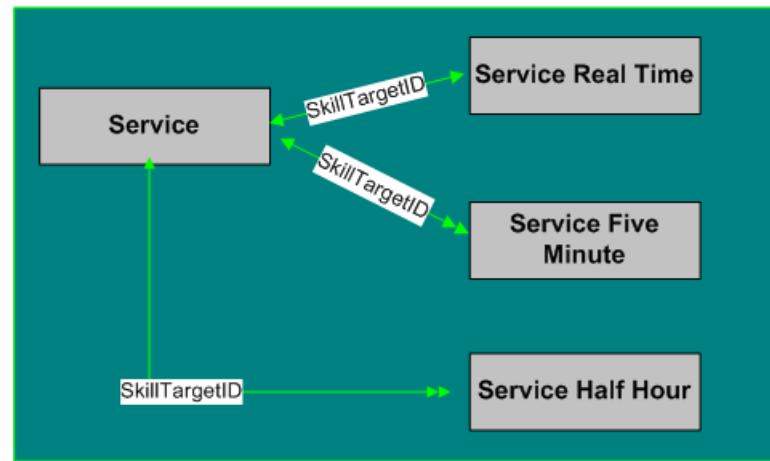


**Service** tables include:

- [Service \(page 386\)](#)
- [Service Five Minute \(page 390\)](#)
- [Service Half Hour \(page 394\)](#)
- [Service Real Time \(page 416\)](#)

## Skill Group Detail


The figures below illustrate tables in the Skill Group and Skill Group Member subcategories.

Figure 21: Skill Group Tables

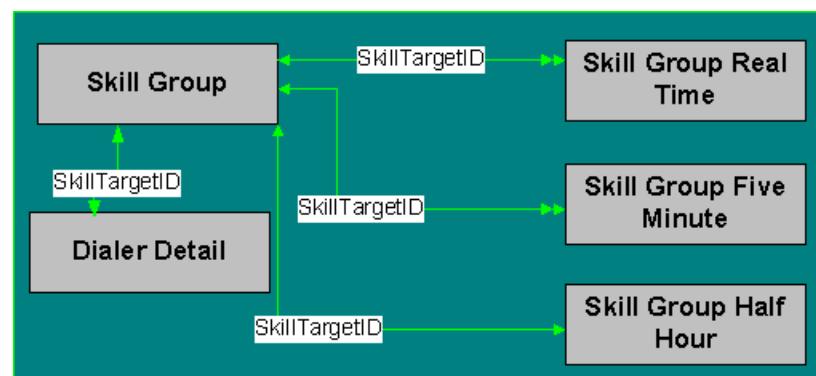

**System**

Figure 22: Skill Group Member Tables

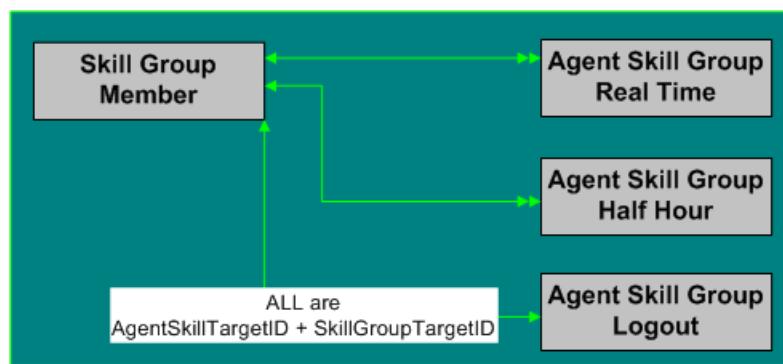


**Skill Group** and **Skill Group Member** Tables include the following:

- [Dialer Detail \(page 206\)](#)
- [Skill Group \(page 432\)](#)
- [Skill Group Five Minute \(page 436\)](#)
- [Skill Group Half Hour \(page 439\)](#)
- [Skill Group Real Time \(page 477\)](#)
- [Skill Group Member \(page 477\)](#)
- [Agent Skill Group Half Hour \(page 39\)](#)
- [Agent Skill Group Logout \(page 62\)](#)
- [Agent Skill Group Real Time \(page 63\)](#)

**System**

The figure below illustrates tables in the System category. To see **database rules** for these tables, click [here \(page 601\)](#).

Figure 23: System Tables

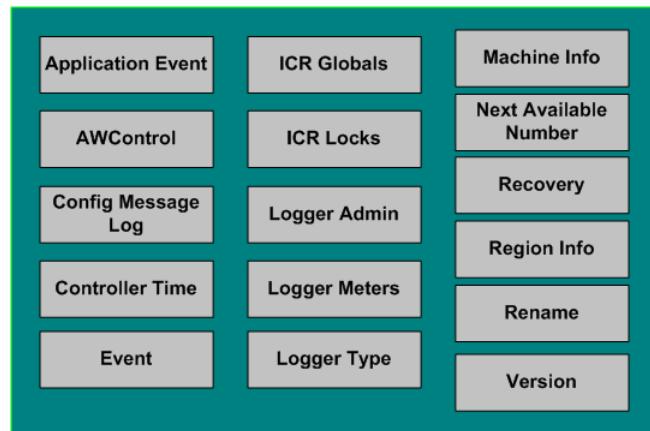

To see **database rules** for these tables, click [here](#) (page 601).

### System Tables

are listed below

- Application Event (page 73)
- AWControl (page 89)
- Config Message Log (page 193)
- Controller Time (page 193)
- Event (page 232)
- ICR Globals (page 264)
- ICR Locks (page 268)
- Logger Admin (page 283)
- Logger Meters (page 284)
- Logger Type (page 285)
- Machine Info (page 287)
- Next Available Number (page 303)
- Recovery (page 329)
- Region Info (page 332)
- Rename (page 336)
- Version (page 519)


**User Preferences**

## User Preferences

The figure below illustrates the relationships among the User Preferences tables.

- A single box represents a single table.
- A stack of boxes represents several tables in another category of the schema.
- A single arrowhead indicates a one-to-one relationship, and a double arrowhead indicates a one-to-many relationship.

*Figure 24: User Preferences Tables*

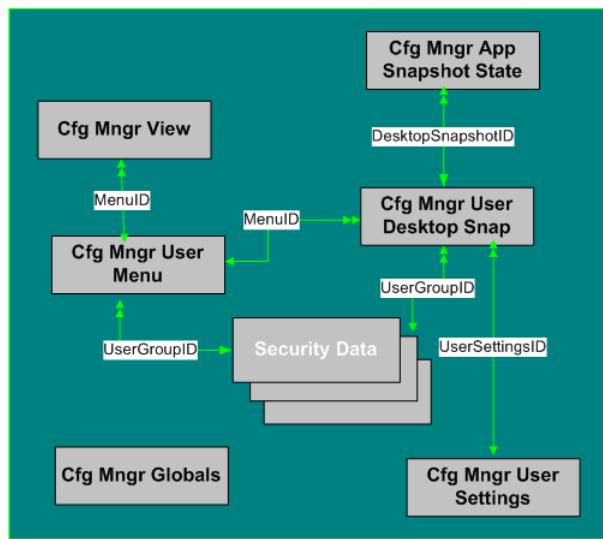

To see **database rules** for these tables, click [here \(page 602\)](#).

**User Preferences Tables** include the following:


- [Cfg Mngr App Snapshot State \(page 183\)](#)
- [Cfg Mngr Globals \(page 185\)](#)
- [Cfg Mngr User Desktop Snap \(page 185\)](#)
- [Cfg Mngr User Menu \(page 187\)](#)
- [Cfg Mngr User Settings \(page 187\)](#)
- [Cfg Mngr View \(page 188\)](#)

## VRU Micro-Application

The figure below illustrates the relationships among the VRU Micro-Application tables.

- A single box represents a single table.
- A single arrowhead indicates a one-to-one relationship, and a double arrowhead indicates a one-to-many relationship.

Figure 25: VRU Micro-Application Tables

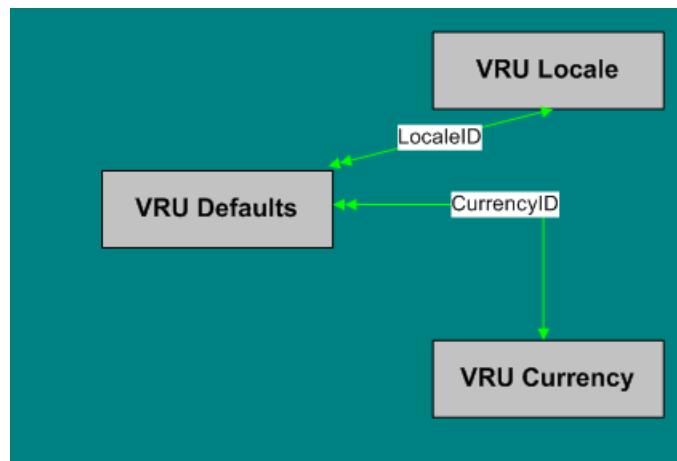

For **database rules**, click [here](#) (page 603).

**VRU MicroApplication Tables** are listed below:

- [VRU Currency \(page 521\)](#)
- [VRU Defaults \(page 522\)](#)
- [VRU Locale \(page 524\)](#)

## Tables Reserved for Future Use

Although the following tables have been added to the Unified ICM/Unified CCE Schema, they are reserved for future use:

- Application\_Gateway\_License
- Campaign\_Half\_Hour
- Campaign\_Real\_Time

**Tables Reserved for Future Use**

- Dialer Skill Group Half Hour
- Dialer Skill Group Real Time
- ECC\_Payload
- ECC\_Payload\_Member
- License\_Definition
- License\_Real\_Time
- Phone\_Strategy
- Phone\_Strategy\_Node



# Chapter 4

## Field Values

---

### Access Levels

Several tables include an AccessLevel field that indicates the rights a user or group has to access an object or class.

Access Level Values	Meaning
10	Read
20	Reference
30	Maintenance (create, read, update, delete)

### AgentState

The [Agent\\_Real\\_Time \(page 34\)](#), [Agent\\_Skill\\_Group\\_Real\\_Time \(page 63\)](#), and [Agent\\_State\\_Trace \(page 64\)](#) tables use the AgentState field, which indicates the agent's state.

**Note:** The Meaning for this field varies depending on the table that uses it.

Agent State Values	Meaning (Agent_Real_Time / Agent_Skill_Group_Real_Time)	Meaning (Agent_State_Trace)
0	Logged Off	Logged Off
1	Logged On	Logged On
2	Not Ready	Not Ready
3	Ready	Ready
4	Talking	Talking
5	Work Not Ready	Work Not Ready

**Application Gateway: Fault Tolerance**

<b>Agent State Values</b>	<b>Meaning (Agent_Real_Time / Agent_Skill_Group_Real_Time)</b>	<b>Meaning (Agent_State_Trace)</b>
6	Work Ready	Work Ready
7	Busy Other	Busy Other—This state does not apply. It applies to the agent skill group state only. Agent skill groups are in the Busy Other state when one or more other agent skill groups are in the states of TALKING, HOLD, RESERVED and so on.
8	Reserved	Reserved
9	Unknown	Unknown
10	Calls On Hold	Call Held
11	Active	Active
12	Paused	Paused
13	Interrupted	Interrupted
14	Not Active	Not Active

The Type field indicates the recurrence pattern of the schedule.

<b>Type Values</b>	<b>Meaning</b>
1	Daily (the DayType field indicates which days of the week)
2	Weekly (the DayType field indicates which days of the week)
3	Biweekly (the DayType field indicates which days of the week)
4	Monthly (the Day field specifies the day of month)
5	Monthly (the DayPosition and DayType fields indicate day of the month)
6	Yearly (the month and day fields specify the day of year)
7	Yearly (the DayPosition, DayType, and Month specify the day of year)
8	Range (the starting and ending date and times specify the range)

**Application Gateway: Fault Tolerance**

The Fault Tolerance field in the [Application Gateway Table \(page 75\)](#) takes these values:

- 0 = none
- 1 = Duplicate Request

Each router will manage a connection to a different host. Each time a script initiates a request, both routers will ask their corresponding host. Both routers will believe the response from whichever host responds first. This method is the most reliable, but has the added expense of requiring two hosts to interface to. Even if a host (or a connection) fails, all requests will be satisfied.

- **2 = Alternate Request**

Each router will manage a connection to a different host. The routers will take turns, sending half the requests to the host connected to side A, and the other half to the host connected to side B. If either host fails, the entire load will be directed to the surviving host. When a host (or connection) fails, some requests may be lost. This is because by the time the router can figure out that a host is not going to respond, it is too late to ask the other host and still route the call within the deadline imposed by the network

- **3 = Hot Standby**

The hot standby method. Each router will manage a connection to a different host. All requests will be directed to the designated primary host. If the host (or connection) fails, all requests will be directed to the backup host. This option may also lose some requests on failures.

## Client Type

The Client Type field in the [Peripheral \(page 306\)](#) and in the [Routing\\_Client Table \(page 357\)](#) takes these values:

- **1 = Avaya DEFINITY ECS (non-EAS)**
- **2 = MCI**
- **3 = Sprint**
- **4 = Aspect**
- **5 = Nortel Meridian**
- **6 = Rockwell Galaxy (without priority enhancements)**
- **7 = GTN**
- **8 = Generic NIC**
- **9 = Avaya G2**
- **10 = Rockwell Galaxy**
- **11 = Rockwell Spectrum**
- **12 = Avaya DEFINITY ECS (EAS)**

**Client Type**

- **13**= VRU
- **14**= British Telecom NIC
- **15**= VRU Polled
- **16**= INCRP NIC
- **17**= Nortel NIC
- **18**= DMS 100
- **19**= Siemens Hicom 300 E (9006)
- **20**= France Telecom
- **21**= Stentor NIC
- **22**= Ameritech
- **23**= BT INAP NIC
- **24** = Siemens ROLM 9751 CBX (9005)
- **25**= ICR Protocol NIC
- **26** = Alcatel 4400
- **27**= NEC NEAX 2x00
- **28**= ACP 1000
- **29**= Nortel Symposium
- **30**= Enterprise Agent
- **31**= Call Routing Service Protocol (CRSP)
- **32**= Ericsson MD110
- **33** = Wireless INAP NIC
- **34**= Energis INAP NIC
- **35**= AUCS INAP NIC
- **36**= Concert NIC
- **37**= Deutsche Telecom NIC
- **38**= CAIN NIC
- **39**= Telfort INAP NIC

- **40**= BT V2 NIC
- **41**= TIM INAP NIC
- **42**= Generic PG
- **43**= Reserved
- **44** = GKTMP NIC (Gatekeeper NIC)
- **45** = SS7IN NIC (SS7 Intelligent Network)
- **46** = NTL NIC
- **47** = Media Routing
- **48** = Non-Voice Agent PIM
- **49**= IPCC Express Gateway
- **50**= IPCC Enterprise Gateway
- **51** = System PG
- **52** = ARS PIM (Agent Routing Services)

## Customer Options Type

The Type field in the [Customer Options Table \(page 195\)](#) indicates a type of option that is enabled or disabled for a customer.

Type Values	Meaning
1	Allow quick-edit of Announcement node
2	Allow quick-edit of Call Type node
3	Allow quick-edit of Caller Entered Digits node
4	Allow quick-edit of Calling Line ID node
5	Allow quick-edit of Dialed Number node
6	Allow quick-edit of Goto Script node
7	Allow quick-edit of Percent Allocation node
8	Allow quick-edit of Requalify node

**Days**

Type Values	Meaning
9	Allow quick-edit of Run VRU Script node
10	Allow quick-edit of Scheduled Select node
11	Allow quick-edit of Switch node
12	Allow quick-edit of Time node
50	Bill for VRU time
51	Customer billing data

**Days**

Both the [Admin Script Schedule Map Table \(page 13\)](#) and the Recurring Schedule Map Table use values to indicate the day of the week, day of the month, day position, and day type.

Values	Meaning
<b>Day of the Week</b>	<b>0x01</b> = Sunday <b>0x02</b> = Monday <b>0x04</b> = Tuesday <b>0x08</b> = Wednesday <b>0x10</b> = Thursday <b>0x20</b> = Friday <b>0x40</b> = Saturday
<b>Day of the Month</b>	<b>0</b> = Applies to every day <b>1-31</b> = Specifies the day of month
<b>Day Position</b>	<b>0</b> = First day of the type in a month <b>1</b> = Second day of the type in a month <b>2</b> = Third day of the type in a month <b>3</b> = Fourth day of the type in a month <b>4</b> = Last day of the type in a month <b>5</b> = Every day of the type in a month

Values	Meaning
<b>Day Type</b>	<b>0-6</b> = Specifies a day (Sunday through Saturday, respectively) <b>7</b> = Every day <b>8</b> = Every weekday <b>9</b> = Every weekend day

## Dialed Number Map: ANIWildCardType

The ANIWildCardType field in the [Dialed Number Map Table \(page 200\)](#) indicates how the system software should interpret the value given in the ANIWildCard field.

ANIWildCardType Value	Meaning
0	Unknown
1	NPA (3-digit match)
2	NPA-NXX (6-digit match)
3	Match (all digits are match)
4	Region
5	All (match all ANIs)
6	Prefix

**Note:** If the value is 4, then the ANIWildCard value is ignored and the RegionID value is used.

## Dialer Detail: CallResult

The CallResult field in the [Dialer Detail \(page 206\)](#) table can be populated with the following values:

System Type Values	Meaning
2	Error condition while dialing
3	Number reported not in service by network
4	No ringback from network when dial attempted
5	Operator intercept returned from network when dial attempted
6	No dial tone when dialer port went off hook
7	Number reported as invalid by the network
8	Customer phone did not answer
9	Customer phone was busy
10	Customer answered and was connected to agent
11	Fax machine detected

## Dialer Detail: CallStatusZone

System Type Values	Meaning
12	Answering machine detected See below.
13	Dialer stopped dialing customer due to lack of agents or network stopped dialing before it was complete
14	Customer requested callback
16	Call was abandoned by the dialer due to lack of agents
17	Failed to reserve agent for personal callback
18	Agent has skipped or rejected a preview call
19	Agent has skipped or rejected a preview call with the close option
20	Customer has been abandoned to an IVR
21	Customer dropped call within configured abandoned time
22	Mostly used with TDM switches - network answering machine, such as a network voicemail
23	Number successfully contacted but wrong number
24	Number successfully contacted but reached the wrong person
25	Dialer has flushed this record due to a change in the skillgroup, the campaign, etc.
26	The number was on the do not call list
27	Call disconnected by the carrier or the network while ringing
28	Dead air or low voice volume call

## Dialer Detail: CallStatusZone

The CallStatusZone1 and CallStatusZone2 fields in the [Dialer Detail \(page 206\)](#) table can be populated with the following values that show the current status of the customer record for the zone.

The values are:

- A = Active - Stored in CallStatusZoneX (1 or 2). A zone is set to active when it has been sent to a dialer for dialing
- B = A callback was requested. Stored in CallStatusZone1 and CallStatusZone2 field when a regular callback (non personal callback) has been scheduled. The Callback time itself is stored in both the CallbackDateTimeZone1 and CallbackDateTimeZone2 columns since the callback overrides the individual zones.
- C = Closed: Record has been closed for that particular zone, so the record will not be retried again for that zone.
- L = Invalid number used for a Personal Callback.

- J = Agent rejected (closed out the record).
- M = The maximum number of attempts has been reached. Stored in both CallStatusZone1 and CallStatusZone2. A record is set to "M" when it has dialed the maximum times as specified in the campaign and will not be retried again. Both zones are set to "M" to indicate no further calling in either zone.
- P = Pending. Stored in CallStatusZoneX (1 or 2). This is the initial state of a record before any dialing has taken place. The record remains in the pending state for a particular zone until all of the numbers specified for that zone are dialed. A pending contact which has already dialed at least one dialer from its sequence will have at least oneCallBackDateTimeXX column filled in with a retry time.
- R = Retry. Stored in CallStatusZoneX (1 or 2) for the zone where the Retry is scheduled. The retry time itself is stored in the CallbackDateTimeZoneX (1 or 2) as well as in the individual number column CallbackDateTimeXX, where XX is the number to be retried (01 - 10). Call can be retried for a variety of reasons including receiving a busy or no answer result, etc.
- S = A personal callback was requested. Stored in both CallStatusZone1 and CallStatusZone2. A record is set to "S" when it has been scheduled for a personal callback. Both zones are set to "S" to indicate that it has been moved to the personal callback list
- U = Unknown: Stored in CallStatusZone1 and CallStatusZone2. A record is set to Unknown if its status was "A" when the Campaign Manager started. If the Campaign Manager shuts down when a record is at a dialer, it no longer knows its status when it restarts; therefore, it will remain in "U" state until the record is returned to it.
- X = For a personal callback, the agent is not available, and the reschedule mode is Abandon. (CallStatusZone1 only)

## Dialer Detail: DialingMode

The DialingMode field in the [Dialer Detail \(page 206\)](#) table can be populated with the following values that show the campaign mode for the call. This field is NULL for Do Not Call entries.

Values are:

- 1 = Predictive only
- 2 = Predictive blended
- 3 = Preview only
- 4 = Preview blended
- 5 = Progressive only
- 6 = Progressive blended

**Event Fields**

- 7. = Direct preview only
- 8. = Direct preview blended

**Event Fields**

The SystemType field in the [Event \(page 232\)](#) Table indicates the type of system within the system software that generated the event.

<b>System Type Values</b>	<b>Meaning</b>
0	Unknown
1	CallRouter
2	Peripheral Gateway (PG)
3	Network Interface Controller (NIC)
4	Administration & DataServer (ADS)
5	Logger
6	Listener
7	CTI Gateway
8	Blended Agent Dialer

**Note:** If the event is generated by a PG or an AT&T NIC, the Event.SystemId field indicates the specific machine. For a CallRouter or Logger, Event.SystemId is always 0.

**Galaxy Fields**

This section lists values for fields in five tables in the Galaxy category.

The **TerminationType** field in the [Galaxy\\_Agent\\_Call\\_Count Table \(page 237\)](#) can take these values:

Valid options include:

- **1** = Agent
- **2** = Digital Agent
- **4** = Audio Response Unit (ARU)
- **32** = Enhanced Agent
- **33** = Digital Enhanced Agent
- **42** = Tone PBX

- **45** = Voice Operated Relay (VOR)
- **48** = Voice Response Unit (VRU)
- **49** = Gate PBX
- **55** = Directory Assistance Billing Agent
- **56** = Directory Assistance Digital Billing Agent
- **57** = Enhanced D.A. Billing Agent
- **58** = Enhanced Directory Assistance Digital Billing Agent
- **60** = Directory Assistance Audio Response Unit (DAARU)

The **TerType** field in the [Galaxy Agent Performance Table \(page 240\)](#) takes these values:

- **1** = agent
- **2** = digital agent
- **6** = station master agent
- **32** = enhanced agent
- **55** = directory assistance billing agent
- **56** = directory assistance digital billing agent
- **57** = enhanced directory assistance billing agent
- **58** = enhanced directory assistance digital billing agent

The **HuntGroupInformation** field in the [Galaxy PBX Table \(page 255\)](#) takes these values:

Valid options include:

- **0** = Phone not in hunt group
- **1** = First phone in hunt group
- **2** = Intermediate phone in hunt group
- **4** = Last phone in hunt group
- **8** = Common last phone in hunt group
- **128** = Phone's position in hunt group has changed.

The **TerminationType** field in the [Galaxy Single Trunk Table \(page 257\)](#) takes these values:

**Galaxy Fields**

Valid options include:

- **8**= Direct Inward Dial (DID)
- **14** = Inter-tandem
- **26** = Off-Network Access Line
- **41** = Tie Line
- **47** = Operator Service
- **50** = Operator Service Feature Group D
- **51** = Australian Off-Network Access Line
- **52** = Australian Tie Line
- **53** = Australian Direct Gate Dial
- **54** = DNIS
- **64** = Directory Assistance Intercept
- **65** = ISDN

The **TerminationType** field in the [Galaxy Trunk Call Count Table \(page 259\)](#) takes these values:

Valid options include:

- **8**= Direct Inward Dial (DID)
- **14** = Inter-tandem
- **26** = Off-Network Access Line
- **41** = Tie Line
- **47** = Operator Service
- **50** = Operator Service Feature Group D
- **51** = Australian Off-Network Access Line
- **52** = Australian Tie Line
- **53** = Australian Direct Gate Dial
- **54** = DNIS
- **64** = Directory Assistance Intercept
- **65** = ISDN

## ICR Locks Fields

The LockType field in the [ICR Locks Table \(page 268\)](#) indicates a kind of lock.

**Table 226: ICR\_Locks.LockType Values**

Value	Meaning
0	Master lock (applies to configuration data and script).
1	Configuration lock (no longer used)
2	Script Lock(applies to an individual script)
3	Application lock (no longer used)

**Note:** If the event is generated by a PG or an AT&T NIC, the Event.SystemId field indicates the specific machine. For a CallRouter or Logger, Event.SystemId is always 0.

## LabelType Fields

The LabelType field in the [Label Table \(page 281\)](#) indicates the type of the routing label.

LabelText Values	Meaning
0	Normal
1	DNIS Override (the system software returns the specific DNIS value to be used with the label)
2	Busy (instructs the routing client to play a busy signal to caller)
3	Ring (instructs the routing client to play an unanswered ring to caller)
4	Post-Query (instructs the routing client to re-enter its call processing plan at a specific point)
5	Resource (used internally for special routing client resources, such as a network VRU)

**Note:** Not all label types are valid for all routing client types.

## Logical Interface Controller Fields

The LogicalControllerType field uses a subset of the values for Event.SystemType listed in the following table. The ClientType field indicates the type of peripheral or routing client associated with the controller:

**Logical Interface Controller Fields**

<b>Value</b>	<b>Meaning</b>
1	Avaya DEFINITY ECS, without Expert Agent Selection (EAS) <sup>1</sup>
2	MCI
3	Sprint
4	Aspect CallCenter
5	Nortel Meridian
6	Rockwell Galaxy without priority enhancements (r1.3) <sup>2</sup>
7	AT&T GTN
8	Generic Network Interface Controller (GenNIC)
9	Avaya G2
10	Rockwell Galaxy
11	Rockwell Spectrum
12	Avaya DEFINITY ECS, with Expert Agent Selection (EAS)
13	Voice Response Unit (VRU)
14	British Telecom NIC
15	Voice Response Unit (VRU), polled
16	INCRP NIC
17	Nortel NIC
18	DMS 100
19	Siemens Hicom 300 E, 9006
20	France Telecom
21	Stentor NIC

1) This value was also formerly used for the AT&T USS network.

2) This value is for backwards compatibility with ICM software Release 1.3 only.

<b>Value</b>	<b>Meaning</b>
22	Ameritech
23	BT INAP NIC
24	Siemens ROLM 9751 CBX, 9005
25	ICR Protocol (ICRP) NIC
26	Alcatel 4400
27	NEC NEAX 2x00
28	ACP 1000
29	Nortel Symposium
30	Enterprise Agent
31	Call Routing Service Protocol (CRSP) NIC
32	Ericsson MD110
33	able & Wireless Corp. (CWC) INAP NIC
34	Energis INAP NIC
35	AUCS INAP NIC
36	Concert NIC
37	Deutsche Telecom NIC
38	CAIN NIC
39	Telfort INAP NIC
40	BT V2 NIC
41	TIM INAP NIC
42	Generic PG
43	CeM

## Network Vru Type

The Type field in the [Network\\_Vru Table \(page 300\)](#) indicates the type of interface the system software uses to communicate with the VRU.

**Note:** Unified CCE is supported in 8.0(1); however, there is no separate 8.0(1) version. If you request features that are in 8.0(1), you must migrate to the Unified CCE software. Full migration information is documented in the *Upgrade Guide for Cisco Unified ICM/Contact Center Enterprise & Hosted*.

<b>Type Values</b>	<b>Interface</b>
1	Normal label type and a correlation ID.

**Port Status**

Type Values	Interface
2	Normal label type and a DNIS.
3	Resource label type and a correlation ID. The routing client can automatically take back the call from the VRU when the system software returns a destination label.
4	Resource label type and a DNIS.
5	Resource label type and either a correlation ID or a DNIS.
6	No label, no correlation ID, and no DNIS (call is already at the VRU).
7	Similar to Type 3, but the system software automatically instructs the VRU to release the call when it sends a destination label to the routing client.
8	Similar to Type 2, but a Type 8 VRU is used when the NAM has a routing client that controls the call to the VRU.
9	Queuing for Network VRU controlled by IPCC System PG.
10	Simplifies configuration requirements in Unified CVP Comprehensive Model deployments.

**Port Status**

The values for the Port Status field in the [Dialer\\_Port\\_Real\\_Time Table \(page 218\)](#) are listed below:

- **290** = port allocated for future dial
- **300** = port released
- **310** = reservation call started
- **320** = agent reserved
- **330** = customer call started
- **340** = customer has been contacted
- **350** = call transferred to agent
- **360** = customer conversation complete
- **370** = agent completed with call

**Route Call Detail Fields**

This section has values for three fields in the [Route\\_Call\\_Detail Table \(page 338\)](#): RequestType, OriginatorType, and TargetType.

The **RequestType** field indicates the type of route request processed.

Value	Meaning
1	Pre- <i>Routing</i> request
2	Blind transfer or network VRU
3	Announced transfer or MCI 800 call
4	Overflow
5	Re-route
6	Post- <i>Routing</i> request

The **OriginatorType** field indicates where the route request came from.

Value	Meaning
0	Unknown
1	Trunk
2	Teleset
3	Voice Response Unit (VRU)
4	Trunk Group

The Route Call Detail **Target Type** is a numeric value representing the execution result of the routing script.

Following is a list of possible values this field (shown in terms of the value, type, and description):

- **0 = resultNone** Call routing ended badly.
- **1= resultDefaultRoute** Call routing ended using a default route.
- **2= resultRouteAgent** Call routing ended with a route to an agent.
- **3= resultRouteService** Call routing ended with a route to a service.
- **4= resultRouteGroup** Call routing ended with a route to a skill group.
- **5= resultAnnouncement** Call routing ended with an announcement.
- **6= resultBusy** Call routing ended in a Busy node.
- **7= resultRing** Call routing ended in a Ring node.
- **8= resultNone** Call routing ended in a Label node.
- **9= resultNetworkDefault** Call routing ended in a Termination node using a network default route
- **10 = resultRouteServiceArray** Call routing ended with a route to a service array.

**Object Types: Security**

- **11= resultMultipleLabels** Call routing ended badly.
- **12 = resultScheduledTarget** - Call routing ended in a Scheduled Target node(busy link functionality).
- **13= resultDone** Only applicable to an AdminScript that ends with no errors.
- **14= resultAborted** Call disconnected.
- **15= resultReleaseCall** Call routing ended with a Release Call node.
- **16= resultQueuedTooLong** Call routing exceeded the queue limit.
- **17= resultSendAgent** Call routing ended with an Agent to Agent node.
- **18 = resultDynamicLabel** Call routing ended with a dynamic label node.
- **19= resultDivertDynamicLabels** Call routing ended with a divert-on-busy dynamic label
- **20= resultQueuedDialogFailure** The administrator asked to fail queued calls
- **21= resultRouteAgentAndGroup** Call routing ended with a route to an agent in a specified group

<b>Value</b>	<b>Meaning</b>
0	Unknown
1	Trunk
2	Teleset
3	Voice Response Unit (VRU)
4	Trunk Group

**Object Types: Security**

Several tables related to security include an ObjectType field that indicates the type of object to which security is applied.

<b>Object Type Values</b>	<b>Meaning</b>
2000	Dialed Number
2001	Call Type
2002	Peripheral
2003	Trunk Group
2004	Service
2005	Skill Group
2006	Agent

<b>Object Type Values</b>	<b>Meaning</b>
2007	Announcement
2008	Translation Route
2009	Label
2010	Route
2011	Script Table
2012	Business Entity
2013	Master Script
2014	Enterprise Service
2015	Enterprise Skill Group
2016	Schedule
2017	Schedule Source
2018	Agent Desk Settings
2019	Agent Team
2020	Application Gateway
2021	Enterprise Agent Group
2022	Network Trunk Group
2023	Service Array
2024	Device Target
2025	Logical Interface Controller
2026	User Variable
2027	User Formula
2028	Schedule Report
2029	Network VRU Script
2030	Scheduled Target
2031	Network VRU
2032	Expanded Call Variable
2033	Campaign
2034	Dialer
2035	Import Rule
2036	Query Rule
2100	System
2101	Network Interface
2102	Peripheral Global
2103	Call
2104	Network/Peripheral

---

**Object Types: User Variable**

## Object Types: User Variable

The ObjectType field in the [User Variable Table \(page 518\)](#) takes one of these values:

- **0** = Unknown
- **1** = Service
- **2** = Skill Group
- **3** = Agent
- **4** = Translation Route
- **5** = Agent Administration Group
- **6** = Announcement
- **7** = Call Type
- **8** = Enterprise Service
- **9** = Enterprise Skill Group
- **10** = Region
- **11** = Dialed Number
- **12** = Logical Interface Controller
- **13** = Physical Interface Controller
- **14** = Peripheral
- **15** = Routing Client
- **16** = Trunk Group
- **17** = Route
- **18** = Peripheral Target
- **19** = Label
- **20** = Master Script
- **21** = Script Table
- **22** = Script Table Column
- **23** = Script

- **24** = Schedule
- **25** = ICR View
- **26** = View Column
- **27** = Network Trunk Group
- **28** = Service Array
- **29** = Application Gateway
- **30** = Device Target
- **31** = User Variable
- **32** = User Formula
- **33** = Network VRU Script
- **34** = Scheduled Target
- **35** = Network VRU
- **36** = Skill Group Member
- **37** = Expanded Call Variable
- **38** = Agent Team
- **39** = Campaign
- **40** = Dialer
- **41** = Import Rule
- **42** = Query Rule
- **43** = Campaign Query Rule
- **44** = Dialer Port Map
- **45** = Message Category
- **46** = Message Destination
- **47** = Response Template

## Peripheral Real Time Status Field

The Status field in the [Peripheral Real Time table \(page 316\)](#) can take these values:

**Peripheral Real Time Status Field**

The current failure state of the peripheral is indicated by the status code:

- **0** = normal operation. The JTAPI Subsystem must be in service and all other subsystems are in service.
- **1 - 31** = failures that do not affect functionality. The JTAPI Subsystem must be in service and some other subsystems are not in service.
- **32-63** = degraded operation (call routing still possible). The JTAPI Subsystem is in partial service and all other subsystems are in service.
- **64** = no call processing

The JTAPI Subsystem is out of service and all other subsystems are in service.

- **65 - 127** = failures that prevent call routing

The JTAPI Subsystem is out of service and some other subsystems are not in service.

The JTAPI Subsystem reports "in service" if it can process calls and if all the configuration you specify can be initialized.

It reports "out of service" if it is not configured, if the CTI Manager is down, or if all of its configuration could not be initialized.

It reports "partial service" if some of its configuration could be initialize but not all of it.

When we are in a range, the Unified IP IVR simply increases the status by one for each subsystem (except the JTAPI subsystem) it finds to not be in service.

These values are dependant upon the peripheral connected to the PIM.

All PIMs use the previously discussed status codes, with the exception of the Galaxy, the Avaya, and the Unified IP IVR PIMs.

The **Unified WIM PIM** receives its Status values from the Init event and the Status event.

The **VRU PIM** receives its status values from the Init Event, the Status Event, and Poll confirmation.

The **Galaxy PIM** uses the following bit-masked values:

- - 0x01 Indicates GAL\_CALLSIDE\_DOWN.
- - 0x02 Indicates GAL\_REPORTSIDE\_DOWN.
- - 0x03 Indicates GAL\_VARCTI\_DOWN.

Example: A Status value of 3 indicates that GAL\_CALLSIDE\_DOWN and GAL\_REPORTSIDE\_DOWN are true.

The **Avaya PIM** only uses four failure states:

**0** = normal operation.

**1** = failures that do not affect functionality.

**32** = degraded operation (call routing still possible).

**64** = failures that prevent call routing.

## Reason Codes

In addition to reason codes that you have defined, the Unified CCEsystem uses predefined Not Ready and Logout reason codes. The following tables describe these predefined Not Ready and Logout reason codes. For more information see the *Reporting Guide for Cisco Unified Contact Center Enterprise & Hosted*. Also refer to the Reason\_Code table.

Predefined Not Ready Reason Code	
50002	A CTI OS component failed, causing the agent to be logged out. This could be due to closing the agent desktop application, heartbeat time out, a CTI OS Server failure, or a CTI OS failure.
50010	The agent did not receive multiple consecutive calls routed to him/her. The system makes the agent Not Ready automatically so that additional calls are not routed to the agent. By default, the number of consecutive calls missed before the agent is made Not Ready is 2.
50041	The agent's state was changed to Not Ready because the call fails when the agent's phone line rings busy.
32767	The agent's state was changed to Not Ready because the agent did not answer a call and the call was redirected to a different agent or skill group.
20001 - applicable if you are using the Cisco Agent Desktop	The agent's state was changed to Not Ready and the agent was forcibly logged out.
20002 - applicable if you are using the Cisco Agent Desktop	This is the normal logout reason code condition from Not Ready.
20003 - applicable if you are using the Cisco Agent Desktop	If the agent is not in Not Ready state, a request is made to place the agent in Not Ready state and then a logout request is made to log the agent out.
Supervisor Not Ready	This code is reserved.

Predefined Logout Reason Code	Description
-1	The agent reinitialized due to peripheral restart.
-2	The PG reset the agent, normally due to a PG failure.
-3	An administrator modified the agent's extension while the agent was logged in.

**Service Fields**

<b>Predefined Logout Reason Code</b>	<b>Description</b>
50002	A CTI OS component failed, causing the agent to be logged out. This could be due to closing the agent desktop application, heartbeat time out, a CTI OS Server failure, or a CTI OS failure.
50003	The agent was logged out because the Unified CM reported the agent's device as out of service.
50004	The agent was logged out due to agent inactivity as configured in agent desk settings.
50020	The agent was logged out when his or her skill group assignment dynamically changed on the Administration & DataServer.
50030	The agent was logged out because the agent was logged into dynamic device target that was using the same dialed number (DN) as the PG static device target.
50040	The mobile agent was logged out because the call failed.
50042	The mobile agent was logged out because the phone line disconnected when using nailed connection mode.
20003- applicable if you are using the Cisco Agent Desktop (CAD)	Forces the logout request.
Supervisor Logout- applicable if you are using the CAD	This code is reserved.

**Service Fields**

The Unified ICM/Unified CCE software can use any of three formulas to calculate the service level for a service.

The formulas differ in the way they treat calls that were abandoned before the service level threshold expired.

The value of the ServiceLevelType field indicates the type of service level calculation used.

<b>Value</b>	<b>Meaning</b>
0	Use default value from Peripheral record.
1	Ignore Abandoned Calls. Remove the abandoned calls from the calculation.
2	Abandoned Calls have negative impact. Treat abandoned calls as though they exceeded the service level threshold.
3	Abandoned Calls have positive impact. Treat abandoned calls as though they were answered within the service level threshold.

Note that regardless of which calculation you choose, the system software always tracks separately the number of calls abandoned before the threshold expired.

In addition to tracking the service level as calculated by the system software, the historical and real-time tables also track the service level as calculated by the peripheral.

In the [Peripheral \(page 306\)](#), the PeripheralServiceLevelType field indicates how the peripheral itself calculates the service level. Aspect CallCenter ACDs can calculate service level in several different ways.

Valid options for Aspect types are:

- **1** = Service Level 1
- **2** = Service Level 2
- **3** = Service Level 3
- **4** = Service Level as Calculated by Call Center.

If this field is 0 for a service, the system software assumes the default specified for the associated peripheral.

If the peripheral is not an Aspect ACD, the type must be 4 (calculated by the peripheral).

If the peripheral is not an Aspect ACD, the type must be 4 (calculated by the peripheral).

## Service Real Time: Service Mode Indicator Field

In the [Service\\_Real\\_Time Table \(page 416\)](#), the ServiceModeIndicator field indicates the current mode of the service.

Value	Meaning
1	Day Service
2	Night Service
3	Closed with Answer
4	Closed with No Answer
5	Transition
6	Open
13	Pilot Status Other

This field may also be used to encode overflow information for a Galaxy ACD.

## Target Types: Script Cross Reference and Scheduled Report Input

For the [Script Cross Reference Table \(page 378\)](#) the TargetType field indicates the type of object referenced by the script. That is, it indicates the table referenced by the Script\_Cross\_Reference.ForeignKey field. This table uses values 1 through 58.

For the [Scheduled Report Input \(page 373\)](#) table, the Target Type is a unique identifier for the report input row. This table uses values 1 through 47.

**Target Types: Script Cross Reference and Scheduled Report Input**

<b>Target Type Values</b>	<b>Meaning</b>
0	Unknown
1	Service
2	Skill Group
3	Agent
4	Translation Route
5	Agent Administration Group
6	Announcement
7	Call Type
8	Enterprise Service
9	Enterprise Skill Group
10	Region
11	Dialed Number
12	Logical Interface Controller
13	Physical Interface Controller
14	Peripheral
15	Routing Client
16	Trunk Group
17	Route
18	Peripheral Target
19	Label
20	Master Script
21	Script Table
22	Script Table Column
23	Script
24	Schedule
25	ICR View
26	View Column
27	Network Trunk Group
28	Service Array
29	Application Gateway
30	Device Target
31	User Variable
32	User Formula
33	Network VRU Script
34	Scheduled Target
35	Network VRU
36	Skill Group Member

Target Type Values	Meaning
37	Expanded Call Variable
38	Agent Team
39	Campaign
40	Dialer
41	Import Rule
42	Query Rule
43	Campaign Query Rule
44	Dialer Port Map
45	Message Category
46	Message Destination
47	Response Template
48	Enterprise Route
49	Person
50	Media Routing Domain Member
51	Media Routing Domain
52	Application Path
53	Peripheral MRD
54	Script Queue Meters
55	Campaign Target Sequence
56	Microapp Defaults
57	Microapp Currency
58	Microapp Locale

The Script\_Cross\_Reference.LocalID field indicates the script object that references the target. The Script\_Cross\_Reference.ForeignKey indicates the specific configuration record referenced.

## Termination Call Detail: Call Disposition and CallDispositionFlag Fields

The [Termination Call Detail Table \(page 490\)](#) has two fields that provide details on why the call was considered handled, abandoned, and so forth.

The **Call Disposition** field gives the final disposition of call (or how the call terminated).

- **1 = Abandoned in Network**

In **Unified ICM**, indicates the call was abandoned, or dropped, before being terminated at a target device (for instance, an ACD, IVR, Desklink, etc.).

In **Unified CCE**, indicates that the call was routed to an agent but it never arrived or arrived after the PIM reservation timed-out. (The default timeout is 7 seconds.) An agent will be set

**Termination Call Detail: Call Disposition and CallDispositionFlag Fields**

to Not Ready if it misses two consecutive routed calls, Peripheral Call Type will normally be two, and the Call Type ID and Network Target ID will be filled in.

In **Outbound Option**, this result code indicates customer phone not in service.

- **2 = Abandoned in Local Queue**

In **Unified ICM**, indicates the call was abandoned in the ACD queue while queued to an ACD answering resources (for instance, a skill group, voice port, trunk, etc.)

Does not apply to **Unified CCE**.

In **Outbound Option**, this result code indicates an outbound call was abandoned either by the customer or dialer.

- **3 = Abandoned Ring**

In **Unified ICM**, indicates the call was abandoned while ringing at a device. For example, the caller did not wait for the call to be answered but hung up while the call was ringing.

In **Unified CCE**, indicates that the caller hung up while phone was ringing at the agent desktop.

- **4 = Abandoned Delay**

In **Unified ICM**, indicates the call was abandoned without having been answered but not while ringing or in a queue. Typically, a call marked Abandoned Delay was delayed due to switch processing. Because of the delay, the caller ended up dropping the call before it could be answered.

In **Unified CCE**, indicates that the destination was not connected when the call terminated. This might mean that:

- The agent logged out
- The agent picked up the phone and then hung up without dialing digits.
- Route requests were logged on the Cisco Communication Manager PG that were not immediately redirected to an agent.

- **5 = Abandoned Interflow**

In **Unified ICM**, indicates an interflow call that dropped before the call could be handled by an answering resource. Interflow calls are calls between ACDs. Abandoned Interflow is supported only by PIMs that track interflow calls. Currently, this includes only the Aspect CallCenter PIM.

Does not apply to **Unified CCE**.

- **6 = Abandoned Agent Terminal**

In **Unified ICM**, indicates the call was dropped while being held at an agent device. For example, the caller is connected to an agent; the agent puts the caller on hold; the caller gets tired of waiting and hangs up.

In **Unified CCE**, indicates that the caller hung up while on hold on the Unified CM PG, which generally indicates a training issue for the agent. On the VRU PG with Service Control Queue reporting checked, this normally indicates caller abandoned..

- **7 = Short**

In **Unified ICM**, indicates the call was abandoned before reaching the abandoned call wait time. Short calls are technically abandoned calls, but they are not counted in the Unified ICM CallsAbandoned counts for the associated service/route. Short calls are, however, counted as offered calls in the CallsOffered and ShortCall counts.

**Note:** When the short call abandon timer is configured, single step transfers (local transfers), being blind transfers by definition, have a Call Disposition of 7 (short call abandon) and a Peripheral Call Type of 4 (transfer)

Also applies to **Unified CCE**. In addition, route requests would be counted as short calls if so configured.

- **8 = Busy**

Not used in **Unified ICM**.

Does not apply to **Unified CCE**.

In **Outbound Option**, this result code indicates an outbound call resulted in a busy signal.

- **9 = Forced Busy**

The call was made busy by the ACD because there were no answering resources available to handle the call. Currently, only the Nortel Meridian and Symposium PIMs support Forced Busy.

Does not apply to **Unified CCE**.

- **10 = Disconnect/drop no answer**

Only the Galaxy and Meridian PIMs support the disconnect/drop no answer call disposition. For Rockwell Galaxy ACDs, disconnect/drop no answer indicates that the PIM received a disposition of "failed routing" from the Galaxy MIS records. For the Meridian ACD, disconnect/drop no answer indicates that the ACD performed a "forced disconnect." Disconnect/drop no answer calls are counted as either abandoned or short calls in the system software's service and route tables.

In **Unified CCE**, indicates that an agent-initiated call was not answered. (If agent picked up the phone but did not dial any digits, the CallDisposition would be **4, Abandoned Delay**.)

- **11 = Disconnect/drop busy**

**Termination Call Detail: Call Disposition and CallDispositionFlag Fields**

Supported only by the Galaxy PIM. This indicates that the Galaxy PIM received a "disconnect forward busy" disposition from the Galaxy MIS records. Disconnect/drop busy calls are counted as either abandoned or short calls in the **Unified ICM** software's service, route, and skill group tables.

Does not apply to **Unified CCE**.

- **12 = Disconnect/drop reorder**

Supported only by the Galaxy PIM. This indicates that the Galaxy PIM received a disposition of "intercept invalid" from the Galaxy MIS records. Disconnect/drop reorder calls are counted as either abandoned or short calls in the system software's service, route, and skill group tables.

Does not apply to **Unified CCE**.

- **13 = Disconnect/drop handled primary route**

In **Unified ICM**, indicates the call was handled by an agent and was neither conferenced nor transferred. These calls are counted as handled calls in Unified ICM Schema's service, route, and skill group tables.

In **Unified CCE**, indicates that a call was routed to an agent on the Cisco Communication Manager PG and handled without a transfer or conference. This call disposition is also used for non-routed calls handled by the agent if wrap up is used. On the VRU PG, this indicates that the call was handled by the VRU. However, it does not indicate if the caller abandoned or disconnected the call after the call was handled by the VRU.

Just in case the script ends without routing the call, the RouterErrorCode field in the Route Call Detail records will indicate the cause. Additionally, you can verify if the ServiceLevelAband and ServiceLevelCallsOffered database fields in the CTHH report are incremented. The incremented fields indicate that the caller abandoned the call when the call was at the VRU.

- **14 = Disconnect/drop handled other** In **Unified ICM** and **Unified CCE**, indicates the call was handled by a non-agent or unmonitored device (for example, a voice mail system). These calls are counted as handled calls in Unified ICM schema's service, route, and skill group tables.

- **15 = Redirected / Rejected**

In **Unified ICM**, this indicates the call was **redirected** such that the PIM no longer can receive events for the call. In other words, the PIM no longer has a way of referencing or tracking the call. For example, the call might have been redirected to a non-Unified ICM monitored device and then returned to the switch with a different call ID. The Unified ICM generates the Termination Call Detail record with only the data originally tracked for the call. Calls marked as Redirected are counted as Overflow Out calls in the Unified ICM service and route tables.

In **Unified CCE**, to more accurately reflect call status, CallDisposition is set to 15 (**Redirected**) instead of 4 (Abandon Delay) when:

- A call leaves a CTI route point to be sent to an IVR.
- An agent transfers the call to another skillgroup and no agent is available, so the call is sent to an IVR.

In **Expert Advisor**, this indicates that the Expert Advisor runtime server **rejected** the call.

- **16 = Cut Through**

Not currently used.

- **17 = Intraflow**

Not currently used.

- **18 = Interflow**

Not currently used.

- **19 = Ring No Answer**

Not currently used in **Unified ICM**.

In **Unified CCE**, this indicates the call wasn't answered by the agent within the Ring No Answer Time (set in the agent desktop setting in Unified ICM Configuration).

In **Outbound Option**, this result code indicates an outbound call was not answered in the allotted time.

- **20 = Intercept reorder**

Supported only by the Galaxy PIM. This indicates that the Galaxy PIM received a disposition of "intercept unknown" from the Galaxy MIS records.

Does not apply to **Unified CCE**.

In **Outbound Option**, this result code indicates the Dialer did not receive a ring back from the ACD on the network.

- **21 = Intercept denial**

Supported only by the Galaxy PIM. This indicates that the Galaxy PIM received a disposition of "intercept restriction" from the Galaxy MIS records.

Does not apply to **Unified CCE**.

In **Outbound Option**, this result code indicates the customer call was intercepted by the operator.

- **22 = Time Out**

**Termination Call Detail: Call Disposition and CallDispositionFlag Fields**

Supported only by the Lucent DEFINITY ECS and Nortel Meridian PIMs. Time out indicates that for an unknown reason the PIM is no longer receiving events for the call. The Time Out call disposition provides a way to "clean up" the call since events for the call can no longer be monitored. Time out calls are counted as TerminatedOther in the Unified ICM service and route tables.

Does not apply to **Unified CCE**.

In **Outbound Option**, this result code indicates the Dialer is unable to detect a dial tone.

- **23 = Voice Energy**

Not currently used in **Unified ICM**.

In **Unified CCE**, this indicates the outbound call was picked up by a person or an answering machine.

In **Outbound Option**, this result code indicates the outbound call was picked up by a person.

- **24 = Non-classified Energy Detected**

Not currently used in **Unified ICM**.

In **Outbound Option**, this result code indicates the outbound call reached a FAX machine.

- **25 = No Cut Through**

Not currently used.

- **26 = U-Abort**

In the **Unified ICM**, this indicates the call ended abnormally.

In **Unified CCE**, the Unified CM indicated the call ended due to one of the following reasons: network congestion, network not obtainable, or resource not available. Such reasons suggest errors in media set up.

In **Outbound Option**, this result code indicates the outbound call was stopped before the customer picked up.

- **27 = Failed Software**

In **Unified ICM**, either the PIM detected an error condition or an event did not occur for a call for an extended period of time. For example, an inbound call with Call ID 1 and associated with Trunk 1 might be marked failed if the PIM received a different call ID associated with Trunk 1. This would indicate a missing Disconnect event for Call ID 1.

If no events are being tracked for the call, the call is eventually timed out. The failed call is marked as a Forced Closed call in the Unified ICM Service and Route tables.

In **Unified CCE**, generally indicates that Unified CM PG terminated the call because it had exceeded the time allowed for this state. (The default is 1 hour in the NULL state when agent has been removed, and 8 hours in the connected state. The value is configurable.)

- **28 = Blind Transfer**

In the **Unified ICM**, a transfer scenario involves a primary call and a secondary call. If the secondary call is transferred to a queue or another non-connected device, then the primary call (the one being transferred) is set to Blind Transfer.

In **Unified CCE** (Unified CM PG), this indicates that the call was transferred before the destination answered. For Unified ICM (VRU PG), this indicates that the IVR indicated the call was successfully redirected.

- **29 = Announced Transfer**

In **Unified ICM** and **Unified CCE**, a transfer scenario involves a primary call and a secondary call. If the secondary call is connected to another answering device, or is put on hold at the device, then the primary call (the call being transferred) is marked as Announced Transfer.

- **30 = Conferenced**

In **Unified ICM** and **Unified CCE**, the call was terminated (dropped out of the conference). Conference time is tracked in the system software's Skill Group tables for the skill group that initiated the conference.

- **31 = Duplicate Transfer**

Supported only on the Siemens HICOM 300E PIM. The call was diverted or transferred off-switch or to an unmonitored device.

Does not apply to **Unified CCE**.

- **32 = Unmonitored Device**

Not currently used.

- **33 = Answering Machine**

In **Unified ICM**, this indicates the call was answered by an answering machine. Does not apply to **Unified CCE**.

In **Outbound Option**, indicates the call was picked up by an answering machine.

- **34 = Network Blind Transfer**

In **Unified ICM**, indicates the call was transferred by the network to a different peripheral. Does not apply to **Unified CCE unless there is an ISN installation**.

- **35 = Task Abandoned in Router**

The NewTask dialogue associated with the task was terminated before the Router could send a DoThisWithTask message to the application instance that issued the NewTask.

- **36 = Task Abandoned Before Offered**

**Termination Call Detail: Call Disposition and CallDispositionFlag Fields**

A task is abandoned **before** offered if the Start Task Timeout period for the task's "pre-call" message expired **before** the Agent PG received a Start or Offer Task message for the task.

- **37 = Task Abandoned While Offered**

This disposition is only defined for multi-session chat tasks. A task is given this disposition if an agent who is working on one chat session is assigned another chat session, and the customer involved in the new chat session hangs up before the agent begins chatting with him.

- **38 = Normal End Task**

The task was handled by an agent.

Only applies to non-voice tasks.

- **39 = Can't Obtain Task ID**

When an application sends the system software an Offer Application Task or Start Application Task request, it waits for the Unified ICM to send a response containing that Task ID that Unified ICM has assigned to the task. If OPC is unable to obtain a task ID from the Router (because the Router is down, or the network connection between OPC and the Router is down), OPC will terminate the task with disposition 39 "Can't Obtain Task ID".

- **40 = Agent Logged Out During Task**

The agent logged out of an MRD without terminating the task.

Not currently used.

- **41 = Maximum Task Lifetime Exceeded**

The system software did not receive an End Task message for this task within the maximum task lifetime of the MRD with which the task is associated.

- **42 = Application Path Went Down**

The Task Life timed out while the system software was attempting to communicate with the application instance associated with the task. (This might have occurred either because the application instance was down, or the network connection between Unified ICM and the application instance was down.)

- **43 = Unified ICM Routing Complete**

Not currently used.

- **44 = Unified ICM Routing Disabled**

Not currently used.

- **45 = Application Invalid MRD ID**

Not currently used.

- **46 = Application Invalid Dialog ID**

Not currently used.

- **47 = Application Duplicate Dialogue ID**

Not currently used.

- **48 = Application Invalid Invoke ID**

Not currently used.

- **49 = Application Invalid Script Selector**

Not currently used.

- **50 = Application Terminate Dialogue**

Not currently used.

- **51 = Task Ended During Application Init**

The application instance notified the system software that a task that existed prior to the loss of connection was not initialized by the application once connection was restored.

- **52 = Called Party Disconnected.**

CD 52 expected when called party disconnects, with CVP being the routing client.

- **53 = Partial call**

This code simplifies the process of distinguishing interim from final TCD records at reporting or extract time.

Records that contain this CallDisposition code are considered interim records.

OPC will be changed to set a new "PartialCall" EventCause when it receives a GEO\_NewTransaction\_Ind message from any PIM, and OPC's EventCauseToDisposition() needs to translate that EventCause to the new "PartialCall" CallDisposition.

- **54 = Drop Network Consult**

A Network Consult was established, and the agent then reconnected.

**Note:** The consult leg would have this disposition for a successful single step transfer.

- **55 = Network Consult Transfer**

The Network Consult was established, and then the transfer was completed.

- **57 = Abandon Network Consult**

**Termination Call Detail: Call Disposition and CallDispositionFlag Fields**

The Network Consult was never established (ringing, but not answered), and the agent gives up and reconnects.

**Note:** This disposition will also be reported on a consult leg for a successful network consult transfer.

- **58 = Router Requery Before Answer**

Router Received a Requery Event from CVP before the Agent PG indicated the call was answered by an agent.

- **59 = Router Requery After Answer**

Router Received a Requery Event from CVP after the Agent PG indicated the call was answered by an agent.

- **60 = Network Error**

Router received a Network Error for a call targeting an agent before the call arrived to the agent.

- **61 = Network Error Before Answer**

Router Received a Network Error Event from CVP before the Agent PG indicated the call was answered by an agent.

- **62 = Network Error After Answer**

Router Received a Network Error Event from CVP after the Agent PG indicated the call was answered by an agent.

The **CallDispositionFlag** field provides detail on the call disposition.

Flags are:

- DBCDF\_HANDLED = 1
- DBCDF\_ABANDONED = 2
- DBCDF\_SHORT = 3
- DBCDF\_ERROR = 4
- DBCDF\_REDIRECTED = 5
- DBCDF\_REQUERY = 6
- DBCDF\_INCOMPLETE = 7

## Termination Call Detail: Peripheral Call Type

The PeripheralCallType field in the [Termination Call Detail Table \(page 490\)](#) offers information about the type of the call as reported by the peripheral.

Valid settings for this field are:

- **1 = ACD In**

In **Unified ICM** (VRU PG), all calls are of this type.

In **Unified CCE** (Unified CM PG), generally indicates that this is a post-route request.

- **2 = Pre-Route ACD In**

In **Unified CCE**, indicates call was routed to this destination so the Unified CM PG has routing information to associate with the call (router call key, call context).

- **3 = Pre-Route Direct Agent**

Does not apply to **Unified CCE**.

- **4 = Transfer In**

In **Unified CCE**, indicates the call was transferred from another agent or device. The name value is misleading because it is used for calls transferred in or out.)

- **5 = Overflow In**

Does not apply to **Unified CCE**.

- **6 = Other In**

In **Unified CCE**, used for inbound calls that do not have route information/call context associated. Applies to a call coming from an agent from the same peripheral.

- **7 = Auto Out**

In **Outbound option**, indicates a Predictive /Progressive customer call.

- **8 = Agent Out**

Does not apply to **Unified CCE**.

- **9 = Out**

In **Unified CCE**, indicates call was placed outside the Unified CM cluster or that a network reached event was received.

- **10 = Agent Inside**

**Termination Call Detail: Peripheral Call Type**

- **11 = Offered**

Does not apply to **Unified CCE**.

- **12 = Consult**

- **13 = Consult Offered**

- **14 = Consult Conference**

Does not apply to **Unified CCE**.

- **15 = Conference**

- **16 = Unmonitored**

Does not apply to **Unified CCE**.

- **17 = Preview**

In **Outbound Option** indicates a Preview/Callback customer call.

- **18 = Reserve**

In **Outbound Option** indicates a Reservation call.

- **19 = Supervisor Assist**

- **20 = Emergency Call**

- **21 = Supervisor Monitor**

Does not apply to **Unified CCE**.

- **22 = Supervisor Whisper**

Does not apply to **Unified CCE**.

- **23 = Supervisor Barge In**

- **24 = Supervisor Intercept**

- **25 = Route by Unified ICM**

Does not apply to **Unified CCE**.

- **26 = Route by Application Instance**

Does not apply to **Unified CCE**.

- **27 = Reservation Preview**

Call type for **Outbound Option** Reservation calls for Preview mode.

- **28 = Reservation Preview Direct**

Call type for **Outbound Option** Reservation calls for Direct Preview mode.

- **29 = Reservation Predictive**

Call type for **Outbound Option** Reservation calls for Predictive mode and Progressive mode.

- **30 = Reservation Callback**

Call type for **Outbound Option** Reservation calls for Callback calls.

- **31 = Reservation Personal Callback**

Call type for **Outbound Option** Reservation calls for Personal Callback calls.

- **32 = Customer Preview**

Call type for **Outbound Option** Customer calls for Preview mode.

- **33 = Customer Preview Direct**

Call type for **Outbound Option** Customer calls for Direct Preview mode.

- **34 = Customer Predictive**

Call type for **Outbound Option** Customer calls for Predictive mode and Progressive mode for agent-based campaigns.

- **35 = Customer Callback**

Call type for **Outbound Option** Customer calls for callback calls.

- **36 = Customer Personal Callback**

Call type for **Outbound Option** Customer calls for personal callback calls.

- **37 = Customer IVR**

Call type for **Outbound Option** Customer calls for Transfer to IVR campaigns.

## Trunk Type

The Type field in the [Trunk Table \(page 506\)](#) allows these values to indicate the type of trunk:

- **1 = Local C.O.**


- **2 = Foreign Exchange**

- **3 = WATS**

---

**Trunk Type**

- **4** = DID/DNIS
- **5** = PRI
- **6** = Tie Line
- **7** = Interflow

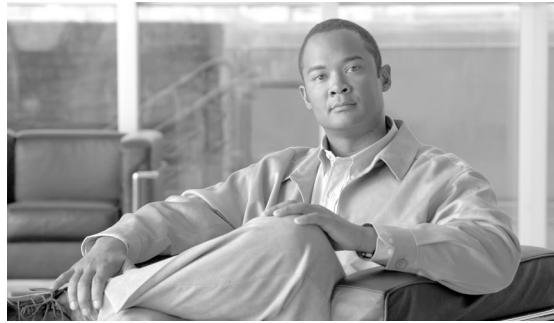

# Chapter 5

## Database Rules

---

### Blended Agent Tables (Outbound Option) - Database Rules

To see a list and an illustration of the Blended Options tables, click [here \(page 527\)](#).

With the optional Outbound Option feature, you can configure a contact center for automated inbound and outbound calling activities.

The [Blended Agent Options \(page 90\)](#) table contains all options that are global to a Blended Agent deployment, such as time parameters for calling a contact.

#### Campaign and Query Rules

A *campaign* delivers outgoing calls to agents for a specific purpose or goal. The goal might be to send a particular message (for example, to invite current clients to take advantage of a new service) or make a particular query (for example, to inquire about an account).

A *query rule* is a SQL filter function that selects contact records and associates those records with a campaign. Contact records are selected from import lists you provide to the Blended Agent software.

The [Campaign \(page 155\)](#) table contains information for all the campaigns defined in a Outbound Option implementation. (There is a single row for every configured campaign.)

The [Campaign Half Hour \(page 163\)](#) table provides historical reporting for campaign attributes.

The [Campaign Query Rule \(page 164\)](#) table is a cross-reference table between the Campaign table and the Query Rule Table.

The [Campaign Skill Group \(page 180\)](#) table is a cross-reference table between Campaign table and the Skill Groups table. It defines the association between skill groups and campaigns.

**Blended Agent Tables (Outbound Option) - Database Rules**

The [Campaign Target Sequence \(page 182\)](#) table contains the target type and sequence with which numbers are dialed within a campaign.

The [Campaign Query Rule Real Time \(page 172\)](#) and [Campaign Query Rule Half Hour \(page 166\)](#) tables provide statistics on particular Campaign-Query Rule combinations.

The [Query Rule Clause \(page 327\)](#) table contains the SQL rules associated with each query rule. There is a single row for each configured query rule.

The [Query Rule \(page 325\)](#) table is a cross-reference table between Query Rule Clause table and the Import Rule table.

### **Import Rules**

An *import rule* defines how Blended Agent imports data from an import list into a contact table. The information in the contact table can then be used to build a dialing list.

An *import list* is a raw set of customer contacts (in text file format) that can be imported into a contact table and used to build a dialing list. The import list may also be referred to as an *import file* or a *contact file*. The import list is associated with a particular campaign and query rule.

The [Import Rule \(page 273\)](#) table contains a list of all the import rules and their associated import lists.

The [Import Rule Real Time \(page 279\)](#) and the [Import Rule History \(page 278\)](#) tables contain statistics on the Outbound Option imports and the success rate of the imports.

The [Import Rule Clause \(page 277\)](#) table defines the portions of an import list to be imported by the Blended Agent Import Rule process.

### **Dialers**

The *dialer* is used in Outbound Option to define the relationship between skill groups, the ACDs to which they are connected, and the ports on a dialer board. The settings you assign to the dialer control how it handles dialing from your location and how it responds to answering machines or human voices. Several database tables control dialer configuration and record statistics.

The [Dialer \(page 202\)](#) table contains configuration information for each dialer in a Outbound Option implementation.

The [Dialer Port Map \(page 217\)](#) table maps port numbers on the dialer to the ports on the ACD, and identifies the ACD stations and their mapping to dialer ports.

Two reporting tables, [Dialer Real Time \(page 219\)](#) and [Dialer Half Hour \(page 211\)](#) provide statistics for reporting on dialer execution.

Two reporting tables, [Dialer Skill Group Real Time \(page 226\)](#) and [Dialer Skill Group Half Hour \(page 223\)](#) provide reports on campaigns running on a dialer.

The [Dialer Detail \(page 206\)](#) table is an historical table that saves detailed dialer records that allow for better troubleshooting and tracking of dialer attempts, agent-skipped calls, and termination codes.

## Device Tables - Database Rules

To see a list and an illustration of the Device tables, click [here \(page 529\)](#).

A [Logical Interface Controller \(page 286\)](#) is either a Peripheral Gateway (PG) or a Network Interface Controller (NIC).

Each logical interface controller maps to a [Physical Interface Controller \(page 324\)](#). If NICs are duplexed, each NIC in the duplexed pair maps to a separate Physical Interface Controller. A duplexed pair of PGs share a single Physical Interface Controller.

A [Routing Client \(page 357\)](#) AT&T, MCI, or Sprint) or a switch within a private network. If a logical interface controller is a NIC, it has one or more associated routing clients. If a logical interface controller is a PG, it may have one or more associated routing clients (if peripherals managed by the PG support Post-Routing)

Each routing client may have one or more associated [Dial Number Plans \(page 201\)](#).

A [Peripheral \(page 306\)](#) is an ACD, PBX, or VRU. Each peripheral is associated with a Peripheral Gateway.

### Trunks

Each peripheral has one or more [Trunk Groups. \(page 507\)](#) The public telephone network may group trunks differently, so each PG may have one or more [Network Trunk Groups \(page 295\)](#).

Each Trunk Group contains one or more Trunks. Each trunk belongs to one trunk group.

### Statistics

At Five-Minute intervals status information is produced for each [Routing Client \(page 357\)](#).

Statistics are produced for each Trunk Group in Real-Time, at Five-Minute intervals, and every Half-hour. Statistics are also produced for each Network Trunk Group in Real-Time and at Half-hour intervals.

Each Peripheral can have a [Default Route \(page 336\)](#) that is used to account for calls at the peripheral that are not associated with any other route.

Real-time statistics are generated for each Peripheral.

For some peripheral types, you must specify what entities to collect data for by including them in the [Peripheral Monitor \(page 315\)](#) table.

### Multiple PIM Types

The Unified ICM PG can support multiple device types (for example, ACDs and VRUs). Each device type requires a separate Peripheral Interface Manager (PIM). In cases where ACD and VRU PIMs are controlled by the same PG, you must specify how VRU ports map to ACD ports or trunks.

**Enterprise Tables - Database Rules****Service Level Threshold**

The [Service Level Threshold \(page 414\)](#) table contains information on how the system software calculates the service level. Each row defines the service level threshold default values for a particular Peripheral-Media Routing Domain pair.

**Enterprise Tables - Database Rules**

To see an illustration and a list of the Enterprise tables, click [here \(page 532\)](#).

Each Route ([page 336](#)) can belong to one or more [Enterprise Routes \(page 228\)](#).

The [Enterprise Route Member \(page 229\)](#) table maps Routes to Enterprise Routes.

Each Skill Group ([page 432](#)) can belong to one or more [Enterprise Skill Groups \(page 231\)](#).

The [Enterprise Skill Group Member \(page 232\)](#) table maps Skill Groups to Enterprise Skill Groups.

Each Service ([page 386](#)) can belong to one or more [Enterprise Services \(page 229\)](#).

The [Enterprise Service Member \(page 230\)](#) table maps services to enterprise services.

Each Peripheral Gateway (PG) can have one or more associated [Service Array \(page 388\)](#)s.

Each [Service Array \(page 388\)](#) contains one or more [Services \(page 386\)](#); but all services in an array must be from peripherals associated with the same PG.

The [Service Array Member \(page 389\)](#) table maps [Services \(page 386\)](#) to Service Arrays.

**Galaxy Tables - Database Rules**

To see an illustration and a list of the Galaxy tables, click [here \(page 533\)](#).

If the system includes a Rockwell Galaxy ACD, special tables within the system database are populated with data taken directly from those ACDs. These data are mostly redundant with data found in the standard Unified ICM/Unified CCE tables.

For each agent configured on the ACD, [Galaxy Agent Performance \(page 240\)](#) and [Galaxy Agent Call Count \(page 237\)](#) records are generated.

For each agent I-group configured on the ACD, [Galaxy Agent IGroup \(page 238\)](#) records are generated.

For each PBX destination, [Galaxy PBX \(page 255\)](#) records are generated.

For each gate configured on the ACD, [Galaxy Gate \(page 245\)](#), [Galaxy Gate Delayed Call \(page 248\)](#), and [Galaxy Overflow \(page 251\)](#) records are generated.

For each trunk I-group configured on the ACD, [Galaxy Trunk IGroup \(page 260\)](#) records are generated.

For each trunk, [Galaxy Single Trunk \(page 257\)](#) and [Galaxy Trunk Call Count \(page 259\)](#) records are generated.

For each DNIS value, [Galaxy DNIS \(page 243\)](#) records are generated.

For each defined transaction code, [Galaxy Transaction Code \(page 258\)](#) records are generated.

For each alarm message output by the Calls or Reports processor, a [Galaxy Alarm \(page 242\)](#) record is generated.

## Media Routing Tables - Database Rules

To see an illustration and a list of the Media Routing tables, click [here \(page 534\)](#).

The [Application Instance \(page 81\)](#) table contains configuration data about external application instances. The data in this table enables the system software to identify application instances and grant them access to the Configuration Management Service (CMS).

The [Application Path \(page 82\)](#) table defines a path from a registered application instances to a CTI Server. Applications need an interface to CTI Server in order to report logins, agent states, and task messages to the system software.

The [Application Path Real Time \(page 84\)](#) table provides real-time status and connection data for application paths.

The [Application Path Member \(page 83\)](#) table defines the Media Routing Domains (MRDs) that use a particular application path.

A *Media Class* is a combination or single instance of physical media that are to be treated as a single concept by Unified ICM/Unified CCE software.

The [Media Class \(page 289\)](#) table defines a type of media class. This table is populated initially with default media classes.

A *Media Routing Domain* (MRD) is a collection of skill groups and services that are associated with a common communication medium.

The [Media Routing Domain \(page 290\)](#) table describes a single implementation of a media class. For example, a media class such as Cisco single-session chat might have one or more Media Routing Domains (MRDs) defined. These MRDs would all be of the same media class. However, they might be on different servers or handle slightly different types of requests.

## Route Tables - Database Rules

To see an illustration and a list of all tables in the Route category, click [here \(page 535\)](#).

**Schedule Tables - Database Rules**

Unified ICM/Unified CCE selects a [Route \(page 336\)](#) for each call. The route specifies a service for the call and a skill target to handle the call. A skill target is a service, skill group, agent, or translation route.

The [Network Target \(page 294\)](#) specifies a destination for a call. A network target can be an [Announcement \(page 72\)](#), a [Peripheral Target \(page 320\)](#), a [Device Target \(page 196\)](#), or a [Scheduled Target \(page 375\)](#). A peripheral target is a trunk group on which to deliver the call and a DNIS value to send with it. A scheduled target is a destination for which the Unified ICM/Unified CCE knows only the number of scheduled resources and the number of calls in progress. For each scheduled target, the Unified ICM/Unified CCE maintains Scheduled Target Real Time data.

The routing client presents the Unified ICM/Unified CCE with a [Dialed Number \(page 197\)](#). A dialed number can be an 800 number such as 800-555-1234, or a string such as "RTE.007." Each Dialed Number can have a default route.

A route is associated with one or more Network Targets. The network target has one or more associated Labels. A label is the string that is passed back to the network to indicate the appropriate target. The [Dialed Number Label \(page 199\)](#) table indicates which labels are valid for each dialed number (or you can choose to make all labels valid for a routing client valid for all of that routing client's dialed numbers).

For each route, statistics are produced in Real Time, every Five Minutes, and every Half-hour.

A [Route Call Detail \(page 338\)](#) record is produced immediately after the Unified ICM/Unified CCE determines a route. This records information about the request and the route determined by the Unified ICM/Unified CCE.

A [Termination Call Detail \(page 490\)](#) record is produced at the end of each call. Data for this record comes from the Peripheral Gateway . It provides information about how the call was handled at the peripheral. The Route Call Detail and Termination Call Detail are linked by the Day and RouterCallKey fields.

A script may direct a call to a [Network VRU \(page 300\)](#) associated with the routing client. The script returns a label to the routing client. It may also specify a [Network Vru Script \(page 302\)](#) to be executed by the VRU.

**Schedule Tables - Database Rules**

To see an illustration and a list of all tables in the Schedule category, click [here \(page 538\)](#).

With the optional Schedule Import feature, you can import schedules for each agent, skill group, and service from a workforce management system.

The [Schedule \(page 365\)](#) table contains one entry for each schedule.

The [Schedule Import \(page 367\)](#) table contains the actual scheduling data for various time periods. The [Schedule Import Real Time \(page 369\)](#) table contains the scheduling data that is currently in effect.

The [Schedule Source \(page 374\)](#) table indicates where the data are imported from. The [Schedule Map \(page 371\)](#) table gives the primary key value for the scheduling data in the source.

The [ICR View \(page 270\)](#) table indicates how the Schedule Import records for a schedule are to be interpreted.

The [View Column \(page 520\)](#) table indicates how to interpret each field in Schedule Import

The [Import Schedule \(page 281\)](#) table defines import processes to be run automatically at specified times.

The [Import Log \(page 272\)](#) table contains information about these import processes.

A schedule may recur daily, weekly, monthly, etc. The Recurring Schedule Map describes a recurrence pattern for a schedule.

The [Schedule Report \(page 372\)](#) table describes the export report.

## Script Tables - Database Rules

To see an illustration and a list of all tables in the Script category, click [here \(page 539\)](#).

The Unified ICM/Unified CCE classifies each incoming call into a [Call Type \(page 95\)](#) based on a [Dialed Number Map \(page 200\)](#). The mapping considers the dialed number, caller-entered digits, and calling line ID. The calling line ID can be specified as a specific number, a wildcard, or a [Region \(page 332\)](#) composed of Prefixes. Each routing client may have a [Default Call Type \(page 195\)](#).

A script is a series of steps executed to determine the best route for a call or to perform periodic administrative actions. You can create several versions of each script. General information about each script is stored in the [Master Script \(page 288\)](#). Specific information about each version is stored in the [Script \(page 377\)](#). The binary representation of the script version is stored in the [Script Data \(page 379\)](#) table. Each Script version has a Cross Reference for each database entity that it references.

A [Call Type Map \(page 121\)](#) associates one or more routing scripts to the call type based on a schedule of when each script is active. An [Admin Script Schedule Map \(page 13\)](#) schedules a periodic administrative script. For each script version, Real Time and Five-Minute data are produced. Also, Real-Time data are produced for each call type.

You can define [User Variables \(page 518\)](#) that you can set and reference in scripts. Optionally, you can define [Persistent Variables \(page 321\)](#) that retain their values between script invocations. You can also define custom functions that are stored as [User Formulas \(page 513\)](#). The expression associated with a custom function is stored in [User Formula Equation \(page 513\)](#).

With the optional Gateway feature, a script can communicate with an external application. An [Application Gateway \(page 75\)](#) represents such an external application. Each side of the Central Controller can maintain a separate Connection for each Application Gateway. Unified ICM/Unified CCE software also maintains Global default values for Application Gateway connections. Half-hour data are produced for each Application Gateway.

**Security Tables - Database Rules**

With the optional Gateway SQL feature, a script can query an external database. The tables that can be accessed are stored in [Script Table \(page 377\)](#) and the specific columns in [Script Table Column \(page 384\)](#).

The [Script Queue Real Time \(page 381\)](#) table contains data on how tasks are processed in a script queue.

**Security Tables - Database Rules**

To see an illustration and a list of all tables in the Security category, click [here \(page 543\)](#).

You might choose to restrict access to some objects in the Unified ICM/Unified CCE database to specific users, specific groups of users, or to a specific entity (such as a division within a company). The enterprise consists of one or more entities. The [Business Entity \(page 94\)](#) tables define the entities within an enterprise.

The [User Group \(page 514\)](#) table defines groups of users or individual users who have specific access rights. If a row in the User Group table defines a group, each user who is a member of that group is configured in the [User Group Member \(page 516\)](#) table. Unified ICM/Unified CCE software also uses the [Sec Group \(page 384\)](#) and [Sec User \(page 385\)](#) tables to track the state of user groups. The [User Supervisor Map \(page 517\)](#) table is used to allow an agent to log in as a Supervisor.

The [Feature Control Set \(page 236\)](#) table defines the different feature sets that may be used by different users. One set of features may be mapped to multiple users.

Each individual item for which the Unified ICM/Unified CCE software controls access is an object. The [Object List \(page 304\)](#) table contains information about these objects. The [Ids \(page 271\)](#) table contains information about row-level security for objects. The [Object Security \(page 305\)](#) table defines the access that specific user groups have for specific objects.

The [User Security Control \(page 516\)](#) table defines the access that specific users have for specific objects. The possible access levels for each object are defined in the [Object Access Xref \(page 303\)](#) table. The Unified ICM/Unified CCE software uses the [Group Security Control \(page 263\)](#) table as an intermediate table to build User Security Control records.

A category of objects on which access is controlled is a class. The [Class List \(page 190\)](#) table defines these categories. The [Class Security \(page 190\)](#) table specifies the level of access a user group has to a specific class. The access levels that are available for a class are specified in the [Class Access Xref \(page 189\)](#) table.

The [ClassID To ObjectType \(page 191\)](#) table defines the mapping of classes to objects.

**Skill Target Tables - Database Rules**

To see an illustration and a list of the Skill Target tables, click [here \(page 544\)](#).

**Peripheral Targets**

Each peripheral can have many [Services \(page 386\)](#), Agents, Skill Groups, and [Translation Routes \(page 503\)](#). These entities are collectively known as [Skill Target \(page 489\)](#).

Each agent can be assigned to an [Agent Team \(page 70\)](#) of agents. Teams are for monitoring purposes only; they are not used for routing calls. The [Agent Team Member \(page 71\)](#) table maps agents to teams.

The [Agent Team Supervisor \(page 71\)](#) table is a configuration table that specifies the mapping of supervisors to agent teams.

For agents that are not associated with an ACD, you can define [Agent Desk Settings \(page 18\)](#), which specify features available and how the Unified ICM handles certain state changes for an agent.

A [Person \(page 322\)](#) record provides primary identification and authentication for all system users, including both agents and administrators.

Each service has one or more associated skill groups. Each skill group can be associated with one or more service. The [Service Member \(page 415\)](#) table maps skill groups to services.

Each Skill Group has one or more member agents. Each agent can be associated with one or more skill groups. The [Skill Group Member \(page 477\)](#) table maps agents to skill groups.

For some peripherals, a base Skill Group can have multiple related Skill Groups with different priorities.

## Statistics

Real-Time statistics are produced for each [Agent \(page 15\)](#), [Skill Group \(page 432\)](#), [Service \(page 386\)](#), and each [Skill Group Member \(page 477\)](#).

At Five-Minute intervals statistics are produced for each [Skill Group \(page 432\)](#) and [Service \(page 386\)](#).

Every Half-hour, statistics are produced for each [Skill Group \(page 432\)](#), [Service \(page 386\)](#), and [Translation Route \(page 503\)](#).

For each agent, the Unified ICM/Unified CCE software maintains a State Trace, which tracks the states an agent has been in. When an agent logs out, the Unified ICM/Unified CCE software creates an [Agent Logout \(page 33\)](#) record.

# System Tables - Database Rules

To see an illustration and a list of the System tables, click [here \(page 548\)](#).

The [Application Event \(page 73\)](#) table contains information about application events generated by the Unified ICM/Unified CCE software. This is a subset of the events reported in the Event table.

The [AWControl \(page 89\)](#) table maintains information about the Admin Workstation and its local database.

## User Preferences Tables - Database Rules

The [Config Message Log \(page 193\)](#) contains database system information.

The [Controller Time \(page 193\)](#) table contains the current time as kept by the Central Controller.

The [Event \(page 232\)](#) table contains information about system events generated by the Unified ICM/Unified CCE software.

The [ICR Globals \(page 264\)](#) table contains some general information about the system.

The [ICR Locks \(page 268\)](#) table contains a row for each database lock currently held.

The [Logger Admin \(page 283\)](#) table maintains information about scheduled administration jobs run on the central database by the Unified ICM/Unified CCE software.

The [Logger Meters \(page 284\)](#) table contains performance information about the Logger process.

The [Logger Type \(page 285\)](#) table specifies the type of Logger (that is, standard, Customer ICM (CICM)) , or Network Applications Manager (NAM) and, if the Logger is a NAM Logger, whether or not the NAM is a slave NAM.

The [Machine Info \(page 287\)](#) table lists the machines in Simplified Configuration deployments

The [Next Available Number \(page 303\)](#) table identifies the next available unique integer ID value for a specific database table.

The [Recovery \(page 329\)](#) table contains internal status about each table in the database.

The [Region Info \(page 332\)](#) table specifies which prefixes and regions are pre-defined by the Unified ICM/Unified CCE software.

The [Rename \(page 336\)](#) table is an internal table.

The [Version \(page 519\)](#) table records the current versions of the Unified ICM/Unified CCE schema installed in the central and local databases.

## User Preferences Tables - Database Rules

To see an illustration and a list of the User Preferences tables, click [here \(page 550\)](#).

Tables in the User Preferences group are used to create custom tool sets and desktop appearances for users of the system software.

The "Cfg" tables control the desktop settings, or appearance, of Configuration Manager tool, which allows users to define desktop settings, and to view, edit, or delete the records of existing desktop settings.

The [Cfg Mngr App Snapshot State \(page 183\)](#) table defines a specific state of the Unified ICM Configuration Manager that a user has saved. Information from this table is used to reconstruct the Unified ICM Configuration Manager state when the Administration & DataServer is restarted.

The [Cfg Mngr User Desktop Snap \(page 185\)](#) table retains information on the current Configuration Manager state for a particular user.

The [Cfg Mngr User Menu \(page 187\)](#) table holds information that describes the default and custom menus in use for each user of the Configuration Manager.

The [Cfg Mngr View \(page 188\)](#) table holds the information necessary to produce the tree view structure for multiple default and custom menus within the Unified ICM Configuration Manager.

The [Cfg Mngr User Settings \(page 187\)](#) table holds specific Unified ICM Configuration Manager settings for each user of the Configuration Manager tool. Each row in this table specifies the personal settings for one user (for example, whether or not the user want to save the Configuration Manager desktop settings in place when Configuration Manager is closed).

The [Cfg\\_Mngr\\_Globals \(page 185\)](#) table contains a single record that stores version information about the menu system that Unified ICM Configuration Manager is currently using.

## VRU Micro-Applications Tables - Database Rules

To see an illustration and a list of the VRU Micro-Applications tables, click [here \(page 551\)](#).

The [VRU Currency \(page 521\)](#) table contains a list of currencies supported by VRU micro-applications.

The [VRU Defaults \(page 522\)](#) table contains a single row of data that contains the default values for a particular VRU micro-application.

The [VRU Locale \(page 524\)](#) table contains a list of locales (a locale is a combination of language and country) supported by VRU micro-applications.



# Database Field Name Index

---

AbandInterval1

[Call\\_Type\\_Interval Table....109](#)

[Call\\_Type\\_Skill\\_Group\\_Interval Table....131](#)

AbandInterval1

[Call\\_Type\\_Half\\_Hour Table ....96](#)

AbandInterval10

[Call\\_Type\\_Half\\_Hour Table ....96](#)

[Call\\_Type\\_Interval Table....109](#)

AbandInterval10

[Call\\_Type\\_Skill\\_Group\\_Interval Table....131](#)

AbandInterval2

[Call\\_Type\\_Interval Table....109](#)

AbandInterval2

[Call\\_Type\\_Half\\_Hour Table ....96](#)

AbandInterval2

[Call\\_Type\\_Skill\\_Group\\_Interval Table....131](#)

AbandInterval3

[Call\\_Type\\_Half\\_Hour Table ....96](#)

[Call\\_Type\\_Interval Table....109](#)

AbandInterval3

[Call\\_Type\\_Skill\\_Group\\_Interval Table....131](#)

AbandInterval4

[Call\\_Type\\_Half\\_Hour Table ....96](#)

[Call\\_Type\\_Interval Table....109](#)

AbandInterval4

[Call\\_Type\\_Skill\\_Group\\_Interval Table....131](#)

AbandInterval5

[Call\\_Type\\_Half\\_Hour Table ....96](#)

[Call\\_Type\\_Interval Table....109](#)

AbandInterval5

[Call\\_Type\\_Skill\\_Group\\_Interval Table....131](#)

AbandInterval6

[Call\\_Type\\_Half\\_Hour Table ....96](#)

[Call\\_Type\\_Interval Table....109](#)

AbandInterval6

[Call\\_Type\\_Skill\\_Group\\_Interval Table....131](#)

AbandInterval7

[Call\\_Type\\_Half\\_Hour Table ....96](#)

[Call\\_Type\\_Interval Table....109](#)

AbandInterval7

[Call\\_Type\\_Skill\\_Group\\_Interval Table....131](#)

AbandInterval8

[Call\\_Type\\_Half\\_Hour Table ....96](#)

[Call\\_Type\\_Interval Table....109](#)

AbandInterval8

[Call\\_Type\\_Skill\\_Group\\_Interval Table....131](#)

AbandInterval9

[Call\\_Type\\_Half\\_Hour Table ....96](#)

[Call\\_Type\\_Interval Table....109](#)

AbandInterval9

[Call\\_Type\\_Skill\\_Group\\_Interval Table....131](#)

AbandonCustomerCallback

[Campaign Table ...155](#)

AbandonDetect

[Campaign\\_Query\\_Rule\\_Interval Table ....170](#)

[Dialer\\_Interval Table....214](#)

AbandonDetectCount

[Campaign\\_Query\\_Rule\\_Real\\_Time Table....172](#)

AbandonDetectTo5

[Campaign\\_Query\\_Rule\\_Real\\_Time Table....172](#)

AbandonDetectToday

[Dialer\\_Real\\_Time Table....219](#)

AbandonDetectToHalf

[Campaign\\_Query\\_Rule\\_Half\\_Hour Table ....166](#)

[Campaign\\_Query\\_Rule\\_Real\\_Time Table....172](#)

[Dialer\\_Half\\_Hour Table....211](#)

Dialer_Skill_Group_Half_Hour Table....223	AbandonedRoutePoint Campaign_Skill_Group Table ....180
Abandoned0 Galaxy_Gate_Delayed_Call Table....248	AbandonEnabled Campaign Table ....155
Abandoned10 Galaxy_Gate_Delayed_Call Table....248	AbandonHoldCalls Agent_Skill_Group_Interval Table....51
Abandoned120 Galaxy_Gate_Delayed_Call Table....248	Skill_Group_Interval Table....457
Abandoned15 Galaxy_Gate_Delayed_Call Table....248	AbandonHoldCallsOut Skill_Group_Interval Table....457
Abandoned180 Galaxy_Gate_Delayed_Call Table....248	AbandonHoldCallsOutToHalf Skill_Group_Half_Hour Table....439
Abandoned20 Galaxy_Gate_Delayed_Call Table....248	AbandonHoldCallsToHalf Agent_Skill_Group_Half_Hour Table ....39
Abandoned25 Galaxy_Gate_Delayed_Call Table....248	Skill_Group_Half_Hour Table....439
Abandoned30 Galaxy_Gate_Delayed_Call Table....248	AbandonHoldOutCalls Agent_Skill_Group_Interval Table....51
Abandoned40 Galaxy_Gate_Delayed_Call Table....248	AbandonHoldOutCallsToHalf Agent_Skill_Group_Half_Hour Table ....39
Abandoned5 Galaxy_Gate_Delayed_Call Table....248	AbandonPercent Campaign Table ....155
Abandoned50 Galaxy_Gate_Delayed_Call Table....248	AbandonRingCalls Agent_Skill_Group_Interval Table....51
Abandoned60 Galaxy_Gate_Delayed_Call Table....248	Skill_Group_Interval Table....457
Abandoned90 Galaxy_Gate_Delayed_Call Table....248	AbandonRingCallsToHalf Agent_Skill_Group_Half_Hour Table ....39
AbandonedCallWaitTime Peripheral Table....306	AbandonRingCallsToHalf Skill_Group_Half_Hour Table....439
AbandonedDialerCallback Campaign Table ....155	AbandonRingTime Agent_Skill_Group_Interval Table....51
AbandonedNoAnswer Galaxy_PBX Table....255	Skill_Group_Interval Table....457
AbandonedOver180 Galaxy_Gate_Delayed_Call Table....248	AbandonRingTimeToHalf Agent_Skill_Group_Half_Hour Table ....39
	Skill_Group_Half_Hour Table....439
	AbandonTimeout Application_Gateway_Globals Table ....78

AbandonTimeout	AcceptedOnRoute2 Galaxy_Overflow Table....251
Application_Gateway_Connection Table....76	
AbandonTo5	AcceptedOnRoute3 Galaxy_Overflow Table....251
Routing_Client_Five_Minute Table....359	
AbandonToIVR	AcceptedOnRoute4 Galaxy_Overflow Table....251
Campaign_Query_Rule_Interval Table ....170	
Dialer_Interval Table....214	AcceptedOnRoute5 Galaxy_Overflow Table....251
AbandonToIVRCount	AcceptedOnRoute6 Galaxy_Overflow Table....251
Campaign_Query_Rule_Real_Time Table....172	
AbandonToIVRHalf	AcceptedOnRoute7 Galaxy_Overflow Table....251
Dialer_Real_Time Table....219	
AbandonToIVRTo5	AcceptedOnRoute8 Galaxy_Overflow Table....251
Campaign_Query_Rule_Real_Time Table....172	
AbandonToIVRToHalf	AcceptedOnRoute9 Galaxy_Overflow Table....251
Campaign_Query_Rule_Real_Time Table....172	
Dialer_Skill_Group_Half_Hour Table....223	AccessLevel Class_Security Table....190 Object_Security Table....305
AbandonToIVRToHalf	AccessLevel Class_Access_Xref Table....189 Group_Security_Control Table....263 Object_Access_Xref Table....303 User_Security_Control Table....516
AcceptedOnRoute1 Galaxy_Overflow Table....251	AccessType Script_Table Table....383
AcceptedOnRoute10 Galaxy_Overflow Table....251	AccountNumber Dialer_Detail Table....206 Dialer_Port_Real_Time Table....218
AcceptedOnRoute11 Galaxy_Overflow Table....251	ACDPeripheralID Vru_Port_Map Table....524
AcceptedOnRoute12 Galaxy_Overflow Table....251	ACDPort Vru_Port_Map Table....524
AcceptedOnRoute13 Galaxy_Overflow Table....251	ACDTimeEnabled Logical_Interface_Controller Table....286
AcceptedOnRoute14 Galaxy_Overflow Table....251	
AcceptedOnRoute15 Galaxy_Overflow Table....251	
AcceptedOnRoute16 Galaxy_Overflow Table....251	

ACDTrunkID	<a href="#">Agent_Desk_Settings Table ....18</a>
Vru_Port_Map Table....524	
ActiveCTIServerTime	<a href="#">AgentClosedCount</a>
Peripheral_Interval Table....313	<a href="#">Campaign_Query_Rule_Real_Time Table....172</a>
ActiveCTIServerTimeToHalf	<a href="#">AgentClosedDetect</a>
Peripheral_Half_Hour Table....310	<a href="#">Campaign_Query_Rule_Interval Table ....170</a>
ActivePeripheralDataTime	<a href="#">Dialer_Interval Table....214</a>
Peripheral_Interval Table....313	
ActivePeripheralDataTimeToHalf	<a href="#">AgentClosedDetectHalf</a>
Peripheral_Half_Hour Table....310	<a href="#">Dialer_Real_Time Table....219</a>
ActivePeripheralTime	<a href="#">AgentClosedDetectTo5</a>
Peripheral_Interval Table....313	<a href="#">Campaign_Query_Rule_Real_Time Table....172</a>
ActivePeripheralTimeToHalf	<a href="#">AgentClosedDetectToHalf</a>
Peripheral_Half_Hour Table....310	<a href="#">Campaign_Query_Rule_Real_Time Table....172</a>
ActivePGAgentSideATimeToHalf	<a href="#">Dialer_Half_Hour Table....211</a>
Physical_Controller_Half_Hour Table....323	<a href="#">Dialer_Skill_Group_Half_Hour Table....223</a>
ActivePGAgentSideBTimeToHalf	<a href="#">AgentClosedDetectToHalf</a>
Physical_Controller_Half_Hour Table....323	<a href="#">Campaign_Query_Rule_Half_Hour Table ....166</a>
ActiveRoutingClientTime	<a href="#">AgentDeskSettingsID</a>
Peripheral_Interval Table....313	<a href="#">Agent_Desk_Settings Table ....18</a>
ActiveRoutingClientTimeToHalf	<a href="#">Peripheral Table....306</a>
Peripheral_Half_Hour Table....310	
ActiveThreshold	<a href="#">AgentDeskSettingsID</a>
Dialer_Detail Table....206	<a href="#">Agent Table....15</a>
ActiveTimeToHalf	<a href="#">AgentDistributionID</a>
Campaign_Half_Hour Table....163	<a href="#">Agent_Distribution Table ....23</a>
ActivityIndicator	<a href="#">AgentErrorCount</a>
Galaxy_Agent_Performance Table....240	<a href="#">Call_Type_Interval Table....109</a>
ActivityTestTo5	<a href="#">Call_Type_Skill_Group_Interval Table....131</a>
Routing_Client_Five_Minute Table....359	
Address	<a href="#">AgentErrorCountHalf</a>
Application_Gateway_Connection Table....76	<a href="#">Call_Type_Real_Time Table ....142</a>
AgentAutoConfig	<a href="#">AgentErrorCountToday</a>
Peripheral Table....306	<a href="#">Call_Type_Real_Time Table ....142</a>
AgentCanSelectGroup	<a href="#">AgentErrorCountToHalf</a>
	<a href="#">Call_Type_Half_Hour Table ....96</a>
	<a href="#">Call_Type_Skill_Group_Half_Hour Table....122</a>
AgentEventDetail	<a href="#">Peripheral Table....306</a>

AgentHistoricalData	Skill_Group_Real_Time Table....477
Agent_Distribution Table ....23	
AgentID	AgentOutCallsTimeToHalf
Galaxy_Agent_Performance Table....240	Agent_Skill_Group_Half_Hour Table ....39
AgentIGroup	Skill_Group_Half_Hour Table....439
Galaxy_Agent_Call_Count Table....237	
AgentName	AgentOutCallsTo5
Galaxy_Agent_Performance Table....240	Skill_Group_Real_Time Table....477
AgentOrdering	AgentOutCallsToHalf
Assignment_Queue Table....85	Agent_Skill_Group_Half_Hour Table ....39
AgentOutCalls	Skill_Group_Half_Hour Table....439
Agent_Skill_Group_Interval Table....51	
Skill_Group_Interval Table....457	
AgentOutCallsOnHold	AgentPercent
Agent_Skill_Group_Interval Table....51	Dialer_Skill_Group_Real_Time Table....226
Skill_Group_Interval Table....457	
AgentOutCallsOnHoldTime	AgentPercentToHalf
Agent_Skill_Group_Interval Table....51	Dialer_Skill_Group_Half_Hour Table....223
Skill_Group_Interval Table....457	
AgentOutCallsOnHoldTimeToHalf	AgentPeripheralNumber
Agent_Skill_Group_Half_Hour Table ....39	Dialer_Detail Table....206
Skill_Group_Half_Hour Table....439	
AgentOutCallsOnHoldToHalf	AgentPeripheralNumber
Agent_Skill_Group_Half_Hour Table ....39	Termination_Call_Detail Table....490
Skill_Group_Half_Hour Table....439	
AgentOutCallsTalkTime	AgentPhoneNumber
Agent_Skill_Group_Interval Table....51	Galaxy_Agent_Performance Table....240
Skill_Group_Interval Table....457	
AgentOutCallsTalkTimeToHalf	AgentRejectedCount
Agent_Skill_Group_Half_Hour Table ....39	Campaign_Query_Rule_Real_Time Table....172
Skill_Group_Half_Hour Table....439	
AgentOutCallsTime	AgentRejectedDetect
Agent_Skill_Group_Interval Table....51	Campaign_Query_Rule_Interval Table ....170
Skill_Group_Interval Table....457	Dialer_Interval Table....214
AgentOutCallsTimeToHalf	AgentRejectedDetectHalf
Agent_Skill_Group_Half_Hour Table ....39	Dialer_Real_Time Table....219
Skill_Group_Half_Hour Table....439	
AgentOutCallsTimeTo5	AgentRejectedDetectTo5
Agent_Skill_Group_Interval Table....51	Campaign_Query_Rule_Real_Time Table....172
Skill_Group_Interval Table....457	
AgentReporting	AgentRejectedDetectToHalf
	Campaign_Query_Rule_Half_Hour Table ....166

Peripheral Table....306	Skill_Group_Interval Table....457
AgentSkillTargetID	AgentTerminatedCallsToHalf
Skill_Group_Member Table....477	Agent_Skill_Group_Half_Hour Table ....39
Termination_Call_Detail Table....490	Skill_Group_Half_Hour Table....439
User_Supervisor_Map Table....517	AgentToAgentCallsAllowed
AgentsLoggedOn	Agent_Desk_Settings Table ....18
Peripheral_Real_Time Table....316	AlarmCode
AgentsTalking	Galaxy_Alarm Table....242
Route_Five_Minute Table....344	AlarmData1
Route_Real_Time Table....352	Galaxy_Alarm Table....242
Service_Five_Minute Table....390	AlarmData2
Service_Real_Time Table....416	Galaxy_Alarm Table....242
AgentState	AlarmProcessor
Agent_Real_Time Table ....34	Galaxy_Alarm Table....242
AgentState	AlarmSubcode
Agent_Skill_Group_Real_Time Table....63	Galaxy_Alarm Table....242
Agent_State_Trace Table....64	AlarmTime
AgentStateTrace	Galaxy_Alarm Table....242
Agent Table....15	AllocatedPorts
AgentStatus	Dialer_Real_Time Table....219
Agent_Real_Time Table ....34	AllowMultipleAppInstances
AgentTargetingMethod	Cfg_Mngr_User/Desktop_Snap Table ....185
Peripheral Table....306	AllPortsBusyCount
AgentTargetingRuleID	Dialer_Interval Table....214
Agent_Targeting_Rule Table....67	AllPortsBusyCountToHalf
Agent_Targeting_Rule_Member Table....68	Dialer_Half_Hour Table....211
Agent_Targeting_Rule_Range Table....69	AllPortsBusyToday
AgentTargetingRuleRangeID	Dialer_Real_Time Table....219
Agent_Targeting_Rule_Range Table....69	AllPortsBusyToHalf
AgentTeamID	Dialer_Real_Time Table....219
Agent_Team Table....70	AllTrunksBusyHalf
Agent_Team_Member Table ....71	Network_Trunk_Group_Real_Time Table....298
Agent_Team_Supervisor Table....71	Trunk_Group_Real_Time Table....511
AgentTerminatedCalls	AllTrunksBusyTime
Agent_Skill_Group_Interval Table....51	Galaxy_Trunk_IGroup Table....260

AllTrunksBusyToday	AnsInterval3
Network_Trunk_Group_Real_Time Table....298	Call_Type_Half_Hour Table ....96
AllTrunksBusyToday	Call_Type_Interval Table....109
Trunk_Group_Real_Time Table....511	Call_Type_Skill_Group_Interval Table....131
AllTrunksBusyToHalf	AnsInterval4
Network_Trunk_Group_Half_Hour Table....296	Call_Type_Half_Hour Table ....96
AllTrunksBusyToHalf	Call_Type_Interval Table....109
Trunk_Group_Five_Minute Table....508	Call_Type_Skill_Group_Interval Table....131
Trunk_Group_Half_Hour Table....509	AnsInterval5
AMDTreatmentMode	Call_Type_Half_Hour Table ....96
Campaign Table ....155	Call_Type_Interval Table....109
ANI	Call_Type_Skill_Group_Interval Table....131
Route_Call_Detail Table....338	AnsInterval6
Termination_Call_Detail Table....490	Call_Type_Half_Hour Table ....96
ANIWildCard	Call_Type_Interval Table....109
Dialed_Number_Map Table....200	Call_Type_Skill_Group_Interval Table....131
ANIWildCardType	AnsInterval7
Dialed_Number_Map Table....200	Call_Type_Half_Hour Table ....96
AnnouncementTo5	Call_Type_Interval Table....109
Routing_Client_Five_Minute Table....359	Call_Type_Skill_Group_Interval Table....131
AnnouncementType	AnsInterval8
Announcement Table ....72	Call_Type_Half_Hour Table ....96
AnsInterval1	Call_Type_Interval Table....109
Call_Type_Interval Table....109	Call_Type_Skill_Group_Interval Table....131
AnsInterval11	AnsInterval9
Call_Type_Half_Hour Table ....96	Call_Type_Half_Hour Table ....96
Call_Type_Skill_Group_Interval Table....131	Call_Type_Interval Table....109
AnsInterval10	Call_Type_Skill_Group_Interval Table....131
Call_Type_Half_Hour Table ....96	AnswerDetectEnabled
Call_Type_Interval Table....109	Campaign Table ....155
Call_Type_Skill_Group_Interval Table....131	AnsweredCountTo5
AnsInterval2	Dialer_Skill_Group_Real_Time Table....226
Call_Type_Half_Hour Table ....96	AnsweredCountToday
Call_Type_Interval Table....109	Dialer_Skill_Group_Real_Time Table....226
Call_Type_Skill_Group_Interval Table....131	AnsweredCountToHalf

Dialer_Skill_Group_Real_Time Table....226	Route_Real_Time Table....352
AnsweredShortCallsThreshold	AnswerWaitTimeTo5
Peripheral Table....306	Service_Real_Time Table....416
AnsweredWithinServiceLevel	AnswerWaitTimeTo5
Termination_Call_Detail Table....490	Call_Type_Real_Time Table ....142
AnsweringMachineCallback	Skill_Group_Real_Time Table....477
Campaign Table ....155	AnswerWaitTimeTo5
AnsweringMachineCount	Route_Real_Time Table....352
Campaign_Query_Rule_Real_Time Table....172	AnswerWaitTimeToday
AnsweringMachineDetect	Call_Type_Real_Time Table ....142
Campaign_Query_Rule_Interval Table ....170	Route_Real_Time Table....352
Dialer_Interval Table....214	Service_Real_Time Table....416
AnsweringMachineDetectTo5	AnswerWaitTimeToHalf
Campaign_Query_Rule_Real_Time Table....172	Call_Type_Skill_Group_Half_Hour Table....122
AnsweringMachineDetectToday	Skill_Group_Half_Hour Table....439
Dialer_Real_Time Table....219	AnswerWaitTimeToHalf
AnsweringMachineDetectToHalf	Route_Half_Hour Table....347
Campaign_Query_Rule_Real_Time Table....172	Service_Half_Hour Table....394
Dialer_Half_Hour Table....211	AnswerWaitTimeToHalf
Dialer_Skill_Group_Half_Hour Table....223	Agent_Skill_Group_Half_Hour Table ....39
AnsweringMachineDetectToHalf	AppearsOnDesktop
Campaign_Query_Rule_Half_Hour Table ....166	Attribute Table....88
AnswerTo5	ApplicationAvailable
Routing_Client_Five_Minute Table....359	Skill_Group_Real_Time Table....477
AnswerWaitTime	ApplicationData
Agent_Skill_Group_Interval Table....51	Termination_Call_Detail Table....490
Call_Type_Interval Table....109	ApplicationGatewayID
Call_Type_Skill_Group_Interval Table....131	Application_Gateway Table....75
Service_Interval Table....406	Application_Gateway_Half_Hour Table ....80
Skill_Group_Interval Table....457	ApplicationGatewayID
AnswerWaitTimeHalf	Application_Gateway_Connection Table....76
Call_Type_Half_Hour Table ....96	ApplicationGatewayType
Call_Type_Real_Time Table ....142	Application_Gateway Table....75
Service_Real_Time Table....416	Application_Gateway_Globals Table ....78
AnswerWaitTimeHalf	ApplicationID

Cfg_Mngr_App_Snapshot_State Table	...183	AttributeDataType
ApplicationID		Attribute Table....88
Cfg_Mngr_View Table	....188	AttributeID
ApplicationInstanceID		Agent_Attribute Table....18
Application_Instance Table	....81	Assignment_Queue_Attribute Table....86
Application_Path Table	....82	Attribute Table....88
ApplicationKey		AttributeRelation
Application_Instance Table	....81	Assignment_Queue_Attribute Table....86
ApplicationOpen		AttributeValue
Cfg_Mngr_App_Snapshot_State Table	...183	Agent_Attribute Table....18
ApplicationPathID		Author
Application_Path Table	....82	Script Table....377
Application_Path_Member Table	....83	AutoAnswerEnabled
Application_Path_Real_Time Table	....84	Agent_Desk_Settings Table ....18
ApplicationTaskDisposition		AutoAnswerReservationCall
Termination_Call_Detail Table	....490	Campaign_Skill_Group Table ....180
ApplicationType		AutoOutCalls
Application_Instance Table	....81	Agent_Skill_Group_Interval Table....51
AppMediaLib		Service_Interval Table....406
Vru_Defaults Table	....522	Skill_Group_Interval Table....457
ArrayIndex		AutoOutCallsHalf
Route_Call_Variable Table	....343	Service_Real_Time Table....416
Termination_Call_Variable Table	....502	AutoOutCallsNow
AssignedTime		Service_Real_Time Table....416
Galaxy_Agent_IGroup Table	....238	AutoOutCallsOnHold
AssignmentQueueID		Agent_Skill_Group_Interval Table....51
Assignment_Queue Table	....85	Service_Interval Table....406
Assignment_Queue_Member Table	....86	Skill_Group_Interval Table....457
Assignment_Queue_Attribute Table	....86	AutoOutCallsOnHoldHalf
AssistQueueCount		Service_Real_Time Table....416
Galaxy_Agent_Performance Table	....240	AutoOutCallsOnHoldTime
AtCommand		Agent_Skill_Group_Interval Table....51
Import_Schedule Table	....281	Service_Interval Table....406
AttemptedCount		Skill_Group_Interval Table....457
Campaign_Query_Rule_Real_Time Table	....172	AutoOutCallsOnHoldTimeHalf

Service_Real_Time Table....416	Service_Interval Table....406
AutoOutCallsOnHoldTimeTo5 Service_Real_Time Table....416	Skill_Group_Interval Table....457
AutoOutCallsOnHoldTimeToday Service_Real_Time Table....416	AutoOutCallsTimeHalf Service_Real_Time Table....416
AutoOutCallsOnHoldTimeToHalf Agent_Skill_Group_Half_Hour Table ....39 Service_Half_Hour Table....394 Skill_Group_Half_Hour Table....439	AutoOutCallsTimeTo5 Service_Real_Time Table....416
AutoOutCallsOnHoldTo5 Service_Real_Time Table....416	AutoOutCallsTimeToday Service_Real_Time Table....416
AutoOutCallsOnHoldToday Service_Real_Time Table....416	AutoOutCallsTimeToHalf Agent_Skill_Group_Half_Hour Table ....39 Service_Half_Hour Table....394 Skill_Group_Half_Hour Table....439
AutoOutCallsOnHoldToHalf Agent_Skill_Group_Half_Hour Table ....39 Service_Half_Hour Table....394 Skill_Group_Half_Hour Table....439	AutoOutCallsTo5 Service_Real_Time Table....416
AutoOutCallsTalkTime Agent_Skill_Group_Interval Table....51 Service_Interval Table....406 Skill_Group_Interval Table....457	Skill_Group_Real_Time Table....477
AutoOutCallsTalkTimeHalf Service_Real_Time Table....416	AutoOutCallsToday Service_Real_Time Table....416
AutoOutCallsTalkTimeTo5 Skill_Group_Real_Time Table....477	AutoOutCallsToHalf Agent_Skill_Group_Half_Hour Table ....39 Skill_Group_Half_Hour Table....439
AutoOutCallsTalkTimeTo5 Service_Real_Time Table....416	AutoRecordOnEmergency Agent_Desk_Settings Table ....18
AutoOutCallsTalkTimeToday Service_Real_Time Table....416	AutoRetrieve Cfg_Mngr_User/Desktop_Snap Table ....185
AutoOutCallsTalkTimeToHalf Agent_Skill_Group_Half_Hour Table ....39 Service_Half_Hour Table....394 Skill_Group_Half_Hour Table....439	Avail Skill_Group_Five_Minute Table....436 Skill_Group_Real_Time Table....477
AutoOutCallsTime Agent_Skill_Group_Interval Table....51	AvailableHoldoffDelay Peripheral Table....306 Skill_Group Table....432
	AvailableInMRD Agent_Real_Time Table ....34

AvailableInMRDTime	Route_Half_Hour Table....347
Agent_Interval Table....29	Service_Half_Hour Table....394
AvailableInMRDTimeToHalf	AvgDelayQNow
Agent_Half_Hour Table ....25	Service_Real_Time Table....416
AvailableTime	AvgDelayQNow
Galaxy_Agent_IGroup Table....238	Route_Five_Minute Table....344
AvailAfterIncoming	Route_Real_Time Table....352
Agent_Desk_Settings Table ....18	Service_Five_Minute Table....390
AvailAfterOutgoing	AvgDelayQToHalf
Agent_Desk_Settings Table ....18	Service_Half_Hour Table....394
AvailTime	AvgDelayQToHalf
Agent_Interval Table....29	Route_Half_Hour Table....347
Agent_Skill_Group_Interval Table....51	AvgDelayToHalf
Skill_Group_Interval Table....457	Application_Gateway_Half_Hour Table ....80
AvailTime	AvgHandledCallsTalkTime
Galaxy_Agent_Performance Table....240	Skill_Group_Interval Table....457
AvailTimeTo5	AvgHandledCallsTalkTimeTo5
Skill_Group_Five_Minute Table....436	Skill_Group_Real_Time Table....477
Skill_Group_Real_Time Table....477	AvgHandledCallsTalkTimeTo5
AvailTimeToHalf	Skill_Group_Five_Minute Table....436
Agent_Half_Hour Table ....25	AvgHandledCallsTalkTimeToHalf
AvailTimeToHalf	Skill_Group_Half_Hour Table....439
Agent_Skill_Group_Half_Hour Table ....39	AvgHandledCallsTime
Skill_Group_Half_Hour Table....439	Skill_Group_Interval Table....457
AvgDelayQ	AvgHandledCallsTimeTo5
Service_Interval Table....406	Skill_Group_Five_Minute Table....436
AvgDelayQAband	Skill_Group_Real_Time Table....477
Service_Interval Table....406	AvgHandledCallsTimeToHalf
AvgDelayQAbandTo5	Skill_Group_Half_Hour Table....439
Service_Real_Time Table....416	AvgHandleTime
AvgDelayQAbandTo5	Service_Interval Table....406
Route_Five_Minute Table....344	AvgHandleTimeTo5
Route_Real_Time Table....352	Service_Real_Time Table....416
Service_Five_Minute Table....390	AvgHandleTimeTo5
AvgDelayQAbandToHalf	Route_Five_Minute Table....344

Route_Real_Time Table....352	Service_Half_Hour Table....394
Service_Five_Minute Table....390	AvgTalkTime
AvgHandleTimeToHalf	Service_Interval Table....406
Route_Half_Hour Table....347	AvgTalkTimeTo5
AvgHandleTimeToHalf	Route_Five_Minute Table....344
Service_Half_Hour Table....394	Route_Real_Time Table....352
AvgRouterDelayQ	AvgTalkTimeTo5
Call_Type_Interval Table....109	Service_Real_Time Table....416
Call_Type_Skill_Group_Interval Table....131	AvgTalkTimeTo5
AvgRouterDelayQHalf	Service_Five_Minute Table....390
Call_Type_Real_Time Table ....142	AvgTalkTimeToHalf
AvgRouterDelayQNow	Service_Half_Hour Table....394
Call_Type_Real_Time Table ....142	AvgTalkTimeToHalf
AvgRouterDelayQTo5	Route_Half_Hour Table....347
Call_Type_Real_Time Table ....142	AWMinor
AvgRouterDelayQToday	Version Table....519
Call_Type_Real_Time Table ....142	AWType
AvgRouterDelayQToHalf	AWControl Table ....89
Call_Type_Half_Hour Table ....96	BadCallTag
Call_Type_Skill_Group_Half_Hour Table....122	Termination_Call_Detail Table....490
AvgRoutesInUseToHalf	BadRecords
Translation_Route_Half_Hour Table....504	Import_Rule_History Table....278
AvgRouteTimeToHalf	Import_Rule_Real_Time Table....279
Translation_Route_Half_Hour Table....504	BargeInCalls
AvgSpeedAnswer	Agent_Skill_Group_Interval Table....51
Service_Interval Table....406	Skill_Group_Interval Table....457
AvgSpeedAnswerTo5	BargeInCallsToHalf
Route_Real_Time Table....352	Agent_Skill_Group_Half_Hour Table ....39
AvgSpeedAnswerTo5	Skill_Group_Half_Hour Table....439
Service_Real_Time Table....416	BaseName
AvgSpeedAnswerTo5	View_Column Table....520
Route_Five_Minute Table....344	BaseSkillTargetID
Service_Five_Minute Table....390	Skill_Group Table....432
AvgSpeedAnswerToHalf	BaseTableName
Route_Half_Hour Table....347	ICR_View Table....270

BeganCallTypeDateTime	BucketIntervalID
Route_Call_Detail Table....338	ICR_Globals Table....264
BeganRoutingDateTime	Buf
Route_Call_Detail Table....338	Rename Table....336
BillRate	BusyCallback
Termination_Call_Detail Table....490	Campaign Table ....155
BinData	BusyCount
Application_Event Table ....73	Campaign_Query_Rule_Real_Time Table....172
Event Table....232	BusyDetect
BlindTransfersOut	Campaign_Query_Rule_Interval Table ....170
Service_Interval Table....406	Dialer_Interval Table....214
BlindTransfersOutToHalf	BusyDetectTo5
Route_Half_Hour Table....347	Campaign_Query_Rule_Real_Time Table....172
Service_Half_Hour Table....394	BusyDetectToday
Bool1	Dialer_Real_Time Table....219
Recurring_Schedule_Map Table....330	BusyDetectToHalf
Schedule_Import_Real_Time Table....369	Campaign_Query_Rule_Real_Time Table....172
Bool1	Dialer_Half_Hour Table....211
Schedule_Import Table....367	Dialer_Skill_Group_Half_Hour Table....223
Bool2	BusyDetectToHalf
Schedule_Import_Real_Time Table....369	Campaign_Query_Rule_Half_Hour Table ....166
Bool2	BusyOther
Recurring_Schedule_Map Table....330	Skill_Group_Five_Minute Table....436
Schedule_Import Table....367	Skill_Group_Real_Time Table....477
BreakTime	BusyOtherTime
Galaxy_Agent_IGroup Table....238	Agent_Skill_Group_Interval Table....51
Galaxy_Agent_Performance Table....240	Skill_Group_Interval Table....457
BucketIntervalID	BusyOtherTimeTo5
Call_Type_Interval Table....109	Skill_Group_Five_Minute Table....436
BucketIntervalID	Skill_Group_Real_Time Table....477
Bucket_Intervals Table ....93	BusyOtherTimeToHalf
Call_Type Table ....95	Agent_Skill_Group_Half_Hour Table ....39
Call_Type_Half_Hour Table ....96	Skill_Group_Half_Hour Table....439
Call_Type_Skill_Group_Interval Table....131	BusyRetryEnabled
Skill_Group_Interval Table....457	Campaign Table ....155

BusyTimer	Peripheral Table....306
Galaxy_Single_Trunk Table....257	
CallbackCount	CallCount
Dialer_Real_Time Table....219	Galaxy_Trunk_Call_Count Table....259
CallbackCount	CallCount
Campaign_Query_Rule_Interval Table ....170	Galaxy_Agent_Call_Count Table....237
Dialer_Interval Table....214	
CallBackCount	CallDelayAbandTime
Campaign_Query_Rule_Real_Time Table....172	Call_Type_Interval Table....109
CallbackCountTo5	Call_Type_Skill_Group_Interval Table....131
Campaign_Query_Rule_Real_Time Table....172	
CallbackCountToHalf	CallDelayAbandTimeHalf
Campaign_Query_Rule_Half_Hour Table ....166	Call_Type_Real_Time Table ....142
Campaign_Query_Rule_Real_Time Table....172	
Dialer_Half_Hour Table....211	CallDelayAbandTimeTo5
Dialer_Skill_Group_Half_Hour Table....223	Call_Type_Real_Time Table ....142
CallbackDateTime	CallDelayAbandTimeToday
Dialer_Detail Table....206	Call_Type_Real_Time Table ....142
CallbackMessages	CallDelayAbandTimeToHalf
Agent_Skill_Group_Interval Table....51	Call_Type_Half_Hour Table ....96
Skill_Group_Interval Table....457	Call_Type_Skill_Group_Half_Hour Table....122
CallbackMessagesTime	CallDisposition
Agent_Skill_Group_Interval Table....51	Termination_Call_Detail Table....490
Skill_Group_Interval Table....457	
CallbackMessagesTimeToHalf	CallDispositionFlag
Agent_Skill_Group_Half_Hour Table ....39	Termination_Call_Detail Table....490
Skill_Group_Half_Hour Table....439	
CallbackMessagesToHalf	CallDuration
Agent_Skill_Group_Half_Hour Table ....39	Dialer_Detail Table....206
Skill_Group_Half_Hour Table....439	Galaxy_DNIS Table....243
CallbackPhone	CallDuration
Dialer_Detail Table....206	Galaxy_PBX Table....255
CallbackTimeLimit	CalledPartyBusyTo5
Campaign Table ....155	Routing_Client_Five_Minute Table....359
CallControlVariableMap	CallEventReportTo5
	Routing_Client_Five_Minute Table....359
	CallGapTo5
	Routing_Client_Five_Minute Table....359
	CallGUID
	Dialer_Detail Table....206
	CallGUID

Termination_Call_Detail Table....490	CallsAbandonedToHalf
CallInProgress	Network_Trunk_Group_Half_Hour Table....296
Agent_Real_Time Table ....34	Trunk_Group_Half_Hour Table....509
CallLegID	CallsAbandQ
Network_Event_Detail Table....293	Service_Interval Table....406
CallOrdering	CallsAbandQHalf
Assignment_Queue Table....85	Route_Real_Time Table....352
CallReferenceID	CallsAbandQHalf
Termination_Call_Detail Table....490	Service_Real_Time Table....416
CallResult	CallsAbandQTo5
Dialer_Detail Table....206	Service_Real_Time Table....416
CallResultDetail	CallsAbandQTo5
Dialer_Detail Table....206	Route_Real_Time Table....352
CallRouterQueueTo5	CallsAbandQToday
Routing_Client_Five_Minute Table....359	Service_Real_Time Table....416
Calls	CallsAbandQToday
Script_Real_Time Table....382	Route_Five_Minute Table....344
CallsAbandoned	Route_Real_Time Table....352
Galaxy_Trunk_IGroup Table....260	Service_Five_Minute Table....390
CallsAbandoned	CallsAbandQToHalf
Galaxy_Gate Table....245	Service_Half_Hour Table....394
CallsAbandonedHalf	CallsAbandQToHalf
Network_Trunk_Group_Real_Time Table....298	Route_Half_Hour Table....347
CallsAbandonedHalf	CallsAnswered
Trunk_Group_Real_Time Table....511	Agent_Skill_Group_Interval Table....51
CallsAbandonedTo5	Call_Type_Interval Table....109
Dialer_Skill_Group_Real_Time Table....226	Call_Type_Skill_Group_Interval Table....131
CallsAbandonedToday	Service_Interval Table....406
Dialer_Skill_Group_Real_Time Table....226	Skill_Group_Interval Table....457
CallsAbandonedToday	CallsAnsweredHalf
Network_Trunk_Group_Real_Time Table....298	Call_Type_Real_Time Table ....142
CallsAbandonedToday	Service_Real_Time Table....416
Trunk_Group_Real_Time Table....511	CallsAnsweredHalf
CallsAbandonedToHalf	Route_Real_Time Table....352
Dialer_Skill_Group_Real_Time Table....226	CallsAnsweredTo5

Route_Real_Time Table....352	Call_Type_Real_Time Table ....142
Service_Five_Minute Table....390	CallsCancelledTo5
Skill_Group_Five_Minute Table....436	Dialer_Skill_Group_Real_Time Table....226
Skill_Group_Real_Time Table....477	CallsCancelledToday
CallsAnsweredTo5	Dialer_Skill_Group_Real_Time Table....226
Call_Type_Real_Time Table ....142	CallsCancelledToHalf
Service_Real_Time Table....416	Dialer_Skill_Group_Real_Time Table....226
CallsAnsweredTo5	CallSegmentTime
Route_Five_Minute Table....344	Termination_Call_Detail Table....490
CallsAnsweredToday	CallSegmentTime
Route_Real_Time Table....352	Route_Call_Detail Table....338
CallsAnsweredToday	CallsHandled
Call_Type_Real_Time Table ....142	Agent_Skill_Group_Interval Table....51
Route_Five_Minute Table....344	Call_Type_Interval Table....109
Service_Real_Time Table....416	Call_Type_Skill_Group_Interval Table....131
CallsAnsweredToday	Service_Interval Table....406
Service_Five_Minute Table....390	Skill_Group_Interval Table....457
CallsAnsweredToHalf	CallsHandled
Call_Type_Skill_Group_Half_Hour Table....122	Galaxy_Trunk_IGroup Table....260
CallsAnsweredToHalf	CallsHandledHalf
Call_Type_Half_Hour Table ....96	Call_Type_Half_Hour Table ....96
Route_Half_Hour Table....347	Route_Real_Time Table....352
Service_Half_Hour Table....394	CallsHandledHalf
CallsAnsweredToHalf	Call_Type_Real_Time Table ....142
Agent_Skill_Group_Half_Hour Table ....39	Service_Real_Time Table....416
Skill_Group_Half_Hour Table....439	CallsHandledNotRouted
CallsAtAgentNow	Call_Type_Skill_Group_Interval Table....131
Call_Type_Real_Time Table ....142	CallsHandledNotRoutedToHalf
CallsAttemptedTo5	Call_Type_Skill_Group_Half_Hour Table....122
Dialer_Skill_Group_Real_Time Table....226	CallsHandledTo5
CallsAttemptedToday	Route_Real_Time Table....352
Dialer_Skill_Group_Real_Time Table....226	Skill_Group_Five_Minute Table....436
CallsAttemptedToHalf	CallsHandledTo5
Dialer_Skill_Group_Real_Time Table....226	Call_Type_Real_Time Table ....142
CallsAtVRUNow	Service_Real_Time Table....416

Skill_Group_Real_Time Table....477	Route_Five_Minute Table....344
CallsHandledTo5	Route_Real_Time Table....352
Route_Five_Minute Table....344	Service_Five_Minute Table....390
Service_Five_Minute Table....390	
CallsHandledToday	CallsIncomingToHalf
Call_Type_Real_Time Table ....142	Service_Half_Hour Table....394
Service_Real_Time Table....416	
CallsHandledToday	CallsIncomingToHalf
Route_Five_Minute Table....344	Route_Half_Hour Table....347
Route_Real_Time Table....352	
Service_Five_Minute Table....390	CallsInHalf
CallsHandledToHalf	Network_Trunk_Group_Real_Time Table....298
Call_Type_Skill_Group_Half_Hour Table....122	
CallsHandledToHalf	CallsInHalf
Service_Half_Hour Table....394	Trunk_Group_Real_Time Table....511
CallsHandledToHalf	CallsInNow
Agent_Skill_Group_Half_Hour Table ....39	Network_Trunk_Group_Real_Time Table....298
Route_Half_Hour Table....347	
Skill_Group_Half_Hour Table....439	CallsInNow
CallsHeld	Service_Real_Time Table....416
Galaxy_Trunk_IGroup Table....260	
CallsHeld	CallsInNow
Galaxy_Gate Table....245	Trunk_Group_Real_Time Table....511
CallsIncoming	
Service_Interval Table....406	CallsInProgress
CallsIncomingHalf	Skill_Group_Real_Time Table....477
Route_Real_Time Table....352	
Service_Real_Time Table....416	CallsInProgress
CallsIncomingTo5	Peripheral_Real_Time Table....316
Script_Five_Minute Table....380	
CallsIncomingTo5	Scheduled_Target_Real_Time Table....376
Service_Real_Time Table....416	
CallsIncomingToday	Service_Real_Time Table....416
Service_Real_Time Table....416	CallsInProgress
CallsIncomingToday	Agent_Skill_Group_Real_Time Table....63
Service_Real_Time Table....416	
CallsIncomingToday	Route_Five_Minute Table....344
Service_Real_Time Table....416	
CallsInToHalf	Route_Real_Time Table....352
	Service_Five_Minute Table....390
CallsInToday	CallsInToday
	Network_Trunk_Group_Real_Time Table....298
CallsInToday	
	Trunk_Group_Real_Time Table....511
CallsInToHalf	
	Trunk_Group_Half_Hour Table....509
CallsInToHalf	

Network_Trunk_Group_Half_Hour Table....296	Route_Five_Minute Table....344
CallsLeftQTo5	Route_Real_Time Table....352
Service_Real_Time Table....416	Service_Five_Minute Table....390
CallsLeftQTo5	CallsOfferedToday
Call_Type_Real_Time Table ....142	Peripheral_Real_Time Table....316
CallsLeftQTo5	Service_Real_Time Table....416
Route_Five_Minute Table....344	CallsOfferedToday
Route_Real_Time Table....352	Call_Type_Real_Time Table ....142
Service_Five_Minute Table....390	CallsOfferedToday
CallsOffered	Route_Five_Minute Table....344
Call_Type_Interval Table....109	Route_Real_Time Table....352
Peripheral_Interval Table....313	Service_Five_Minute Table....390
Service_Interval Table....406	CallsOfferedToHalf
Skill_Group_Interval Table....457	Service_Half_Hour Table....394
CallsOfferedHalf	CallsOfferedToHalf
Call_Type_Half_Hour Table ....96	Peripheral_Half_Hour Table....310
Call_Type_Real_Time Table ....142	Route_Half_Hour Table....347
Peripheral_Real_Time Table....316	Skill_Group_Half_Hour Table....439
Service_Real_Time Table....416	CallsOnHold
CallsOfferedHalf	Call_Type_Interval Table....109
Route_Real_Time Table....352	Call_Type_Skill_Group_Interval Table....131
CallsOfferedNotRouted	CallsOnHoldToHalf
Call_Type_Skill_Group_Interval Table....131	Call_Type_Half_Hour Table ....96
CallsOfferedNotRoutedToHalf	Call_Type_Skill_Group_Half_Hour Table....122
Call_Type_Skill_Group_Half_Hour Table....122	CallsOut
CallsOfferedRouted	Service_Interval Table....406
Call_Type_Skill_Group_Interval Table....131	CallsOutHalf
CallsOfferedRoutedToHalf	Network_Trunk_Group_Real_Time Table....298
Call_Type_Skill_Group_Half_Hour Table....122	Service_Real_Time Table....416
CallsOfferedTo5	CallsOutHalf
Skill_Group_Real_Time Table....477	Trunk_Group_Real_Time Table....511
CallsOfferedTo5	CallsOutNow
Call_Type_Real_Time Table ....142	Network_Trunk_Group_Real_Time Table....298
Service_Real_Time Table....416	Service_Real_Time Table....416
CallsOfferedTo5	CallsOutNow

Trunk_Group_Real_Time Table....511	CallsQToHalf
CallsOutTo5	Route_Half_Hour Table....347
Service_Real_Time Table....416	CallsQueued
CallsOutToday	Skill_Group_Interval Table....457
Network_Trunk_Group_Real_Time Table....298	CallsQueuedNow
Service_Real_Time Table....416	Skill_Group_Real_Time Table....477
CallsOutToday	CallsQueuedToHalf
Trunk_Group_Real_Time Table....511	Skill_Group_Half_Hour Table....439
CallsOutToHalf	CallsReportedAgainstOther
Network_Trunk_Group_Half_Hour Table....296	Call_Type_Skill_Group_Interval Table....131
Service_Half_Hour Table....394	CallsReportedAgainstOtherToHalf
Trunk_Group_Half_Hour Table....509	Call_Type_Skill_Group_Half_Hour Table....122
CallsPerNode	CallsRequeried
Script_Five_Minute Table....380	Call_Type_Interval Table....109
CallsQ	Call_Type_Skill_Group_Interval Table....131
Service_Interval Table....406	CallsRequeriedToHalf
CallsQHandled	Call_Type_Half_Hour Table ....96
Call_Type_Interval Table....109	Call_Type_Skill_Group_Half_Hour Table....122
Call_Type_Skill_Group_Interval Table....131	CallsRONA
CallsQHandledToHalf	Call_Type_Interval Table....109
Call_Type_Skill_Group_Half_Hour Table....122	Call_Type_Skill_Group_Interval Table....131
CallsQHandledToHalf	CallsRONAHalf
Call_Type_Half_Hour Table ....96	Call_Type_Real_Time Table ....142
CallsQNow	CallsRONATo5
Service_Real_Time Table....416	Call_Type_Real_Time Table ....142
CallsQNow	CallsRONAToday
Route_Five_Minute Table....344	Call_Type_Real_Time Table ....142
Route_Real_Time Table....352	CallsRONAToHalf
Service_Five_Minute Table....390	Call_Type_Half_Hour Table ....96
CallsQNowTime	Call_Type_Skill_Group_Half_Hour Table....122
Route_Real_Time Table....352	CallsRouted
CallsQNowTime	Call_Type_Interval Table....109
Service_Real_Time Table....416	Service_Interval Table....406
CallsQToHalf	CallsRoutedHalf
Service_Half_Hour Table....394	Peripheral_Real_Time Table....316

Service_Real_Time Table....416	CallStatusZone2
CallsRoutedHalf	Dialer_Detail Table....206
Route_Real_Time Table....352	CallsTerminatedOther
CallsRoutedNonAgent	Service_Interval Table....406
Call_Type_Interval Table....109	CallsTerminatedOtherHalf
Call_Type_Skill_Group_Interval Table....131	Service_Real_Time Table....416
CallsRoutedNonAgentHalf	CallsTerminatedOtherTo5
Call_Type_Real_Time Table ....142	Service_Real_Time Table....416
CallsRoutedNonAgentTo5	CallsTerminatedOtherToday
Call_Type_Real_Time Table ....142	Service_Real_Time Table....416
CallsRoutedNonAgentToday	CallsTerminatedOtherToHalf
Call_Type_Real_Time Table ....142	Service_Half_Hour Table....394
CallsRoutedNonAgentToHalf	CallsTransferredIn
Call_Type_Skill_Group_Half_Hour Table....122	Galaxy_Gate Table....245
CallsRoutedNonAgentToHalf	CallsTransferredOut
Call_Type_Half_Hour Table ....96	Galaxy_Agent_IGroup Table....238
CallsRoutedTo5	Galaxy_Gate Table....245
Script_Five_Minute Table....380	CallTrace
CallsRoutedToday	Route_Call_Detail Table....338
Route_Five_Minute Table....344	CallTypeAbandonCallWaitTime
Service_Real_Time Table....416	ICR_Globals Table....264
CallsRoutedToday	CallTypeID
Call_Type_Real_Time Table ....142	Call_Type_Interval Table....109
Peripheral_Real_Time Table....316	Call_Type_Skill_Group_Half_Hour Table....122
CallsRoutedToday	Call_Type_Skill_Group_Interval Table....131
Route_Real_Time Table....352	Default_Call_Type Table....195
Service_Five_Minute Table....390	Dialed_Number_Map Table....200
CallsRoutedToHalf	CallTypeID
Call_Type_Half_Hour Table ....96	Call_Type_Half_Hour Table ....96
Call_Type_Real_Time Table ....142	Call_Type_Map Table ....121
Service_Half_Hour Table....394	Call_Type_Real_Time Table ....142
CallsRoutedToHalf	Route_Call_Detail Table....338
Route_Half_Hour Table....347	Termination_Call_Detail Table....490
CallStatusZone1	CallTypeID
Dialer_Detail Table....206	Call_Type Table ....95

CallTypeReportingDateTime	CancelledDetect
Termination_Call_Detail Table....490	Campaign_Query_Rule_Interval Table ....170
CallTypeServiceLevelThreshold	Dialer_Interval Table....214
ICR_Globals Table....264	CancelledDetectCount
CallTypeServiceLevelType	Campaign_Query_Rule_Real_Time Table....172
ICR_Globals Table....264	CancelledDetectHalf
CampaignID	Dialer_Real_Time Table....219
Campaign_Half_Hour Table....163	CancelledDetectTo5
Dialer_Detail Table....206	Campaign_Query_Rule_Real_Time Table....172
Dialer_Port_Real_Time Table....218	CancelledDetectToHalf
Dialer_Skill_Group_Real_Time Table....226	Campaign_Query_Rule_Real_Time Table....172
Skill_Group_Half_Hour Table....439	Dialer_Skill_Group_Half_Hour Table....223
Skill_Group_Interval Table....457	CancelledDetectToHalf
CampaignID	Campaign_Query_Rule_Half_Hour Table ....166
Agent_Real_Time Table ....34	Dialer_Half_Hour Table....211
Campaign_Query_Rule Table ....164	CancelRinging
Campaign_Query_Rule_Half_Hour Table ....166	Campaign Table ....155
Campaign_Query_Rule_Interval Table ....170	Category
Campaign_Query_Rule_Real_Time Table....172	Application_Event Table ....73
Campaign_Skill_Group Table ....180	Event Table....232
Campaign_Target_Sequence Table....182	CCDomainName
CampaignID	ICR_Globals Table....264
Campaign Table ....155	CCMinor
CampaignName	Version Table....519
Campaign Table ....155	CDPD
CampaignOutOfNumbers	Route_Call_Detail Table....338
Campaign_Query_Rule_Interval Table ....170	CED
CampaignOutOfNumbersToHalf	Route_Call_Detail Table....338
Campaign_Query_Rule_Half_Hour Table ....166	CED
CampaignPurposeType	Termination_Call_Detail Table....490
Campaign Table ....155	CEDWildCard
CampaignReportingDateTime	Dialed_Number_Map Table....200
Dialer_Detail Table....206	CentralControllerFileTime
CancelledCallRetryTime	Application_Event Table ....73
Campaign Table ....155	Event Table....232

CentralControllerTimeZone	Business_Entity Table....94
Application_Event Table ....73	Cfg_Mngr_View Table....188
CentralControllerTimeZone	Customer_Definition Table....194
Event Table....232	Dialed_Number Table....197
CentralControllerVirtualTime	Enterprise_Route Table....228
Event Table....232	Expanded_Call_Variable Table....234
CentralControllerVirtualTime	ICR_Globals Table....264
Application_Event Table ....73	ICR_Instance Table....267
ChangeStamp	ICR_Locks Table....268
Assignment_Queue Table....85	ICR_Node Table....269
Attribute Table....88	Import_Rule Table....273
Cfg_Mngr_Globals Table ....185	Media_Class Table....289
Cfg_Mngr_User/Desktop_Snap Table ....185	Network_Vru Table....300
Cfg_Mngr_User_Menu Table....187	Network_Vru_Script Table....302
Cfg_Mngr_User_Settings Table....187	Peripheral Table....306
Class_Security Table....190	Peripheral_Monitor Table....315
Configuration_Limit Table....192	Person Table....322
Device_Target Table....196	Physical_Interface_Controller Table....324
Dial_Number_Plan Table....201	Query_Rule Table....325
Enterprise_Service Table....229	Reason_Code Table ....328
Enterprise_Skill_Group Table....231	Region_Prefix Table....333
Feature_Control_Set Table....236	Region_View Table....334
Import_Schedule Table....281	Route Table....336
Label Table....281	Routing_Client Table....357
Machine_Info....287	Schedule Table....365
Master_Script Table....288	Schedule_Map Table....371
Media_Routing_Domain Table....290	Schedule_Report Table....372
Network_Trunk_Group Table....295	Schedule_Report_Input Table....373
Network_Vru_Bank Table....301	Schedule_Source Table....374
Object_Security Table....305	Scheduled_Target Table....375
Peripheral_Target Table....320	Script Table....377
Region Table....332	Script_Print_Control Table....381
Trunk Table....506	Script_Table_Column Table....384
ChangeStamp	Service Table....386
Blended_Agent_Options Table ....90	Service_Array Table....388

Translation_Route Table....503	Class_Access_Xref Table....189
Trunk_Group Table....507	ClassID
User_Formula Table....513	Class_List Table....190
User_Group Table....514	ClassID_To_ObjectType Table....191
User_Group_Member Table....516	ClassID
User_Variable Table....518	Class_Access_Xref Table....189
View_Column Table....520	Class_Security Table....190
Vru_Currency Table....521	ClassSecurityID
Vru_Locale Table....524	Class_Security Table....190
ChangeStamp	CLIDMaskingDigitsToMask
Agent Table....15	ICR_Globals Table....264
Agent_Desk_Settings Table ....18	CLIDMaskingEnable
Agent_Distribution Table ....23	ICR_Globals Table....264
Agent_Team Table....70	CLIDMaskingMaskCharacter
Announcement Table ....72	ICR_Globals Table....264
Application_Gateway Table....75	CLIDMaskingRemoveDigits
Application_Gateway_Globals Table ....78	ICR_Globals Table....264
Application_Instance Table ....81	ClientType
Application_Path Table....82	Logical_Interface_Controller Table....286
Bucket_Intervals Table ....93	Peripheral Table....306
Call_Type Table ....95	Routing_Client Table....357
Campaign Table ....155	CloseAbandonedToIVR
Dialer Table....202	Campaign Table ....155
ICR_View Table....270	ClosedCount
Logical_Interface_Controller Table....286	Campaign_Query_Rule_Real_Time Table....172
Script_Table Table....383	Color
Skill_Group Table....432	Region_View_Member Table....335
Vru_Defaults Table....522	ColumnName
ChildNodeID	Script_Table_Column Table....384
Cfg_Mngr_View Table....188	ColumnNumber
CircuitProvider	View_Column Table....520
Trunk Table....506	Command
CircularRouteResponsesTo5	Application_Gateway_Connection Table....76
Routing_Client_Five_Minute Table....359	CommandParam
ClassAccessXrefID	Application_Gateway_Connection Table....76

Comment	<a href="#">Termination_Call_Detail Table....490</a>
Region_Info Table....332	<a href="#">ConfigChangedBySystemName</a>
CompanyName	<a href="#">AWControl Table ....89</a>
ICR_Globals Table....264	<a href="#">ConfigChangedByUserName</a>
CompatibleECCPayloadRules	<a href="#">AWControl Table ....89</a>
ICR_Globals Table....264	<a href="#">ConfigErrorsToHalf</a>
ComputerName	<a href="#">Translation_Route_Half_Hour Table....504</a>
Dialer Table....202	<a href="#">ConfigLimitCurrentValue</a>
ConferencedInCalls	<a href="#">Configuration_Limit Table....192</a>
Agent_Skill_Group_Interval Table....51	<a href="#">ConfigLimitDefaultValue</a>
Skill_Group_Interval Table....457	<a href="#">Configuration_Limit Table....192</a>
ConferencedInCallsTime	<a href="#">ConfigLimitID</a>
Agent_Skill_Group_Interval Table....51	<a href="#">Configuration_Limit Table....192</a>
Skill_Group_Interval Table....457	<a href="#">ConfigLimitName</a>
ConferencedInCallsTimeToHalf	<a href="#">Configuration_Limit Table....192</a>
Agent_Skill_Group_Half_Hour Table ....39	<a href="#">ConfigMessage</a>
ConferencedInCallsTimeToHalf	<a href="#">Config_Message_Log Table....193</a>
Skill_Group_Half_Hour Table....439	<a href="#">ConfigMessagesTo5</a>
ConferencedInCallsToHalf	<a href="#">Logger_Meters Table....284</a>
Agent_Skill_Group_Half_Hour Table ....39	<a href="#">ConfigParam</a>
ConferencedInCallsToHalf	<a href="#">Agent Table....15</a>
Skill_Group_Half_Hour Table....439	<a href="#">ConfigParam</a>
ConferencedOutCalls	<a href="#">Service Table....386</a>
Agent_Skill_Group_Interval Table....51	<a href="#">Skill_Group Table....432</a>
Skill_Group_Interval Table....457	<a href="#">ConfigParam</a>
ConferencedOutCallsTime	<a href="#">Campaign Table ....155</a>
Agent_Skill_Group_Interval Table....51	<a href="#">Campaign_Skill_Group Table ....180</a>
Skill_Group_Interval Table....457	<a href="#">Campaign_Target_Sequence Table....182</a>
ConferencedOutCallsTimeToHalf	<a href="#">Device_Target Table....196</a>
Agent_Skill_Group_Half_Hour Table ....39	<a href="#">Dialer Table....202</a>
Skill_Group_Half_Hour Table....439	<a href="#">ICR_Node Table....269</a>
ConferencedOutCallsToHalf	<a href="#">Logical_Interface_Controller Table....286</a>
Agent_Skill_Group_Half_Hour Table ....39	<a href="#">Network_Vru_Script Table....302</a>
Skill_Group_Half_Hour Table....439	<a href="#">Peripheral Table....306</a>
ConferenceTime	<a href="#">Routing_Client Table....357</a>

Trunk_Group Table....507	Dialer_Interval Table....214
ConnectInfo	ContactsDialedToday
Application_Gateway_Connection Table....76	Dialer_Real_Time Table....219
ConnectTo5	ContactsDialedToHalf
Routing_Client_Five_Minute Table....359	Dialer_Half_Hour Table....211
ConsultativeCalls	Dialer_Real_Time Table....219
Agent_Skill_Group_Interval Table....51	ContactTableName
Skill_Group_Interval Table....457	Import_Rule Table....273
ConsultativeCallsTime	ControllerConfigChangeKey
Agent_Skill_Group_Interval Table....51	AWControl Table ....89
Skill_Group_Interval Table....457	ControllerConfigChangeTime
ConsultativeCallsTimeToHalf	AWControl Table ....89
Agent_Skill_Group_Half_Hour Table ....39	CPAAnalysisPeriod
Skill_Group_Half_Hour Table....439	Blended_Agent_Options Table ....90
ConsultativeCallsToHalf	Campaign Table ....155
Agent_Skill_Group_Half_Hour Table ....39	Dialer Table....202
Skill_Group_Half_Hour Table....439	CPAJitterBufferDelay
ConsultOutCalls	Dialer Table....202
Agent_Skill_Group_Interval Table....51	CPAJitterBufferDelay
ConsultOutCalls	Blended_Agent_Options Table ....90
Skill_Group_Interval Table....457	CPAMaxTermToneAnalysis
ConsultOutCallsTime	Dialer Table....202
Agent_Skill_Group_Interval Table....51	CPAMaxTermToneAnalysis
ConsultOutCallsTime	Blended_Agent_Options Table ....90
Skill_Group_Interval Table....457	Campaign Table ....155
ContactsAttempted	CPAMaxTimeAnalysis
Campaign_Query_Rule_Interval Table ....170	Dialer Table....202
ContactsAttemptedTo5	CPAMaxTimeAnalysis
Campaign_Query_Rule_Real_Time Table....172	Blended_Agent_Options Table ....90
ContactsAttemptedToHalf	Campaign Table ....155
Campaign_Query_Rule_Real_Time Table....172	CPAMinimumValidSpeech
Dialer_Skill_Group_Half_Hour Table....223	Campaign Table ....155
ContactsAttemptedToHalf	CPAMinimumValidSpeechTime
Campaign_Query_Rule_Half_Hour Table ....166	Blended_Agent_Options Table ....90
ContactsDialed	Dialer Table....202

CPAMinSilencePeriod	CustomerAbandonDetect
Blended_Agent_Options Table ....90	Campaign_Query_Rule_Interval Table ....170
Campaign Table ....155	Dialer_Interval Table....214
Dialer Table....202	CustomerAbandonDetectCount
CPARecordWaveFile	Campaign_Query_Rule_Real_Time Table....172
Dialer Table....202	CustomerAbandonDetectHalf
CpuTime	Dialer_Real_Time Table....219
Script_Real_Time Table....382	CustomerAbandonDetectTo5
CTDelayAbandTime	Campaign_Query_Rule_Real_Time Table....172
Call_Type_Interval Table....109	CustomerAbandonDetectToHalf
CTDelayAbandTimeHalf	Campaign_Query_Rule_Real_Time Table....172
Call_Type_Real_Time Table ....142	Dialer_Half_Hour Table....211
CTDelayAbandTimeTo5	Dialer_Skill_Group_Half_Hour Table....223
Call_Type_Real_Time Table ....142	CustomerAbandonDetectToHalf
CTDelayAbandTimeToday	Campaign_Query_Rule_Half_Hour Table ....166
Call_Type_Real_Time Table ....142	CustomerAccountNumber
CTDelayAbandTimeToHalf	Agent_Real_Time Table ....34
Call_Type_Half_Hour Table ....96	CustomerDefinitionID
CTI_Status	Customer_Definition Table....194
Dialer_Real_Time Table....219	Customer_Options Table....195
CTIServerOnline	Dialed_Number Table....197
Peripheral_Real_Time Table....316	CustomerDefinitionID
CTVRUTime	Call_Type Table ....95
Call_Type_Interval Table....109	Label Table....281
CTVRUTimeToHalf	Master_Script Table....288
Call_Type_Half_Hour Table ....96	Network_Vru_Script Table....302
CurrencyID	Scheduled_Target Table....375
Vru_Currency Table....521	User_Group Table....514
Vru_Defaults Table....522	CustomerId
CurrencyName	Application_Event Table ....73
Vru_Currency Table....521	Event Table....232
CurrentHalfHour	CustomerIdShadow
Peripheral_Real_Time Table....316	Master_Script Table....288
CurrentVersion	CustomerNotHomeCallback
Master_Script Table....288	Campaign Table ....155

CustomerNotHomeCount	Call_Type_Interval Table....109
Campaign_Query_Rule_Real_Time Table....172	Call_Type_Skill_Group_Half_Hour Table....122
Dialer_Real_Time Table....219	Call_Type_Skill_Group_Interval Table....131
CustomerNotHomeCount	Campaign_Half_Hour Table....163
Campaign_Query_Rule_Interval Table ....170	Dialer_Detail Table....206
Dialer_Interval Table....214	Dialer_Port_Real_Time Table....218
CustomerNotHomeCountTo5	Dialer_Skill_Group_Half_Hour Table....223
Campaign_Query_Rule_Real_Time Table....172	Dialer_Skill_Group_Real_Time Table....226
CustomerNotHomeCountToHalf	Logger_Meters Table....284
Campaign_Query_Rule_Half_Hour Table ....166	Network_Trunk_Group_Half_Hour Table....296
Campaign_Query_Rule_Real_Time Table....172	Peripheral_Interval Table....313
Dialer_Half_Hour Table....211	Route_Five_Minute Table....344
Dialer_Skill_Group_Half_Hour Table....223	Schedule_Import Table....367
CustomerPhoneNumber	Service_Interval Table....406
Agent_Real_Time Table ....34	Skill_Group_Interval Table....457
CustomerPortTimeToday	Translation_Route_Half_Hour Table....504
Dialer_Real_Time Table....219	Date <b>Time</b>
CustomerPortTimeToHalf	Agent_Event_Detail Table ....24
Dialer_Real_Time Table....219	Agent_Half_Hour Table ....25
CustomerTimeZone	Agent_Real_Time Table ....34
Dialer_Detail Table....206	Agent_Skill_Group_Half_Hour Table ....39
DataFld	Agent_Skill_Group_Real_Time Table....63
ICR_Locks Table....268	Application_Gateway_Half_Hour Table ....80
DataMessagesTo5	Call_Type_Half_Hour Table ....96
Logger_Meters Table....284	Call_Type_Real_Time Table ....142
DataPagesAllocated	Campaign_Query_Rule_Half_Hour Table ....166
Logger_Meters Table....284	Campaign_Query_Rule_Interval Table ....170
DataPagesUsed	Campaign_Query_Rule_Real_Time Table....172
Logger_Meters Table....284	Dialer_Half_Hour Table....211
DataType	Dialer_Interval Table....214
User_Variable Table....518	Dialer_Real_Time Table....219
DateTime	Galaxy_Transaction_Code Table....258
Agent_Interval Table....29	Import_Log Table....272
Agent_Skill_Group_Interval Table....51	Logger_Admin Table ....283
Agent_State_Trace Table....64	Network_Trunk_Group_Real_Time Table....298

Peripheral_Real_Time Table....316	Script Table....377
Physical_Controller_Half_Hour Table....323	Script_Five_Minute Table....380
Recovery Table....329	Script_Real_Time Table....382
Route_Call_Detail Table....338	Service_Five_Minute Table....390
Routing_Client_Five_Minute Table....359	Skill_Group_Half_Hour Table....439
Schedule_Import_Real_Time Table....369	Termination_Call_Variable Table....502
Script_Queue_Real_Time Table....381	Trunk_Group_Five_Minute Table....508
Service_Half_Hour Table....394	Trunk_Group_Real_Time Table....511
Service_Real_Time Table....416	DateTime1
Skill_Group_Five_Minute Table....436	Schedule_Import_Real_Time Table....369
Skill_Group_Real_Time Table....477	DateTime1
Termination_Call_Detail Table....490	Schedule_Import Table....367
Trunk_Group_Half_Hour Table....509	DateTime2
DateTime	Schedule_Import Table....367
Application_Path_Real_Time Table ....84	Schedule_Import_Real_Time Table....369
Config_Message_Log Table....193	DateTime3
Galaxy_Agent_Call_Count Table....237	Schedule_Import Table....367
Galaxy_Agent_IGroup Table....238	Schedule_Import_Real_Time Table....369
Galaxy_Alarm Table....242	DateTimeLastModeChange
Galaxy_DNIS Table....243	Agent_Real_Time Table ....34
Galaxy_Gate Table....245	DateTimeLastStateChange
Galaxy_Gate_Delayed_Call Table....248	Agent_Real_Time Table ....34
Galaxy_Overflow Table....251	DateTimeLastStateChange
Galaxy_PBX Table....255	Agent_Skill_Group_Real_Time Table....63
Galaxy_Single_Trunk Table....257	DateTimeLogin
Galaxy_Trunk_Call_Count Table....259	Agent_Real_Time Table ....34
Galaxy_Trunk_IGroup Table....260	DateTimeLogin
ICR_Locks Table....268	Agent_Skill_Group_Real_Time Table....63
Import_Rule_Real_Time Table....279	DateTimeStart
Network_Event_Detail Table....293	Import_Rule_Real_Time Table....279
Peripheral_Half_Hour Table....310	DateTimeTaskLevelChange
Route_Call_Variable Table....343	Agent_Real_Time Table ....34
Route_Half_Hour Table....347	DayFlags
Route_Real_Time Table....352	Admin_Script_Schedule_Map Table....13
Scheduled_Target_Real_Time Table....376	DayFlags

Recurring_Schedule_Map Table....330	Agent_Half_Hour Table ....25
DaylightSavingsEnabled	Agent_Skill_Group_Half_Hour Table ....39
Region_Prefix Table....333	Application_Gateway_Half_Hour Table ....80
DayOfMonth	Call_Type_Half_Hour Table ....96
Admin_Script_Schedule_Map Table....13	Campaign_Query_Rule_Interval Table ....170
DayOfMonth	Dialer_Half_Hour Table....211
Import_Rule Table....273	Dialer_Interval Table....214
Recurring_Schedule_Map Table....330	Network_Trunk_Group_Half_Hour Table....296
DayPosition	Peripheral_Half_Hour Table....310
Admin_Script_Schedule_Map Table....13	Physical_Controller_Half_Hour Table....323
DayPosition	Route_Call_Detail Table....338
Recurring_Schedule_Map Table....330	Route_Half_Hour Table....347
DayType	Skill_Group_Half_Hour Table....439
Admin_Script_Schedule_Map Table....13	Termination_Call_Variable Table....502
Recurring_Schedule_Map Table....330	Trunk_Group_Half_Hour Table....509
DbDateTime	DecimalPlaces
Agent_Interval Table....29	Import_Rule_Clause Table....277
Agent_Skill_Group_Interval Table....51	DefaultCallTypeID
Call_Type_Interval Table....109	ICR_Globals Table....264
Call_Type_Skill_Group_Half_Hour Table....122	DefaultDevicePortAddress
Call_Type_Skill_Group_Interval Table....131	Agent_Desk_Settings Table ....18
Campaign_Half_Hour Table....163	DefaultEntry
Campaign_Query_Rule_Half_Hour Table ....166	Skill_Group Table....432
Dialer_Detail Table....206	DefaultMRDomainID
Dialer_Skill_Group_Half_Hour Table....223	Routing_Client Table....357
Peripheral_Interval Table....313	DefaultNetworkTargetID
Service_Half_Hour Table....394	ICR_Globals Table....264
Service_Interval Table....406	DefaultValue
Skill_Group_Interval Table....457	Attribute Table....88
Translation_Route_Half_Hour Table....504	DelayAgentAbandTime
DbDateTime	Call_Type_Interval Table....109
Route_Call_Variable Table....343	Call_Type_Skill_Group_Interval Table....131
Termination_Call_Detail Table....490	DelayAgentAbandTimeHalf
DbDateTime	Call_Type_Real_Time Table ....142
Agent_Event_Detail Table ....24	DelayAgentAbandTimeTo5

Call_Type_Real_Time Table ....142	DelayTimeToAbandoned
DelayAgentAbandTimeToday	Galaxy_Gate Table....245
Call_Type_Real_Time Table ....142	DelayTimeToHandle
DelayAgentAbandTimeToHalf	Galaxy_Gate Table....245
Call_Type_Half_Hour Table ....96	Deleted
Call_Type_Skill_Group_Half_Hour Table....122	Dialed_Number Table....197
DelayBeforeQueue	Expanded_Call_Variable Table....234
Peripheral_Target Table....320	Routing_Client Table....357
DelayQAbandTime	Deleted
Call_Type_Interval Table....109	Campaign Table ....155
Call_Type_Skill_Group_Interval Table....131	Dialer Table....202
Service_Interval Table....406	Import_Rule Table....273
DelayQAbandTimeHalf	Logical_Interface_Controller Table....286
Call_Type_Half_Hour Table ....96	Peripheral Table....306
Call_Type_Real_Time Table ....142	Physical_Interface_Controller Table....324
DelayQAbandTimeTo5	Route Table....336
Service_Real_Time Table....416	Service Table....386
DelayQAbandTimeTo5	Trunk_Group Table....507
Call_Type_Real_Time Table ....142	Deleted
Route_Real_Time Table....352	Agent Table....15
DelayQAbandTimeToday	Bucket_Intervals Table ....93
Call_Type_Real_Time Table ....142	Call_Type Table ....95
DelayQAbandTimeToHalf	Person Table....322
Call_Type_Skill_Group_Half_Hour Table....122	Query_Rule Table....325
DelayQAbandTimeToHalf	Reason_Code Table ....328
Route_Half_Hour Table....347	Schedule Table....365
Service_Half_Hour Table....394	Script Table....377
DelayQTime	Skill_Group Table....432
Service_Interval Table....406	DepartmentNumber
DelayQTimeToHalf	Galaxy_PBX Table....255
Service_Half_Hour Table....394	Description
DelayQTimeToHalf	Admin_Script_Schedule_Map Table....13
Route_Half_Hour Table....347	Agent_Attribute Table....18
DelayTime	Agent_Targeting_Rule Table....67
Termination_Call_Detail Table....490	Assignment_Queue Table....85

Assignment_Queue_Attribute Table....86	Dialer Table....202
Attribute Table....88	Enterprise_Route Table....228
Configuration_Limit Table....192	Enterprise_Service Table....229
Device_Target Table....196	Enterprise_Skill_Group Table....231
Dialed_Number Table....197	Expanded_Call_Variable Table....234
Logical_Interface_Controller Table....286	Feature_Control_Set Table....236
Machine_Info....287	Galaxy_Transaction_Code Table....258
Master_Script Table....288	ICR_Instance Table....267
Network_Vru Table....300	ICR_Node Table....269
Network_Vru_Script Table....302	ICR_View Table....270
Object_List Table....304	Import_Schedule Table....281
Physical_Interface_Controller Table....324	Label Table....281
Reason_Code Table ....328	Media_Class Table....289
Route Table....336	Media_Routing_Domain Table....290
Description	Network_Trunk_Group Table....295
Dialed_Number_Map Table....200	Peripheral Table....306
Schedule_Map Table....371	Peripheral_Target Table....320
Script_Table_Column Table....384	Person Table....322
Service Table....386	Query_Rule Table....325
Description	Region Table....332
Agent Table....15	Region_View Table....334
Agent_Desk_Settings Table ....18	Routing_Client Table....357
Agent_Team Table....70	Schedule Table....365
Announcement Table ....72	Schedule_Report Table....372
Application_Gateway Table....75	Schedule_Report_Input Table....373
Application_Gateway_Connection Table....76	Schedule_Source Table....374
Application_Instance Table ....81	Scheduled_Target Table....375
Application_Path Table....82	Script Table....377
Business_Entity Table....94	Script_Table Table....383
Call_Type Table ....95	Service_Array Table....388
Call_Type_Map Table ....121	Skill_Group Table....432
Campaign Table ....155	Translation_Route Table....503
Class_List Table....190	Trunk_Group Table....507
Customer_Definition Table....194	User_Formula Table....513
Dial_Number_Plan Table....201	User_Group Table....514

User_Variable Table....518	DialEndMinutes
View_Column Table....520	Blended_Agent_Options Table ....90
Vru_Defaults Table....522	
DesktopSnapShotID	DialerID
Cfg_Mngr_App_Snapshot_State Table ....183	Dialer Table....202
Cfg_Mngr_User/Desktop_Snap Table ....185	Dialer_Detail Table....206
Cfg_Mngr_User_Menu Table....187	Dialer_Port_Map Table....217
DesktopSnapShotName	Dialer_Port_Real_Time Table....218
Cfg_Mngr_User/Desktop_Snap Table ....185	Dialer_Skill_Group_Half_Hour Table....223
Destination	Dialer_Skill_Group_Real_Time Table....226
Agent_Real_Time Table ....34	DialerID
DestinationTo5	Dialer_Half_Hour Table....211
Routing_Client_Five_Minute Table....359	Dialer_Interval Table....214
DeviceAddressType	Dialer_Real_Time Table....219
Device_Target Table....196	DialerName
DeviceTargetType	Dialer Table....202
Device_Target Table....196	DialerSkillGroupEnabled
DialedNumber	Dialer_Skill_Group_Half_Hour Table....223
Campaign_Skill_Group Table ....180	Dialer_Skill_Group_Real_Time Table....226
DialedNumberID	DialerSkillGroupMode
Dialed_Number Table....197	Dialer_Skill_Group_Half_Hour Table....223
Dialed_Number_Map Table....200	Dialer_Skill_Group_Real_Time Table....226
Dial_Number_Plan Table....201	DialerSkillGroupType
DialedNumberID	Dialer_Skill_Group_Half_Hour Table....223
Agent_Team Table....70	Dialer_Skill_Group_Real_Time Table....226
Dialed_Number_Label Table....199	DialerStatus
DialedNumberID	Dialer_Real_Time Table....219
Route_Call_Detail Table....338	DialerType
DialedNumberLabelMapPresent	Dialer Table....202
Routing_Client Table....357	DialingListID
DialedNumberString	Dialer_Detail Table....206
Dialed_Number Table....197	DialingMode
Route_Call_Detail Table....338	Dialer_Detail Table....206
DialEndHours	DialingTime
Blended_Agent_Options Table ....90	Dialer_Interval Table....214
	DialingTimeToHalf

Dialer_Half_Hour Table....211	
DialNumberPlanID	DNIS
Dial_Number_Plan Table....201	Galaxy_DNIS Table....243
DialNumberPlanType	Peripheral_Target Table....320
Dial_Number_Plan Table....201	DomainName
DialogErrorConfTo5	User_Group Table....514
Routing_Client_Five_Minute Table....359	DomainName
DialogFailTo5	ICR_Node Table....269
Routing_Client_Five_Minute Table....359	Double1
DialStartHours	Schedule_Import Table....367
Blended_Agent_Options Table ....90	Double1
DialStartMinutes	Schedule_Import_Real_Time Table....369
Blended_Agent_Options Table ....90	Double10
DialString	Schedule_Import Table....367
Dial_Number_Plan Table....201	Double10
DialToneDetectEnabled	Schedule_Import_Real_Time Table....369
Dialer Table....202	Double2
DigitsDialed	Schedule_Import Table....367
Termination_Call_Detail Table....490	Schedule_Import_Real_Time Table....369
Direction	Double3
Agent_Real_Time Table ....34	Schedule_Import Table....367
Direction	Schedule_Import_Real_Time Table....369
Agent_State_Trace Table....64	Double4
DisableCPA	Schedule_Import Table....367
Campaign Table ....155	Double4
DiscardedCallsTo5	Schedule_Import_Real_Time Table....369
Routing_Client_Five_Minute Table....359	Double5
DisconnectTo5	Schedule_Import Table....367
Routing_Client_Five_Minute Table....359	Schedule_Import_Real_Time Table....369
DistributorSiteName	Double6
Agent_Distribution Table ....23	Schedule_Import Table....367
DMPIInServiceTimeToHalf	Schedule_Import_Real_Time Table....369
Physical_Controller_Half_Hour Table....323	Double7
DNIS	Schedule_Import Table....367
Termination_Call_Detail Table....490	Schedule_Import_Real_Time Table....369

Double8	Dword5
<a href="#">Schedule_Import Table</a> ....367	<a href="#">Application_Event Table</a> ....73
<a href="#">Schedule_Import_Real_Time Table</a> ....369	
Double9	ECCArray
<a href="#">Schedule_Import Table</a> ....367	<a href="#">Expanded_Call_Variable Table</a> ....234
<a href="#">Schedule_Import_Real_Time Table</a> ....369	
DSTLocation	ECCPayloadID
<a href="#">Campaign Table</a> ....155	<a href="#">Network_Vru Table</a> ....300
DTMFTermKey	<a href="#">Route_Call_Detail Table</a> ....338
<a href="#">Vru_Defaults Table</a> ....522	<a href="#">Termination_Call_Detail Table</a> ....490
Duration	ECCValue
<a href="#">Termination_Call_Detail Table</a> ....490	<a href="#">Route_Call_Variable Table</a> ....343
Duration	<a href="#">Termination_Call_Variable Table</a> ....502
<a href="#">Agent_Event_Detail Table</a> ....24	EdgeDetectEnabled
<a href="#">Campaign_Query_Rule Table</a> ....164	<a href="#">Campaign Table</a> ....155
<a href="#">Network_Event_Detail Table</a> ....293	Edit
DurationEnabled	<a href="#">View_Column Table</a> ....520
<a href="#">Campaign_Query_Rule Table</a> ....164	ElapsedTime
Dword1	<a href="#">Script_Real_Time Table</a> ....382
<a href="#">Application_Event Table</a> ....73	EmergencyAssists
<a href="#">Event Table</a> ....232	<a href="#">Agent_Skill_Group_Interval Table</a> ....51
Dword2	<a href="#">Skill_Group_Interval Table</a> ....457
<a href="#">Event Table</a> ....232	EmergencyAssistsToHalf
Dword2	<a href="#">Agent_Skill_Group_Half_Hour Table</a> ....39
<a href="#">Application_Event Table</a> ....73	<a href="#">Skill_Group_Half_Hour Table</a> ....439
Dword3	EmergencyCallMethod
<a href="#">Event Table</a> ....232	<a href="#">Agent_Desk_Settings Table</a> ....18
Dword3	EMSMessagesTo5
<a href="#">Application_Event Table</a> ....73	<a href="#">Logger_Meters Table</a> ....284
Dword4	Enabled
<a href="#">Event Table</a> ....232	<a href="#">Query_Rule Table</a> ....325
Dword4	Enabled
<a href="#">Application_Event Table</a> ....73	<a href="#">Agent_Distribution Table</a> ....23
Dword5	<a href="#">Campaign Table</a> ....155
<a href="#">Event Table</a> ....232	<a href="#">Dialer Table</a> ....202
	<a href="#">Expanded_Call_Variable Table</a> ....234
	<a href="#">Import_Rule Table</a> ....273

EnableExpandedCallContext	
	ICR_Globals Table....264
EnableHHThrottle	
	ICR_Globals Table....264
EnableMediaTermination	
	Campaign Table ....155
EnableRecordWaveFile	
	Campaign Table ....155
Encryption	
	Application_Gateway Table....75
EndDateTime	
	Import_Rule_History Table....278
EndDay	
	Admin_Script_Schedule_Map Table....13
EndDay	
	Recurring_Schedule_Map Table....330
EndHour	
	Admin_Script_Schedule_Map Table....13
EndHour	
	Recurring_Schedule_Map Table....330
EndHours	
	Campaign_Query_Rule Table ....164
EndMinute	
	Admin_Script_Schedule_Map Table....13
EndMinute	
	Recurring_Schedule_Map Table....330
EndMinutes	
	Campaign_Query_Rule Table ....164
EndMonth	
	Admin_Script_Schedule_Map Table....13
	Recurring_Schedule_Map Table....330
EndSecond	
	Admin_Script_Schedule_Map Table....13
EndSecond	
	Recurring_Schedule_Map Table....330
EndTime	
	Logger_Admin Table ....283
EndYear	
	Admin_Script_Schedule_Map Table....13
EndYear	
	Recurring_Schedule_Map Table....330
EntensionNumber	
	Galaxy_PBX Table....255
EnterpriseName	
	Agent_Targeting_Rule Table....67
	Assignment_Queue Table....85
	Attribute Table....88
	Customer_Definition Table....194
	Enterprise_Service Table....229
	Expanded_Call_Variable Table....234
	Logical_Interface_Controller Table....286
	Media_Class Table....289
	Network_Vru Table....300
	Peripheral Table....306
	Schedule Table....365
	Script_Table Table....383
EnterpriseName	
	Agent_Desk_Settings Table ....18
	Agent_Team Table....70
	Application_Instance Table ....81
	Application_Path Table....82
	Dialed_Number Table....197
	Enterprise_Route Table....228
	Enterprise_Skill_Group Table....231
	Feature_Control_Set Table....236
	ICR_Node Table....269
	Master_Script Table....288
	Network_Trunk_Group Table....295
	Physical_Interface_Controller Table....324

Region Table....332	Enterprise_Skill_Group Table....231
Region_View Table....334	EntityID
Routing_Client Table....357	Enterprise_Service Table....229
Schedule_Report Table....372	EntityID
Scheduled_Target Table....375	Business_Entity Table....94
Service Table....386	Master_Script Table....288
EnterpriseName	EntityID
Agent Table....15	Enterprise_Route Table....228
Announcement Table ....72	Enterprise_Skill_Group Table....231
Application_Gateway Table....75	Schedule Table....365
Bucket_Intervals Table ....93	Schedule_Report Table....372
Call_Type Table ....95	Schedule_Source Table....374
Device_Target Table....196	EntityName
ICR_Instance Table....267	Business_Entity Table....94
ICR_View Table....270	EquationString
Media_Routing_Domain Table....290	User_Formula_Equation Table....513
Network_Vru_Script Table....302	ErrorCount
Route Table....336	Call_Type_Interval Table....109
Service_Array Table....388	Call_Type_Skill_Group_Interval Table....131
Skill_Group Table....432	ErrorCountTo5
Translation_Route Table....503	Dialer_Skill_Group_Real_Time Table....226
Trunk_Group Table....507	ErrorCountToday
User_Formula Table....513	Dialer_Skill_Group_Real_Time Table....226
Vru_Defaults Table....522	ErrorCountToday
EnterpriseQueueTime	Call_Type_Real_Time Table ....142
Termination_Call_Detail Table....490	ErrorCountToHalf
EnterpriseRouteID	Call_Type_Skill_Group_Half_Hour Table....122
Enterprise_Route Table....228	Dialer_Skill_Group_Real_Time Table....226
Enterprise_Route_Member Table....229	ErrorCountToHalf
EnterpriseServiceID	Call_Type_Half_Hour Table ....96
Enterprise_Service Table....229	Call_Type_Real_Time Table ....142
Enterprise_Service_Member Table....230	ErrorsToHalf
EnterpriseSkillGroupID	Application_Gateway_Half_Hour Table ....80
Enterprise_Skill_Group_Member Table....232	ErrorThreshold
EnterpriseSkillGroupID	Application_Gateway_Connection Table....76

Application_Gateway_Globals Table ....78	FaxDetect
Event	Campaign_Query_Rule_Interval Table ....170
Agent_Event_Detail Table ....24	FaxDetectCount
Network_Event_Detail Table....293	Campaign_Query_Rule_Real_Time Table....172
EventName	FaxDetectHalf
Agent_State_Trace Table....64	Dialer_Real_Time Table....219
ExhaustedCallsEnabled	FaxDetectTo5
Campaign Table ....155	Campaign_Query_Rule_Real_Time Table....172
ExpandedCallVariableID	FaxDetectToHalf
Expanded_Call_Variable Table....234	Campaign_Query_Rule_Real_Time Table....172
Route_Call_Variable Table....343	Dialer_Half_Hour Table....211
Termination_Call_Variable Table....502	Dialer_Skill_Group_Half_Hour Table....223
ExpectedDelay	FaxDetectToHalf
Service_Five_Minute Table....390	Campaign_Query_Rule_Half_Hour Table ....166
Service_Real_Time Table....416	FeatureSetData
Expression	Feature_Control_Set Table....236
Agent_Targeting_Rule Table....67	FeatureSetID
Extension	Feature_Control_Set Table....236
Agent_Logout Table....33	FeatureSetID
Extension	Customer_Definition Table....194
Agent_Interval Table....29	User_Group Table....514
Agent_Real_Time Table ....34	FieldName
Extension	Schedule_Map Table....371
Peripheral_Monitor Table....315	FieldName
Service Table....386	Import_Rule_Clause Table....277
Skill_Group Table....432	FieldValue
Trunk_Group Table....507	Schedule_Map Table....371
ExternalAuthentication	FilePath
ICR_Globals Table....264	Import_Rule Table....273
ExternalScriptValidation	Schedule_Source Table....374
ICR_Globals Table....264	FilePollingEnabled
FaultTolerance	Import_Rule Table....273
Application_Gateway Table....75	Filter1
FaxDetect	Cfg_Mngr_App_Snapshot_State Table ....183
Dialer_Interval Table....214	Filter2

Cfg_Mngr_App_Snapshot_State Table ....183	Logger_Admin Table ....283
Filter3FieldName	Recovery Table....329
Cfg_Mngr_App_Snapshot_State Table ....183	
Filter3FieldType	FunctionName
Cfg_Mngr_App_Snapshot_State Table ....183	Logger_Admin Table ....283
Filter3OptionSelection	FutureUseFloat1
Cfg_Mngr_App_Snapshot_State Table ....183	Campaign Table ....155
Filter3Selection	FutureUseFloat2
Cfg_Mngr_App_Snapshot_State Table ....183	Campaign Table ....155
FinalObjectID	FutureUseFloat3
Route_Call_Detail Table....338	Campaign Table ....155
FirstName	FutureUseInt1
Dialer_Detail Table....206	Agent_Real_Time Table ....34
FirstName	Agent_Skill_Group_Real_Time Table....63
Person Table....322	Blended_Agent_Options Table ....90
FiveMinuteHistoryTo5	Campaign Table ....155
Logger_Meters Table....284	Campaign_Half_Hour Table....163
FixedFormatEnabled	Campaign_Query_Rule Table ....164
Import_Rule Table....273	Campaign_Query_Rule_Half_Hour Table ....166
ForcedClosedCalls	Campaign_Query_Rule_Real_Time Table....172
Service_Interval Table....406	Campaign_Skill_Group Table ....180
ForcedClosedCallsToHalf	Campaign_Target_Sequence Table....182
Route_Half_Hour Table....347	Dialer Table....202
Service_Half_Hour Table....394	Dialer_Half_Hour Table....211
ForeignKey	Dialer_Port_Map Table....217
Script_Cross_Reference Table....378	Dialer_Port_Real_Time Table....218
ForeignKey	Dialer_Real_Time Table....219
Schedule_Report_Input Table....373	Dialer_Skill_Group_Half_Hour Table....223
ForeignKey1	Dialer_Skill_Group_Real_Time Table....226
Persistent_Variable Table....321	Import_Rule Table....273
ForwardedCalls	Import_Rule_Clause Table....277
Galaxy_PBX Table....255	Import_Rule_History Table....278
FridayEnabled	Import_Rule_Real_Time Table....279
Import_Rule Table....273	Query_Rule Table....325
FromRecoveryKey	Query_Rule_Clause Table....327
	Skill_Group_Real_Time Table....477

FutureUseInt1	Agent_Skill_Group_Real_Time Table....63
Campaign_Query_Rule_Interval Table ....170	Blended_Agent_Options Table ....90
Dialer_Interval Table....214	Campaign Table ....155
FutureUseInt1 - FutureUseInt8	Campaign_Half_Hour Table....163
Dialer_Detail Table....206	Campaign_Query_Rule Table ....164
FutureUseInt2	Campaign_Query_Rule_Half_Hour Table ....166
Agent_Real_Time Table ....34	Campaign_Query_Rule_Interval Table ....170
Agent_Skill_Group_Real_Time Table....63	Campaign_Query_Rule_Real_Time Table....172
Blended_Agent_Options Table ....90	Campaign_Skill_Group Table ....180
Campaign Table ....155	Campaign_Target_Sequence Table....182
Campaign_Half_Hour Table....163	Dialer Table....202
Campaign_Query_Rule Table ....164	Dialer_Half_Hour Table....211
Campaign_Query_Rule_Half_Hour Table ....166	Dialer_Port_Map Table....217
Campaign_Query_Rule_Real_Time Table....172	Dialer_Port_Real_Time Table....218
Campaign_Skill_Group Table ....180	Dialer_Real_Time Table....219
Campaign_Target_Sequence Table....182	Dialer_Skill_Group_Half_Hour Table....223
Dialer Table....202	Dialer_Skill_Group_Real_Time Table....226
Dialer_Half_Hour Table....211	Import_Rule Table....273
Dialer_Port_Map Table....217	Import_Rule_Clause Table....277
Dialer_Port_Real_Time Table....218	Import_Rule_History Table....278
Dialer_Real_Time Table....219	Import_Rule_Real_Time Table....279
Dialer_Skill_Group_Half_Hour Table....223	Query_Rule Table....325
Dialer_Skill_Group_Real_Time Table....226	Query_Rule_Clause Table....327
Import_Rule Table....273	Skill_Group_Real_Time Table....477
Import_Rule_Clause Table....277	FutureUseInt3
Import_Rule_History Table....278	Dialer_Interval Table....214
Import_Rule_Real_Time Table....279	FutureUseInt4
Query_Rule Table....325	Agent_Real_Time Table ....34
Query_Rule_Clause Table....327	Agent_Skill_Group_Real_Time Table....63
Skill_Group_Real_Time Table....477	Blended_Agent_Options Table ....90
FutureUseInt2	Campaign Table ....155
Campaign_Half_Hour Table....163	Campaign_Half_Hour Table....163
Campaign_Query_Rule Table ....164	Campaign_Query_Rule_Half_Hour Table ....166
Campaign_Query_Rule_Interval Table ....170	Campaign_Query_Rule_Interval Table ....170
FutureUseInt3	Campaign_Query_Rule_Table ....170
Agent_Real_Time Table ....34	

Campaign_Query_Rule_Real_Time Table....172	Dialer_Real_Time Table....219
Campaign_Skill_Group Table ....180	Dialer_Skill_Group_Half_Hour Table....223
Campaign_Target_Sequence Table....182	Dialer_Skill_Group_Real_Time Table....226
Dialer Table....202	Import_Rule Table....273
Dialer_Half_Hour Table....211	Import_Rule_Clause Table....277
Dialer_Port_Map Table....217	Import_Rule_History Table....278
Dialer_Port_Real_Time Table....218	Import_Rule_Real_Time Table....279
Dialer_Real_Time Table....219	Query_Rule Table....325
Dialer_Skill_Group_Half_Hour Table....223	Query_Rule_Clause Table....327
Dialer_Skill_Group_Real_Time Table....226	Skill_Group_Real_Time Table....477
Import_Rule Table....273	FutureUseInt5
Import_Rule_Clause Table....277	Dialer_Interval Table....214
Import_Rule_History Table....278	FutureUseVarchar1
Import_Rule_Real_Time Table....279	Blended_Agent_Options Table ....90
Query_Rule Table....325	Campaign Table ....155
Query_Rule_Clause Table....327	Campaign_Query_Rule Table ....164
Skill_Group_Real_Time Table....477	Campaign_Skill_Group Table ....180
FutureUseInt4	Campaign_Target_Sequence Table....182
Dialer_Interval Table....214	Dialer Table....202
FutureUseInt5	Dialer_Port_Map Table....217
Agent_Real_Time Table ....34	Import_Rule Table....273
Agent_Skill_Group_Real_Time Table....63	Import_Rule_Clause Table....277
Blended_Agent_Options Table ....90	Query_Rule Table....325
Campaign Table ....155	Query_Rule_Clause Table....327
Campaign_Half_Hour Table....163	FutureUseVarChar1-4
Campaign_Query_Rule Table ....164	Dialer_Detail Table....206
Campaign_Query_Rule_Half_Hour Table ....166	FutureUseVarchar2
Campaign_Query_Rule_Interval Table ....170	Blended_Agent_Options Table ....90
Campaign_Query_Rule_Real_Time Table....172	Campaign Table ....155
Campaign_Skill_Group Table ....180	Campaign_Query_Rule Table ....164
Campaign_Target_Sequence Table....182	Campaign_Skill_Group Table ....180
Dialer Table....202	Campaign_Target_Sequence Table....182
Dialer_Half_Hour Table....211	Dialer Table....202
Dialer_Port_Map Table....217	Dialer_Port_Map Table....217
Dialer_Port_Real_Time Table....218	Import_Rule Table....273

Import_Rule_Clause Table....277	Handled120	Galaxy_Gate_Delayed_Call Table....248
Query_Rule Table....325	Handled15	Galaxy_Gate_Delayed_Call Table....248
Query_Rule_Clause Table....327	Handled20	Galaxy_Gate_Delayed_Call Table....248
FutureUseVarchar3	Handled25	Galaxy_Gate_Delayed_Call Table....248
Blended_Agent_Options Table ....90	Handled30	Galaxy_Gate_Delayed_Call Table....248
Campaign Table ....155	Handled40	Galaxy_Gate_Delayed_Call Table....248
Campaign_Query_Rule Table ....164	Handled5	Galaxy_Gate_Delayed_Call Table....248
Campaign_Skill_Group Table ....180	Handled50	Galaxy_Gate_Delayed_Call Table....248
Campaign_Target_Sequence Table....182	Handled60	Galaxy_Gate_Delayed_Call Table....248
Dialer Table....202	Handled90	Galaxy_Gate_Delayed_Call Table....248
Dialer_Port_Map Table....217	HandledCallsTalkTime	Galaxy_Gate_Delayed_Call Table....248
Import_Rule Table....273	HandledCallsTalkTimeTo5	Galaxy_Gate_Delayed_Call Table....248
Import_Rule_Clause Table....277	HandledCallsTalkTimeToHalf	Galaxy_Gate_Delayed_Call Table....248
Query_Rule Table....325	HandledCallsTime	Agent_Skill_Group_Interval Table....51
Query_Rule_Clause Table....327	HandledCallsTimeTo5	Skill_Group_Interval Table....457
GateAssignment	HandledCallsTimeToHalf	Agent_Skill_Group_Half_Hour Table ....39
Galaxy_Trunk_IGroup Table....260	HandledCallsTimeTo5	Skill_Group_Half_Hour Table....439
GateID	Handled0	Import_Rule_History Table....278
Galaxy_Gate Table....245	Handled0	Import_Rule_Real_Time Table....279
Galaxy_Gate_Delayed_Call Table....248	Handled10	Logger_Meters Table....284
Galaxy_Overflow Table....251	Handled0	Galaxy_Gate_Delayed_Call Table....248
GateValid	Handled10	Galaxy_Gate_Delayed_Call Table....248
Galaxy_Trunk_IGroup Table....260	Handled0	Galaxy_Gate_Delayed_Call Table....248
GeoTelProvided	Handled0	Expanded_Call_Variable Table....234
GlobalAddress	Handled0	Device_Target Table....196
Device_Target Table....196	Handled0	Import_Rule_History Table....278
GoodRecords	Handled0	Import_Rule_Real_Time Table....279
Import_Rule_History Table....278	Handled0	Logger_Meters Table....284
Import_Rule_Real_Time Table....279	Handled0	Galaxy_Gate_Delayed_Call Table....248
HalfHourHistoryTo5	Handled0	Galaxy_Gate_Delayed_Call Table....248
Logger_Meters Table....284	Handled0	Galaxy_Gate_Delayed_Call Table....248
Handled0	Handled0	Galaxy_Gate_Delayed_Call Table....248
Handled10	Handled0	Galaxy_Gate_Delayed_Call Table....248

Skill_Group_Real_Time Table....477	HeartbeatInterval
HandledCallsTimeToHalf	Application_Gateway_Globals Table ....78
Agent_Skill_Group_Half_Hour Table ....39	HeartbeatInterval
Skill_Group_Half_Hour Table....439	Application_Gateway_Connection Table....76
HandledOver180	HeartbeatLimit
Galaxy_Gate_Delayed_Call Table....248	Application_Gateway_Connection Table....76
HandleTime	Application_Gateway_Globals Table ....78
Call_Type_Interval Table....109	HeartbeatRetry
Call_Type_Skill_Group_Interval Table....131	Application_Gateway_Connection Table....76
Service_Interval Table....406	Application_Gateway_Globals Table ....78
HandleTimeHalf	HeartbeatTimeout
Service_Real_Time Table....416	Application_Gateway_Connection Table....76
HandleTimeHalf	Application_Gateway_Globals Table ....78
Call_Type_Half_Hour Table ....96	HighExtension
Call_Type_Real_Time Table ....142	Agent_Targeting_Rule_Range Table....69
Route_Real_Time Table....352	Histogram0
HandleTimeTo5	Routing_Client_Five_Minute Table....359
Call_Type_Real_Time Table ....142	Histogram1
Route_Real_Time Table....352	Routing_Client_Five_Minute Table....359
Service_Real_Time Table....416	Histogram10
HandleTimeToday	Routing_Client_Five_Minute Table....359
Service_Real_Time Table....416	Histogram11
HandleTimeToday	Routing_Client_Five_Minute Table....359
Call_Type_Real_Time Table ....142	Histogram12
Route_Real_Time Table....352	Routing_Client_Five_Minute Table....359
HandleTimeToHalf	Histogram13
Call_Type_Skill_Group_Half_Hour Table....122	Routing_Client_Five_Minute Table....359
HandleTimeToHalf	Histogram14
Service_Half_Hour Table....394	Routing_Client_Five_Minute Table....359
HandleTimeToHalf	Histogram15
Route_Half_Hour Table....347	Routing_Client_Five_Minute Table....359
HangupTime	Histogram16
Dialer Table....202	Routing_Client_Five_Minute Table....359
HDSPropertyEnabled	Histogram17
AWControl Table ....89	Routing_Client_Five_Minute Table....359

Histogram18	
	<a href="#">Routing_Client_Five_Minute Table....359</a>
Histogram19	
	<a href="#">Routing_Client_Five_Minute Table....359</a>
Histogram2	
	<a href="#">Routing_Client_Five_Minute Table....359</a>
Histogram3	
	<a href="#">Routing_Client_Five_Minute Table....359</a>
Histogram4	
	<a href="#">Routing_Client_Five_Minute Table....359</a>
Histogram5	
	<a href="#">Routing_Client_Five_Minute Table....359</a>
Histogram6	
	<a href="#">Routing_Client_Five_Minute Table....359</a>
Histogram7	
	<a href="#">Routing_Client_Five_Minute Table....359</a>
Histogram8	
	<a href="#">Routing_Client_Five_Minute Table....359</a>
Histogram9	
	<a href="#">Routing_Client_Five_Minute Table....359</a>
HistoricalReportingInterval	
	<a href="#">ICR_Globals Table....264</a>
	<a href="#">Logical_Interface_Controller Table....286</a>
HitRate	
	<a href="#">Campaign_Query_Rule Table ....164</a>
HitRateEnabled	
	<a href="#">Campaign_Query_Rule Table ....164</a>
Hold	
	<a href="#">Skill_Group_Real_Time Table....477</a>
HoldTime	
	<a href="#">Agent_Skill_Group_Interval Table....51</a>
	<a href="#">Call_Type_Interval Table....109</a>
	<a href="#">Call_Type_Skill_Group_Interval Table....131</a>
	<a href="#">Service_Interval Table....406</a>
	<a href="#">Skill_Group_Interval Table....457</a>
HoldTime	
	<a href="#">Termination_Call_Detail Table....490</a>
HoldTimeHalf	
	<a href="#">Service_Real_Time Table....416</a>
HoldTimeHalf	
	<a href="#">Call_Type_Real_Time Table ....142</a>
HoldTimeHalf	
	<a href="#">Route_Real_Time Table....352</a>
HoldTimeTo5	
	<a href="#">Call_Type_Real_Time Table ....142</a>
	<a href="#">Service_Real_Time Table....416</a>
HoldTimeTo5	
	<a href="#">Route_Real_Time Table....352</a>
	<a href="#">Skill_Group_Real_Time Table....477</a>
HoldTimeToday	
	<a href="#">Call_Type_Real_Time Table ....142</a>
	<a href="#">Service_Real_Time Table....416</a>
HoldTimeToday	
	<a href="#">Route_Real_Time Table....352</a>
HoldTimeToHalf	
	<a href="#">Call_Type_Skill_Group_Half_Hour Table....122</a>
HoldTimeToHalf	
	<a href="#">Agent_Skill_Group_Half_Hour Table ....39</a>
	<a href="#">Call_Type_Half_Hour Table ....96</a>
	<a href="#">Service_Half_Hour Table....394</a>
HoldTimeToHalf	
	<a href="#">Route_Half_Hour Table....347</a>
	<a href="#">Skill_Group_Half_Hour Table....439</a>
HomeEnabled	
	<a href="#">Campaign Table ....155</a>
HomeEndHours	
	<a href="#">Campaign Table ....155</a>
HomeEndMinutes	
	<a href="#">Campaign Table ....155</a>
HomeStartHours	

Campaign Table ....155	ICRViewID
HomeStartMinutes	ICR_View Table....270
Campaign Table ....155	View_Column Table....520
HuntGroupInformation	ID
Galaxy_PBX Table....255	Application_Gateway_Globals Table ....78
IcmAvailable	IdlePortTime
Skill_Group_Real_Time Table....477	Dialer_Interval Table....214
ICRCallKey	IdlePortTimeToday
Agent_State_Trace Table....64	Dialer_Real_Time Table....219
Termination_Call_Detail Table....490	IdlePortTimeToHalf
ICRCallKeyChild	Dialer_Half_Hour Table....211
Termination_Call_Detail Table....490	Dialer_Real_Time Table....219
ICRCallKeyParent	IdleReasonRequired
Termination_Call_Detail Table....490	Agent_Desk_Settings Table ....18
ICRDefaultRouted	IdleRecords
Call_Type_Interval Table....109	Dialer_Skill_Group_Real_Time Table....226
ICRDefaultRoutedToday	IGroupID
Call_Type_Real_Time Table ....142	Galaxy_Agent_IGroup Table....238
ICRDefaultRoutedToHalf	Galaxy_Trunk_IGroup Table....260
Call_Type_Half_Hour Table ....96	ImportedToDialingListCount
Call_Type_Real_Time Table ....142	Import_Rule_History Table....278
ICRInstanceID	ImportRuleDateTime
ICR_Instance Table....267	Dialer_Detail Table....206
ICRInstanceID	ImportRuleID
ICR_Node Table....269	Import_Rule_Clause Table....277
Label Table....281	ImportRuleID
ICRInstanceID	Import_Rule Table....273
Application_Gateway Table....75	Import_Rule_History Table....278
Customer_Definition Table....194	Query_Rule Table....325
ICRNodeID	ImportRuleID
ICR_Node Table....269	Import_Rule_Real_Time Table....279
ICRTypE	ImportRuleName
ICR_Globals Table....264	Import_Rule Table....273
ICRViewID	ImportScheduleID
Schedule Table....365	Import_Schedule Table....281

ImportType	<a href="#">Trunk_Group_Real_Time Table....511</a>
Import_Rule Table....273	
InCalls	<a href="#">InServiceTimeToday</a>
Galaxy_PBX Table....255	<a href="#">Network_Trunk_Group_Real_Time Table....298</a>
IncomingCallsOnHold	<a href="#">InServiceTimeToday</a>
Agent_Skill_Group_Interval Table....51	<a href="#">Trunk_Group_Real_Time Table....511</a>
Skill_Group_Interval Table....457	
IncomingCallsOnHoldTime	<a href="#">InServiceTimeToHalf</a>
Agent_Skill_Group_Interval Table....51	<a href="#">Network_Trunk_Group_Half_Hour Table....296</a>
Skill_Group_Interval Table....457	
IncomingCallsOnHoldTimeToHalf	<a href="#">InServiceTimeToHalf</a>
Agent_Skill_Group_Half_Hour Table ....39	<a href="#">Trunk_Group_Half_Hour Table....509</a>
Skill_Group_Half_Hour Table....439	
IncomingCallsOnHoldToHalf	<a href="#">Instance</a>
Agent_Skill_Group_Half_Hour Table ....39	<a href="#">User_Variable Table....518</a>
Skill_Group_Half_Hour Table....439	
IncompleteCalls	<a href="#">InstrumentPortNumber</a>
Call_Type_Interval Table....109	<a href="#">Termination_Call_Detail Table....490</a>
Call_Type_Skill_Group_Interval Table....131	
IncompleteCallsHalf	<a href="#">InterceptCalls</a>
Call_Type_Half_Hour Table ....96	<a href="#">Agent_Skill_Group_Interval Table....51</a>
IncompleteCallsToHalf	<a href="#">Skill_Group_Interval Table....457</a>
Call_Type_Skill_Group_Half_Hour Table....122	
IndexColumnEnabled	<a href="#">InterceptCallsToHalf</a>
Import_Rule_Clause Table....277	<a href="#">Agent_Skill_Group_Half_Hour Table ....39</a>
InODCallsAbandoned	<a href="#">Skill_Group_Half_Hour Table....439</a>
Galaxy_Trunk_IGroup Table....260	
InODCallsHandled	<a href="#">InterDigitTimeout</a>
Galaxy_Trunk_IGroup Table....260	<a href="#">Vru_Defaults Table....522</a>
InODCallsRejected	<a href="#">InternalCalls</a>
Galaxy_Trunk_IGroup Table....260	<a href="#">Agent_Skill_Group_Interval Table....51</a>
InService	<a href="#">Skill_Group_Interval Table....457</a>
Application_Gateway_Connection Table....76	
InServiceTimeHalf	<a href="#">InternalCallsOnHold</a>
Network_Trunk_Group_Real_Time Table....298	<a href="#">Agent_Skill_Group_Interval Table....51</a>
	<a href="#">Skill_Group_Interval Table....457</a>
InternalCallsOnHoldTime	<a href="#">InternalCallsOnHoldTime</a>
	<a href="#">Agent_Skill_Group_Interval Table....51</a>
	<a href="#">Skill_Group_Interval Table....457</a>
InternalCallsOnHoldTimeToHalf	<a href="#">InternalCallsOnHoldTimeToHalf</a>
	<a href="#">Agent_Skill_Group_Half_Hour Table ....39</a>
	<a href="#">Skill_Group_Half_Hour Table....439</a>
InternalCallsOnHoldToHalf	<a href="#">InternalCallsOnHoldToHalf</a>
	<a href="#">Agent_Skill_Group_Half_Hour Table ....39</a>

Skill_Group_Half_Hour Table....439	Network_Vru_Script Table....302
InternalCallsRcvd	Interruptible
Agent_Skill_Group_Interval Table....51	Media_Routing_Domain Table....290
Skill_Group_Interval Table....457	IntervalUpperBound1
InternalCallsRcvdTime	Bucket_Intervals Table ....93
Agent_Skill_Group_Interval Table....51	IntervalUpperBound2
Skill_Group_Interval Table....457	Bucket_Intervals Table ....93
InternalCallsRcvdTimeToHalf	IntervalUpperBound3
Agent_Skill_Group_Half_Hour Table ....39	Bucket_Intervals Table ....93
Skill_Group_Half_Hour Table....439	IntervalUpperBound4
InternalCallsRcvdToHalf	Bucket_Intervals Table ....93
Agent_Skill_Group_Half_Hour Table ....39	IntervalUpperBound5
Skill_Group_Half_Hour Table....439	Bucket_Intervals Table ....93
InternalCallsTime	IntervalUpperBound6
Agent_Skill_Group_Interval Table....51	Bucket_Intervals Table ....93
Skill_Group_Interval Table....457	IntervalUpperBound7
InternalCallsTimeToHalf	Bucket_Intervals Table ....93
Agent_Skill_Group_Half_Hour Table ....39	IntervalUpperBound8
Skill_Group_Half_Hour Table....439	Bucket_Intervals Table ....93
InternalCallsToHalf	IntervalUpperBound9
Agent_Skill_Group_Half_Hour Table ....39	Bucket_Intervals Table ....93
Skill_Group_Half_Hour Table....439	InUseInboundTimeHalf
InternalIPTAOnly	Network_Trunk_Group_Real_Time Table....298
Peripheral Table....306	InUseInboundTimeHalf
InternalUse1 - InternalUse11	Trunk_Group_Real_Time Table....511
Dialer_Detail Table....206	InUseInboundTimeToday
InterruptedTime	Network_Trunk_Group_Real_Time Table....298
Agent_Skill_Group_Interval Table....51	InUseInboundTimeToday
Skill_Group_Interval Table....457	Trunk_Group_Real_Time Table....511
InterruptedTimeTo5	InUseInboundTimeToHalf
Skill_Group_Real_Time Table....477	Network_Trunk_Group_Half_Hour Table....296
InterruptedTimeToHalf	InUseInboundTimeToHalf
Agent_Skill_Group_Half_Hour Table ....39	Trunk_Group_Half_Hour Table....509
Skill_Group_Half_Hour Table....439	InUseOutboundTimeHalf
Interruptible	Network_Trunk_Group_Real_Time Table....298

Trunk_Group_Real_Time Table....511	Dialed_Number_Map Table....200
InUseOutboundTimeToday	ItemRelation
Network_Trunk_Group_Real_Time Table....298	Assignment_Queue_Attribute Table....86
InUseOutboundTimeToday	IVRPorts
Trunk_Group_Real_Time Table....511	Campaign_Skill_Group Table ....180
InUseOutboundTimeToHalf	IVRRoutePoint
Network_Trunk_Group_Half_Hour Table....296	Campaign_Skill_Group Table ....180
InUseOutboundTimeToHalf	KeepNScriptVersions
Trunk_Group_Half_Hour Table....509	ICR_Globals Table....264
InvalidEntryTries	Label
Vru_Defaults Table....522	Label Table....281
IPAMDEnabled	Route_Call_Detail Table....338
Campaign Table ....155	LabelID
IPBridgingEnabled	Label Table....281
Dialer Table....202	LabelID
IPCCMinor	Dialed_Number Table....197
Version Table....519	Dialed_Number_Label Table....199
IPDirectDialPreview	Route_Call_Detail Table....338
Blended_Agent_Options Table ....90	LabelText
IPTA	Label Table....281
Skill_Group Table....432	LastDesktopSnapShotID
IPTerminatingBeepDetect	Cfg_Mngr_User_Settings Table....187
Campaign Table ....155	LastName
IsDeploymentMasterAW	Dialer_Detail Table....206
Machine_Info....287	LastName
ISDNCallByCallLimitRejects	Person Table....322
Galaxy_Single_Trunk Table....257	LastRetrievalKey
ISDNCallByCallRejects	AWControl Table ....89
Galaxy_Trunk_IGroup Table....260	LastRetrievalTime
ISDNCallsWithAniSid	AWControl Table ....89
Galaxy_Trunk_IGroup Table....260	LastUpdateKey
Item	ICR_Instance Table....267
Assignment_Queue_Attribute Table....86	LateCallsTo5
Call_Type_Map Table ....121	Routing_Client_Five_Minute Table....359
Item	LatesToHalf

Application_Gateway_Half_Hour Table ....80	LocaleID
LateThreshold	Vru_Defaults Table....522
Routing_Client Table....357	Vru_Locale Table....524
LateTimeout	LocalID
Application_Gateway_Connection Table....76	Script_Cross_Reference Table....378
Application_Gateway_Globals Table ....78	LocalQTime
LeaveMessageEnabled	Termination_Call_Detail Table....490
Campaign Table ....155	Location
Length	Region_Info Table....332
Script Table....377	Location
Length	Peripheral Table....306
Import_Rule_Clause Table....277	LocationParamName
User_Formula Table....513	Termination_Call_Detail Table....490
LinesPerAgent	LocationParamPKID
Dialer_Skill_Group_Real_Time Table....226	Termination_Call_Detail Table....490
LinesPerAgent	LockID
Campaign Table ....155	ICR_Locks Table....268
LinesPerAgentToHalf	LockName
Dialer_Skill_Group_Half_Hour Table....223	ICR_Locks Table....268
LinkTestThreshold	LockType
Application_Gateway_Globals Table ....78	ICR_Locks Table....268
LinkTestThreshold	LoggedOn
Application_Gateway_Connection Table....76	Skill_Group_Five_Minute Table....436
ListOrder	Skill_Group_Real_Time Table....477
Campaign_Query_Rule Table ....164	LoggedOnTime
LoadODOutHoldTime	Agent_Interval Table....29
Galaxy_Trunk_IGroup Table....260	Agent_Skill_Group_Interval Table....51
LoadTransferOut	Skill_Group_Interval Table....457
Galaxy_Trunk_IGroup Table....260	LoggedOnTimeTo5
LoadTransferOutCalls	Skill_Group_Real_Time Table....477
Galaxy_Gate Table....245	LoggedOnTimeToHalf
LocalAreaCode	Agent_Half_Hour Table ....25
Dialer Table....202	Agent_Skill_Group_Half_Hour Table ....39
Locale	Skill_Group_Half_Hour Table....439
Vru_Locale Table....524	LoggerType

Logger_Type Table....285	Agent_Logout Table....33
LogicalControllerID	LogoutDateTime
Peripheral Table....306	Agent_Skill_Group_Logout Table ....62
Service_Array Table....388	LogoutNonActivityTime
LogicalControllerID	Agent_Desk_Settings Table ....18
Application_Path Table....82	LogoutReasonRequired
Logical_Interface_Controller Table....286	Agent_Desk_Settings Table ....18
Network_Trunk_Group Table....295	LogPagesAllocated
Physical_Interface_Controller Table....324	Logger_Meters Table....284
Routing_Client Table....357	LogPagesUsed
Translation_Route Table....503	Logger_Meters Table....284
LogicalControllerType	Long1
Logical_Interface_Controller Table....286	Recurring_Schedule_Map Table....330
LoginCaseUnique	Schedule_Import Table....367
ICR_Globals Table....264	Schedule_Import_Real_Time Table....369
LoginDateTime	Long10
Agent_Event_Detail Table ....24	Schedule_Import_Real_Time Table....369
LoginDuration	Long10
Agent_Logout Table....33	Schedule_Import Table....367
LoginDuration	Long11
Agent_Skill_Group_Logout Table ....62	Schedule_Import_Real_Time Table....369
LoginEnabled	Long11
Person Table....322	Schedule_Import Table....367
LoginName	Long12
Cfg_Mngr_User_Settings Table....187	Schedule_Import_Real_Time Table....369
LoginName	Long12
Person Table....322	Schedule_Import Table....367
Schedule_Source Table....374	Long13
LoginNameShadow	Schedule_Import_Real_Time Table....369
Person Table....322	Long13
LogOperation	Schedule_Import Table....367
Config_Message_Log Table....193	Long14
LogOperation	Schedule_Import_Real_Time Table....369
Import_Log Table....272	Long14
LogoutDateTime	Schedule_Import Table....367

Long15	<a href="#">Service_Real_Time Table....416</a>
	<a href="#">Skill_Group_Real_Time Table....477</a>
Long15	<a href="#">LongestAvailAgent</a>
	<a href="#">Service_Five_Minute Table....390</a>
	<a href="#">Skill_Group_Five_Minute Table....436</a>
Long2	<a href="#">LongestCallAbandTime</a>
	<a href="#">Service_Interval Table....406</a>
Long2	<a href="#">LongestCallAbandTime</a>
	<a href="#">Route_Half_Hour Table....347</a>
	<a href="#">Service_Half_Hour Table....394</a>
Long2	<a href="#">LongestCallDelayQTime</a>
	<a href="#">Service_Interval Table....406</a>
Long3	<a href="#">LongestCallDelayQTime</a>
	<a href="#">Route_Half_Hour Table....347</a>
	<a href="#">Service_Half_Hour Table....394</a>
Long4	<a href="#">LongestCallQ</a>
	<a href="#">Route_Five_Minute Table....344</a>
	<a href="#">Service_Real_Time Table....416</a>
	<a href="#">Skill_Group_Real_Time Table....477</a>
Long5	<a href="#">LongestCallQ</a>
	<a href="#">Route_Real_Time Table....352</a>
	<a href="#">Service_Five_Minute Table....390</a>
Long6	<a href="#">LongestDelay</a>
	<a href="#">Galaxy_Gate_Delayed_Call Table....248</a>
Long7	<a href="#">LowExtension</a>
	<a href="#">Agent_Targeting_Rule_Range Table....69</a>
Long8	<a href="#">LowNoiseVolume</a>
	<a href="#">Campaign_Query_Rule_Interval Table ....170</a>
	<a href="#">Dialer_Interval Table....214</a>
Long9	<a href="#">LowNoiseVolumeTo5</a>
	<a href="#">Campaign_Query_Rule_Real_Time Table....172</a>
LongDistancePrefix	<a href="#">LowNoiseVolumeToday</a>
	<a href="#">Campaign_Query_Rule_Real_Time Table....172</a>
Dialer Table....202	<a href="#">LowNoiseVolumeToHalf</a>
LongestAvailAgent	<a href="#">Campaign_Query_Rule_Half_Hour Table ....166</a>

Campaign_Query_Rule_Real_Time Table....172	Media_Routing_Domain Table....290
Dialer_Half_Hour Table....211	MaxCallsInQueuePerCallType
Dialer_Skill_Group_Half_Hour Table....223	Media_Routing_Domain Table....290
MachineID	MaxCallsQueued
Machine_Info....287	Call_Type_Interval Table....109
MachineName	Call_Type_Skill_Group_Interval Table....131
Machine_Info....287	MaxCallWaitTime
MachineType	Call_Type_Interval Table....109
Machine_Info....287	MaxCallWaitTime
Major	Call_Type_Skill_Group_Interval Table....131
Version Table....519	MaxCorrelationNumber
MajorVersion	ICR_Globals Table....264
Region_Info Table....332	MaxDelay
Mask	Routing_Client_Five_Minute Table....359
View_Column Table....520	MaxDelayToHalf
MasterScriptID	Application_Gateway_Half_Hour Table ....80
Admin_Script_Schedule_Map Table....13	MaxHoldTime
MasterScriptID	Call_Type_Interval Table....109
Call_Type_Real_Time Table ....142	Call_Type_Skill_Group_Interval Table....131
Master_Script Table....288	MaxHoldTimeToHalf
MasterScriptID	Call_Type_Skill_Group_Half_Hour Table....122
Call_Type_Map Table ....121	MaxHoldTimeToHalf
Script Table....377	Call_Type_Half_Hour Table ....96
MaxActiveGlitchTime	MaximumArraySize
Dialer_Detail Table....206	Expanded_Call_Variable Table....234
MaxAttempts	MaximumDelayQueueLength
Campaign Table ....155	Galaxy_Gate_Delayed_Call Table....248
MaxBusyAttempts	MaximumLength
Campaign Table ....155	Expanded_Call_Variable Table....234
MaxCallsInProgress	MaximumLineAgent
Peripheral_Interval Table....313	Campaign Table ....155
Scheduled_Target_Real_Time Table....376	MaximumValue
MaxCallsInProgress	Attribute Table....88
Peripheral_Half_Hour Table....310	MaxNumberLoggedOnAgents
MaxCallsInQueue	Peripheral_Interval Table....313

MaxNumberLoggedOnAgentsToHalf	<a href="#">Import_Log Table....272</a>
Peripheral_Half_Hour Table....310	<a href="#">MessageId</a>
MaxPartitions	<a href="#">Application_Event Table ....73</a>
ICR_Globals Table....264	<a href="#">Event Table....232</a>
MaxPostSpeechSilenceGlitchTime	<a href="#">MessageString</a>
Dialer_Detail Table....206	<a href="#">Event Table....232</a>
MaxRoutesInUseToHalf	<a href="#">MessageString</a>
Translation_Route_Half_Hour Table....504	<a href="#">Application_Event Table ....73</a>
MaxRouteTimeToHalf	<a href="#">MessageTimeTo5</a>
Translation_Route_Half_Hour Table....504	<a href="#">Logger_Meters Table....284</a>
MaxTaskDuration	<a href="#">MinCorrelationNumber</a>
Media_Class Table....289	<a href="#">ICR_Globals Table....264</a>
Media_Routing_Domain Table....290	<a href="#">MinimumCallDuration</a>
MaxTasks	<a href="#">Campaign Table ....155</a>
Agent_Real_Time Table ....34	<a href="#">MinimumValue</a>
MaxTimeInQueue	<a href="#">Attribute Table....88</a>
Media_Routing_Domain Table....290	<a href="#">MinorVersion</a>
MaxZCRstdev	<a href="#">Region_Info Table....332</a>
Dialer_Detail Table....206	<a href="#">MinPasswordLength</a>
MDSMessagesTo5	<a href="#">ICR_Globals Table....264</a>
Logger_Meters Table....284	<a href="#">MinScriptSchedTime</a>
MeanResponseTo5	<a href="#">ICR_Globals Table....264</a>
Routing_Client_Five_Minute Table....359	<a href="#">Mode</a>
MediaClassID	<a href="#">Peripheral_Real_Time Table....316</a>
Media_Class Table....289	<a href="#">MondayEnabled</a>
Media_Routing_Domain Table....290	<a href="#">Import_Rule Table....273</a>
MediaServerSet	<a href="#">MonitorCalls</a>
Vru_Defaults Table....522	<a href="#">Agent_Skill_Group_Interval Table....51</a>
MenuID	<a href="#">Skill_Group_Interval Table....457</a>
Cfg_Mngr_User/Desktop_Snap Table ....185	<a href="#">MonitorCallsToHalf</a>
Cfg_Mngr_User_Menu Table....187	<a href="#">Agent_Skill_Group_Half_Hour Table ....39</a>
Cfg_Mngr_View Table....188	<a href="#">Skill_Group_Half_Hour Table....439</a>
MenuName	<a href="#">MonthlyEnabled</a>
Cfg_Mngr_User_Menu Table....187	<a href="#">Import_Rule Table....273</a>
Message	<a href="#">MonthOfYear</a>

Admin_Script_Schedule_Map Table....13	Class_List Table....190
MonthOfYear	Name
Recurring_Schedule_Map Table....330	Object_List Table....304
MRDomainID	NetConferencedOutCalls
Agent_Interval Table....29	Agent_Skill_Group_Interval Table....51
Agent_State_Trace Table....64	Skill_Group_Interval Table....457
Dialed_Number Table....197	NetConferencedOutCallsToHalf
Peripheral_Interval Table....313	Agent_Skill_Group_Half_Hour Table ....39
Route_Call_Detail Table....338	Skill_Group_Half_Hour Table....439
MRDomainID	NetConfOutCallsTime
Agent_Half_Hour Table ....25	Agent_Skill_Group_Interval Table....51
Agent_Real_Time Table ....34	Skill_Group_Interval Table....457
Peripheral_Default_Route Table....310	NetConfOutCallsTimeToHalf
Peripheral_Real_Time Table....316	Agent_Skill_Group_Half_Hour Table ....39
Service Table....386	Skill_Group_Half_Hour Table....439
Service_Level_Threshold Table....414	NetConsultativeCalls
Termination_Call_Detail Table....490	Agent_Skill_Group_Interval Table....51
MRDomainID	Skill_Group_Interval Table....457
Agent_Event_Detail Table ....24	NetConsultativeCallsTime
Agent_Logout Table....33	Agent_Skill_Group_Interval Table....51
Application_Path_Member Table....83	Skill_Group_Interval Table....457
Media_Routing_Domain Table....290	NetConsultativeCallsTimeToHalf
Peripheral_Half_Hour Table....310	Agent_Skill_Group_Half_Hour Table ....39
Skill_Group Table....432	Skill_Group_Half_Hour Table....439
MRStatus	NetConsultativeCallsToHalf
Dialer_Real_Time Table....219	Agent_Skill_Group_Half_Hour Table ....39
Msg	Skill_Group_Half_Hour Table....439
Rename Table....336	NetQTime
MsgOrigin	Route_Call_Detail Table....338
Route_Call_Detail Table....338	NetQTime
MultilineAgentControl	Termination_Call_Detail Table....490
Peripheral Table....306	NetTransferOutCalls
MultilineAgentStateBehavior	Skill_Group_Interval Table....457
Peripheral Table....306	NetTransferOutCallsToHalf
Name	Skill_Group_Half_Hour Table....439

NetTransferredOutCalls	<a href="#">Call_Type_Real_Time Table ....142</a>
Agent_Skill_Group_Interval Table....51	
NetTransferredOutCallsToHalf	<a href="#">NetworkDefaultTo5</a>
Agent_Skill_Group_Half_Hour Table ....39	<a href="#">Routing_Client_Five_Minute Table....359</a>
NetworkAnnouncement	<a href="#">NetworkICRInstanceID</a>
<a href="#">Call_Type_Interval Table....109</a>	<a href="#">ICR_Instance Table....267</a>
NetworkAnnouncementToday	<a href="#">NetworkOnRoute1</a>
<a href="#">Call_Type_Real_Time Table ....142</a>	<a href="#">Galaxy_Overflow Table....251</a>
NetworkAnnouncementToHalf	<a href="#">NetworkOnRoute10</a>
<a href="#">Call_Type_Half_Hour Table ....96</a>	<a href="#">Galaxy_Overflow Table....251</a>
NetworkAnnouncementToHalf	<a href="#">NetworkOnRoute11</a>
<a href="#">Call_Type_Real_Time Table ....142</a>	<a href="#">Galaxy_Overflow Table....251</a>
NetworkAnsMachineCount	<a href="#">NetworkOnRoute12</a>
<a href="#">Campaign_Query_Rule_Real_Time Table....172</a>	<a href="#">Galaxy_Overflow Table....251</a>
NetworkAnsMachineDetect	<a href="#">NetworkOnRoute13</a>
<a href="#">Campaign_Query_Rule_Interval Table ....170</a>	<a href="#">Galaxy_Overflow Table....251</a>
Dialer_Interval Table....214	
NetworkAnsMachineDetectHalf	<a href="#">NetworkOnRoute14</a>
Dialer_Real_Time Table....219	<a href="#">Galaxy_Overflow Table....251</a>
NetworkAnsMachineDetectTo5	<a href="#">NetworkOnRoute15</a>
<a href="#">Campaign_Query_Rule_Real_Time Table....172</a>	<a href="#">Galaxy_Overflow Table....251</a>
NetworkAnsMachineDetectToHalf	<a href="#">NetworkOnRoute16</a>
<a href="#">Campaign_Query_Rule_Half_Hour Table ....166</a>	<a href="#">Galaxy_Overflow Table....251</a>
<a href="#">Campaign_Query_Rule_Real_Time Table....172</a>	
Dialer_Half_Hour Table....211	
Dialer_Skill_Group_Half_Hour Table....223	
NetworkBusyTo5	<a href="#">NetworkOnRoute2</a>
<a href="#">Routing_Client_Five_Minute Table....359</a>	<a href="#">Galaxy_Overflow Table....251</a>
NetworkDefaultRouted	<a href="#">NetworkOnRoute3</a>
<a href="#">Call_Type_Interval Table....109</a>	<a href="#">Galaxy_Overflow Table....251</a>
NetworkDefaultRoutedToday	<a href="#">NetworkOnRoute4</a>
<a href="#">Call_Type_Real_Time Table ....142</a>	<a href="#">Galaxy_Overflow Table....251</a>
NetworkDefaultRoutedToHalf	<a href="#">NetworkOnRoute5</a>
<a href="#">Call_Type_Half_Hour Table ....96</a>	<a href="#">Galaxy_Overflow Table....251</a>
NetworkDefaultRoutedToHalf	<a href="#">NetworkOnRoute6</a>
	<a href="#">Galaxy_Overflow Table....251</a>
	<a href="#">NetworkOnRoute7</a>
	<a href="#">Galaxy_Overflow Table....251</a>
	<a href="#">NetworkOnRoute8</a>
	<a href="#">Galaxy_Overflow Table....251</a>

NetworkOnRoute9	NetworkTransferPreferred
Galaxy_Overflow Table....251	Routing_Client Table....357
NetworkPostQueryTo5	NetworkTrunkGroupID
Routing_Client_Five_Minute Table....359	Network_Trunk_Group Table....295
NetworkResourceTo5	Network_Trunk_Group_Half_Hour Table....296
Routing_Client_Five_Minute Table....359	Network_Trunk_Group_Real_Time Table....298
NetworkRingTo5	Peripheral_Target Table....320
Routing_Client_Five_Minute Table....359	NetworkTrunkGroupID
NetworkRoutingClient	Trunk_Group Table....507
Routing_Client Table....357	NetworkVruNetworkTargetID
NetworkSkillGroupQTime	Network_Vru_Bank Table...301
Termination_Call_Detail Table....490	NetworkVruScriptID
NetworkTargetID	Network_Vru_Script Table....302
Agent_Logout Table....33	NewCallTo5
Customer_Definition Table....194	Routing_Client_Five_Minute Table....359
Device_Target Table....196	NewTransaction
Label Table....281	Termination_Call_Detail Table....490
Network_Vru Table....300	NextAvailableNumber
Network_Vru_Bank Table....301	Next_Available_Number Table....303
Network_Vru_Script Table....302	NextAvailableVersion
Termination_Call_Detail Table....490	Master_Script Table....288
NetworkTargetID	NextHuntGroupPhone
Network_Target Table....294	Galaxy_PBX Table....255
Peripheral Table....306	NoAnswerCallback
Scheduled_Target Table....375	Campaign Table ....155
NetworkTargetID	NoAnswerDetect
Agent_Real_Time Table ....34	Campaign_Query_Rule_Interval Table ....170
Announcement Table ....72	Dialer_Interval Table....214
Peripheral_Target Table....320	NoAnswerDetectCount
Route_Call_Detail Table....338	Campaign_Query_Rule_Real_Time Table....172
Scheduled_Target_Real_Time Table....376	NoAnswerDetectTo5
NetworkTargetType	Campaign_Query_Rule_Real_Time Table....172
Network_Target Table....294	NoAnswerDetectToday
NetworkTime	Dialer_Real_Time Table....219
Termination_Call_Detail Table....490	NoAnswerDetectToHalf

Campaign_Query_Rule_Half_Hour Table ....166	NonACDLineCallsInTime
Campaign_Query_Rule_Real_Time Table....172	Agent_Interval Table....29
Dialer_Half_Hour Table....211	NonACDLineCallsOutCount
Dialer_Skill_Group_Half_Hour Table....223	Agent_Interval Table....29
NoAnswerRingLimit	NonACDLineCallsOutTime
Campaign Table ....155	Agent_Interval Table....29
NoAnswerTo5	NoRingBackDetect
Routing_Client_Five_Minute Table....359	Campaign_Query_Rule_Interval Table ....170
NodeID	Dialer_Interval Table....214
Cfg_Mngr_View Table....188	NoRingBackDetectCount
NoDialToneDetect	Campaign_Query_Rule_Real_Time Table....172
Campaign_Query_Rule_Interval Table ....170	NoRingBackDetectHalf
Dialer_Interval Table....214	Dialer_Real_Time Table....219
NoDialToneDetectCount	NoRingBackDetectTo5
Campaign_Query_Rule_Real_Time Table....172	Campaign_Query_Rule_Real_Time Table....172
NoDialToneDetectHalf	NoRingBackDetectToHalf
Dialer_Real_Time Table....219	Campaign_Query_Rule_Real_Time Table....172
NoDialToneDetectTo5	Dialer_Skill_Group_Half_Hour Table....223
Campaign_Query_Rule_Real_Time Table....172	NoRingBackDetectToHalf
NoDialToneDetectToHalf	Campaign_Query_Rule_Half_Hour Table ....166
Campaign_Query_Rule_Real_Time Table....172	Dialer_Half_Hour Table....211
NoDialToneDetectToHalf	NotReady
Campaign_Query_Rule_Half_Hour Table ....166	Skill_Group_Real_Time Table....477
NoEntryTimeout	NotReady
Vru_Defaults Table....522	Skill_Group_Five_Minute Table....436
NoEntryTries	NotReadyTime
Vru_Defaults Table....522	Agent_Interval Table....29
NoiseThreshold	Agent_Skill_Group_Interval Table....51
Dialer_Detail Table....206	Skill_Group_Interval Table....457
NonACDCallsAllowed	NotReadyTimeTo5
Agent_Desk_Settings Table ....18	Skill_Group_Real_Time Table....477
NonACDLineCallsInCount	NotReadyTimeTo5
Agent_Interval Table....29	Skill_Group_Five_Minute Table....436
	NotReadyTimeToHalf
	Agent_Skill_Group_Half_Hour Table ....39

Skill_Group_Half_Hour Table....439	Routing_Client_Five_Minute Table....359
NotReadyTimeToHalf	NumConferenceCallReqTo5
Agent_Half_Hour Table ....25	Routing_Client_Five_Minute Table....359
NowTime	NumConferencedEventTo5
Controller_Time Table....193	Routing_Client_Five_Minute Table....359
NullEnabled	NumConnectionClearedEventTo5
Import_Rule_Clause Table....277	Routing_Client_Five_Minute Table....359
NumAgentsInterruptedNow	NumConsultConfTo5
Skill_Group_Real_Time Table....477	Routing_Client_Five_Minute Table....359
NumAlternateCallConfTo5	NumConsultTransferConfTo5
Routing_Client_Five_Minute Table....359	Routing_Client_Five_Minute Table....359
NumAlternateCallReqTo5	NumConsultTransferReqTo5
Routing_Client_Five_Minute Table....359	Routing_Client_Five_Minute Table....359
Number	NumDropConnectionConfTo5
ICR_Instance Table....267	Routing_Client_Five_Minute Table....359
NumberCallsAbandoned	NumDropConnectionReqTo5
Galaxy_DNIS Table....243	Routing_Client_Five_Minute Table....359
NumberCallsAnswered	NumMissingTasks
Galaxy_DNIS Table....243	Service_Interval Table....406
NumberOfSamples	NumMissingTasks
Peripheral_Half_Hour Table....310	Service_Half_Hour Table....394
Peripheral_Interval Table....313	NumOfActiveGlitches
NumBlindTransferConfTo5	Dialer_Detail Table....206
Routing_Client_Five_Minute Table....359	NumOfPostSpeechSilenceGlitches
NumCallEstablishedEventTo5	Dialer_Detail Table....206
Routing_Client_Five_Minute Table....359	NumReconnectCallConfTo5
NumCallFailedEventTo5	Routing_Client_Five_Minute Table....359
Routing_Client_Five_Minute Table....359	NumReconnectCallReqTo5
NumCallHeldEventTo5	Routing_Client_Five_Minute Table....359
Routing_Client_Five_Minute Table....359	NumReleaseInd
NumCallOriginatedEventTo5	Routing_Client_Five_Minute Table....359
Routing_Client_Five_Minute Table....359	NumRetrievedEventTo5
NumCancelInd	Routing_Client_Five_Minute Table....359
Routing_Client_Five_Minute Table....359	NumTransferEventTo5
NumConferenceCallConfTo5	Routing_Client_Five_Minute Table....359

ObjectAccessXrefID	<a href="#">Application_Path_Real_Time Table ....84</a>
Object_Access_Xref Table....303	
ObjectID	<a href="#">OpenAppsOnLoad</a>
Ids Table....271	<a href="#">Cfg_Mngr_User/Desktop_Snap Table ....185</a>
ObjectID	<a href="#">OpenTimeout</a>
ClassID_To_ObjectType Table....191	<a href="#">Application_Gateway_Connection Table....76</a>
Group_Security_Control Table....263	<a href="#">Application_Gateway_Globals Table ....78</a>
Object_Security Table....305	<a href="#">OptionValue</a>
User_Security_Control Table....516	<a href="#">Customer_Options Table....195</a>
ObjectSecurityID	<a href="#">Originated</a>
Object_Security Table....305	<a href="#">Termination_Call_Detail Table....490</a>
ObjectType	<a href="#">Originator</a>
ClassID_To_ObjectType Table....191	<a href="#">Route_Call_Detail Table....338</a>
Group_Security_Control Table....263	<a href="#">OriginatorType</a>
Ids Table....271	<a href="#">Route_Call_Detail Table....338</a>
Object_Access_Xref Table....303	<a href="#">OriginClassID</a>
ObjectType	<a href="#">Group_Security_Control Table....263</a>
Object_List Table....304	<a href="#">OriginObjectID</a>
ObjectType	<a href="#">Group_Security_Control Table....263</a>
Object_Security Table....305	<a href="#">OriginObjectType</a>
User_Security_Control Table....516	<a href="#">Group_Security_Control Table....263</a>
User_Variable Table....518	<a href="#">OutboundAccessInternational</a>
ODAbandoned	<a href="#">Agent_Desk_Settings Table ....18</a>
Galaxy_Gate Table....245	<a href="#">OutboundAccessOperatorAssisted</a>
ODInRejected	<a href="#">Agent_Desk_Settings Table ....18</a>
Galaxy_Gate Table....245	<a href="#">OutboundAccessPBX</a>
ODOutCallsHandled	<a href="#">Agent_Desk_Settings Table ....18</a>
Galaxy_Overflow Table....251	<a href="#">OutboundAccessPrivateNet</a>
OnHold	<a href="#">Agent_Desk_Settings Table ....18</a>
Agent_Real_Time Table ....34	<a href="#">OutboundAccessPublicNet</a>
Online	<a href="#">Agent_Desk_Settings Table ....18</a>
Peripheral_Real_Time Table....316	<a href="#">OutCalls</a>
OnLine	<a href="#">Galaxy_Agent_IGroup Table....238</a>
Application_Path_Real_Time Table ....84	<a href="#">Galaxy_Agent_Performance Table....240</a>
OnLineDateTime	<a href="#">Galaxy_Gate Table....245</a>
	<a href="#">Galaxy_PBX Table....255</a>

Galaxy_Trunk_IGroup Table....260	Service_Half_Hour Table....394
OutCallTalkTime	OverflowODCallWorkTime
Galaxy_Agent_IGroup Table....238	Galaxy_Gate Table....245
Galaxy_Gate Table....245	OverflowODHandled
Galaxy_Trunk_IGroup Table....260	Galaxy_Gate Table....245
OutCallTime	OverflowODTalkTime
Galaxy_Agent_Performance Table....240	Galaxy_Gate Table....245
OutODCallsAccepted	OverflowOut
Galaxy_Trunk_IGroup Table....260	Call_Type_Interval Table....109
OutODCallsRejected	Call_Type_Skill_Group_Interval Table....131
Galaxy_Trunk_IGroup Table....260	Service_Interval Table....406
OverflowAgents	OverflowOutHalf
Campaign_Skill_Group Table ....180	Call_Type_Half_Hour Table ....96
OverflowCallWorkTime	Service_Real_Time Table....416
Galaxy_Gate Table....245	OverflowOutHalf
OverflowHandled	Call_Type_Real_Time Table ....142
Galaxy_Gate Table....245	OverflowOutMode
OverflowIn	Service_Real_Time Table....416
Service_Interval Table....406	OverflowOutNow
OverflowInHalf	Service_Real_Time Table....416
Service_Real_Time Table....416	OverflowOutNow
OverflowInMode	Route_Real_Time Table....352
Service_Real_Time Table....416	OverflowOutTo5
OverflowInNow	Call_Type_Real_Time Table ....142
Route_Real_Time Table....352	Service_Real_Time Table....416
OverflowInNow	OverflowOutTo5
Service_Real_Time Table....416	Service_Five_Minute Table....390
OverflowInTo5	OverflowOutToday
Service_Five_Minute Table....390	Service_Real_Time Table....416
OverflowInTo5	OverflowOutToday
Service_Real_Time Table....416	Call_Type_Real_Time Table ....142
OverflowInToday	OverflowOutToHalf
Service_Real_Time Table....416	Call_Type_Skill_Group_Half_Hour Table....122
OverflowInToHalf	OverflowOutToHalf
Route_Half_Hour Table....347	Route_Half_Hour Table....347

Service_Half_Hour Table....394	PcbBusyRetry
OverflowTalkTime	Blended_Agent_Options Table ....90
Galaxy_Gate Table....245	PcbCheckRecords
Overridable	Blended_Agent_Options Table ....90
Network_Vru_Script Table....302	PcbMaxAttempts
OverwriteEnabled	Blended_Agent_Options Table ....90
Import_Rule Table....273	PcbMode
ParamCount	Blended_Agent_Options Table ....90
User_Formula Table....513	PcbNoAnswerRetry
ParamString	Blended_Agent_Options Table ....90
Peripheral_Monitor Table....315	PcbNoAnswerRingLimit
ParentCount	Blended_Agent_Options Table ....90
Assignment_Queue_Attribute Table....86	PcbPurgeRecords
ParentObjectID	Blended_Agent_Options Table ....90
Ids Table....271	PcbPurgeStatus
ParentObjectType	Blended_Agent_Options Table ....90
Ids Table....271	PcbRecordsToCache
ParentRegionID	Blended_Agent_Options Table ....90
Region_Member Table....333	PcbReserveRetry
PartitioningIndicator	Blended_Agent_Options Table ....90
ICR_Globals Table....264	PeerNodeID
Password	Cfg_Mngr_View Table....188
Person Table....322	PendingRecordsZone1
PasswordChangeRequired	Campaign_Query_Rule_Real_Time Table....172
Person Table....322	PendingRecordsZone2
PasswordLastChangedTime	Campaign_Query_Rule_Real_Time Table....172
Person Table....322	PendingRetryRecordsZone1
PasswordType	Campaign_Query_Rule_Real_Time Table....172
ICR_Globals Table....264	PendingRetryRecordsZone2
PathName	Campaign_Query_Rule_Real_Time Table....172
Schedule_Report Table....372	Penetration
PcbAllowedSaturday	Campaign_Query_Rule Table ....164
Blended_Agent_Options Table ....90	PenetrationEnabled
PcbAllowedSunday	Campaign_Query_Rule Table ....164
Blended_Agent_Options Table ....90	PercentUtilization

Skill_Group_Interval Table....457	PeripheralData4
PercentUtilizationTo5	Peripheral_Real_Time Table....316
Skill_Group_Five_Minute Table....436	PeripheralData5
Skill_Group_Real_Time Table....477	Peripheral_Real_Time Table....316
PercentUtilizationToHalf	PeripheralData6
Skill_Group_Half_Hour Table....439	Peripheral_Real_Time Table....316
PeripheralAutoConfig	PeripheralData7
Peripheral Table....306	Peripheral_Real_Time Table....316
PeripheralCallKey	PeripheralData8
Agent_State_Trace Table....64	Peripheral_Real_Time Table....316
Dialer_Detail Table....206	PeripheralData9
PeripheralCallKey	Peripheral_Real_Time Table....316
Termination_Call_Detail Table....490	PeripheralID
PeripheralCallType	Agent_Targeting_Rule Table....67
Termination_Call_Detail Table....490	Dialer Table....202
PeripheralData1	Dialer_Detail Table....206
Peripheral_Real_Time Table....316	Galaxy_Overflow Table....251
PeripheralData10	Galaxy_Single_Trunk Table....257
Peripheral_Real_Time Table....316	Peripheral Table....306
PeripheralData11	Peripheral_Interval Table....313
Peripheral_Real_Time Table....316	Peripheral_Real_Time Table....316
PeripheralData12	PeripheralID
Peripheral_Real_Time Table....316	Galaxy_Transaction_Code Table....258
PeripheralData13	Peripheral_Default_Route Table....310
Peripheral_Real_Time Table....316	Peripheral_Half_Hour Table....310
PeripheralData14	Peripheral_Monitor Table....315
Peripheral_Real_Time Table....316	Service Table....386
PeripheralData15	PeripheralID
Peripheral_Real_Time Table....316	Agent Table....15
PeripheralData16	Agent_Distribution Table ....23
Peripheral_Real_Time Table....316	Agent_Team Table....70
PeripheralData2	Application_Path_Member Table....83
Peripheral_Real_Time Table....316	Galaxy_Agent_Call_Count Table....237
PeripheralData3	Galaxy_Agent_IGroup Table....238
Peripheral_Real_Time Table....316	Galaxy_Agent_Performance Table....240

Galaxy_Alarm Table....242	PeripheralTimeOffset
Galaxy_DNIS Table....243	Peripheral_Real_Time Table....316
Galaxy_Gate Table....245	PeripheralTimeZone
Galaxy_Gate_Delayed_Call Table....248	Galaxy_Single_Trunk Table....257
Galaxy_PBX Table....255	PeripheralTimeZone
Galaxy_Trunk_Call_Count Table....259	Galaxy_Agent_Call_Count Table....237
Galaxy_Trunk_IGroup Table....260	Galaxy_Agent_IGroup Table....238
Routing_Client Table....357	Galaxy_Agent_Performance Table....240
Service_Level_Threshold Table....414	Galaxy_Alarm Table....242
Skill_Group Table....432	Galaxy_DNIS Table....243
Termination_Call_Detail Table....490	Galaxy_Gate_Delayed_Call Table....248
Trunk_Group Table....507	Galaxy_Overflow Table....251
PeripheralMonitorID	Galaxy_PBX Table....255
Peripheral_Monitor Table....315	Galaxy_Transaction_Code Table....258
PeripheralMonitorType	Galaxy_Trunk_Call_Count Table....259
Peripheral_Monitor Table....315	Galaxy_Trunk_IGroup Table....260
PeripheralName	Peripheral_Real_Time Table....316
Peripheral Table....306	PeripheralTimeZone
PeripheralName	Galaxy_Gate Table....245
Skill_Group Table....432	PeriphServiceLevel
PeripheralName	Service_Interval Table....406
Agent Table....15	PeriphServiceLevelCalls
Service Table....386	Service_Interval Table....406
Trunk_Group Table....507	PeriphServiceLevelCallsHalf
PeripheralNumber	Service_Real_Time Table....416
Agent Table....15	PeriphServiceLevelCallsToday
Service Table....386	Service_Real_Time Table....416
Skill_Group Table....432	PeriphServiceLevelCallsToHalf
PeripheralNumber	Service_Half_Hour Table....394
Trunk_Group Table....507	PeriphServiceLevelHalf
PeripheralQueueTo5	Service_Real_Time Table....416
Routing_Client_Five_Minute Table....359	PeriphServiceLevelOffer
PeripheralServiceLevelType	Service_Interval Table....406
Peripheral Table....306	PeriphServiceLevelOfferHalf
Service Table....386	Service_Real_Time Table....416

PeriphServiceLevelOfferToday	Campaign Table ....155
Service_Real_Time Table....416	
PeriphServiceLevelOfferToHalf	PersonID
Service_Half_Hour Table....394	Agent Table....15
PeriphServiceLevelTo5	Person Table....322
Service_Real_Time Table....416	PGTimeOutsToHalf
PeriphServiceLevelTo5	Translation_Route_Half_Hour Table....504
Service_Five_Minute Table....390	Phone
PeriphServiceLevelToday	Dialer_Detail Table....206
Service_Five_Minute Table....390	PhoneExt
Service_Real_Time Table....416	Dialer_Detail Table....206
PeriphServiceLevelToHalf	PhoneID
Service_Half_Hour Table....394	Dialer_Detail Table....206
PermissionLevel	PhoneIndex
Application_Instance Table ....81	Campaign_Target_Sequence Table....182
PermitApplicationRouting	Phone Index
Dialed_Number Table....197	Dialer_Detail Table....206
Persistent	PhoneNumber
Expanded_Call_Variable Table....234	Dialer_Port_Real_Time Table....218
Persistent	PhoneNumber
User_Variable Table....518	Galaxy_Agent_Call_Count Table....237
PersonalCallbackCount	PhoneType
Campaign_Query_Rule_Real_Time Table....172	Agent_Logout Table....33
Dialer_Real_Time Table....219	Agent_Real_Time Table ....34
PersonalCallbackCount	PhysicalControllerID
Campaign_Query_Rule_Interval Table ....170	Physical_Interface_Controller Table....324
Dialer_Interval Table....214	PhysicalControllerID
PersonalCallbackCountTo5	Physical_Controller_Half_Hour Table....323
Campaign_Query_Rule_Real_Time Table....172	Routing_Client_Five_Minute Table....359
PersonalCallbackCountToHalf	PickedUpCalls
Campaign_Query_Rule_Half_Hour Table ....166	Galaxy_PBX Table....255
Campaign_Query_Rule_Real_Time Table....172	PickupTime
Dialer_Half_Hour Table....211	Dialer_Detail Table....206
Dialer_Skill_Group_Half_Hour Table....223	PlugInTime
PersonalizedCallbackEnabled	Galaxy_Agent_IGroup Table....238
	PortID

Galaxy_Agent_Call_Count Table....237	Campaign Table ....155
Galaxy_Agent_Performance Table....240	PrefixDigits
Galaxy_PBX Table....255	Dialer Table....202
Galaxy_Single_Trunk Table....257	PreviewCalls
Galaxy_Trunk_Call_Count Table....259	Agent_Skill_Group_Interval Table....51
PortNumber	Service_Interval Table....406
Dialer_Detail Table....206	Skill_Group_Interval Table....457
Dialer_Port_Real_Time Table....218	PreviewCallsHalf
PortNumber	Service_Real_Time Table....416
Dialer_Port_Map Table....217	PreviewCallsNow
PortStatus	Service_Real_Time Table....416
Dialer_Port_Real_Time Table....218	PreviewCallsOnHold
PortThrottle	Agent_Skill_Group_Interval Table....51
Dialer Table....202	Service_Interval Table....406
PostRoute	Skill_Group_Interval Table....457
Dial_Number_Plan Table....201	PreviewCallsOnHoldHalf
POSX	Service_Real_Time Table....416
Cfg_Mngr_App_Snapshot_State Table ....183	PreviewCallsOnHoldTime
POSY	Agent_Skill_Group_Interval Table....51
Cfg_Mngr_App_Snapshot_State Table ....183	Service_Interval Table....406
PredictiveCorrectionPace	Skill_Group_Interval Table....457
Campaign Table ....155	PreviewCallsOnHoldTimeHalf
Dialer Table....202	Service_Real_Time Table....416
PredictiveGain	PreviewCallsOnHoldTimeTo5
Campaign Table ....155	Service_Real_Time Table....416
Dialer Table....202	PreviewCallsOnHoldTimeToday
PredictiveHistoricGain	Service_Real_Time Table....416
Campaign Table ....155	PreviewCallsOnHoldTimeToHalf
Dialer Table....202	Agent_Skill_Group_Half_Hour Table ....39
PredictiveLowAbandonGain	Service_Half_Hour Table....394
Campaign Table ....155	Skill_Group_Half_Hour Table....439
Dialer Table....202	PreviewCallsOnHoldTo5
PreferredSide	Service_Real_Time Table....416
Application_Gateway Table....75	PreviewCallsOnHoldToday
PrefixDigits	Service_Real_Time Table....416

PreviewCallsOnHoldToHalf	<a href="#">Skill_Group_Half_Hour Table....439</a>
Agent_Skill_Group_Half_Hour Table ....39	
Service_Half_Hour Table....394	
Skill_Group_Half_Hour Table....439	
PreviewCallsTalkTime	
Agent_Skill_Group_Interval Table....51	
Service_Interval Table....406	
Skill_Group_Interval Table....457	
PreviewCallsTalkTimeHalf	
Service_Real_Time Table....416	
PreviewCallsTalkTimeTo5	
Service_Real_Time Table....416	
PreviewCallsTalkTimeTo5	
Skill_Group_Real_Time Table....477	
PreviewCallsTalkTimeToday	
Service_Real_Time Table....416	
PreviewCallsTalkTimeToHalf	
Agent_Skill_Group_Half_Hour Table ....39	
Service_Half_Hour Table....394	
Skill_Group_Half_Hour Table....439	
PreviewCallsTime	
Agent_Skill_Group_Interval Table....51	
Service_Interval Table....406	
Skill_Group_Interval Table....457	
PreviewCallsTimeHalf	
Service_Real_Time Table....416	
PreviewCallsTimeTo5	
Service_Real_Time Table....416	
Skill_Group_Real_Time Table....477	
PreviewCallsTimeToday	
Service_Real_Time Table....416	
PreviewCallsTimeToHalf	
Service_Half_Hour Table....394	
PreviewCallsTimeToHalf	
Agent_Skill_Group_Half_Hour Table ....39	
PreviewCallsTo5	
Service_Real_Time Table....416	
Skill_Group_Real_Time Table....477	
PreviewCallsToday	
Service_Real_Time Table....416	
PreviewCallsToHalf	
Agent_Skill_Group_Half_Hour Table ....39	
Service_Half_Hour Table....394	
Skill_Group_Half_Hour Table....439	
PreviewTime	
Dialer_Detail Table....206	
PriCallsHandled	
Galaxy_Agent_Performance Table....240	
PriCallworkTime	
Galaxy_Agent_Performance Table....240	
PriGate	
Galaxy_Agent_Performance Table....240	
PrimaryAssignedTime	
Galaxy_Gate Table....245	
PrimaryAvailableTime	
Galaxy_Gate Table....245	
PrimaryCallsHandled	
Galaxy_Agent_IGroup Table....238	
PrimaryCallworkTime	
Galaxy_Agent_IGroup Table....238	
PrimaryCallWorkTime	
Galaxy_Gate Table....245	
PrimaryCtiAddress	
Logical_Interface_Controller Table....286	
PrimaryHandled	
Galaxy_Gate Table....245	
PrimaryODCallsHandled	
Galaxy_Agent_IGroup Table....238	
PrimaryODCallworkTime	

Galaxy_Agent_IGroup Table....238	PstnTrunkGroupChannelNumber
PrimaryODCallWorkTime	Termination_Call_Detail Table....490
Galaxy_Gate Table....245	
PrimaryODHandled	PstnTrunkGroupID
Galaxy_Gate Table....245	Termination_Call_Detail Table....490
PrimaryODTalkTIme	QualityRecordingRate
Galaxy_Agent_IGroup Table....238	Agent_Desk_Settings Table ....18
PrimaryODTalkTime	QueryRuleActive
Galaxy_Gate Table....245	Campaign_Query_Rule_Real_Time Table....172
PrimaryPluggedTime	QueryRuleActiveTime
Galaxy_Gate Table....245	Campaign_Query_Rule_Interval Table ....170
PrimaryTalkTime	QueryRuleActiveTimeToHalf
Galaxy_Agent_IGroup Table....238	Campaign_Query_Rule_Half_Hour Table ....166
Galaxy_Gate Table....245	
PrintControlSettings	QueryRuleEnabled
Script_Print_Control Table....381	Campaign_Query_Rule Table ....164
Priority	QueryRuleID
Agent_Skill_Group_Real_Time Table....63	Dialer_Detail Table....206
Route_Call_Detail Table....338	Dialer_Port_Real_Time Table....218
Service_Member Table....415	
Termination_Call_Detail Table....490	
Priority	QueryRuleID
Skill_Group Table....432	Campaign_Query_Rule_Half_Hour Table ....166
PriSupervisorSkillTargetID	Campaign_Query_Rule_Interval Table ....170
Agent_Team Table....70	Campaign_Query_Rule_Real_Time Table....172
PriTalkTime	Query_Rule_Clause Table....327
Galaxy_Agent_Performance Table....240	
ProcName	QueryRuleID
Application_Event Table ....73	Agent_Real_Time Table ....34
Event Table....232	Campaign_Query_Rule Table ....164
Protocol	Query_Rule Table....325
Application_Gateway_Connection Table....76	
ProtocolID	QueryRuleName
Dialer_Detail Table....206	Query_Rule Table....325
Termination_Call_Detail Table....490	QueueLimitingRejectCount
	Galaxy_Gate Table....245
QueueNode	QueueNode
	Script_Queue_Real_Time Table....381
QuickDetectEnabled	QuickDetectEnabled
	Campaign Table ....155
QuickEditBaseVersion	QuickEditBaseVersion

Script Table....377	Service_Five_Minute Table....390
RCDRecoveryKey	Service_Interval Table....406
Route_Call_Variable Table....343	Skill_Group_Interval Table....457
RcvInErrorTo5	RecoveryDay
Routing_Client_Five_Minute Table....359	Route_Call_Detail Table....338
ReadBaseTable	Route_Half_Hour Table....347
ICR_View Table....270	Service_Half_Hour Table....394
ReadOnly	Termination_Call_Detail Table....490
User_Group Table....514	RecoveryDay
Ready	Application_Event Table ....73
Skill_Group_Real_Time Table....477	Network_Event_Detail Table....293
Ready	Network_Trunk_Group_Half_Hour Table....296
Skill_Group_Five_Minute Table....436	Route_Five_Minute Table....344
ReasonCode	Skill_Group_Five_Minute Table....436
Agent_Logout Table....33	Skill_Group_Half_Hour Table....439
ReasonCode	Trunk_Group_Five_Minute Table....508
Agent_Real_Time Table ....34	Trunk_Group_Half_Hour Table....509
Agent_Skill_Group_Real_Time Table....63	RecoveryKey
Reason_Code Table ....328	Agent_Interval Table....29
ReasonCode	Agent_Skill_Group_Interval Table....51
Agent_Event_Detail Table ....24	Call_Type_Interval Table....109
Agent_Skill_Group_Logout Table ....62	Call_Type_Skill_Group_Half_Hour Table....122
Agent_State_Trace Table....64	Call_Type_Skill_Group_Interval Table....131
ReasonCodeID	Campaign_Half_Hour Table....163
Reason_Code Table ....328	Config_Message_Log Table....193
ReasonText	Dialer_Detail Table....206
Reason_Code Table ....328	Dialer_Skill_Group_Half_Hour Table....223
RecordingMode	Galaxy_DNIS Table....243
Agent_Desk_Settings Table ....18	Galaxy_Trunk_IGroup Table....260
RecordsToCache	Import_Log Table....272
Campaign_Skill_Group Table ....180	Network_Event_Detail Table....293
RecoveryDay	Peripheral_Interval Table....313
Event Table....232	Recovery Table....329
Routing_Client_Five_Minute Table....359	Route_Five_Minute Table....344
Script_Five_Minute Table....380	Schedule_Import Table....367

Service_Interval Table....406	Physical_Controller_Half_Hour Table....323
Skill_Group_Interval Table....457	Route_Call_Detail Table....338
Translation_Route_Half_Hour Table....504	Route_Half_Hour Table....347
RecoveryKey	Routing_Client_Five_Minute Table....359
Agent_Logout Table....33	Script_Five_Minute Table....380
Agent_Skill_Group_Half_Hour Table ....39	Service_Five_Minute Table....390
Agent_Skill_Group_Logout Table ....62	Service_Half_Hour Table....394
Application_Gateway_Half_Hour Table ....80	Skill_Group_Five_Minute Table....436
Call_Type_Half_Hour Table ....96	Skill_Group_Half_Hour Table....439
Dialer_Half_Hour Table....211	Termination_Call_Detail Table....490
Dialer_Interval Table....214	Termination_Call_Variable Table....502
Import_Rule_History Table....278	Trunk_Group_Five_Minute Table....508
Logger_Admin Table ....283	Trunk_Group_Half_Hour Table....509
Route_Call_Variable Table....343	RecoveryKey
RecoveryKey	Galaxy_Agent_Performance Table....240
Agent_Event_Detail Table ....24	Galaxy_Gate_Delayed_Call Table....248
Agent_Half_Hour Table ....25	Recurrence
Agent_State_Trace Table....64	Admin_Script_Schedule_Map Table....13
Application_Event Table ....73	RecurrenceFreq
Campaign_Query_Rule_Half_Hour Table ....166	Admin_Script_Schedule_Map Table....13
Campaign_Query_Rule_Interval Table ....170	RedirectNoAnsCalls
Event Table....232	Agent_Skill_Group_Interval Table....51
Galaxy_Agent_Call_Count Table....237	Service_Interval Table....406
Galaxy_Agent_IGroup Table....238	Skill_Group_Interval Table....457
Galaxy_Alarm Table....242	RedirectNoAnsCallsHalf
Galaxy_Gate Table....245	Route_Real_Time Table....352
Galaxy_Overflow Table....251	Service_Real_Time Table....416
Galaxy_PBX Table....255	RedirectNoAnsCallsTime
Galaxy_Single_Trunk Table....257	Agent_Skill_Group_Interval Table....51
Galaxy_Transaction_Code Table....258	Skill_Group_Interval Table....457
Galaxy_Trunk_Call_Count Table....259	RedirectNoAnsCallsTimeToHalf
Logger_Meters Table....284	Agent_Skill_Group_Half_Hour Table ....39
Network_Trunk_Group_Half_Hour Table....296	Skill_Group_Half_Hour Table....439
Peripheral_Half_Hour Table....310	RedirectNoAnsCallsTo5
Persistent_Variable Table....321	Route_Real_Time Table....352

Service_Real_Time Table....416	RejectedOnRoute11
Skill_Group_Real_Time Table....477	Galaxy_Overflow Table....251
RedirectNoAnsCallsToday	RejectedOnRoute12
Route_Real_Time Table....352	Galaxy_Overflow Table....251
Service_Real_Time Table....416	RejectedOnRoute13
RedirectNoAnsCallsToHalf	Galaxy_Overflow Table....251
Route_Half_Hour Table....347	RejectedOnRoute14
Service_Half_Hour Table....394	Galaxy_Overflow Table....251
RedirectNoAnsCallsToHalf	RejectedOnRoute15
Agent_Skill_Group_Half_Hour Table ....39	Galaxy_Overflow Table....251
Skill_Group_Half_Hour Table...439	RejectedOnRoute16
RegionID	Galaxy_Overflow Table....251
Region_Prefix Table....333	RejectedOnRoute2
RegionID	Galaxy_Overflow Table....251
Dialed_Number_Map Table....200	RejectedOnRoute3
Region Table....332	Galaxy_Overflow Table....251
Region_Member Table....333	RejectedOnRoute4
Region_View_Member Table....335	Galaxy_Overflow Table....251
RegionPrefix	RejectedOnRoute5
Region_Prefix Table....333	Galaxy_Overflow Table....251
RegionPrefixID	RejectedOnRoute6
Region_Prefix Table....333	Galaxy_Overflow Table....251
RegionType	RejectedOnRoute7
Region Table....332	Galaxy_Overflow Table....251
RegionViewID	RejectedOnRoute8
Region_View Table....334	Galaxy_Overflow Table....251
Region_View_Member Table....335	RejectedOnRoute9
RegionViewType	Galaxy_Overflow Table....251
Region_View Table....334	RejectsToHalf
RegisteredPorts	Application_Gateway_Half_Hour Table ....80
Dialer_Real_Time Table....219	ReleaseCallbackEnabled
RejectedOnRoute1	Campaign Table ....155
Galaxy_Overflow Table....251	ReleaseOnSend
RejectedOnRoute10	ICR_Locks Table....268
Galaxy_Overflow Table....251	RemoteAgentType

Agent_Desk_Settings Table ....18	User_Variable Table....518
RemoteLoginWithoutDesktop	ReportType
Agent_Desk_Settings Table ....18	Schedule_Report Table....372
RemotePhoneNumber	ReqInstrTo5
Agent_Logout Table....33	Routing_Client_Five_Minute Table....359
Agent_Real_Time Table ....34	RequeryResult
RenameEnabled	Route_Call_Detail Table....338
Import_Rule Table....273	RequestedSupervisorAssist
RenameMax Versions	Agent_Real_Time Table ....34
Import_Rule Table....273	RequestsToHalf
ReportingHalfHour	Application_Gateway_Half_Hour Table ....80
Agent_Interval Table....29	RequestTimeout
Agent_Skill_Group_Interval Table....51	Application_Gateway_Connection Table....76
Call_Type_Interval Table....109	Application_Gateway_Globals Table ....78
Call_Type_Skill_Group_Interval Table....131	RequestType
Peripheral_Interval Table....313	Route_Call_Detail Table....338
Service_Interval Table....406	ReRouteReqTo5
Skill_Group_Interval Table....457	Routing_Client_Five_Minute Table....359
ReportingHalfHour	RescheduleCallbackMode
Campaign_Query_Rule_Interval Table ....170	Campaign Table ....155
Dialer_Interval Table....214	RescheduleCallbacks
ReportingInterval	Blended_Agent_Options Table ....90
Agent_Interval Table....29	ReservationCallDuration
Agent_Skill_Group_Interval Table....51	Dialer_Detail Table....206
Call_Type Table ....95	ReservationCalls
Call_Type_Interval Table....109	Call_Type_Interval Table....109
Call_Type_Skill_Group_Interval Table....131	ReservationCalls
Peripheral_Interval Table....313	Call_Type_Skill_Group_Interval Table....131
Service_Interval Table....406	ReservationPercentage
Skill_Group_Interval Table....457	Campaign_Skill_Group Table ....180
ReportingInterval	ReserveCalls
Dialer_Interval Table....214	Agent_Skill_Group_Interval Table....51
ReportingInterval	Service_Interval Table....406
Campaign_Query_Rule_Interval Table ....170	Skill_Group_Interval Table....457
ReportingMethod	ReserveCallsHalf

Service_Real_Time Table....416	ReserveCallsTalkTimeHalf
ReserveCallsNow	Service_Real_Time Table....416
Service_Real_Time Table....416	ReserveCallsTalkTimeTo5
ReserveCallsOnHold	Skill_Group_Real_Time Table....477
Agent_Skill_Group_Interval Table....51	ReserveCallsTalkTimeTo5
Service_Interval Table....406	Service_Real_Time Table....416
Skill_Group_Interval Table....457	ReserveCallsTalkTimeToday
ReserveCallsOnHoldHalf	Service_Real_Time Table....416
Service_Real_Time Table....416	ReserveCallsTalkTimeToHalf
ReserveCallsOnHoldTime	Agent_Skill_Group_Half_Hour Table ....39
Agent_Skill_Group_Interval Table....51	Service_Half_Hour Table....394
Service_Interval Table....406	Skill_Group_Half_Hour Table....439
Skill_Group_Interval Table....457	ReserveCallsTime
ReserveCallsOnHoldTimeHalf	Agent_Skill_Group_Interval Table....51
Service_Real_Time Table....416	Service_Interval Table....406
ReserveCallsOnHoldTimeTo5	Skill_Group_Interval Table....457
Service_Real_Time Table....416	ReserveCallsTimeHalf
ReserveCallsOnHoldTimeToday	Service_Real_Time Table....416
Service_Real_Time Table....416	ReserveCallsTimeTo5
ReserveCallsOnHoldTimeToHalf	Skill_Group_Real_Time Table....477
Agent_Skill_Group_Half_Hour Table ....39	ReserveCallsTimeTo5
Service_Half_Hour Table....394	Service_Real_Time Table....416
Skill_Group_Half_Hour Table....439	ReserveCallsTimeToday
ReserveCallsOnHoldTo5	Service_Real_Time Table....416
Service_Real_Time Table....416	ReserveCallsTimeToHalf
ReserveCallsOnHoldToday	Agent_Skill_Group_Half_Hour Table ....39
Service_Real_Time Table....416	Service_Half_Hour Table....394
ReserveCallsOnHoldToHalf	Skill_Group_Half_Hour Table....439
Agent_Skill_Group_Half_Hour Table ....39	ReserveCallsTo5
Service_Half_Hour Table....394	Service_Real_Time Table....416
Skill_Group_Half_Hour Table....439	Skill_Group_Real_Time Table....477
ReserveCallsTalkTime	ReserveCallsToday
Agent_Skill_Group_Interval Table....51	Service_Real_Time Table....416
Service_Interval Table....406	ReserveCallsToHalf
Skill_Group_Interval Table....457	Agent_Skill_Group_Half_Hour Table ....39

Service_Half_Hour Table....394	Call_Type_Half_Hour Table ....96
Skill_Group_Half_Hour Table....439	Call_Type_Interval Table....109
Reserved1	Call_Type_Skill_Group_Half_Hour Table....122
Agent_Half_Hour Table ....25	Call_Type_Skill_Group_Interval Table....131
Agent_Interval Table....29	Route_Half_Hour Table....347
Agent_Skill_Group_Half_Hour Table ....39	Service_Half_Hour Table....394
Agent_Skill_Group_Interval Table....51	Service_Interval Table....406
Call_Type_Half_Hour Table ....96	Skill_Group_Half_Hour Table....439
Call_Type_Interval Table....109	Skill_Group_Interval Table....457
Call_Type_Skill_Group_Half_Hour Table....122	Reserved4
Call_Type_Skill_Group_Interval Table....131	Agent_Half_Hour Table ....25
Route_Half_Hour Table....347	Agent_Interval Table....29
Service_Half_Hour Table....394	Agent_Skill_Group_Half_Hour Table ....39
Service_Interval Table....406	Agent_Skill_Group_Interval Table....51
Skill_Group_Half_Hour Table....439	Call_Type_Half_Hour Table ....96
Skill_Group_Interval Table....457	Call_Type_Interval Table....109
Reserved2	Call_Type_Skill_Group_Half_Hour Table....122
Agent_Half_Hour Table ....25	Call_Type_Skill_Group_Interval Table....131
Agent_Interval Table....29	Route_Half_Hour Table....347
Agent_Skill_Group_Half_Hour Table ....39	Service_Half_Hour Table....394
Agent_Skill_Group_Interval Table....51	Service_Interval Table....406
Call_Type_Half_Hour Table ....96	Skill_Group_Half_Hour Table....439
Call_Type_Interval Table....109	Skill_Group_Interval Table....457
Call_Type_Skill_Group_Half_Hour Table....122	Reserved5
Call_Type_Skill_Group_Interval Table....131	Agent_Half_Hour Table ....25
Route_Half_Hour Table....347	Agent_Interval Table....29
Service_Half_Hour Table....394	Agent_Skill_Group_Half_Hour Table ....39
Service_Interval Table....406	Agent_Skill_Group_Interval Table....51
Skill_Group_Half_Hour Table....439	Call_Type_Half_Hour Table ....96
Skill_Group_Interval Table....457	Call_Type_Interval Table....109
Reserved3	Call_Type_Skill_Group_Half_Hour Table....122
Agent_Half_Hour Table ....25	Call_Type_Skill_Group_Interval Table....131
Agent_Interval Table....29	Route_Half_Hour Table....347
Agent_Skill_Group_Half_Hour Table ....39	Service_Half_Hour Table....394
Agent_Skill_Group_Interval Table....51	Service_Interval Table....406

Skill_Group_Half_Hour Table....439	Call_Type_Interval Table....109
Skill_Group_Interval Table....457	ReturnReleaseHalf
ReservedAgents	Call_Type_Real_Time Table ....142
Skill_Group_Real_Time Table....477	ReturnReleaseToday
ReservedByIVR	Call_Type_Real_Time Table ....142
Dialed_Number Table....197	ReturnReleaseToHalf
ReservedStateTime	Call_Type_Half_Hour Table ....96
Agent_Skill_Group_Interval Table....51	ReturnRing
Skill_Group_Interval Table....457	Call_Type_Interval Table....109
ReservedStateTimeTo5	ReturnRingToday
Skill_Group_Five_Minute Table....436	Call_Type_Real_Time Table ....142
Skill_Group_Real_Time Table....477	ReturnRingToHalf
ReservedStateTimeToHalf	Call_Type_Half_Hour Table ....96
Agent_Skill_Group_Half_Hour Table ....39	Call_Type_Real_Time Table ....142
Skill_Group_Half_Hour Table....439	RingNoAnswerDialedNumberID
ReservePortTime	Agent_Desk_Settings Table ....18
Dialer_Interval Table....214	RingNoAnswerTime
ReservePortTimeToday	Agent_Desk_Settings Table ....18
Dialer_Real_Time Table....219	RingTime
ReservePortTimeToHalf	Termination_Call_Detail Table....490
Dialer_Half_Hour Table....211	Routable
Dialer_Real_Time Table....219	Agent_Real_Time Table ....34
ResponsesTo5	RoutableInMRDTime
Routing_Client_Five_Minute Table....359	Agent_Interval Table....29
Retain	RoutableInMRDTimeToHalf
Logger_Admin Table ....283	Agent_Half_Hour Table ....25
ReturnBusy	RouteCallDetailTo5
Call_Type_Interval Table....109	Logger_Meters Table....284
ReturnBusyToday	RoutedAgentSkillTargetID
Call_Type_Real_Time Table ....142	Termination_Call_Detail Table....490
ReturnBusyToHalf	RoutedServiceSkillTargetID
Call_Type_Half_Hour Table ....96	Termination_Call_Detail Table....490
ReturnBusyToHalf	RoutedSkillGroupSkillTargetID
Call_Type_Real_Time Table ....142	Termination_Call_Detail Table....490
ReturnRelease	RoutedToHalf

Translation_Route_Half_Hour Table....504	RouterAnsInterval10 Skill_Group_Interval Table....457
RouteID Peripheral_Default_Route Table....310	RouterAnsInterval2 Skill_Group_Interval Table....457
RouteID Route_Half_Hour Table....347	RouterAnsInterval3 Skill_Group_Interval Table....457
RouteID Route_Real_Time Table....352	RouterAnsInterval4 Skill_Group_Interval Table....457
RouteID Termination_Call_Detail Table....490	RouterAnsInterval5 Skill_Group_Interval Table....457
RouteID Enterprise_Route_Member Table....229	RouterAnsInterval6 Skill_Group_Interval Table....457
RouteID Peripheral_Target Table....320	RouterAnsInterval7 Skill_Group_Interval Table....457
Route Table....336	RouterAnsInterval8 Skill_Group_Interval Table....457
RouteID Route_Call_Detail Table....338	RouterAnsInterval9 Skill_Group_Interval Table....457
RouteID Route_Five_Minute Table....344	RouterCallKey Dialer_Detail Table....206
RouterAbandInterval1 Skill_Group_Interval Table....457	RouterCallKey Network_Event_Detail Table....293
RouterAbandInterval10 Skill_Group_Interval Table....457	RouterCallKey Route_Call_Detail Table....338
RouterAbandInterval2 Skill_Group_Interval Table....457	RouterCallKey Termination_Call_Detail Table....490
RouterAbandInterval3 Skill_Group_Interval Table....457	RouterCallKey, RouterCallKeyDay, RouterCallKeySequenceNumber Agent_State_Trace Table....64
RouterAbandInterval4 Skill_Group_Interval Table....457	RouterCallKeyDay Dialer_Detail Table....206
RouterAbandInterval5 Skill_Group_Interval Table....457	RouterCallKeyDay Route_Call_Detail Table....338
RouterAbandInterval6 Skill_Group_Interval Table....457	RouterCallKeyDay Termination_Call_Detail Table....490
RouterAbandInterval7 Skill_Group_Interval Table....457	RouterCallKeyDay Network_Event_Detail Table....293
RouterAbandInterval8 Skill_Group_Interval Table....457	RouterCallKeySequenceNumber Network_Event_Detail Table....293
RouterAbandInterval9 Skill_Group_Interval Table....457	
RouterAnsInterval11 Skill_Group_Interval Table....457	

Route_Call_Detail Table....338	Call_Type_Real_Time Table ....142
Termination_Call_Detail Table....490	RouterCallsAbandToAgentTo5
RouterCallsAband	Call_Type_Real_Time Table ....142
Agent_Interval Table....29	Skill_Group_Real_Time Table....477
RouterCallsAbandDequeued	RouterCallsAbandToAgentToday
Call_Type_Skill_Group_Interval Table....131	Call_Type_Real_Time Table ....142
Skill_Group_Interval Table....457	RouterCallsAbandToAgentToHalf
RouterCallsAbandDequeuedTo5	Call_Type_Half_Hour Table ....96
Skill_Group_Real_Time Table....477	Call_Type_Skill_Group_Half_Hour Table....122
RouterCallsAbandDequeuedToHalf	Skill_Group_Half_Hour Table....439
Skill_Group_Half_Hour Table....439	RouterCallsAbandToHalf
RouterCallsAbandQ	Agent_Half_Hour Table ....25
Agent_Interval Table....29	RouterCallsAnswered
Call_Type_Interval Table....109	Agent_Interval Table....29
Call_Type_Skill_Group_Interval Table....131	RouterCallsAnsweredToHalf
Skill_Group_Interval Table....457	Agent_Half_Hour Table ....25
RouterCallsAbandQHalf	RouterCallsDequeued
Call_Type_Real_Time Table ....142	Agent_Interval Table....29
RouterCallsAbandQTo5	Call_Type_Skill_Group_Interval Table....131
Skill_Group_Real_Time Table....477	Skill_Group_Interval Table....457
RouterCallsAbandQTo5	RouterCallsDequeuedTo5
Call_Type_Real_Time Table ....142	Skill_Group_Real_Time Table....477
RouterCallsAbandQToday	RouterCallsDequeuedToHalf
Call_Type_Real_Time Table ....142	Agent_Half_Hour Table ....25
RouterCallsAbandQToHalf	Call_Type_Skill_Group_Half_Hour Table....122
Agent_Half_Hour Table ....25	Skill_Group_Half_Hour Table....439
Call_Type_Skill_Group_Half_Hour Table....122	RouterCallsHandled
RouterCallsAbandQToHalf	Agent_Interval Table....29
Call_Type_Half_Hour Table ....96	RouterCallsHandledToHalf
Skill_Group_Half_Hour Table....439	Agent_Half_Hour Table ....25
RouterCallsAbandToAgent	RouterCallsOffered
Call_Type_Interval Table....109	Agent_Interval Table....29
Call_Type_Skill_Group_Interval Table....131	Skill_Group_Interval Table....457
Skill_Group_Interval Table....457	RouterCallsOfferedTo5
RouterCallsAbandToAgentHalf	Skill_Group_Real_Time Table....477

RouterCallsOfferedToHalf	<a href="#">Skill_Group_Interval Table....457</a>
Agent_Half_Hour Table ....25	
Skill_Group_Half_Hour Table....439	
RouterCallsQNow	<a href="#">RouterQueueCalls</a>
Scheduled_Target_Real_Time Table....376	<a href="#">Agent_Interval Table....29</a>
Skill_Group_Real_Time Table....477	<a href="#">Call_Type_Interval Table....109</a>
RouterCallsQNow	<a href="#">Call_Type_Skill_Group_Interval Table....131</a>
Call_Type_Real_Time Table ....142	<a href="#">Skill_Group_Interval Table....457</a>
RouterCallsQNowTime	<a href="#">RouterQueueCallsHalf</a>
Call_Type_Real_Time Table ....142	<a href="#">Call_Type_Real_Time Table ....142</a>
RouterCallsQueueNow	<a href="#">RouterQueueCallsTo5</a>
Agent_Real_Time Table ....34	<a href="#">Call_Type_Real_Time Table ....142</a>
RouterCallsRedirected	<a href="#">RouterQueueCallsToday</a>
Agent_Interval Table....29	<a href="#">Call_Type_Real_Time Table ....142</a>
RouterCallsRedirectedToHalf	<a href="#">RouterQueueCallsToHalf</a>
Agent_Half_Hour Table ....25	<a href="#">Agent_Half_Hour Table ....25</a>
RouterDelayQABandTime	<a href="#">Call_Type_Skill_Group_Half_Hour Table....122</a>
Skill_Group_Interval Table....457	
RouterError	<a href="#">RouterQueueCallsToHalf</a>
Agent_Interval Table....29	<a href="#">Call_Type_Half_Hour Table ....96</a>
Skill_Group_Interval Table....457	<a href="#">Skill_Group_Half_Hour Table....439</a>
RouterErrorCode	<a href="#">RouterQueueCallTypeLimit</a>
Route_Call_Detail Table....338	<a href="#">Call_Type_Interval Table....109</a>
RouterErrorToHalf	<a href="#">RouterQueueCallTypeLimitToHalf</a>
Agent_Half_Hour Table ....25	<a href="#">Call_Type_Half_Hour Table ....96</a>
Skill_Group_Half_Hour Table....439	
RouterLongestCallInQ	<a href="#">RouterQueueGlobalLimit</a>
Skill_Group_Real_Time Table....477	<a href="#">Call_Type_Interval Table....109</a>
RouterLongestCallQ	<a href="#">RouterQueueGlobalLimitToHalf</a>
Call_Type_Real_Time Table ....142	<a href="#">Call_Type_Half_Hour Table ....96</a>
RouterLongestCallQ	<a href="#">RouterQueueTime</a>
Agent_Real_Time Table ....34	<a href="#">Route_Call_Detail Table....338</a>
RouterMaxCallsQueued	<a href="#">RouterQueueWaitTime</a>
Skill_Group_Interval Table....457	<a href="#">Call_Type_Interval Table....109</a>
RouterMaxCallWaitTime	<a href="#">Call_Type_Skill_Group_Interval Table....131</a>
	<a href="#">RouterQueueWaitTimeHalf</a>
	<a href="#">Call_Type_Real_Time Table ....142</a>
	<a href="#">RouterQueueWaitTimeTo5</a>
	<a href="#">Call_Type_Real_Time Table ....142</a>

RouterQueueWaitTimeToday	<a href="#">Query_Rule_Clause Table....327</a>
Call_Type_Real_Time Table ....142	
RouterQueueWaitTimeToHalf	<a href="#">RuleType</a>
Call_Type_Skill_Group_Half_Hour Table....122	<a href="#">Agent_Targeting_Rule Table....67</a>
RouterQueueWaitTimeToHalf	<a href="#">RunScriptTo5</a>
Call_Type_Half_Hour Table ....96	<a href="#">Routing_Client_Five_Minute Table....359</a>
RouterTimeOutToHalf	<a href="#">SaturdayEnabled</a>
Translation_Route_Half_Hour Table....504	<a href="#">Import_Rule Table....273</a>
RouteSelectFailureTo5	<a href="#">SaveApplicationPositions</a>
Routing_Client_Five_Minute Table....359	<a href="#">Cfg_Mngr_User/Desktop_Snap Table ....185</a>
RoutingClientCallKey	<a href="#">SaveFilterData</a>
Route_Call_Detail Table....338	<a href="#">Cfg_Mngr_User/Desktop_Snap Table ....185</a>
RoutingClientID	<a href="#">SaveSnapShotOnExit</a>
Agent_Targeting_Rule_Member Table....68	<a href="#">Cfg_Mngr_User_Settings Table....187</a>
Dialed_Number Table....197	<a href="#">ScheduledAt</a>
Route_Call_Detail Table....338	<a href="#">Logger_Admin Table ....283</a>
Translation_Route_Half_Hour Table....504	
RoutingClientID	<a href="#">ScheduleID</a>
Default_Call_Type Table....195	<a href="#">Agent Table....15</a>
Dial_Number_Plan Table....201	<a href="#">Import_Log Table....272</a>
Label Table....281	
Routing_Client_Five_Minute Table....359	<a href="#">ScheduleID</a>
RoutingClientID	<a href="#">Service Table....386</a>
Routing_Client Table....357	<a href="#">Skill_Group Table....432</a>
RowOrder	<a href="#">ScheduleID</a>
Script_Data Table....379	<a href="#">Import_Schedule Table....281</a>
RowOrder	<a href="#">Recurring_Schedule_Map Table....330</a>
User_Formula_Equation Table....513	<a href="#">Schedule Table....365</a>
RowsCopied	<a href="#">Schedule_Import Table....367</a>
Recovery Table....329	<a href="#">Schedule_Import_Real_Time Table....369</a>
RowsCopied	<a href="#">Schedule_Map Table....371</a>
Import_Log Table....272	<a href="#">Scheduled_Target Table....375</a>
RowsPurged	<a href="#">Service_Array Table....388</a>
Logger_Admin Table ....283	<a href="#">ScheduleMapID</a>
RuleData	<a href="#">Schedule_Map Table....371</a>
	<a href="#">SchedulePeriod</a>
	<a href="#">Schedule Table....365</a>
	<a href="#">ScheduleReportID</a>

Schedule Table....365	ScriptRespTo5
Schedule_Report Table....372	Routing_Client_Five_Minute Table....359
ScheduleReportID	ScriptSchedule
Schedule_Report_Input Table....373	Call_Type_Map Table ....121
ScheduleReportInputID	ScriptTableColumnID
Schedule_Report_Input Table....373	Script_Table_Column Table....384
ScheduleSourceID	ScriptTableID
Schedule Table....365	Script_Table Table....383
Schedule_Source Table....374	ScriptTableID
ScheduleStartHours	Script_Table_Column Table....384
Import_Rule Table....273	ScriptType
ScheduleStartMinutes	Master_Script Table....288
Import_Rule Table....273	SecCallsHandled
ScheduleType	Galaxy_Agent_Performance Table....240
Schedule Table....365	SecCallworkTime
ScriptData	Galaxy_Agent_Performance Table....240
Script_Data Table....379	SecGate
ScriptID	Galaxy_Agent_Performance Table....240
Script_Real_Time Table....382	SecondaryAssignedTime
ScriptID	Galaxy_Gate Table....245
Call_Type_Real_Time Table ....142	SecondaryCallsHandled
Script Table....377	Galaxy_Agent_IGroup Table....238
Script_Data Table....379	SecondaryCallworkTime
Script_Print_Control Table....381	Galaxy_Agent_IGroup Table....238
ScriptID	SecondaryCallWorkTime
Route_Call_Detail Table....338	Galaxy_Gate Table....245
Script_Cross_Reference Table....378	SecondaryCtiAddress
Script_Five_Minute Table....380	Logical_Interface_Controller Table....286
Script_Queue_Real_Time Table....381	SecondaryHandled
ScriptMeters	Galaxy_Gate Table....245
Script_Real_Time Table....382	SecondaryODCallsHandled
ScriptModificationAllowed	Galaxy_Agent_IGroup Table....238
Assignment_Queue Table....85	SecondaryODCallworkTime
ScriptPrintControlID	Galaxy_Agent_IGroup Table....238
Script_Print_Control Table....381	SecondaryODCallWorkTime

Galaxy_Gate Table....245	SequenceNumber
SecondaryODHandled	Campaign_Target_Sequence Table....182
Galaxy_Gate Table....245	SerialNumber
SecondaryODTalkTime	Galaxy_Agent_Performance Table....240
Galaxy_Gate Table....245	ServiceArraySkillTargetID
SecondaryODTalkTime	Service_Array_Member Table....389
Galaxy_Agent_IGroup Table....238	ServiceLevel
SecondaryPluggedTime	Call_Type_Interval Table....109
Galaxy_Gate Table....245	Call_Type_Skill_Group_Interval Table....131
SecondaryTalkTime	Peripheral_Interval Table....313
Galaxy_Agent_IGroup Table....238	Service_Interval Table....406
Galaxy_Gate Table....245	Skill_Group_Interval Table....457
SecondCallDuration	ServiceLevelAband
Galaxy_PBX Table....255	Call_Type_Interval Table....109
SecondCalls	Call_Type_Skill_Group_Interval Table....131
Galaxy_PBX Table....255	Peripheral_Interval Table....313
SecondsInPeriod	Service_Interval Table....406
Galaxy_Agent_IGroup Table....238	ServiceLevelAbandHalf
Galaxy_DNIS Table....243	Peripheral_Real_Time Table....316
Galaxy_Gate Table....245	ServiceLevelAbandHalf
Galaxy_Gate_Delayed_Call Table....248	Call_Type_Half_Hour Table ....96
Galaxy_Overflow Table....251	Call_Type_Real_Time Table ....142
Galaxy_Transaction_Code Table....258	Route_Real_Time Table....352
Galaxy_Trunk_IGroup Table....260	Service_Real_Time Table....416
SecTalkTime	ServiceLevelAbandTo5
Galaxy_Agent_Performance Table....240	Route_Five_Minute Table....344
SeizureCount	Route_Real_Time Table....352
Galaxy_Single_Trunk Table....257	ServiceLevelAbandTo5
SequenceNumber	Call_Type_Real_Time Table ....142
Admin_Script_Schedule_Map Table....13	Service_Five_Minute Table....390
Import_Rule_Clause Table....277	Service_Real_Time Table....416
SequenceNumber	ServiceLevelAbandToday
Query_Rule_Clause Table....327	Call_Type_Real_Time Table ....142
SequenceNumber	Peripheral_Real_Time Table....316
Recurring_Schedule_Map Table....330	Route_Five_Minute Table....344

Route_Real_Time Table....352	ServiceLevelCallsOffered
Service_Five_Minute Table....390	Call_Type_Interval Table....109
Service_Real_Time Table....416	Call_Type_Skill_Group_Interval Table....131
ServiceLevelAbandToHalf	Peripheral_Interval Table....313
Call_Type_Skill_Group_Half_Hour Table....122	Service_Interval Table....406
ServiceLevelAbandToHalf	Skill_Group_Interval Table....457
Peripheral_Half_Hour Table....310	ServiceLevelCallsOfferedHalf
Route_Half_Hour Table....347	Call_Type_Half_Hour Table ....96
Service_Half_Hour Table....394	ServiceLevelCallsOfferedHalf
ServiceLevelCalls	Call_Type_Real_Time Table ....142
Call_Type_Interval Table....109	Peripheral_Real_Time Table....316
Call_Type_Skill_Group_Interval Table....131	Route_Real_Time Table....352
Peripheral_Interval Table....313	Service_Real_Time Table....416
Service_Interval Table....406	ServiceLevelCallsOfferedTo5
Skill_Group_Interval Table....457	Service_Real_Time Table....416
ServiceLevelCallsAband	Skill_Group_Real_Time Table....477
Skill_Group_Interval Table....457	ServiceLevelCallsOfferedTo5
ServiceLevelCallsAbandTo5	Call_Type_Real_Time Table ....142
Skill_Group_Real_Time Table....477	Route_Five_Minute Table....344
ServiceLevelCallsAbandToHalf	Route_Real_Time Table....352
Skill_Group_Half_Hour Table....439	Service_Five_Minute Table....390
ServiceLevelCallsDequeue	ServiceLevelCallsOfferedToday
Call_Type_Skill_Group_Interval Table....131	Call_Type_Real_Time Table ....142
Skill_Group_Interval Table....457	Peripheral_Real_Time Table....316
ServiceLevelCallsDequeuedTo5	Route_Real_Time Table....352
Skill_Group_Real_Time Table....477	Service_Real_Time Table....416
ServiceLevelCallsDequeueToHalf	ServiceLevelCallsOfferedToday
Call_Type_Skill_Group_Half_Hour Table....122	Route_Five_Minute Table....344
Skill_Group_Half_Hour Table....439	Service_Five_Minute Table....390
ServiceLevelCallsHalf	ServiceLevelCallsOfferedToHalf
Call_Type_Half_Hour Table ....96	Call_Type_Skill_Group_Half_Hour Table....122
Call_Type_Real_Time Table ....142	Route_Half_Hour Table....347
Peripheral_Real_Time Table....316	Service_Half_Hour Table....394
Route_Real_Time Table....352	Skill_Group_Half_Hour Table....439
Service_Real_Time Table....416	ServiceLevelCallsOfferedToHalf

Peripheral_Half_Hour Table....310	Skill_Group_Interval Table....457
ServiceLevelCallsQHeld Route_Five_Minute Table....344	ServiceLevelErrorHalf Call_Type_Real_Time Table ....142
ServiceLevelCallsQHeld Call_Type_Real_Time Table ....142	ServiceLevelErrorToday Call_Type_Real_Time Table ....142
ServiceLevelCallsQHeld Route_Real_Time Table....352	ServiceLevelErrorToHalf Call_Type_Half_Hour Table ....96
ServiceLevelCallsQHeld Service_Five_Minute Table....390	Call_Type_Skill_Group_Half_Hour Table....122
ServiceLevelCallsQHeld Service_Real_Time Table....416	Skill_Group_Half_Hour Table....439
ServiceLevelCallsTo5 Skill_Group_Real_Time Table....477	ServiceLevelHalf Call_Type_Half_Hour Table ....96
ServiceLevelCallsTo5 Call_Type_Real_Time Table ....142	Call_Type_Real_Time Table ....142
ServiceLevelCallsTo5 Route_Five_Minute Table....344	Peripheral_Real_Time Table....316
ServiceLevelCallsTo5 Route_Real_Time Table....352	Route_Real_Time Table....352
ServiceLevelCallsTo5 Service_Five_Minute Table....390	Service_Real_Time Table....416
ServiceLevelCallsTo5 Service_Real_Time Table....416	ServiceLevelRONA Call_Type_Interval Table....109
ServiceLevelCallsToday Peripheral_Real_Time Table....316	Call_Type_Skill_Group_Interval Table....131
ServiceLevelCallsToday Call_Type_Real_Time Table ....142	Skill_Group_Interval Table....457
ServiceLevelCallsToday Route_Five_Minute Table....344	ServiceLevelRONAHalf Call_Type_Real_Time Table ....142
ServiceLevelCallsToday Route_Real_Time Table....352	ServiceLevelRONATo5 Call_Type_Real_Time Table ....142
ServiceLevelCallsToday Service_Five_Minute Table....390	Skill_Group_Real_Time Table....477
ServiceLevelCallsToday Service_Real_Time Table....416	ServiceLevelRONAToday Call_Type_Real_Time Table ....142
ServiceLevelCallsToHalf Call_Type_Skill_Group_Half_Hour Table....122	ServiceLevelRONAToHalf Call_Type_Half_Hour Table ....96
ServiceLevelCallsToHalf Skill_Group_Half_Hour Table....439	Call_Type_Skill_Group_Half_Hour Table....122
ServiceLevelCallsToHalf Peripheral_Half_Hour Table....310	Skill_Group_Half_Hour Table....439
ServiceLevelCallsToHalf Route_Half_Hour Table....347	ServiceLevelThreshold Media_Routing_Domain Table....290
ServiceLevelCallsToHalf Service_Half_Hour Table....394	Service_Level_Threshold Table....414
ServiceLevelError Call_Type_Interval Table....109	Skill_Group Table....432
ServiceLevelError Call_Type_Skill_Group_Interval Table....131	ServiceLevelThreshold

Call_Type Table ....95	Skill_Group Table....432
Service Table....386	ServiceLevelType
ServiceLevelTo5	Call_Type Table ....95
Skill_Group_Real_Time Table....477	Peripheral_Half_Hour Table....310
ServiceLevelTo5	Route_Half_Hour Table....347
Call_Type_Real_Time Table ....142	Service_Half_Hour Table....394
Route_Real_Time Table....352	Service_Level_Threshold Table....414
Service_Real_Time Table....416	ServiceLevelType
ServiceLevelTo5	Media_Routing_Domain Table....290
Route_Five_Minute Table....344	ServiceModeIndicator
Service_Five_Minute Table....390	Service_Real_Time Table....416
ServiceLevelToday	ServiceProvider
Peripheral_Real_Time Table....316	User_Group Table....514
ServiceLevelToday	ServiceSkillTargetID
Call_Type_Real_Time Table ....142	Service_Array_Member Table....389
Route_Real_Time Table....352	ServiceSkillTargetID
Service_Real_Time Table....416	Route Table....336
ServiceLevelToday	Service_Member Table....415
Route_Five_Minute Table....344	Termination_Call_Detail Table....490
Service_Five_Minute Table....390	ServiceSkillTargetID
ServiceLevelToHalf	Agent_Real_Time Table ....34
Call_Type_Skill_Group_Half_Hour Table....122	SessionRetry
Skill_Group_Half_Hour Table....439	Application_Gateway_Connection Table....76
ServiceLevelToHalf	Application_Gateway_Globals Table ....78
Peripheral_Half_Hour Table....310	SessionRetryLimit
Route_Half_Hour Table....347	Application_Gateway_Globals Table ....78
Service_Half_Hour Table....394	SessionRetryLimit
ServiceLevelType	Application_Gateway_Connection Table....76
Call_Type_Half_Hour Table ....96	SettableByAgent
Call_Type_Interval Table....109	Attribute Table....88
Call_Type_Skill_Group_Half_Hour Table....122	Severity
Call_Type_Skill_Group_Interval Table....131	Event Table....232
Peripheral_Interval Table....313	Severity
Service Table....386	Application_Event Table ....73
Service_Interval Table....406	Shift

View_Column Table....520	Script_Table Table....383
ShiftName	SignedInSeconds
Shift Table....432	Galaxy_Agent_Performance Table....240
ShortCalls	SignInTime
Agent_Skill_Group_Interval Table....51	Galaxy_Agent_Performance Table....240
Call_Type_Interval Table....109	SilencePeriod
Call_Type_Skill_Group_Interval Table....131	Dialer_Detail Table....206
Service_Interval Table....406	SilentMonitorAudibleIndication
Skill_Group_Interval Table....457	Agent_Desk_Settings Table ....18
ShortCallsHalf	SilentMonitorWarningMessage
Call_Type_Half_Hour Table ....96	Agent_Desk_Settings Table ....18
ShortCallsTime	SITToneDetect
Service_Interval Table....406	Dialer_Interval Table....214
ShortCallsTimeToHalf	SITToneDetect
Route_Half_Hour Table....347	Campaign_Query_Rule_Interval Table ....170
Service_Half_Hour Table....394	SITToneDetectCount
ShortCallsToday	Campaign_Query_Rule_Real_Time Table....172
Call_Type_Real_Time Table ....142	SITToneDetectTo5
ShortCallsToHalf	Campaign_Query_Rule_Real_Time Table....172
Call_Type_Skill_Group_Half_Hour Table....122	SITToneDetectToday
ShortCallsToHalf	Dialer_Real_Time Table....219
Agent_Skill_Group_Half_Hour Table ....39	SITToneDetectToHalf
Route_Half_Hour Table....347	Campaign_Query_Rule_Real_Time Table....172
Service_Half_Hour Table....394	Dialer_Half_Hour Table....211
Skill_Group_Half_Hour Table....439	Dialer_Real_Time Table....219
ShortCallsToHalf	Dialer_Skill_Group_Half_Hour Table....223
Call_Type_Real_Time Table ....142	SITToneDetectToHalf
Side	Campaign_Query_Rule_Half_Hour Table ....166
Application_Event Table ....73	SkillGroupSkillTargetID
Event Table....232	Agent_Skill_Group_Interval Table....51
Side	Call_Type_Skill_Group_Half_Hour Table....122
Application_Gateway_Connection Table....76	Call_Type_Skill_Group_Interval Table....131
SideA	Dialer_Detail Table....206
Script_Table Table....383	Dialer_Skill_Group_Half_Hour Table....223
SideB	Dialer_Skill_Group_Real_Time Table....226

Skill_Group_Member Table....477	Agent_Skill_Group_Real_Time Table....63
SkillGroupSkillTargetID	Agent_Team_Member Table ....71
Agent_Real_Time Table ....34	Galaxy_Agent_Performance Table....240
Agent_Skill_Group_Half_Hour Table ....39	Galaxy_Gate Table....245
Agent_Skill_Group_Logout Table ....62	Galaxy_Gate_Delayed_Call Table....248
Agent_Skill_Group_Real_Time Table....63	Galaxy_Overflow Table....251
Service_Member Table....415	Service Table....386
Termination_Call_Detail Table....490	Service_Array Table....388
SkillGroupSkillTargetID	Service_Five_Minute Table....390
Agent_State_Trace Table....64	Skill_Group Table....432
SkillTargetID	Skill_Group_Half_Hour Table....439
Agent_Attribute Table....18	Translation_Route Table....503
Agent_Interval Table....29	SkillTargetID
Agent_Skill_Group_Interval Table....51	Agent_State_Trace Table....64
Assignment_Queue_Member Table....86	SkillTargetType
Enterprise_Skill_Group_Member Table....232	Skill_Target Table....489
Route Table....336	SlaveNICR
Service_Interval Table....406	Logger_Type Table....285
Service_Real_Time Table....416	SourceAgentPeripheralNumber
Skill_Group_Five_Minute Table....436	Termination_Call_Detail Table....490
Skill_Group_Interval Table....457	SourceAgentSkillTargetID
SkillTargetID	Termination_Call_Detail Table....490
Agent_Half_Hour Table ....25	SourceFileTime
Agent_Logout Table....33	Application_Event Table ....73
Campaign_Skill_Group Table ....180	Event Table....232
Enterprise_Service_Member Table....230	SourceSystemName
Service_Half_Hour Table....394	Event Table....232
Skill_Group_Real_Time Table....477	SourceSystemName
Skill_Target Table....489	Application_Event Table ....73
SkillTargetID	SourceVirtualTime
Agent Table....15	Event Table....232
Agent_Event_Detail Table ....24	SourceVirtualTime
Agent_Real_Time Table ....34	Application_Event Table ....73
Agent_Skill_Group_Half_Hour Table ....39	SPClosedRecordCount
Agent_Skill_Group_Logout Table ....62	Campaign Table ....155

SPClosedRecordEnabled	<a href="#">Recurring_Schedule_Map Table....330</a>
Campaign Table ....155	
SPPostImportEnabled	<a href="#">Recovery Table....329</a>
Import_Rule Table....273	
SPPreImportEnabled	<a href="#">Logger_Admin Table ....283</a>
Import_Rule Table....273	
StandardColumnType	<a href="#">Shift Table....432</a>
Import_Rule_Clause Table....277	
StartTime	<a href="#">StartYear</a>
Import_Rule_History Table....278	
StartTimeUTC	<a href="#">Admin_Script_Schedule_Map Table....13</a>
Termination_Call_Detail Table....490	
StartDay	<a href="#">StartYear</a>
Admin_Script_Schedule_Map Table....13	
StartDay	<a href="#">Recurring_Schedule_Map Table....330</a>
Recurring_Schedule_Map Table....330	
StartHour	<a href="#">Station</a>
Admin_Script_Schedule_Map Table....13	
StartHour	<a href="#">Dialer_Port_Map Table....217</a>
Recurring_Schedule_Map Table....330	
StartHours	<a href="#">Status</a>
Campaign_Query_Rule Table ....164	
StartMinute	<a href="#">Import_Rule_Real_Time Table....279</a>
Admin_Script_Schedule_Map Table....13	
StartMinute	<a href="#">Peripheral_Real_Time Table....316</a>
Recurring_Schedule_Map Table....330	
StartMinutes	<a href="#">StatusCode</a>
Campaign_Query_Rule Table ....164	
StartMonth	<a href="#">Event Table....232</a>
Admin_Script_Schedule_Map Table....13	
StartMonth	<a href="#">StatusCode</a>
Recurring_Schedule_Map Table....330	
StartSecond	<a href="#">Application_Event Table ....73</a>
Admin_Script_Schedule_Map Table....13	
StartSecond	<a href="#">StatusCodeString</a>
Recurring_Schedule_Map Table....330	
StopTime	<a href="#">Event Table....232</a>
Shift Table....432	
String1	<a href="#">StopTime</a>
Application_Event Table ....73	
String1	<a href="#">String1</a>
Schedule_Import Table....367	
String1	<a href="#">Application_Event Table ....73</a>
Event Table....232	
String1	<a href="#">Schedule_Import_Real_Time Table....369</a>
Event Table....232	
String2	

Application_Event Table ....73	Agent_Skill_Group_Interval Table....51
Schedule_Import Table....367	Skill_Group_Interval Table....457
Schedule_Import_Real_Time Table....369	SupervAssistCallsTimeToHalf
String2	Agent_Skill_Group_Half_Hour Table ....39
Event Table....232	Skill_Group_Half_Hour Table....439
String3	SupervAssistCallsToHalf
Application_Event Table ....73	Agent_Skill_Group_Half_Hour Table ....39
Schedule_Import Table....367	Skill_Group_Half_Hour Table....439
Schedule_Import_Real_Time Table....369	SupervisorAgent
String3	Agent Table....15
Event Table....232	SupervisorAssistCallMethod
String4	Agent_Desk_Settings Table ....18
Application_Event Table ....73	SupervisorCallsAllowed
Event Table....232	Agent_Desk_Settings Table ....18
Schedule_Import Table....367	SupervisorSkillTargetID
Schedule_Import_Real_Time Table....369	Agent_Team_Supervisor Table....71
String5	SystemId
Application_Event Table ....73	Application_Event Table ....73
Schedule_Import Table....367	Event Table....232
Schedule_Import_Real_Time Table....369	SystemMediaLib
String5	Vru_Defaults Table....522
Event Table....232	SystemName
SubGroupMaskType	Schedule_Report Table....372
Skill_Group Table....432	SystemName
SubscriberNumber	ICR_Locks Table....268
Galaxy_PBX Table....255	ICR_Node Table....269
SubSkillGroupMask	Schedule_Source Table....374
Peripheral Table....306	SystemPassword
Skill_Group Table....432	Schedule_Source Table....374
SundayEnabled	SystemTimeZone
Import_Rule Table....273	Schedule_Report Table....372
SupervAssistCalls	Schedule_Source Table....374
Agent_Skill_Group_Interval Table....51	SystemType
Skill_Group_Interval Table....457	Schedule_Source Table....374
SupervAssistCallsTime	SystemType

Application_Event Table ....73	TalkInTime
Event Table....232	Agent_Skill_Group_Interval Table....51
TableName	Skill_Group_Interval Table....457
Config_Message_Log Table....193	TalkInTimeTo5
Next_Available_Number Table....303	Skill_Group_Real_Time Table....477
TableName	TalkInTimeToHalf
Logger_Admin Table ....283	Agent_Skill_Group_Half_Hour Table ....39
Recovery Table....329	TalkInTimeToHalf
Rename Table....336	Skill_Group_Half_Hour Table....439
TalkAutoOutTime	TalkOtherTime
Agent_Skill_Group_Interval Table....51	Agent_Interval Table....29
Skill_Group_Interval Table....457	Agent_Skill_Group_Interval Table....51
TalkAutoOutTimeTo5	Skill_Group_Interval Table....457
Skill_Group_Real_Time Table....477	TalkOtherTimeTo5
TalkAutoOutTimeToHalf	Skill_Group_Real_Time Table....477
Agent_Skill_Group_Half_Hour Table ....39	TalkOtherTimeToHalf
Skill_Group_Half_Hour Table....439	Agent_Skill_Group_Half_Hour Table ....39
TalkingAutoOut	Skill_Group_Half_Hour Table....439
Skill_Group_Real_Time Table....477	TalkOtherTimeToHalf
TalkingIn	Agent_Half_Hour Table ....25
Skill_Group_Real_Time Table....477	TalkOutTime
TalkingIn	Agent_Skill_Group_Interval Table....51
Skill_Group_Five_Minute Table....436	Skill_Group_Interval Table....457
TalkingOther	TalkOutTimeTo5
Skill_Group_Real_Time Table....477	Skill_Group_Real_Time Table....477
TalkingOther	TalkOutTimeToHalf
Skill_Group_Five_Minute Table....436	Agent_Skill_Group_Half_Hour Table ....39
TalkingOut	Skill_Group_Half_Hour Table....439
Skill_Group_Real_Time Table....477	TalkPreviewTime
TalkingOut	Agent_Skill_Group_Interval Table....51
Skill_Group_Five_Minute Table....436	Skill_Group_Interval Table....457
TalkingPreview	TalkPreviewTimeTo5
Skill_Group_Real_Time Table....477	Skill_Group_Real_Time Table....477
TalkingReserve	TalkPreviewTimeToHalf
Skill_Group_Real_Time Table....477	Agent_Skill_Group_Half_Hour Table ....39

Skill_Group_Half_Hour Table....439	Service_Real_Time Table....416
TalkReserveTime	TalkTimeToday
Agent_Skill_Group_Interval Table....51	Route_Real_Time Table....352
Skill_Group_Interval Table....457	
TalkReserveTimeTo5	TalkTimeToHalf
Skill_Group_Real_Time Table....477	Call_Type_Skill_Group_Half_Hour Table....122
TalkReserveTimeToHalf	Campaign_Query_Rule_Real_Time Table....172
Agent_Skill_Group_Half_Hour Table ....39	Service_Half_Hour Table....394
TalkReserveTimeToHalf	TalkTimeToHalf
Skill_Group_Half_Hour Table....439	Campaign_Query_Rule_Half_Hour Table ....166
TalkTime	Route_Half_Hour Table....347
Call_Type_Interval Table....109	TalkTimeToHalf
Call_Type_Skill_Group_Interval Table....131	Skill_Group_Half_Hour Table....439
Service_Interval Table....406	TargetLabel
Skill_Group_Interval Table....457	Route_Call_Detail Table....338
TalkTime	TargetLabelID
Campaign_Query_Rule_Interval Table ....170	Route_Call_Detail Table....338
Termination_Call_Detail Table....490	TargetType
TalkTimeCount	Route_Call_Detail Table....338
Campaign_Query_Rule_Real_Time Table....172	TargetType
TalkTimeHalf	Schedule_Report_Input Table....373
Call_Type_Real_Time Table ....142	Script_Cross_Reference Table....378
Service_Real_Time Table....416	TaskLife
TalkTimeHalf	Media_Routing_Domain Table....290
Call_Type_Half_Hour Table ....96	TaskLife
Route_Real_Time Table....352	Media_Class Table....289
TalkTimeTo5	TasksQueued
Call_Type_Real_Time Table ....142	Script_Queue_Real_Time Table....381
Service_Real_Time Table....416	TaskStartTimeout
Skill_Group_Five_Minute Table....436	Media_Class Table....289
Skill_Group_Real_Time Table....477	Media_Routing_Domain Table....290
TalkTimeTo5	TCDRecoveryKey
Route_Real_Time Table....352	Termination_Call_Variable Table....502
TalkTimeToday	TemplateCategory
Call_Type_Real_Time Table ....142	Schedule_Report Table....372

Schedule_Report Table....372	Application_Path_Real_Time Table ....84
TemplateOptions	Text8
Schedule_Report Table....372	Application_Path_Real_Time Table ....84
TemplateScope	Text9
Schedule_Report Table....372	Application_Path_Real_Time Table ....84
TemporaryAgent	ThursdayEnabled
Agent Table....15	Import_Rule Table....273
TenDigitDialEnabled	TimeInQueue
Dialer Table....202	Script_Queue_Real_Time Table....381
TerminationCallDetailTo5	Timeout
Logger_Meters Table....284	Network_Vru_Script Table....302
TerminationType	TimeoutCallsTo5
Galaxy_Agent_Call_Count Table....237	Routing_Client_Five_Minute Table....359
Galaxy_PBX Table....255	TimeoutLimit
Galaxy_Single_Trunk Table....257	Routing_Client Table....357
Galaxy_Trunk_Call_Count Table....259	TimeoutsToHalf
TermToneDetectionTime	Application_Gateway_Half_Hour Table ....80
Dialer_Detail Table....206	TimeoutThreshold
Tertype	Routing_Client Table....357
Galaxy_Agent_Performance Table....240	TimeToAband
Text1	Termination_Call_Detail Table....490
Application_Path_Real_Time Table ....84	TimeToAnswer
Text10	Galaxy_DNIS Table....243
Application_Path_Real_Time Table ....84	TimeZone
Text2	Agent_Half_Hour Table ....25
Application_Path_Real_Time Table ....84	Agent_Interval Table....29
Text3	Agent_Skill_Group_Half_Hour Table ....39
Application_Path_Real_Time Table ....84	Agent_Skill_Group_Interval Table....51
Text4	Call_Type_Interval Table....109
Application_Path_Real_Time Table ....84	Call_Type_Skill_Group_Half_Hour Table....122
Text5	Call_Type_Skill_Group_Interval Table....131
Application_Path_Real_Time Table ....84	Campaign_Half_Hour Table....163
Text6	Dialer_Detail Table....206
Application_Path_Real_Time Table ....84	Dialer_Skill_Group_Half_Hour Table....223
Text7	Galaxy_Agent_IGroup Table....238

Import_Rule_History Table....278	Galaxy_PBX Table....255
Peripheral_Interval Table....313	Galaxy_Single_Trunk Table....257
Route_Call_Detail Table....338	Galaxy_Transaction_Code Table....258
Routing_Client_Five_Minute Table....359	Galaxy_Trunk_Call_Count Table....259
Schedule_Import_Real_Time Table....369	Galaxy_Trunk_IGroup Table....260
Service_Interval Table....406	Import_Log Table....272
Skill_Group_Interval Table....457	Logger_Meters Table....284
Termination_Call_Detail Table....490	Network_Trunk_Group_Half_Hour Table....296
Translation_Route_Half_Hour Table....504	Physical_Controller_Half_Hour Table....323
TimeZone	Route_Five_Minute Table....344
Application_Gateway_Half_Hour Table ....80	Script_Five_Minute Table....380
Campaign_Query_Rule_Half_Hour Table ....166	Service_Five_Minute Table....390
Campaign_Query_Rule_Interval Table ....170	Skill_Group_Half_Hour Table....439
Controller_Time Table....193	Trunk_Group_Five_Minute Table....508
Dialer_Half_Hour Table....211	Trunk_Group_Half_Hour Table....509
Dialer_Interval Table....214	TimeZoneName
Network_Event_Detail Table....293	Controller_Time Table....193
Peripheral_Half_Hour Table....310	Tmp
Route_Half_Hour Table....347	Rename Table....336
Schedule_Import Table....367	TollCalls
Service_Half_Hour Table....394	Galaxy_PBX Table....255
Skill_Group_Five_Minute Table....436	ToRecoveryKey
TimeZone	Recovery Table....329
Agent_Event_Detail Table ....24	ToRecoveryKey
Agent_Logout Table....33	Logger_Admin Table ....283
Agent_Skill_Group_Logout Table ....62	TotalBusyTime
Agent_State_Trace Table....64	Galaxy_Single_Trunk Table....257
Call_Type_Half_Hour Table ....96	TotalCallsAband
Galaxy_Agent_Call_Count Table....237	Call_Type_Interval Table....109
Galaxy_Agent_Performance Table....240	TotalCallsAbandHalf
Galaxy_Alarm Table....242	Call_Type_Real_Time Table ....142
Galaxy_DNIS Table....243	TotalCallsAbandTo5
Galaxy_Gate Table....245	Call_Type_Real_Time Table ....142
Galaxy_Gate_Delayed_Call Table....248	TotalCallsAbandToday
Galaxy_Overflow Table....251	Call_Type_Real_Time Table ....142

TotalCallsAbandToHalf	<a href="#">Service_Interval Table....406</a>
<a href="#">Call_Type_Half_Hour Table ....96</a>	
TotalCallsInProgressSamples	<a href="#">Skill_Group_Interval Table....457</a>
<a href="#">Peripheral_Interval Table....313</a>	
TotalCallsInProgressSamples	<a href="#">TransferOutCallsHalf</a>
<a href="#">Peripheral_Half_Hour Table....310</a>	<a href="#">Service_Real_Time Table....416</a>
TotalCount	<a href="#">TransferOutCallsTo5</a>
<a href="#">Campaign_Query_Rule_Real_Time Table....172</a>	<a href="#">Service_Real_Time Table....416</a>
TotalRecords	<a href="#">Skill_Group_Real_Time Table....477</a>
<a href="#">Import_Rule_History Table....278</a>	
<a href="#">Import_Rule_Real_Time Table....279</a>	
TransactionCodeNumber	<a href="#">TransferOutCallsToday</a>
<a href="#">Galaxy_Transaction_Code Table....258</a>	<a href="#">Service_Real_Time Table....416</a>
TransactionCount	<a href="#">TransferOutCallsToHalf</a>
<a href="#">Galaxy_Transaction_Code Table....258</a>	<a href="#">Service_Half_Hour Table....394</a>
TransferInCalls	<a href="#">Skill_Group_Half_Hour Table....439</a>
<a href="#">Service_Interval Table....406</a>	
<a href="#">Skill_Group_Interval Table....457</a>	
TransferInCallsHalf	<a href="#">TransferredInCalls</a>
<a href="#">Service_Real_Time Table....416</a>	<a href="#">Agent_Skill_Group_Interval Table....51</a>
TransferInCallsTime	<a href="#">TransferredInCallsTime</a>
<a href="#">Skill_Group_Interval Table....457</a>	<a href="#">Agent_Skill_Group_Interval Table....51</a>
TransferInCallsTimeTo5	<a href="#">TransferredInCallsTimeToHalf</a>
<a href="#">Skill_Group_Real_Time Table....477</a>	<a href="#">Agent_Skill_Group_Half_Hour Table ....39</a>
TransferInCallsTimeToHalf	<a href="#">TransferredInCallsToHalf</a>
<a href="#">Skill_Group_Half_Hour Table....439</a>	<a href="#">Agent_Skill_Group_Half_Hour Table ....39</a>
TransferInCallsTo5	<a href="#">TransferredOutCalls</a>
<a href="#">Service_Real_Time Table....416</a>	<a href="#">Agent_Skill_Group_Interval Table....51</a>
<a href="#">Skill_Group_Real_Time Table....477</a>	
TransferInCallsToday	<a href="#">TransferredOutCallsToHalf</a>
<a href="#">Service_Real_Time Table....416</a>	<a href="#">Agent_Skill_Group_Half_Hour Table ....39</a>
TransferInCallsToHalf	<a href="#">TranslationRouteAbortedTo5</a>
<a href="#">Service_Half_Hour Table....394</a>	<a href="#">Routing_Client_Five_Minute Table....359</a>
<a href="#">Skill_Group_Half_Hour Table....439</a>	
TransferOutCalls	<a href="#">TranslationRouteID</a>
	<a href="#">Agent_Targeting_Rule Table....67</a>
	<a href="#">TranslationRouteSkillTargetID</a>
	<a href="#">Network_Vru_Bank Table....301</a>
	<a href="#">Translation_Route_Half_Hour Table....504</a>
	<a href="#">TranslationRouteTimedOutTo5</a>
	<a href="#">Routing_Client_Five_Minute Table....359</a>
	<a href="#">Trunk</a>
	<a href="#">Termination_Call_Detail Table....490</a>

TrunkAssignedTime	TrunksInService
Galaxy_Trunk_IGroup Table....260	Trunk_Group_Five_Minute Table....508
TrunkCount	TrunksInService
Trunk_Group Table....507	Network_Trunk_Group_Half_Hour Table....296
TrunkGroup	Network_Trunk_Group_Real_Time Table....298
Galaxy_Single_Trunk Table....257	Trunk_Group_Real_Time Table....511
TrunkGroupID	TrunksInService
Network_Vru_Bank Table....301	Trunk_Group_Half_Hour Table....509
Termination_Call_Detail Table....490	TrunkType
TrunkGroupID	Trunk Table....506
Trunk Table....506	TuesdayEnabled
TrunkGroupID	Import_Rule Table....273
Galaxy_Trunk_IGroup Table....260	Type
Trunk_Group Table....507	Admin_Script_Schedule_Map Table....13
Trunk_Group_Five_Minute Table....508	ICR_Node Table....269
Trunk_Group_Half_Hour Table....509	Recurring_Schedule_Map Table....330
Trunk_Group_Real_Time Table....511	Type
TrunkID	Customer_Options Table....195
Vru_Port_Map Table....524	Type
TrunkID	ICR_Instance Table....267
Trunk Table....506	Import_Rule_Clause Table....277
TrunkIdleTime	Network_Vru Table....300
Galaxy_Trunk_IGroup Table....260	Recovery Table....329
TrunkIGroup	Translation_Route Table....503
Galaxy_Single_Trunk Table....257	Vru_Port_Map Table....524
Galaxy_Trunk_Call_Count Table....259	UnAvailableToHalf
TrunkNumber	Translation_Route_Half_Hour Table....504
Trunk Table....506	UnavailableToHalf
TrunksIdle	Application_Gateway_Half_Hour Table ....80
Network_Trunk_Group_Half_Hour Table....296	Unified CCE DeploymentState
TrunksIdle	ICR_Globals Table....264
Network_Trunk_Group_Real_Time Table....298	Unified CCE DeploymentType
Trunk_Group_Five_Minute Table....508	ICR_Globals Table....264
Trunk_Group_Half_Hour Table....509	UnmatchedRegionPrefixCount
Trunk_Group_Real_Time Table....511	Import_Rule_History Table....278

Unused	<a href="#">Sec_Group Table....384</a>
<a href="#">Route_Call_Detail Table....338</a>	<a href="#">Sec_User Table....385</a>
Unused1	<a href="#">UserGroupName</a>
<a href="#">Route_Five_Minute Table....344</a>	<a href="#">Class_Security Table....190</a>
<a href="#">Service_Five_Minute Table....390</a>	<a href="#">Group_Security_Control Table....263</a>
<a href="#">Skill_Group_Five_Minute Table....436</a>	<a href="#">Object_Security Table....305</a>
UseDefault	<a href="#">User_Group Table....514</a>
<a href="#">Agent_Attribute Table....18</a>	<a href="#">User_Group_Member Table....516</a>
UsedRecords	<a href="#">UserGroupType</a>
<a href="#">Dialer_Skill_Group_Real_Time Table....226</a>	<a href="#">User_Group Table....514</a>
UsedToHalf	<a href="#">UserGuid</a>
<a href="#">Translation_Route_Half_Hour Table....504</a>	<a href="#">User_Group Table....514</a>
UseGMTFromRegionPrefix	<a href="#">UserName</a>
<a href="#">Campaign Table ....155</a>	<a href="#">User_Group Table....514</a>
UserControl	<a href="#">UserName</a>
<a href="#">Peripheral_Real_Time Table....316</a>	<a href="#">ICR_Locks Table....268</a>
UserDeletable	<a href="#">User_Group_Member Table....516</a>
<a href="#">Agent Table....15</a>	<a href="#">User_Security_Control Table....516</a>
<a href="#">Service Table....386</a>	<a href="#">UserSettingsID</a>
<a href="#">Skill_Group Table....432</a>	<a href="#">Cfg_Mngr_User/Desktop_Snap Table ....185</a>
UserFormulaID	<a href="#">Cfg_Mngr_User_Settings Table....187</a>
<a href="#">User_Formula Table....513</a>	<a href="#">UserToUser</a>
<a href="#">User_Formula_Equation Table....513</a>	<a href="#">Route_Call_Detail Table....338</a>
UserGroupID	<a href="#">UserToUser</a>
<a href="#">Group_Security_Control Table....263</a>	<a href="#">Termination_Call_Detail Table....490</a>
UserGroupID	<a href="#">UserVariableID</a>
<a href="#">Sec_Group Table....384</a>	<a href="#">Persistent_Variable Table....321</a>
<a href="#">Sec_User Table....385</a>	<a href="#">User_Variable Table....518</a>
UserGroupID	<a href="#">UTC (formerly called GMT)</a>
<a href="#">User_Group Table....514</a>	<a href="#">Region_Prefix Table....333</a>
<a href="#">User_Security_Control Table....516</a>	<a href="#">Valid</a>
<a href="#">User_Supervisor_Map Table....517</a>	<a href="#">Script Table....377</a>
UserGroupMemberID	<a href="#">ValidSpeechTime</a>
<a href="#">User_Group_Member Table....516</a>	<a href="#">Dialer_Detail Table....206</a>
UserGroupName	<a href="#">ValidType</a>

Galaxy_DNIS Table....243	Termination_Call_Detail Table....490
Value1	Variable6
Assignment_Queue_Attribute Table....86	Route_Call_Detail Table....338
Value1	Variable6
Network_Event_Detail Table....293	Termination_Call_Detail Table....490
Value2	Variable7
Assignment_Queue_Attribute Table....86	Route_Call_Detail Table....338
Network_Event_Detail Table....293	Variable7
ValueChar	Termination_Call_Detail Table....490
Persistent_Variable Table....321	Variable8
ValueDateTime	Route_Call_Detail Table....338
Persistent_Variable Table....321	Termination_Call_Detail Table....490
ValueFloat	Variable9
Persistent_Variable Table....321	Route_Call_Detail Table....338
ValueInt	Termination_Call_Detail Table....490
Persistent_Variable Table....321	VariableName
Variable1	User_Variable Table....518
Route_Call_Detail Table....338	Version
Termination_Call_Detail Table....490	Cfg_Mngr_Globals Table ....185
Variable10	Version
Route_Call_Detail Table....338	Script Table....377
Termination_Call_Detail Table....490	VersionID
Variable2	Cfg_Mngr_Globals Table ....185
Route_Call_Detail Table....338	VersionNum
Termination_Call_Detail Table....490	Application_Event Table ....73
Variable3	VersionNum
Route_Call_Detail Table....338	Event Table....232
Termination_Call_Detail Table....490	ViewColumnID
Variable4	View_Column Table....520
Route_Call_Detail Table....338	ViewName
Variable4	ICR_View Table....270
Termination_Call_Detail Table....490	View_Column Table....520
Variable5	ViewType
Route_Call_Detail Table....338	ICR_View Table....270
Variable5	VoiceCount

Campaign_Query_Rule_Real_Time Table....172	Call_Type_Half_Hour Table ....96
VoiceCountTo5	VruOptOutUnhandledCalls
Dialer_Skill_Group_Real_Time Table....226	Call_Type_Interval Table....109
VoiceCountToday	VruOptOutUnhandledCallsToHalf
Dialer_Skill_Group_Real_Time Table....226	Call_Type_Half_Hour Table ....96
VoiceCountToHalf	VruOtherCalls
Dialer_Skill_Group_Real_Time Table....226	Call_Type_Interval Table....109
VoiceDetect	VruOtherCallsToHalf
Campaign_Query_Rule_Interval Table ....170	Call_Type_Half_Hour Table ....96
Dialer_Interval Table....214	VruProgress
VoiceDetectTo5	Route_Call_Detail Table....338
Campaign_Query_Rule_Real_Time Table....172	VruScriptedXferredCalls
VoiceDetectToday	Call_Type_Interval Table....109
Dialer_Real_Time Table....219	VruScriptedXferredCallsToHalf
VoiceDetectToHalf	Call_Type_Half_Hour Table ....96
Campaign_Query_Rule_Real_Time Table....172	VruScriptName
Dialer_Real_Time Table....219	Network_Vru_Script Table....302
Dialer_Skill_Group_Half_Hour Table....223	VruScripts
VoiceDetectToHalf	Route_Call_Detail Table....338
Dialer_Half_Hour Table....211	VRUTime
VoiceDetectToHalf	Call_Type_Interval Table....109
Campaign_Query_Rule_Half_Hour Table ....166	VRUTimeToHalf
VruAssistedCalls	Call_Type_Half_Hour Table ....96
Call_Type_Interval Table....109	VruUnhandledCalls
VruAssistedCallsToHalf	Call_Type_Interval Table....109
Call_Type_Half_Hour Table ....96	VruUnhandledCallsToHalf
VruDefaultsID	Call_Type_Half_Hour Table ....96
Vru_Defaults Table....522	WaitForBusyRetry
VruForcedXferredCalls	Campaign Table ....155
Call_Type_Interval Table....109	WednesdayEnabled
VruForcedXferredCallsToHalf	Import_Rule Table....273
Call_Type_Half_Hour Table ....96	WhisperCalls
VruHandledCalls	Agent_Skill_Group_Interval Table....51
Call_Type_Interval Table....109	Skill_Group_Interval Table....457
VruHandledCallsToHalf	WhisperCallsToHalf

Agent_Skill_Group_Half_Hour Table ....39	Skill_Group_Five_Minute Table....436
Skill_Group_Half_Hour Table....439	WorkReadyTimeToHalf
WildcardPattern	Agent_Skill_Group_Half_Hour Table ....39
Dial_Number_Plan Table....201	Skill_Group_Half_Hour Table....439
WorkEnabled	WorkStartHours
Campaign Table ....155	Campaign Table ....155
WorkEndHours	WorkStartMinutes
Campaign Table ....155	Campaign Table ....155
WorkEndMinutes	WorkstationName
Campaign Table ....155	Import_Log Table....272
WorkModeTimer	Import_Schedule Table....281
Agent_Desk_Settings Table ....18	WorkTime
WorkNotReady	Termination_Call_Detail Table....490
Skill_Group_Real_Time Table....477	WrapupData
WorkNotReady	Dialer_Detail Table....206
Skill_Group_Five_Minute Table....436	WrapupData
WorkNotReadyTime	Termination_Call_Detail Table....490
Agent_Skill_Group_Interval Table....51	WrapupDataIncomingMode
Skill_Group_Interval Table....457	Agent_Desk_Settings Table ....18
WorkNotReadyTimeTo5	WrapupDataOutgoingMode
Skill_Group_Five_Minute Table....436	Agent_Desk_Settings Table ....18
WorkNotReadyTimeTo5	WrapupTime
Skill_Group_Real_Time Table....477	Campaign_Query_Rule_Interval Table ....170
WorkNotReadyTimeToHalf	WrapupTimeCount
Agent_Skill_Group_Half_Hour Table ....39	Campaign_Query_Rule_Real_Time Table....172
Skill_Group_Half_Hour Table....439	WrapupTimeToHalf
WorkReady	Campaign_Query_Rule_Real_Time Table....172
Skill_Group_Five_Minute Table....436	WrapupTimeToHalf
Skill_Group_Real_Time Table....477	Campaign_Query_Rule_Half_Hour Table ....166
WorkReadyTime	WrongNumberCount
Agent_Skill_Group_Interval Table....51	Campaign_Query_Rule_Real_Time Table....172
Skill_Group_Interval Table....457	Dialer_Real_Time Table....219
WorkReadyTimeTo5	WrongNumberCount
Skill_Group_Real_Time Table....477	Campaign_Query_Rule_Interval Table ....170
WorkReadyTimeTo5	Dialer_Interval Table....214

WrongNumberCountTo5

[Campaign\\_Query\\_Rule\\_Real\\_Time Table....172](#)

WrongNumberCountToHalf

[Campaign\\_Query\\_Rule\\_Half\\_Hour Table ....166](#)

[Campaign\\_Query\\_Rule\\_Real\\_Time Table....172](#)

[Dialer\\_Half\\_Hour Table....211](#)

[Dialer\\_Skill\\_Group\\_Half\\_Hour Table....223](#)

ZoneIndex

[Campaign\\_Target\\_Sequence Table....182](#)

[Dialer\\_Detail Table....206](#)