



Package Contents

- Wireless-G PTZ Internet Camera with Audio
- Power Adapter
- Ethernet Network Cable
- Setup CD-ROM with on-screen User Guide
- SoloLink DDNS Free Trial Card
- Registration Card

2.4GHz
802.11g

Wireless-G

**PTZ Internet Camera
with Audio**

Quick Installation



Model WVC200

1

Set up the Wireless-G PTZ Internet Camera with Audio

A Insert the Setup CD-ROM into your CD or DVD drive. You see a screen like this one. If it doesn't appear automatically, click the **Start** button, choose **Run**, type **D:\wvc200.exe** in the *Open* field (where "D" is the drive letter of your CD or DVD drive), then click **OK**.

B Click the **Click here to Start** button.

C Read and agree to the license agreement, then click **Next**.


D Connect the included Ethernet network cable to your network router or switch, then click **Next**.



B



C

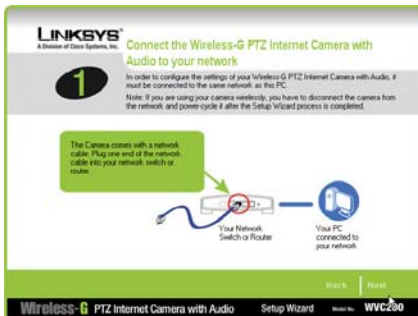

D


E Connect the other end of the cable to the Camera's ETHERNET port, then click **Next**.

F Connect the included power adapter to the Camera's POWER port, plug the other end into a standard electrical outlet, then click **Next**.

G Make sure that the Camera's LEDs are lit, then click **Next**.



E

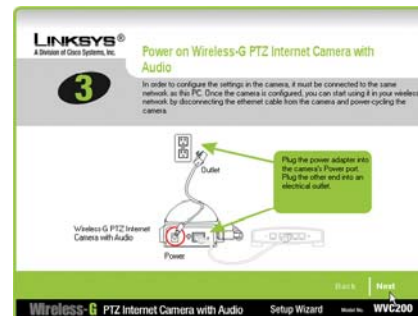

F



G

H In the *Selection* box, select the Camera you're installing, write down the IP address of the Camera, so you can access the Web-based utility later, then click **Next**. If the Camera you want is not displayed in the *Selection* box, click **Search Again**.

I For increased network security, type **admin**, in lowercase letters, in the *Administrator Name* and *Administrator Password* fields, then click **OK**. (You can change the administrator name and administrator password using the Camera's Web-based Utility later.)


J On the *Basic Settings* screen, change the following settings:

- **Camera Name:** Enter a unique name, up to 15 characters, for the Camera. Unique names are helpful when you are using multiple Cameras on the same network.
- **Description:** Enter a description, up to 32 characters, with additional information, such as the location, for the Camera.
- **Time Zone:** Select the time zone that corresponds with the Camera's location.
- **Date:** Enter the current date in the provided fields.
- **Time:** Enter the current time in the provided fields.


When you have finished making changes, click **Next**.



H

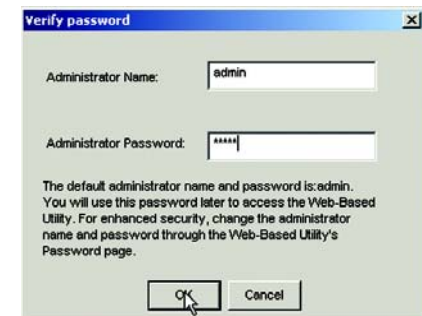

I

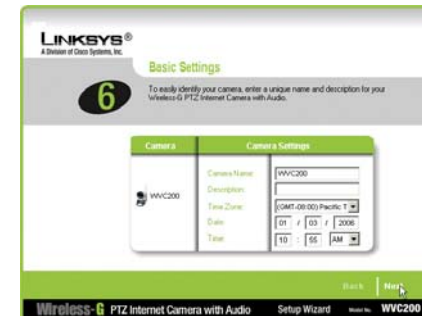

J


K If your network uses static IP addresses, select **Static IP address**, click **Next**, then go to Step L.

If your network uses a DHCP server to assign IP addresses to network devices, keep the default setting, **Automatic Configuration-DHCP**, click **Next**, then go to step M.

L Enter an IP Address, Subnet Mask, Default Gateway, Primary DNS, and Secondary DNS that corresponds with your network's settings, then click **Next**.

M If you want your camera to communicate using a wireless access point or router, select **Infrastructure** as the *Mode Setting*, then click **Next**.

If you want your camera to communicate without using a wireless access point or router, select **Ad-Hoc** as the *Mode Setting*, then click **Next**.

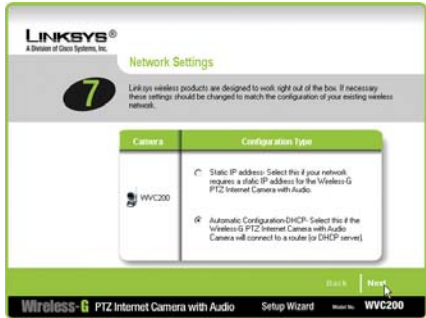

K



L



M

N On the *Wireless Settings* screen, change the following settings:

- **SSID:** Enter the SSID name of your wireless network.

- **Channel:** If you selected Ad-Hoc mode in step M, select the channel that matches your Ad-Hoc network.

When you have finished making changes, click **Next**.


O Select the wireless security setting that matches your wireless network, then enter the required information for the type of security you're using, then click **Next**.

If your network doesn't have wireless security enabled, select **Disabled**, then click **Next**.

P Review the new settings for your Camera, then click the **Next** button.



N

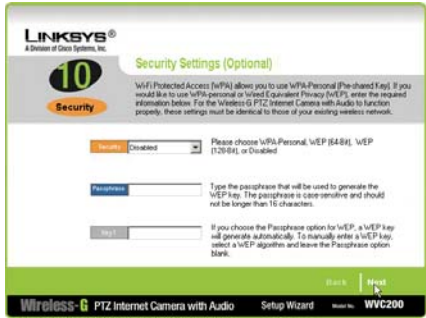

O




P

Q Click **OK** to save the new settings or click **Cancel** to discard your changes.

R You see a *Congratulations* screen like this one. Click **Install Viewer & Recorder Utility** to install the software on your PC.

Setup is complete. You can relocate the Camera after you install the Utility and/or the SoloLink service.

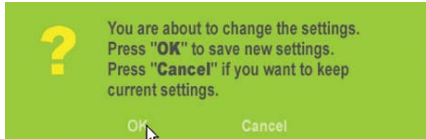

Q



R

LINKSYS®
A Division of Cisco Systems, Inc.

For additional information or troubleshooting help, refer to the User Guide on the Setup Wizard CD-ROM. You can also e-mail for further support.

24 Hour Technical Support
800-326-7114
(toll-free from US or Canada)

E-mail Support
support@linksys.com

Website
<http://www.linksys.com> or
<http://support.linksys.com>

RMA (Return Merchandise Authorization)
<http://www.linksys.com/support>

FTP Site
<ftp://ftp.linksys.com>

Sales Information
800-546-5797 (800-LINKSYS)

Linksys is a registered trademark or trademark of Cisco Systems, Inc. and/or its affiliates in the U.S. and certain other countries. Copyright © 2006 Cisco Systems, Inc. All rights reserved.

WVC200-QI-60330NC BW