

Fehlerbehebung bei IS-IS-Adjazenzproblemen

Inhalt

[Einleitung](#)

[Voraussetzungen](#)

[Anforderungen](#)

[Verwendete Komponenten](#)

[IS-IS-Adjacency inaktiv](#)

[ISIS-Adjacency Down \(nicht auf MTU-Diskrepanzen bezogen\)](#)

[IS-IS-Adjazenz instabil](#)

[IS-IS-Adjazenz instabil \(zufällige Flaps\)](#)

Einleitung

Dieses Dokument beschreibt die Fehlerbehebung beim IS-IS-Protokoll für Cisco IOS® XE-Plattformen.

Voraussetzungen

Anforderungen

Cisco empfiehlt, dass Sie über Kenntnisse in folgenden Bereichen verfügen:

- Intermediate System to Intermediate System (IS-IS)
- Cisco IOS XE

Weitere Informationen zu diesen Themen finden Sie unter:

- [IP-Routing: ISIS-Konfigurationsleitfaden](#)
- [Konfigurieren der IS-IS-Adjacency und der Bereichstypen](#)

Verwendete Komponenten

Die Informationen in diesem Dokument basieren auf der Cisco IOS XE Software.

Die Informationen in diesem Dokument beziehen sich auf Geräte in einer speziell eingerichteten Testumgebung. Alle Geräte, die in diesem Dokument benutzt wurden, begannen mit einer gelöschten (Nichterfüllungs) Konfiguration. Wenn Ihr Netzwerk in Betrieb ist, stellen Sie sicher, dass Sie die möglichen Auswirkungen aller Befehle kennen.

IS-IS-Adjacency inaktiv

Dieser Abschnitt bietet eine Lösung für das häufige Problem der IS-IS-Ausfallsicherung. Dieses Netzwerkdiagramm dient als Beispiel:



Baseline-Topologie

IS-IS ist zwischen Gerät A und Gerät B ausgefallen.

<#root>

DeviceA#

show isis neighbors detail

System Id	Type Interface	IP Address	State Holdtime	Circuit Id
DeviceA#				

<#root>

DeviceB#

show isis neighbors detail

System Id	Type Interface	IP Address	State Holdtime	Circuit Id
DeviceA	L1L2 Twe1/0/9	192.0.2.1	DOWN 28	05

Area Address(es): 49.0001
SNPA: a84f.b1c3.9484
State Changed: never
Format: Phase V
Remote TID: 0
Local TID: 0
Interface name: TwentyFiveGigE1/0/9
Neighbor Circuit Id: 5
Adj sync: Full

Diagnose des Problems:

1. Validieren Sie die Verbindung zwischen den Geräten.

<#root>

DeviceA#

ping 192.0.2.2 size 1500 df-bit

Type escape sequence to abort.

Sending 5, 1500-byte ICMP Echos to 192.0.2.2, timeout is 2 seconds:

Packet sent with the DF bit set

!!!!!!

Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/1 ms

DeviceA#

<#root>

DeviceB#

ping 192.0.2.1 size 1500 df-bit

Type escape sequence to abort.

Sending 5, 1500-byte ICMP Echos to 192.0.2.1, timeout is 2 seconds:

Packet sent with the DF bit set

!!!!!!

Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/1 ms

DeviceB#

2. Überprüfen Sie die Konfiguration auf beiden Seiten.

<#root>

DeviceA#

show running-config | sec router isis

```
ip router isis
router isis
 net 49.0001.0000.0000.000a.00
```

DeviceA#

<#root>

DeviceB#

show running-config | sec router isis

```
ip router isis
```

```
router isis
 net 49.0001.0000.0000.000b.00
DeviceB#
```

3. Überprüfen Sie, ob die Adjacency am Connectionless Network Service (CLNS) Dies bietet eine Zusammenfassung der mit Ihrem Gerät verbundenen Nachbarn.

<#root>

DeviceA#

show clns neighbors detail

System Id	Interface	SNPA	State	Holdtime	Type	Protocol
0000.0000.000B	Te0/0/4					
6c31.0edb.3b5f						

Up

257 IS ES-IS
Area Address(es): 49.0001

Uptime: 02:02:11

Interface name: TenGigabitEthernet0/0/4
DeviceA#

<#root>

DeviceB#

show clns neighbors detail

System Id	Interface	SNPA	State	Holdtime	Type	Protocol
0000.0000.000A	Twe1/0/9					
a84f.b1c3.9484						

Down

20 L1L2 IS-IS
Area Address(es): 49.0001
IP Address(es): 192.0.2.1*

Uptime: 02:02:09

NSF capable
Interface name: TwentyFiveGigE1/0/9
DeviceB#

Die in jedem CLNS-Nachbarn aufgelisteten MAC-Adressen sind die MAC-Adressen der Remote-Geräte, die eine Peer-Verbindung mit dem lokalen Gerät herstellen.

<#root>

DeviceA#

show interface TenGigabitEthernet0/0/4

TenGigabitEthernet0/0/4 is up, line protocol is up
Hardware is 8xSFP+, address is

a84f.b1c3.9484 (bia a84f.b1c3.9484) < mac address appeared on SNPA DeviceB

Internet address is 192.0.2.1/30
MTU 1500 bytes, BW 10000000 Kbit/sec, DLY 10 usec,
reliability 255/255, txload 1/255, rxload 1/255

<#root>

DeviceB#

show interface TwentyFiveGigE1/0/9

TwentyFiveGigE1/0/9 is up, line protocol is up (connected)
Hardware is Twenty Five Gigabit Ethernet, address is

6c31.0edb.3b5f (bia 6c31.0edb.3b5f) < mac address appeared on SNPA DeviceA

Internet address is 192.0.2.2/30
MTU 9216 bytes, BW 10000000 Kbit/sec, DLY 10 usec,
reliability 255/255, txload 1/255, rxload 1/255
Encapsulation ARPA, loopback not set

4. Führen Sie den Befehl `show clns interface` aus, um zu überprüfen, ob die Parameter mit dem Peer übereinstimmen.

Stellen Sie sicher, dass diese Werte übereinstimmen:

- Maximum Transmission Unit (MTU)
- Schaltungstyp

GerätA
<#root> DeviceA# show clns interface TenGigabitEthernet0/0/4 TenGigabitEthernet0/0/4 is up, line protocol is up Attached to: isis Checksums enabled,

MTU 1497

, Encapsulation SAP
ERPDUs enabled, min. interval 10 msec.
CLNS fast switching disabled
CLNS SSE switching disabled
DEC compatibility mode OFF for this interface
Next ESH/ISH in 19 seconds
Routing Protocol: IS-IS

Circuit Type: level-1-2

Interface number 0x0, local circuit ID 0x5
Neighbor Extended Local Circuit ID: 0x0
Level-1 Metric: 10, Priority: 64, Circuit ID: DeviceA.05
Level-1 IPv6 Metric: 10
Number of active level-1 adjacencies: 0
Level-2 Metric: 10, Priority: 64, Circuit ID: DeviceA.05
Level-2 IPv6 Metric: 10
Number of active level-2 adjacencies: 0
Next IS-IS Hello in 908 milliseconds

if state DOWN

Gerät B

<#root>

DeviceB#

show clns interface TwentyFiveGigE1/0/9

TwentyFiveGigE1/0/9 is up, line protocol is up
Attached to: isis
Checksums enabled,

MTU 9213


, Encapsulation SAP
ERPDUs enabled, min. interval 10 msec.
CLNS fast switching disabled
CLNS SSE switching disabled
DEC compatibility mode OFF for this interface
Next ESH/ISH in 8 seconds
Routing Protocol: IS-IS

Circuit Type: level-1-2

Interface number 0x0, local circuit ID 0xB
Neighbor Extended Local Circuit ID: 0x5
Neighbor System-ID: 0000.0000.000A
P2P retransmit queue size: 0
Level-1 Metric: 10, Priority: 64, Circuit ID: DeviceB.0B
Level-1 IPv6 Metric: 10
Number of active level-1 adjacencies: 0
Level-2 Metric: 10, Priority: 64, Circuit ID: DeviceB.0B
Level-2 IPv6 Metric: 10
Number of active level-2 adjacencies: 0
Next IS-IS Hello in 2 seconds

```
if state INIT
```

In diesem Szenario ist das Problem auf die MTU-Diskrepanz zurückzuführen. Wenn auf den Remote-Peer nicht zugegriffen werden kann, `debug isis adj-packets` kann der MTU-Wert angezeigt werden, der gesendet und empfangen wird.

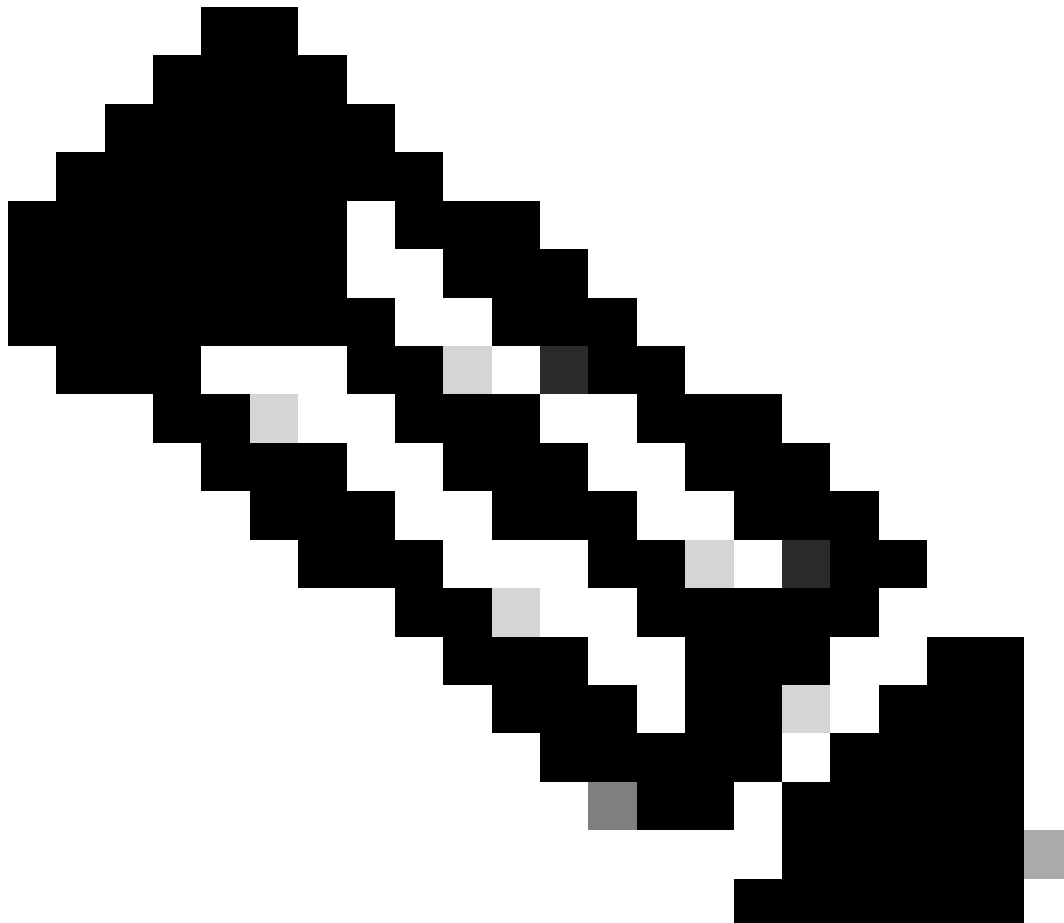

Anmerkung: Dies gilt nur, wenn der Befehl `show clns interface` gedruckt wird `if state INIT`.

```
<#root>
```

```
DeviceA#
```

```
debug isis adj-packets TenGigabitEthernet 0/0/4
```

```
IS-IS Adjacency related packets debugging is on for router process null
```

```
*Jul 18 23:24:16.598: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0x0 Length:5
```

```
*Jul 18 23:24:16.599: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:DOWN,
```

length 1496 < MTU sent to the neighbor >

```
*Jul 18 23:24:25.189: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0x0 Length:5
*Jul 18 23:24:25.189: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:DOWN, length
*Jul 18 23:24:34.057: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0x0 Length:5
*Jul 18 23:24:34.057: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:DOWN, length
*Jul 18 23:24:42.866: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0x0 Length:5
*Jul 18 23:24:42.866: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:DOWN, length
*Jul 18 23:24:51.646: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0x0 Length:5
*Jul 18 23:24:51.646: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:DOWN, length
*Jul 18 23:24:59.606: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0x0 Length:5
*Jul 18 23:24:59.606: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:DOWN, length
```

<#root>

DeviceB#

debug isis adj-packets twentyFiveGigE 1/0/9

```
*Jul 18 23:53:22.420: ISIS-Adj: Sending serial IIH on TwentyFiveGigE1/0/9, 3way state:INIT,
length 9212 < MTU sent to the neighbor >
```

```
*Jul 18 23:53:22.591: ISIS-Adj: Rec serial IIH from a84f.b1c3.9484 (TwentyFiveGigE1/0/9)
*Jul 18 23:53:22.591: ISIS-Adj: cir type L1L2, cir id 05,
```

length 1496 < MTU received from neighbor >

```
*Jul 18 23:53:22.592: ISIS-Adj: rcvd state DOWN, old state INIT, new state INIT, nbr usable TRUE
*Jul 18 23:53:22.592: ISIS-Adj: RCV:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0x49000184 Length:5
*Jul 18 23:53:22.592: ISIS-Adj: Nghbr Ckt ID changed: FALSE
*Jul 18 23:53:22.592: ISIS-Adj: newstate:1, state_changed:0, going_up:0, going_down:0
*Jul 18 23:53:22.592: ISIS-Adj: Action = ACCEPT
*Jul 18 23:53:22.592: ISIS-Adj: ACTION_ACCEPT:
...
```

ISIS-Adjacency Down (nicht auf MTU-Diskrepanzen bezogen)

IS-IS ist ausgefallen, und die MTU entspricht den Schnittstellen.

<#root>

DeviceA#

show clns neighbors

System Id	Interface	SNPA	State	Holdtime	Type	Protocol
DeviceA#						

<#root>

DeviceB#

show clns neighbors

System Id	Interface	SNPA	State	Holdtime	Type	Protocol
-----------	-----------	------	-------	----------	------	----------

DeviceB#

1. Überprüfen Sie die Konfiguration, die mit dem Peer übereinstimmt.
2. Stellen Sie sicher, dass die physische Schnittstelle in einem guten Übertragungszustand ist (keine Fehler oder Probleme mit der Beleuchtung).
3. Überprüfen Sie die Verbindungen zwischen Peers (Ping-Test zum Hinzufügen der MTU-Größe und des df-Bit).
4. Validieren Sie die CLNS-Nachbarn zwischen den Peers.
5. Stellen Sie sicher, dass beide Enden die gleiche MTU und den gleichen Schaltungstyp zusammen mit dem Status haben.

GerätA

<#root>

DeviceA#

show clns interface TenGigabitEthernet 0/0/4

TenGigabitEthernet0/0/4 is up, line protocol is up
Attached to: isis
Checksums enabled,

MTU 1497

, Encapsulation SAP
ERPDUs enabled, min. interval 10 msec.
CLNS fast switching disabled
CLNS SSE switching disabled
DEC compatibility mode OFF for this interface
Next ESH/ISH in 41 seconds
Routing Protocol: IS-IS

Circuit Type: level-1-2

Interface number 0x0, local circuit ID 0x5
Neighbor Extended Local Circuit ID: 0x0
Level-1 Metric: 10, Priority: 64, Circuit ID: DeviceA.05
Level-1 IPv6 Metric: 10
Number of active level-1 adjacencies: 0
Level-2 Metric: 10, Priority: 64, Circuit ID: DeviceA.05
Level-2 IPv6 Metric: 10
Number of active level-2 adjacencies: 0
Next IS-IS Hello in 2 seconds

if state DOWN

Gerät B

```
<#root>
```

```
DeviceB#
```

```
show clns interface twentyFiveGigE 1/0/9
```

```
TwentyFiveGigE1/0/9 is up, line protocol is up
```

```
Attached to: isis
```

```
Checksums enabled,
```

```
MTU 1497
```

```
, Encapsulation SAP
```

```
ERPDUs enabled, min. interval 10 msec.
```

```
CLNS fast switching disabled
```

```
CLNS SSE switching disabled
```

```
DEC compatibility mode OFF for this interface
```

```
Next ESH/ISH in 42 seconds
```

```
Routing Protocol: IS-IS
```

```
Circuit Type: level-1-2
```

```
Interface number 0x0, local circuit ID 0xB
```

```
Neighbor Extended Local Circuit ID: 0x0
```

```
P2P retransmit queue size: 0
```

```
Level-1 Metric: 10, Priority: 64, Circuit ID: DeviceB.0B
```

```
Level-1 IPv6 Metric: 10
```

```
Number of active level-1 adjacencies: 0
```

```
Level-2 Metric: 10, Priority: 64, Circuit ID: DeviceB.0B
```

```
Level-2 IPv6 Metric: 10
```

```
Number of active level-2 adjacencies: 0
```

```
Next IS-IS Hello in 5 seconds
```

```
if state DOWN
```

6. Aktivieren debug isis adj-packet

und validieren Sie die gesendeten und empfangenen Pakete.

```
<#root>
```

```
DeviceA#
```

```
debug isis adj-packets TenGigabitEthernet 0/0/4
```

```
IS-IS Adjacency related packets debugging is on for router process null
```

```
*Jul 19 13:32:52.788: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0x0 Length:5
```

```
*Jul 19 13:32:52.788: ISIS-Adj:
```

```
Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:DOWN, length 1496
```

```
*Jul 19 13:33:00.708: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0x0 Length:5
```

```
*Jul 19 13:33:00.709: ISIS-Adj:
```

```
Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:DOWN, length 1496
```

```
*Jul 19 13:33:09.726: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0x0 Length:5
```

```
*Jul 19 13:33:09.726: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:DOWN, length 1496
```

```
*Jul 19 13:33:18.376: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0x0 Length:5
*Jul 19 13:33:18.376: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:DOWN, length 1496
*Jul 19 13:33:26.132: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0x0 Length:5
*Jul 19 13:33:26.132: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:DOWN, length 1496
DeviceA#
```

<#root>

DeviceB#

debug isis adj-packets TwentyFiveGigE1/0/9

IS-IS Adjacency related packets debugging is on for router process null

```
*Jul 19 14:01:32.125: ISIS-Adj: SND:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x0 Length:5
*Jul 19 14:01:32.125: ISIS-Adj:
```

Sending serial IIH on TwentyFiveGigE1/0/9, 3way state:DOWN, length 1496

```
*Jul 19 14:01:40.005: ISIS-Adj: SND:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x0 Length:5
*Jul 19 14:01:40.005: ISIS-Adj:
```

Sending serial IIH on TwentyFiveGigE1/0/9, 3way state:DOWN, length 1496

```
*Jul 19 14:01:49.602: ISIS-Adj: SND:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x0 Length:5
*Jul 19 14:01:49.602: ISIS-Adj: Sending serial IIH on TwentyFiveGigE1/0/9, 3way state:DOWN, length 1496
*Jul 19 14:01:58.284: ISIS-Adj: SND:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x0 Length:5
*Jul 19 14:01:58.284: ISIS-Adj: Sending serial IIH on TwentyFiveGigE1/0/9, 3way state:DOWN, length 1496
```

Beide Geräte senden, empfangen das Hello-Paket jedoch nicht von ihren Nachbarn.

7. Aktivieren Sie eine Erfassung, um zu überprüfen, ob die Pakete an jeden Nachbarn gesendet werden. Wenn die Erfassung abgeschlossen ist, exportieren Sie sie in den Bootflash oder Flash-Speicher als .pcap file und laden Sie sie auf einen TFTP-Server hoch, um weitere Details zu erhalten.

<#root>

DeviceA#

show monitor cap cap parameter

```
monitor capture cap interface TenGigabitEthernet0/0/4 BOTH < Interface from where send and receive the packets >
monitor capture cap control-plane IN < Packets to be process and generated by the CPU >
monitor capture cap access-list TAC < ACL for capture only the IS-IS packets >
monitor capture cap buffer size 10
monitor capture cap limit pps 1000
```

DeviceA#

show access-list TAC

```
Extended MAC access list TAC
  permit host
```

a84f.b1c3.9484

host

0900.2b00.0005 < Local MAC address towards the IS-IS Hello >

permit host

6c31.0edb.3b5f host 0900.2b00.0005 < Remote MAC address towards the IS-IS Hello >

<#root>

DeviceB#

show monitor capture cap parameter


monitor capture cap interface TwentyFiveGigE1/0/9 BOTH < Interface from where send and receive the Hello >

monitor capture cap control-plane BOTH < Packets to be process and generated by the CPU >

monitor capture

cap match any < match all the packets on the switch >

monitor capture cap buffer size 10

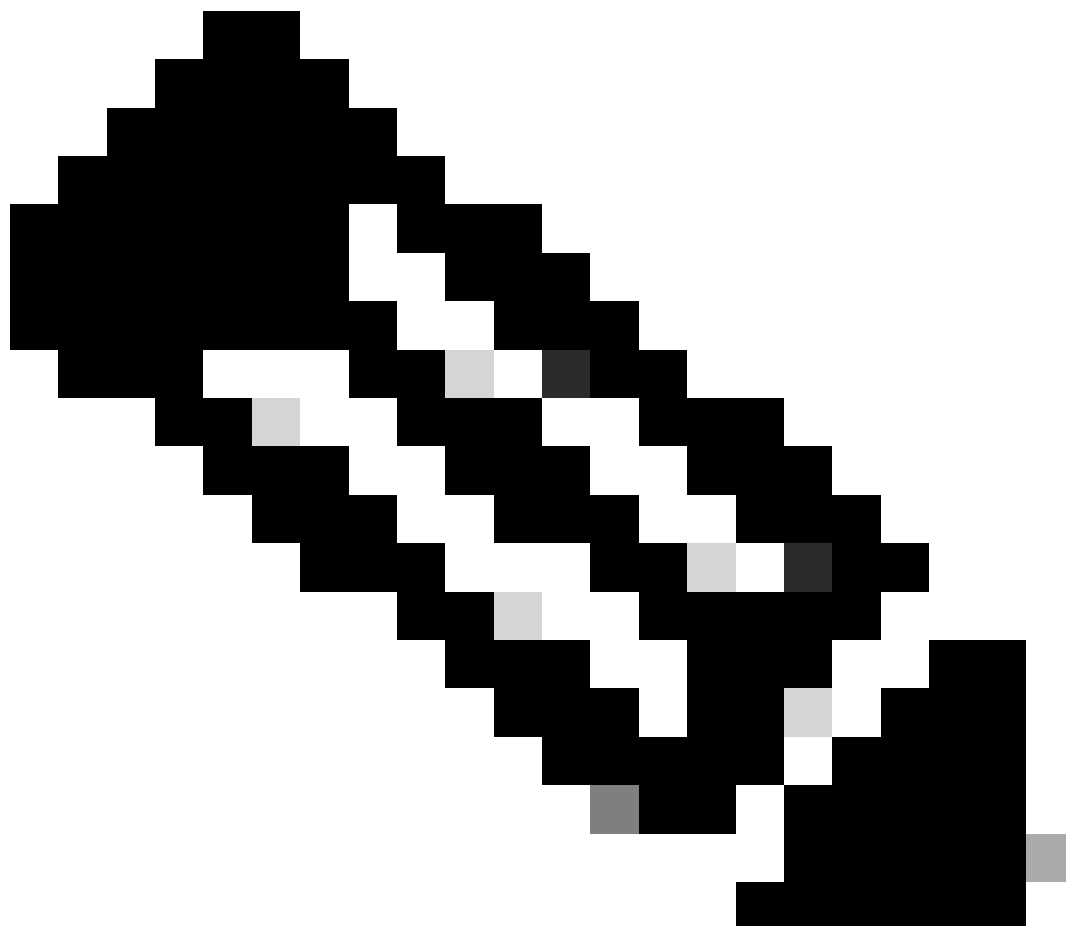

Anmerkung: EPC bei Catalyst Cisco IOS XE-Switches erfasst nur ausgehende IS-IS-Hellos und nicht die eingehenden Pakete. Alternativ werden SPAN-Aufnahmen empfohlen.

In dieser Tabelle wird ein Verweis auf die Hello-Pakete angezeigt.

Name	Ziel-MAC-Adresse
Alle L1-ISs	0180 c200 0014
Alle L2-ISs	0180 c200 0015
Alle IS	0900.2b00.0005
Alle ES	0900.2b00.0004

8. Überprüfen Sie die exportierte Erfassung, und stellen Sie sicher, dass die Hello-Pakete

zwischen Nachbarn ausgetauscht werden.

Gerät A sendet die Hello-Pakete unter Hinzufügen ihrer System-ID (rotes Quadrat). Es wird erwartet, dass er ein Paket von seinem Nachbarn mit seiner System-ID empfängt. Bei dieser Erfassung können Sie feststellen, dass Gerät B diese Pakete nicht an den Peer weiterleitet.

eth.dst == 09:00:2b:00:00:05

Nr	Time	Source	Destination	seq
1	2023-07-19 08:31:55.703958	Cisco_c3:94:84	DEC-MAP-(or-OSI?)~...	P2P HELLO, System-ID: 0000.0000.000a
3	2023-07-19 08:32:05.236987	Cisco_c3:94:84	DEC-MAP-(or-OSI?)~...	P2P HELLO, System-ID: 0000.0000.000a
4	2023-07-19 08:32:14.076991	Cisco_c3:94:84	DEC-MAP-(or-OSI?)~...	P2P HELLO, System-ID: 0000.0000.000a
5	2023-07-19 08:32:23.127984	Cisco_c3:94:84	DEC-MAP-(or-OSI?)~...	P2P HELLO, System-ID: 0000.0000.000a

> Frame 3: 1513 bytes on wire (12104 bits), 1513 bytes captured (12104 bits)

IEEE 802.3 Ethernet

> Destination: DEC-MAP-(or-OSI?)-Intermediate-System-Hello? (09:00:2b:00:00:05)

> Source: Cisco_c3:94:84 (a8:4f:b1:c3:94:84)

Length: 1499

Logical-Link Control

ISO 10589 ISIS InTRA Domain Routeing Information Exchange Protocol

Intradomain Routing Protocol Discriminator: ISIS (0x83)

Length Indicator: 20

Version/Protocol ID Extension: 1

ID Length: 0

000. = Reserved: 0x0

...1 0001 = PDU Type: P2P HELLO (17)

Version: 1

Reserved: 0

Maximum Area Addresses: 0

ISIS HELLO

.... ..11 = Circuit type: Level 1 and 2 (0x3)

0000 00.. = Reserved: 0x00

SystemID {Sender of PDU}: 0000.0000.000a

Holding timer: 30

PDU length: 1496

Local circuit ID: 5

> Restart Signaling (t=211, l=3)

> Point-to-point Adjacency State (t=240, l=5)

> Protocols Supported (t=129, l=1)

> Area address(es) (t=1, l=4)

> IP Interface address(es) (t=132, l=4)

> Padding (t=8, l=255)

> Padding (t=8, l=255)

> Padding (t=8, l=255)

> Padding (t=8, l=255)

> Padding (t=8, l=255)

> Padding (t=8, l=162)

Hello packet

Source from local interface(MAC)

Destination MAC IS-IS Point to Point

System ID sent to the neighbor

GerätA IS-Down-Erfassung

Die Erfassung von DeviceB zeigt, dass die Hello-Pakete an einen Nachbarn gesendet werden (rotes Quadrat). Ähnlich wie bei der letzten Erfassung werden die Hello-Pakete jedoch nicht von einem Nachbarn empfangen.

eth.dst == 09:00:2b:00:00:05

Nr	Time	Source	Destination	seq
1	2023-07-19 09:00:28.028914	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
2	2023-07-19 09:00:35.603384	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
3	2023-07-19 09:00:45.386207	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
4	2023-07-19 09:00:54.772284	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b

> Frame 1: 1513 bytes on wire (12104 bits), 1513 bytes captured (12104 bits) on interface /tmp/epc_ws/wif_to_ts_pipe, id 0

IEEE 802.3 Ethernet

> Destination: DEC-MAP-(or-OSI?)-Intermediate-System-Hello? (09:00:2b:00:00:05)

> Source: Cisco_db:3b:5f (6c:31:0e:db:3b:5f)

Length: 1499

Hello packet

Source MAC address (local Interface)

Destination MAC IS-IS Point to Point

Logical-Link Control

ISO 10589 ISIS InTRA Domain Routeing Information Exchange Protocol

Intradomain Routing Protocol Discriminator: ISIS (0x83)

Length Indicator: 20

Version/Protocol ID Extension: 1

ID Length: 0

000. = Reserved: 0x0

...1 0001 = PDU Type: P2P HELLO (17)

Version: 1

Reserved: 0

Maximum Area Addresses: 0

ISIS HELLO

.... ..11 = Circuit type: Level 1 and 2 (0x3)

0000 00.. = Reserved: 0x00

SystemID {Sender of PDU}: 0000.0000.000b

Holding timer: 30

PDU length: 1496

Local circuit ID: 11

> Restart Signaling (t=211, l=3)

> Point-to-point Adjacency State (t=240, l=5)

> Protocols Supported (t=129, l=1)

> Area address(es) (t=1, l=4)

> IP Interface address(es) (t=132, l=4)

> Padding (t=8, l=255)

> Padding (t=8, l=255)

> Padding (t=8, l=255)

> Padding (t=8, l=255)

> Padding (t=8, l=255)

> Padding (t=8, l=162)

System ID sent to the neighbor

Gerät B - ISIS-Down-Erfassung

Das Problem in diesem Szenario liegt an einem zwischengeschalteten Gerät, das das Senden der Hello-Pakete nicht zulässt. Wenn Sie eine ähnliche Situation beobachten und eine weitere Fehlerbehebung durchführen müssen, öffnen Sie ein Cisco TAC-Ticket.

IS-IS-Adjazenz instabil

Dieser Abschnitt bietet eine Lösung für das häufige Problem der IS-IS-Klappen.

Diagnose des Problems:

IS-IS ist zwischen Gerät A und Gerät B instabil.

<#root>

DeviceA#

show logging

Jul 19 15:05:03.623:

%CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceB (TenGigabitEthernet0/0/4) Down, hold time expired

Jul 19 15:05:15.075: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceB (TenGigabitEthernet0/0/4) Up, new ad

Jul 19 15:07:04.575: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceB (TenGigabitEthernet0/0/4) Down, hold

Jul 19 15:07:15.759: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceB (TenGigabitEthernet0/0/4) Up, new ad

Jul 19 15:09:04.983: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceB (TenGigabitEthernet0/0/4) Down, hold

Jul 19 15:09:14.835: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceB (TenGigabitEthernet0/0/4) Up, new ad

<#root>

DeviceB#

show logging

Jul 19 15:05:02.316:

%CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceA (TwentyFiveGigE1/0/9) Down, hold time expired

Jul 19 15:05:18.191: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceA (TwentyFiveGigE1/0/9) Up, new adjace

Jul 19 15:07:09.280: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceA (TwentyFiveGigE1/0/9) Down, hold tim

Jul 19 15:07:18.876: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceA (TwentyFiveGigE1/0/9) Up, new adjace

Jul 19 15:09:06.080: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceA (TwentyFiveGigE1/0/9) Down, hold tim

Jul 19 15:09:17.948: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceA (TwentyFiveGigE1/0/9) Up, new adjace

1. Überprüfen Sie die Verbindungen zwischen Peers (Ping-Test mit MTU-Größe und dem df-Bit-Satz).

2. Stellen Sie sicher, dass die physische Schnittstelle in einem guten Zustand ist, um zu übertragen (keine Fehler oder Probleme mit Lichtstärken).

3. Validieren Sie mit dem Befehl **show clns traffic interface**, dass die CLNS-Nachbarn Datenverkehr zueinander senden.

<#root>

DeviceA#

show clns traffic interface TenGigabitEthernet0/0/4

CLNS: Time since last clear: 00:01:57

CLNS & ESIS Output: 3, Input: 21

Dropped Protocol not enabled on interface: 0

CLNS Local: 0, Forward: 0

Interface TenGigabitEthernet0/0/4:

IS-IS: Time since last clear: 00:01:57
IS-IS: Level-1 Hellos (sent/rcvd): 0/0
IS-IS: Level-2 Hellos (sent/rcvd): 0/0

IS-IS: PTP Hellos (sent/rcvd): 15/11 < DeviceA sends hello packets and receives less than its sends

IS-IS: Level-1 LSPs flooded (sent/rcvd): 2/2
IS-IS: Level-2 LSPs flooded (sent/rcvd): 2/2

IS-IS: Level-1 CSNPs (sent/rcvd): 1/1
IS-IS: Level-2 CSNPs (sent/rcvd): 1/1
IS-IS: Level-1 PSNPs (sent/rcvd): 1/1
IS-IS: Level-2 PSNPs (sent/rcvd): 1/1
IS-IS: Level-1 DR Elections: 0
IS-IS: Level-2 DR Elections: 0

<#root>

DeviceB#

show clns traffic interface TwentyFiveGigE1/0/9

CLNS: Time since last clear: 00:00:27
CLNS queue depth: 0/100, drops: 0, highest: 2
CLNS & ISIS Output: 1, Input: 14
Dropped Protocol not enabled on interface: 0
CLNS Local: 0, Forward: 0


Interface TwentyFiveGigE1/0/9:

IS-IS: Time since last clear: 00:00:27
IS-IS: Level-1 Hellos (sent/rcvd): 0/0
IS-IS: Level-2 Hellos (sent/rcvd): 0/0

IS-IS: PTP Hellos (sent/rcvd): 4/5 < DeviceB, sends and receives a couple of hellos in comparison v

IS-IS: Level-1 LSPs flooded (sent/rcvd): 2/2
IS-IS: Level-2 LSPs flooded (sent/rcvd): 2/2

IS-IS: Level-1 CSNPs (sent/rcvd): 1/1
IS-IS: Level-2 CSNPs (sent/rcvd): 1/1
IS-IS: Level-1 PSNPs (sent/rcvd): 1/1
IS-IS: Level-2 PSNPs (sent/rcvd): 1/1
IS-IS: Level-1 DR Elections: 0
IS-IS: Level-2 DR Elections: 0

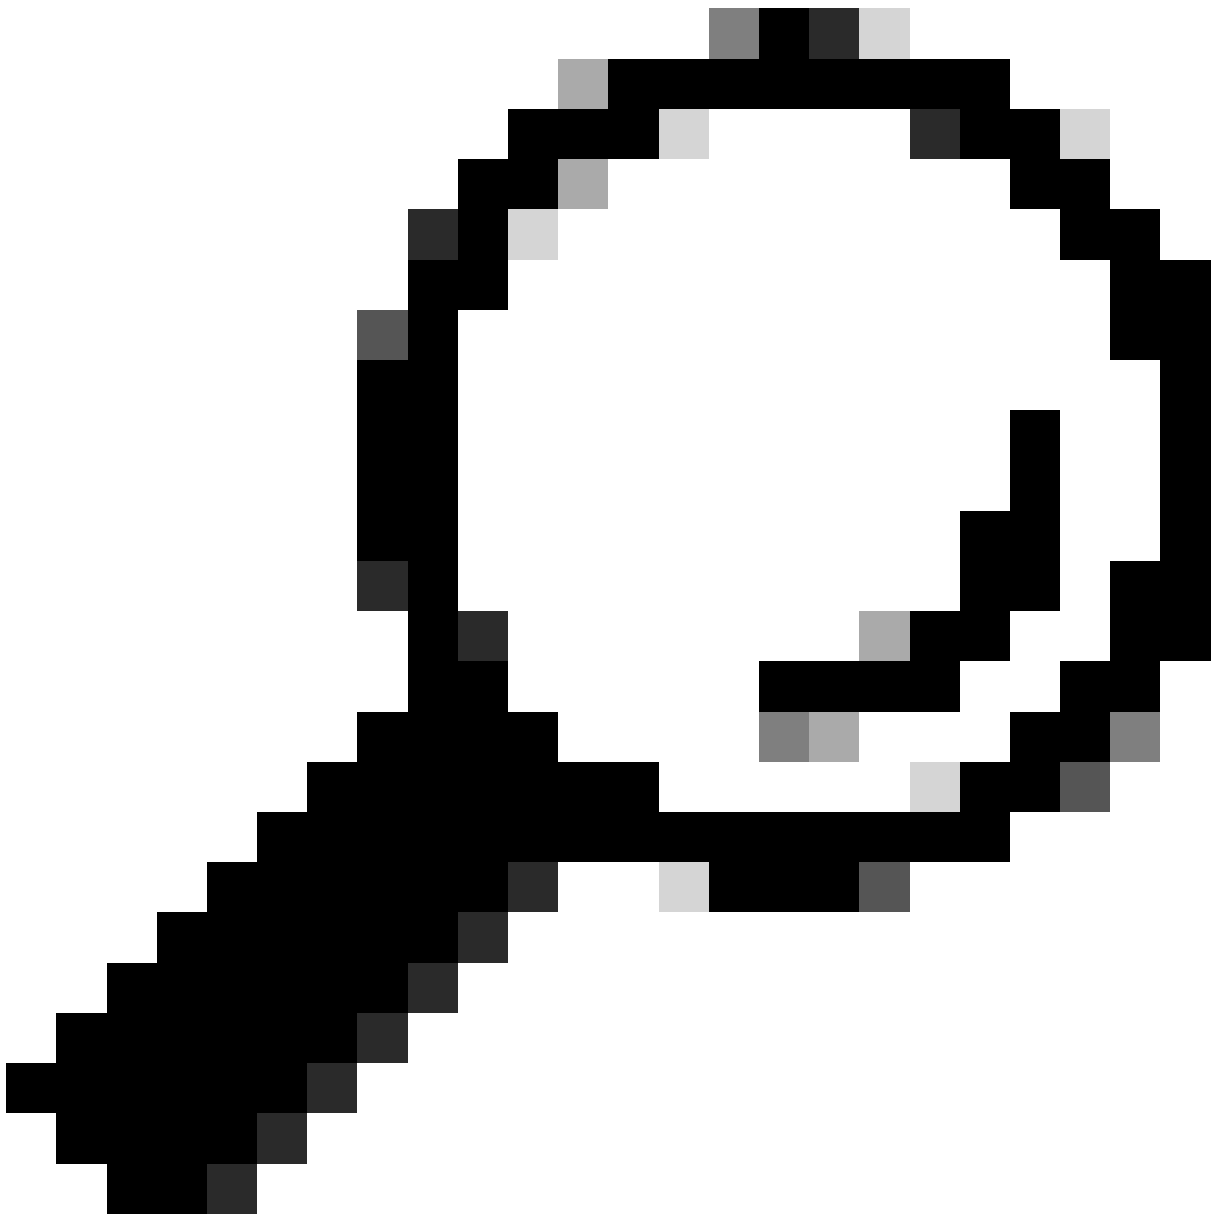

Tipp: Der Befehl `cls traffic` zeigt IS-IS Hellos basierend auf IS-IS-Ebene und IS-IS-Netzwerktyp an.

4. Aktivieren Sie diese Option, `debug ISIS adj-packets` um festzustellen, welche Pakete zwischen Nachbarn ausgetauscht werden.

```
<#root>
```

```
DeviceA#
```

```
show isis adj-packets TenGigabitEthernet0/0/4
```

```
< Hellos sent to the DeviceB with no response >
```

Jul 19 18:58:34.779: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0xB Length:15
Jul 19 18:58:34.779: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:UP, length 1496
Jul 19 18:58:42.719: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0xB Length:15
Jul 19 18:58:42.719: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:UP, length 1496
Jul 19 18:58:50.430: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0xB Length:15
Jul 19 18:58:50.430: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:UP, length 1496
Jul 19 18:58:58.356: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0xB Length:15
Jul 19 18:58:58.356: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:UP, length 1496

< IS-IS declares the protocol down >

Jul 19 18:59:01.879: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceB (TenGigabitEthernet0/0/4)
Down, hold time expired

< IS-IS sends hellos to the neighbor and receives a response from DeviceB >

Jul 19 18:59:01.879: ISIS-Adj: L2 adj count 0
Jul 19 18:59:07.724: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0x0 Length:5
Jul 19 18:59:07.724: ISIS-Adj:

Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:DOWN, length 1496

Jul 19 18:59:15.894: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0x0 Length:5
Jul 19 18:59:15.894: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:DOWN, length 1496
Jul 19 18:59:15.896: ISIS-Adj:

Rec serial IIH from 6c31.0edb.3b5f (TenGigabitEthernet0/0/4)

Jul 19 18:59:15.896: ISIS-Adj: cir type L2, cir id 0B, length 1496
Jul 19 18:59:15.896: ISIS-Adj:

RCV:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x5 Length:15

Jul 19 18:59:15.896: ISIS-Adj: Nghbr Ckt ID changed: TRUE
Jul 19 18:59:15.896: ISIS-Adj: received Neighbor System-ID (must be our) 0000.0000.000A
Jul 19 18:59:15.896: ISIS-Adj: received Neighbor ext.circuit ID (must be our) 0x5
Jul 19 18:59:15.896: ISIS-Adj: newstate:1, state_changed:1, going_up:0, going_down:0
Jul 19 18:59:15.896: ISIS-Adj: Action = GOING UP, new type = L2

< DeviceA declares that the adjacency is UP and starts to establish the session >

Jul 19 18:59:15.896: ISIS-Adj: New serial adjacency
Jul 19 18:59:15.896: ISIS-Adj:

rcvd state INIT, old state DOWN, new state INIT, nbr usable TRUE

Jul 19 18:59:15.898: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0xB Length:15
Jul 19 18:59:15.898: ISIS-Adj:

Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:INIT, length 1496

Jul 19 18:59:15.900: ISIS-Adj: Rec serial IIH from 6c31.0edb.3b5f (TenGigabitEthernet0/0/4)
Jul 19 18:59:15.900: ISIS-Adj: cir type L2, cir id 0B, length 1496
Jul 19 18:59:15.900: ISIS-Adj:

rcvd state UP, old state INIT, new state UP, nbr usable TRUE

Jul 19 18:59:15.900: ISIS-Adj: RCV:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x5 Length:15

Jul 19 18:59:15.900: ISIS-Adj: Nghbr Ckt ID changed: FALSE
Jul 19 18:59:15.900: ISIS-Adj: received Neighbor System-ID (must be our) 0000.0000.000A
Jul 19 18:59:15.900: ISIS-Adj: received Neighbor ext.circuit ID (must be our) 0x5
Jul 19 18:59:15.900: ISIS-Adj: newstate:0, state_changed:1, going_up:1, going_down:0
Jul 19 18:59:15.900: ISIS-Adj: Action = GOING UP, new type = L2
Jul 19 18:59:15.900: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceB (TenGigabitEthernet0/0/4)

Up, new adjacency

<#root>

DeviceB#

debug isis adj-packets TwentyFiveGigE1/0/9

< Hello sent to the DeviceA with no response >

Jul 19 18:58:44.105: ISIS-Adj: SND:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x5 Length:15
Jul 19 18:58:44.105: ISIS-Adj: Sending serial IIH on TwentyFiveGigE1/0/9, 3way state:UP, length 1496
Jul 19 18:58:51.814: ISIS-Adj: SND:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x5 Length:15
Jul 19 18:58:51.814: ISIS-Adj: Sending serial IIH on TwentyFiveGigE1/0/9, 3way state:UP, length 1496
Jul 19 18:58:59.768: ISIS-Adj: SND:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x5 Length:15
Jul 19 18:58:59.768: ISIS-Adj: Sending serial IIH on TwentyFiveGigE1/0/9, 3way state:UP, length 1496

< IS-IS declares the protocol down >

Jul 19 18:59:07.886: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceA (TwentyFiveGigE1/0/9)

Down, hold time expired

< IS-IS sends hellos to the neighbor and receives a response from DeviceA >

Jul 19 18:59:07.887: ISIS-Adj: L2 adj count 0
Jul 19 18:59:08.422: ISIS-Adj: SND:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x0 Length:5
Jul 19 18:59:08.422: ISIS-Adj:

Sending serial IIH on TwentyFiveGigE1/0/9, 3way state:DOWN, length 1496

Jul 19 18:59:16.144: ISIS-Adj: SND:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x0 Length:5
Jul 19 18:59:16.144: ISIS-Adj: Sending serial IIH on TwentyFiveGigE1/0/9, 3way state:DOWN, length 1496
Jul 19 18:59:19.001: ISIS-Adj:

Rec serial IIH from a84f.b1c3.9484 (TwentyFiveGigE1/0/9)

Jul 19 18:59:19.001: ISIS-Adj: cir type L2, cir id 05, length 1496
Jul 19 18:59:19.001: ISIS-Adj:

RCV:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0x49000184 Length:5

Jul 19 18:59:19.001: ISIS-Adj: Nghbr Ckt ID changed: TRUE
Jul 19 18:59:19.001: ISIS-Adj: newstate:1, state_changed:1, going_up:0, going_down:0
Jul 19 18:59:19.001: ISIS-Adj: Action = GOING UP, new type = L2

< DeviceB declares that the adjacency is UP and starts to establish the session >

Jul 19 18:59:19.001: ISIS-Adj: New serial adjacency

Jul 19 18:59:19.001: ISIS-Adj:

rcvd state DOWN, old state DOWN, new state INIT, nbr usable TRUE

Jul 19 18:59:19.002: ISIS-Adj: SND:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x5 Length:15

Jul 19 18:59:19.002: ISIS-Adj:

Sending serial IIH on TwentyFiveGigE1/0/9, 3way state:INIT, length 1496

Jul 19 18:59:19.004: ISIS-Adj: Rec serial IIH from a84f.b1c3.9484 (TwentyFiveGigE1/0/9)

Jul 19 18:59:19.004: ISIS-Adj: cir type L2, cir id 05, length 1496

Jul 19 18:59:19.004: ISIS-Adj:

rcvd state INIT, old state INIT, new state UP, nbr usable TRUE

Jul 19 18:59:19.004: ISIS-Adj: RCV:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0xB Length:15

Jul 19 18:59:19.004: ISIS-Adj: Nghbr Ckt ID changed: FALSE

Jul 19 18:59:19.004: ISIS-Adj: received Neighbor System-ID (must be our) 0000.0000.000B

Jul 19 18:59:19.004: ISIS-Adj: received Neighbor ext.circuit ID (must be our) 0xB

Jul 19 18:59:19.004: ISIS-Adj: newstate:0, state_changed:1, going_up:1, going_down:0

Jul 19 18:59:19.004: ISIS-Adj: Action = GOING UP, new type = L2

Jul 19 18:59:19.004: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceA (TwentyFiveGigE1/0/9)

Up, new adjacency

5. Aktivieren Sie eine Erfassung, um zu überprüfen, ob die Pakete an jeden Nachbarn gesendet werden. Wenn die Erfassung abgeschlossen ist, exportieren Sie die Erfassung in den Bootflash als `.pcap file`, und laden Sie sie auf einen TFTP-Server hoch, um weitere Details zu erhalten.

Gerät A empfängt ein Paket von Gerät B (19:15.05), nachdem dieses Paket empfangen wurde. Gerät A sendet sein entsprechendes Hello ohne Antwort des Nachbarn, bis die Haltezeit abgelaufen ist, die standardmäßig 30 Sekunden beträgt (rotes Quadrat).

In diesem Fall deklariert der Router die Adjacency als ausgefallen. Nach diesem Zeitraum sendet Gerät B sein Hello und wird von Gerät A empfangen, und diese Pakete werden problemlos ausgetauscht (grünes Quadrat).

eth.dst == 09:00:2b:00:00:05				
Nr	Time	Source	Destination	seq
1	19:14:48.784947	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
2	19:14:49.664958	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
3	19:14:57.201985	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
4	19:14:57.520969	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
5	19:15:05.147987	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
6	19:15:06.439964	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
7	19:15:16.015990	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
8	19:15:25.153983	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
9	19:15:32.868943	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
	19:15:35.149986	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
	19:15:45.071987	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
	19:15:51.718956	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
	19:15:51.720955	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
	19:15:51.721947	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
	19:15:51.722954	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
	19:15:51.723961	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
	19:16:00.949947	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
	19:16:01.164984	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
	19:16:08.904951	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
	19:16:09.835955	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
	19:16:16.435966	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
	19:16:19.244982	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
	19:16:23.987940	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
	19:16:28.034986	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
	19:16:33.752951	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
	19:16:37.050992	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
	19:16:41.765951	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
	19:16:44.948940	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
	19:16:49.618956	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
	19:16:53.623960	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
	19:16:58.815952	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
	19:17:01.182989	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
	19:17:08.310973	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
	19:17:09.463965	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
	19:17:10.705954	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
> Frame 5: 1513 bytes on wire (12104 bits), 1513 bytes captured (12104 bits) > IEEE 802.3 Ethernet > Logical-Link Control > ISO 10589 ISIS InTRA Domain Routeing Information Exchange Protocol > ISIS HELLO				

ISIS instabiles Gerät A

Die Erfassung von Gerät B ähnelt dem Symptom des Peers. Das Gerät empfängt die Hello-Pakete nicht von seinem Nachbarn. Das letzte Paket wird von Gerät B ohne Antwort von Gerät A gesendet, bis der Hold-Timer für 30 Sekunden erreicht ist. Dieser Switch betrachtet die Adjacency als ausgefallen. Nach diesem Fehler empfängt der Switch den Hello-Befehl von Gerät A und startet die Nachbarschaft.

eth.dst == 09:00:2b:00:00:05				
Nr	Time	Source	Destination	seq
4	01:11:27.332388	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
5	01:11:27.894819	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
	01:11:34.859121	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
	01:11:35.738192	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
	01:11:43.274969	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
	01:11:43.594820	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
	01:11:51.221556	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
	01:11:52.513395	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
	01:11:59.401211	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
	01:12:08.669824	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
	01:12:17.078248	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
	01:12:22.514746	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
	01:12:31.351461	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
	01:12:37.791466	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
	01:12:37.793033	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
	01:12:37.794384	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
	01:12:37.794895	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
	01:12:37.796641	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
	01:12:47.022577	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
	01:12:47.237364	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
	01:12:54.976460	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
	01:12:55.908343	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
	01:13:02.507283	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
	01:13:05.317018	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
	01:13:10.059795	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
	01:13:14.106249	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
	01:13:19.824557	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
	01:13:23.122303	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
	01:13:27.837176	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
	01:13:31.019915	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
	01:13:35.690382	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
	01:13:39.695453	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
	01:13:44.887023	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b

```

> Frame 32: 1513 bytes on wire (12104 bits), 1513 bytes captured (12104 bits) on interface \Device\NPF_{D6BBE860-9886-4A6C-BDD5-8E2837C66FB0}, id 0
> IEEE 802.3 Ethernet
> Logical-Link Control
> ISO 10589 ISIS InTRA Domain Routeing Information Exchange Protocol
> ISIS HELLO

```

ISIS instabiles Gerät B

Dies schließt ein Problem mit dem Transport ab, und Sie müssen überprüfen, warum die Pakete verloren gehen.

IS-IS-Adjazenz instabil (zufällige Flaps)

IS-IS ist zwischen Gerät A und Gerät B instabil. Das Protokoll erkennt zufällige Flaps.

```
<#root>
```

DeviceA#

show logging

```

Jul 21 10:03:38.633: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceB (TenGigabitEthernet0/0/4) Down, hold
Jul 21 10:05:10.272: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceB (TenGigabitEthernet0/0/4) Up, new ad
Jul 21 10:33:41.528: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceB (TenGigabitEthernet0/0/4) Down, hold
Jul 21 10:35:07.979: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceB (TenGigabitEthernet0/0/4) Up, new ad
Jul 21 11:03:42.442: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceB (TenGigabitEthernet0/0/4) Down, hold
Jul 21 11:05:08.469: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceB (TenGigabitEthernet0/0/4) Up, new ad

```

<#root>


DeviceB#

show logging

```
Jul 21 10:03:44.535: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceA (TwentyFiveGigE1/0/9) Down, hold tim
Jul 21 10:05:13.281: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceA (TwentyFiveGigE1/0/9) Up, new adjace
Jul 21 10:33:38.408: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceA (TwentyFiveGigE1/0/9) Down, hold tim
Jul 21 10:35:10.989: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceA (TwentyFiveGigE1/0/9) Up, new adjace
Jul 21 11:03:39.291: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceA (TwentyFiveGigE1/0/9) Down, hold tim
Jul 21 11:05:11.479: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceA (TwentyFiveGigE1/0/9) Up, new adjace
```

Wenn ein Problem auftritt, gehen Sie wie folgt vor:

1. Überprüfen der Übereinstimmung der Konfiguration mit dem Peer
2. Stellen Sie sicher, dass die physische Schnittstelle in einem guten Übertragungszustand ist (keine Fehler oder Probleme mit der Beleuchtung).
3. Überprüfen Sie die Verbindungen zwischen Peers (Ping-Test mit MTU-Größe und dem df-Bit-Satz).

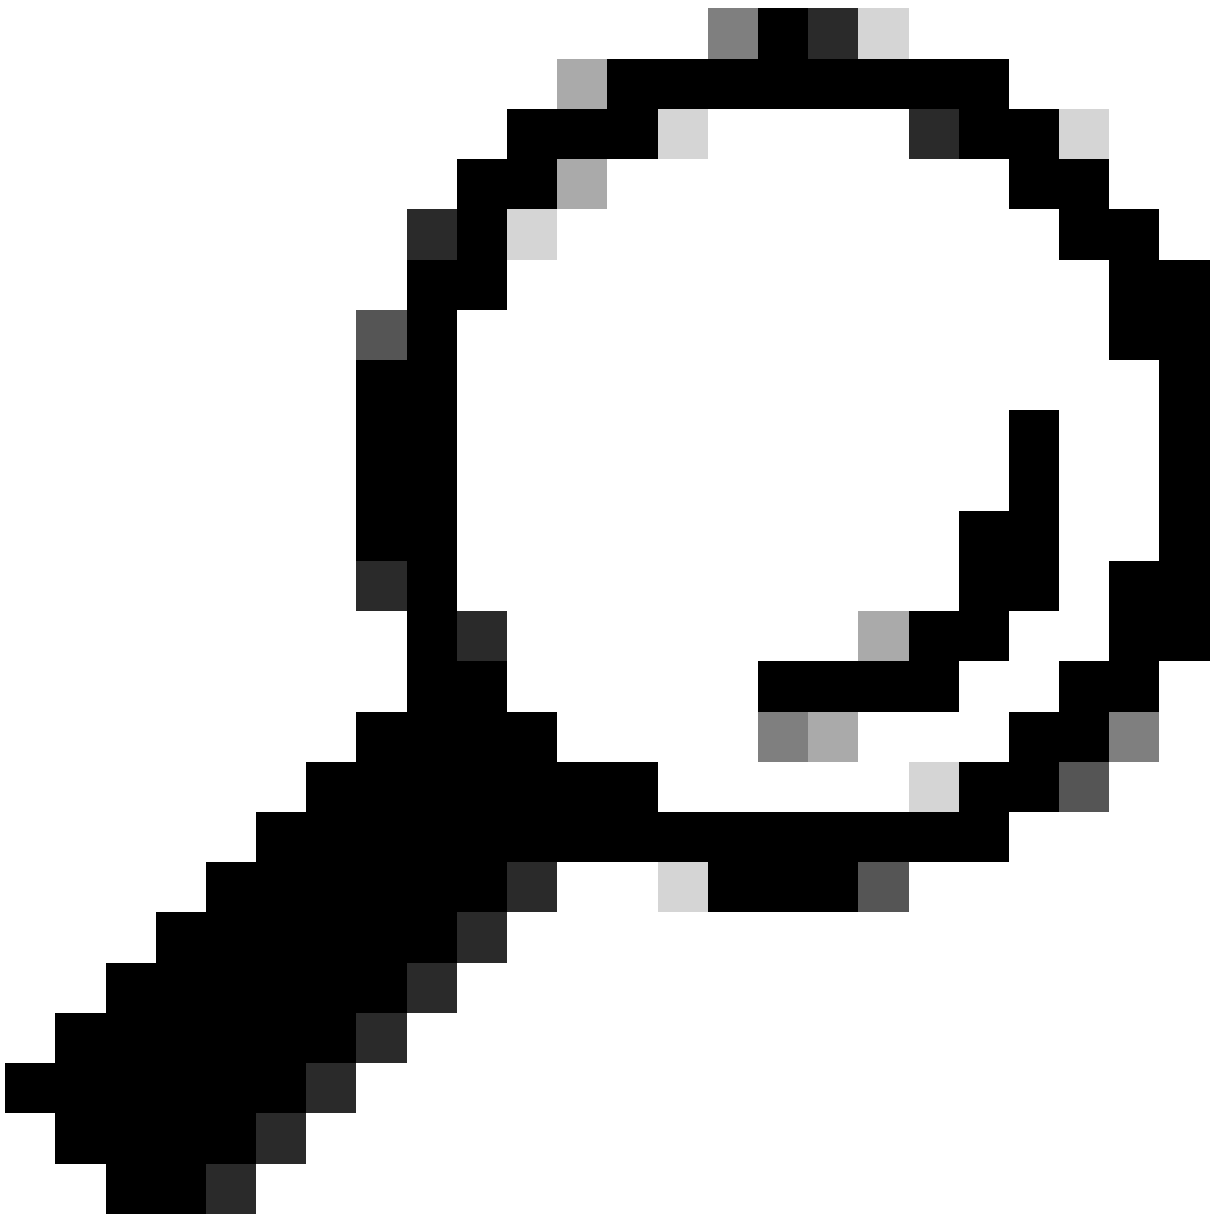

Tipp: Es ist nicht einfach, diese Art von Problemen aufgrund des Zustands der zufälligen Klappen zu beheben. Um dieses Problem zu beheben, sollten Sie Skripte verwenden, um die erforderlichen Befehle auszuführen und die Fehlerbehebung fortzusetzen.

4. Fahren Sie mit der Konfiguration einer Monitorerfassung mit einer Zugriffsliste fort, um die Fehlerbehebung genauer zu beschreiben.

5. Deaktivieren Sie die Protokollierungskonsole, und aktivieren Sie die `debug isis adj-packets`

.

<#root>

DeviceA(config)#

no logging console

```
DeviceA(config)#exit
DeviceA#

debug isis adj-packets TenGigabitEthernet0/0/4
```

6. Aktivieren Sie die Paketerfassung auf dem Gerät, und aktivieren Sie sie.

<#root>

DeviceA#

```
show monitor capture cap parameter
```

```
monitor capture cap interface TenGigabitEthernet0/0/4 BOTH
monitor capture cap control-plane IN
monitor capture cap
```

```
access-list TAC > match only the packets allowed on the ACL
```

```
monitor capture cap buffer size 100
```

```
circular > when the capture reaches the size of 100 MB this overwrite the previous information.
```

```
monitor capture cap limit pps 1000
```

DeviceA#

```
show access-lists TAC
```

```
Extended MAC access list TAC
permit
```

```
host a84f.b1c3.9484 host 0900.2b00.0005 < Local MAC address towards the IS-IS Hello >
permit
```

```
host 6c31.0edb.3b5f host 0900.2b00.0005 < Remote MAC address towards the IS-IS Hello >
```

```
DeviceA#monitor capture cap start
```

7. Konfigurieren Sie den Embedded Event Manager (EEM) auf dem Cisco Gerät. Wenn das Problem das Syslog-Muster auslöst, werden Protokolle generiert, die im Flash-Speicher als .txt-Datei gespeichert werden. Fahren Sie mit dem Hochladen der Dateien auf einen TFTP-Server fort, um weitere Informationen zu erhalten.

<#root>

DeviceA#

```
show running-config | sec event
```

```
event manager applet ISIS_Flap authorization bypass
```

```
event syslog pattern "%CLNS-5-ADJCHANGE:.*hold time expired"
```

```
action 1.0 syslog msg "ISIS down Please wait - capturing the traffic"
```

```
action 1.1 cli command "enable"
```

```
action 1.2 cli command "show clns interface ten0/0/4 | append bootflash:ISIS_DeviceA.txt"
```

```
action 1.3 cli command "show clns traffic interface tenGigabitEthernet 0/0/4 |
```

```
append bootflash:ISIS_DeviceA.txt"
```

```
action 2.0 cli command "show logging | append bootflash:debug_DeviceA.txt"
```

```
action 2.1 cli command "undebug all"
```

```
action 2.2 cli command "monitor capture cap stop"
```

```
action 3.0 cli command "end"
```

For switches to append the logs it is necessary to use the

append flash:

, as example:

```
event manager applet ISIS_Flap authorization bypass
```

```
event syslog pattern "%CLNS-5-ADJCHANGE:.*hold time expired"
```

```
action 1.0 syslog msg "ISIS down Please wait - capturing the traffic"
```

```
action 1.1 cli command "enable"
```

```
action 1.2 cli command "show clns interface ten0/0/4 | append
```

```
flash:ISIS_DeviceB.txt"
```

```
action 3.0 cli command "end"
```

8. Sobald das Problem ausgelöst wird, fahren Sie fort, die Aufzeichnung auf dem Bootflash/Flash zu exportieren und sicherzustellen, dass die .txt Dateien ordnungsgemäß am gleichen Speicherort gespeichert werden.

<#root>

DeviceA#

```
monitor capture cap export bootflash:ISIS_DeviceA.pcap
```

Exported Successfully

DeviceA#

```
dir bootflash:*.txt
```

Directory of bootflash:/*.txt

Directory of bootflash:/

```
  19  -rw-          6048  Jul 22 2023 13:33:40 +00:00
```

ISIS_DeviceA.txt

```
  20  -rw-        103153  Jul 22 2023 13:33:40 +00:00
```

debug_DeviceA.txt

26975526912 bytes total (20527607808 bytes free)

DeviceB#

```
monitor capture cap export location flash:ISIS_DeviceB.pcap
```

Exported Successfully

DeviceB#

```
dir bootflash:*.txt
```

Directory of bootflash:/*.txt

Directory of bootflash:/

```
356939  -rw-          660  Jul 22 2023 13:33:42 +00:00
```

ISIS_DeviceB.txt

```
356943  -rw-        103283  Jul 22 2023 13:33:42 +00:00
```

debug_DeviceB.txt

9. Laden Sie die Dateien auf einen TFTP-Server hoch, um die Protokolle zwischen den Geräten zu vergleichen.

<#root>

DeviceA#

```
copy bootflash:ISIS_DeviceA.txt tftp:
```

Address or name of remote host []?

< TFTP IP address >

Destination filename [

ISIS_DeviceA.txt

]?

!!
18144 bytes copied in 0.095 secs (190989 bytes/sec)

10. Vergleichen Sie die Erfassungen und Protokolle, um zu überprüfen, ob die Pakete von beiden Routern gesendet und empfangen werden.

Analyse der IS-IS-Protokolle:

- Beide IS-IS-Schnittstellen werden mit dem gleichem Netzwerktyp L1-L2 konfiguriert.
- Der Schnittstellenstatus (wenn der Status "DOWN" lautet) zeigt, dass beide Schnittstellen das Hello-Paket nicht empfangen.
- IS-IS: Bei den PTP-Hellos stimmen die Pakete nicht überein. Während DeviceA 205 Pakete sendet und 199 vom Peer empfängt, hat DeviceB 202 von 202. Dies weist darauf hin, dass der Transport nicht zuverlässig ist.

<#root>

DeviceA

TenGigabitEthernet0/0/4 is up, line protocol is up
Attached to: isis
Checksums enabled, MTU 1497, Encapsulation SAP
ERPDUs enabled, min. interval 10 msec.
CLNS fast switching disabled
CLNS SSE switching disabled
DEC compatibility mode OFF for this interface
Next ESH/ISH in 30 seconds
Routing Protocol: IS-IS

Circuit Type: level-1-2

Interface number 0x0, local circuit ID 0x5
Neighbor Extended Local Circuit ID: 0x0
Level-1 Metric: 10, Priority: 64, Circuit ID: DeviceA.05
Level-1 IPv6 Metric: 10
Number of active level-1 adjacencies: 0
Level-2 Metric: 10, Priority: 64, Circuit ID: DeviceA.05
Level-2 IPv6 Metric: 10
Number of active level-2 adjacencies: 0
Next IS-IS Hello in 574 milliseconds

if state DOWN

CLNS: Time since last clear: 00:29:37
CLNS & ISIS Output: 33, Input: 241
Dropped Protocol not enabled on interface: 0
CLNS Local: 0, Forward: 0

Interface TenGigabitEthernet0/0/4:
IS-IS: Time since last clear: 00:29:37
IS-IS: Level-1 Hellos (sent/rcvd): 0/0
IS-IS: Level-2 Hellos (sent/rcvd): 0/0

IS-IS: PTP Hellos (sent/rcvd): 205/199
IS-IS: Level-1 LSPs flooded (sent/rcvd): 2/2
IS-IS: Level-2 LSPs flooded (sent/rcvd): 2/2

IS-IS: Level-1 CSNPs (sent/rcvd): 0/0
IS-IS: Level-2 CSNPs (sent/rcvd): 0/0
IS-IS: Level-1 PSNPs (sent/rcvd): 2/2
IS-IS: Level-2 PSNPs (sent/rcvd): 2/2
IS-IS: Level-1 DR Elections: 0
IS-IS: Level-2 DR Elections: 0

DeviceB

TwentyFiveGigE1/0/9 is up, line protocol is up
Attached to: isis
Checksums enabled, MTU 1497, Encapsulation SAP
ERPDUs enabled, min. interval 10 msec.
CLNS fast switching disabled
CLNS SSE switching disabled
DEC compatibility mode OFF for this interface
Next ESH/ISH in 20 seconds
Routing Protocol: IS-IS

Circuit Type: level-1-2

Interface number 0x0, local circuit ID 0xB
Neighbor Extended Local Circuit ID: 0x0
P2P retransmit queue size: 0
Level-1 Metric: 10, Priority: 64, Circuit ID: DeviceB.0B
Level-1 IPv6 Metric: 10
Number of active level-1 adjacencies: 0
Level-2 Metric: 10, Priority: 64, Circuit ID: DeviceB.0B
Level-2 IPv6 Metric: 10
Number of active level-2 adjacencies: 0
Next IS-IS Hello in 7 seconds

if state DOWN

CLNS: Time since last clear: 00:29:34
CLNS queue depth: 0/100, drops: 0, highest: 1
CLNS & ISIS Output: 34, Input: 243
Dropped Protocol not enabled on interface: 0
CLNS Local: 0, Forward: 0

```
Interface TwentyFiveGigE1/0/9:
IS-IS: Time since last clear: 00:29:34
IS-IS: Level-1 Hellos (sent/rcvd): 0/0
IS-IS: Level-2 Hellos (sent/rcvd): 0/0

IS-IS: PTP Hellos      (sent/rcvd): 202/202
IS-IS: Level-1 LSPs flooded (sent/rcvd): 2/2
IS-IS: Level-2 LSPs flooded (sent/rcvd): 2/2

IS-IS: Level-1 CSNPs (sent/rcvd): 0/0
IS-IS: Level-2 CSNPs (sent/rcvd): 0/0
IS-IS: Level-1 PSNPs (sent/rcvd): 2/2
IS-IS: Level-2 PSNPs (sent/rcvd): 2/2
IS-IS: Level-1 DR Elections: 0
IS-IS: Level-2 DR Elections: 0
```

Im nächsten Schritt werden die Debugs und Captures verglichen.

<#root>

DeviceA

```
Jul 22 19:17:24.929: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0xB Length:15
Jul 22 19:17:24.929: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:UP, length 1496
Jul 22 19:17:31.685: ISIS-Adj: Rec serial IIH from 6c31.0edb.3b5f (TenGigabitEthernet0/0/4)

Jul 22 19:17:31.685: ISIS-Adj: cir type L1L2, cir id 0B, length 1496
Jul 22 19:17:31.685: ISIS-Adj: rcvd state UP, old state UP, new state UP, nbr usable TRUE
Jul 22 19:17:31.685: ISIS-Adj: RCV:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x5 Length:15
Jul 22 19:17:31.685: ISIS-Adj: Nghbr Ckt ID changed: FALSE
Jul 22 19:17:31.685: ISIS-Adj: received Neighbor System-ID (must be our) 0000.0000.000A
Jul 22 19:17:31.685: ISIS-Adj: received Neighbor ext.circuit ID (must be our) 0x5
Jul 22 19:17:31.685: ISIS-Adj: newstate:0, state_changed:0, going_up:0, going_down:0
Jul 22 19:17:31.685: ISIS-Adj: Action = ACCEPT
Jul 22 19:17:31.685: ISIS-Adj: ACTION_ACCEPT:

Jul 22 19:17:33.626: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0xB Length:15
Jul 22 19:17:33.627: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:UP, length 1496
Jul 22 19:17:42.671: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0xB Length:15
Jul 22 19:17:42.672: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:UP, length 1496

Jul 22 19:17:52.008: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0xB Length:15
Jul 22 19:17:52.008: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:UP, length 1496
Jul 22 19:18:01.475: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0xB Length:15
Jul 22 19:18:01.475: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:UP, length 1496

Jul 22 19:18:01.685: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceB (TenGigabitEthernet0/0/4) Down, hold
Jul 22 19:18:01.685: ISIS-Adj: L1 adj count 0
Jul 22 19:18:01.685: ISIS-Adj: L2 adj count 0
```

DeviceB

```
Jul 22 19:17:25.693: ISIS-Adj: SND:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x5 Length:15
```

Jul 22 19:17:25.693: ISIS-Adj: Sending serial IIH on TwentyFiveGigE1/0/9, 3way state:UP, length 1496

Jul 22 19:17:27.882: ISIS-Adj: Rec serial IIH from a84f.b1c3.9484 (TwentyFiveGigE1/0/9)

Jul 22 19:17:27.882: ISIS-Adj: cir type L1L2, cir id 05, length 1496
Jul 22 19:17:27.882: ISIS-Adj: rcvd state UP, old state UP, new state UP, nbr usable TRUE
Jul 22 19:17:27.882: ISIS-Adj: RCV:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0xB Length:15
Jul 22 19:17:27.882: ISIS-Adj: Nghbr Ckt ID changed: FALSE
Jul 22 19:17:27.882: ISIS-Adj: received Neighbor System-ID (must be our) 0000.0000.000B
Jul 22 19:17:27.882: ISIS-Adj: received Neighbor ext.circuit ID (must be our) 0xB
Jul 22 19:17:27.882: ISIS-Adj: newstate:0, state_changed:0, going_up:0, going_down:0
Jul 22 19:17:27.882: ISIS-Adj: Action = ACCEPT
Jul 22 19:17:27.882: ISIS-Adj: ACTION_ACCEPT:

Jul 22 19:17:34.637: ISIS-Adj: SND:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x5 Length:15

Jul 22 19:17:34.637: ISIS-Adj: Sending serial IIH on TwentyFiveGigE1/0/9, 3way state:UP, length 1496

Jul 22 19:17:36.579: ISIS-Adj: Rec serial IIH from a84f.b1c3.9484 (TwentyFiveGigE1/0/9)

Jul 22 19:17:36.579: ISIS-Adj: cir type L1L2, cir id 05, length 1496
Jul 22 19:17:36.579: ISIS-Adj: rcvd state UP, old state UP, new state UP, nbr usable TRUE
Jul 22 19:17:36.579: ISIS-Adj: RCV:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0xB Length:15
Jul 22 19:17:36.579: ISIS-Adj: Nghbr Ckt ID changed: FALSE
Jul 22 19:17:36.579: ISIS-Adj: received Neighbor System-ID (must be our) 0000.0000.000B
Jul 22 19:17:36.579: ISIS-Adj: received Neighbor ext.circuit ID (must be our) 0xB
Jul 22 19:17:36.579: ISIS-Adj: newstate:0, state_changed:0, going_up:0, going_down:0
Jul 22 19:17:36.579: ISIS-Adj: Action = ACCEPT
Jul 22 19:17:36.579: ISIS-Adj: ACTION_ACCEPT:

Jul 22 19:17:43.270: ISIS-Adj: SND:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x5 Length:15

Jul 22 19:17:43.271: ISIS-Adj: Sending serial IIH on TwentyFiveGigE1/0/9, 3way state:UP, length 1496

Jul 22 19:17:51.658: ISIS-Adj: SND:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x5 Length:15
Jul 22 19:17:51.658: ISIS-Adj: Sending serial IIH on TwentyFiveGigE1/0/9, 3way state:UP, length 1496
Jul 22 19:18:00.248: ISIS-Adj: SND:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x5 Length:15
Jul 22 19:18:00.248: ISIS-Adj: Sending serial IIH on TwentyFiveGigE1/0/9, 3way state:UP, length 1496

Jul 22 19:18:06.579: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceA (TwentyFiveGigE1/0/9) Down, hold time

Jul 22 19:18:06.579: ISIS-Adj: L1 adj count 0
Jul 22 19:18:06.579: ISIS-Adj: L2 adj count 0

Analyse der IS-IS-Debug-Protokolle:

- Gerät A sendet ein Hello-Paket (22. Juli 19:17:24), Gerät B antwortet auf dieses Paket (22. Juli 19:17:25), Gerät A empfängt diese Antwort (22. Juli 19:17:31).

GerätA

```
Jul 22 19:17:24.929: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0xB Length:15
Jul 22 19:17:24.929: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:UP, length 149
Jul 22 19:17:31.685: ISIS-Adj: Rec serial IIH from 6c31.0edb.3b5f (TenGigabitEthernet0/0/4)
```

Gerät B

```
Jul 22 19:17:25.693: ISIS-Adj: SND:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x5 Length:15
Jul 22 19:17:25.693: ISIS-Adj: Sending serial IIH on TwentyFiveGigE1/0/9, 3way state:UP, length 1496
Jul 22 19:17:27.882: ISIS-Adj: Rec serial IIH from a84f.b1c3.9484 (TwentyFiveGigE1/0/9)
```

- Gerät A sendet ein weiteres Hello-Paket (22. Juli 19:17:33), Gerät B sendet sein Hello-Paket (22. Juli 19:17:34) und empfängt das Paket zwei Sekunden später von seinem Peer.

GerätA

```
Jul 22 19:17:33.626: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0xB Length:15
Jul 22 19:17:33.627: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:UP, length 149
```

Gerät B

```
Jul 22 19:17:34.637: ISIS-Adj: SND:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x5 Length:15
Jul 22 19:17:34.637: ISIS-Adj: Sending serial IIH on TwentyFiveGigE1/0/9, 3way state:UP, length 1496
Jul 22 19:17:36.579: ISIS-Adj: Rec serial IIH from a84f.b1c3.9484 (TwentyFiveGigE1/0/9)
```

- Während der Zeit, in der Gerät A das von Gerät B gesendete Paket nicht empfängt, meldet sich das Protokoll nach 30 Sekunden als inaktiv.

GerätA

```
Jul 22 19:17:42.671: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0xB Length:15
Jul 22 19:17:42.672: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:UP, length 149

Jul 22 19:18:01.475: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:UP, length 149
Jul 22 19:18:01.685: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceB (TenGigabitEthernet0/0/4) Down, hold
```

- Gerät B empfängt kein Paket von seinem Peer. Nach dem standardmäßigen Haltezeitraum meldet sich dieses Protokoll als inaktiv.

Gerät B

```
Jul 22 19:17:43.270: ISIS-Adj: SND:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x5 Length:15  
Jul 22 19:17:43.271: ISIS-Adj: Sending serial IIH on TwentyFiveGigE1/0/9, 3way state:UP, length 1496
```

<snip>

```
Jul 22 19:18:06.579: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceA (TwentyFiveGigE1/0/9) Down, hold tim
```

Analyse wird erfasst:

Gerät A empfängt Pakete von Gerät B, aber das letzte Paket, das dieser Router vom Peer empfängt, ist in Minute 13:17.31. Anschließend sendet Gerät A Hello-Pakete.

ohne Antwort vom Peer.

eth.dst == 09:00:2b:00:00:05				
Nr	Time	Source	Destination	seq
2023-07-22	13:15:35.638959	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	13:15:43.516971	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	13:15:44.531970	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	13:15:51.320982	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	13:15:52.786946	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	13:15:59.511966	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	13:16:02.646954	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	13:16:09.329969	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	13:16:10.505970	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	13:16:17.169989	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	13:16:19.943936	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	13:16:25.480962	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	13:16:28.851945	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	13:16:34.616957	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	13:16:38.643963	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	13:16:42.579956	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	13:16:47.501972	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	13:16:50.839952	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	13:16:55.382975	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	13:16:59.049985	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	13:17:04.634961	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	13:17:07.215976	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	13:17:14.446967	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	13:17:15.226978	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	13:17:22.740958	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	13:17:24.928937	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	13:17:31.684962	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	13:17:33.626966	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	13:17:42.671962	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	13:17:52.007995	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	13:18:01.474966	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
> Frame 679: 1513 bytes on wire (12104 bits), 1513 bytes captured (12104 bits) > IEEE 802.3 Ethernet > Logical-Link Control > ISO 10589 ISIS InTRA Domain Routeing Information Exchange Protocol > ISIS HELLO				

ISIS-Zufällige Flaps Gerät A

Die Erfassung von Gerät B zeigt einen ähnlichen Zustand an. Der Switch empfängt das letzte Hello-Paket von seinem Peer, Gerät B beginnt jedoch, seine Hello-Pakete ohne Antwort zu senden.

eth.dst == 09:00:2b:00:00:05				
Nr	Time	Source	Destination	seq
2023-07-22	19:12:55.830021	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	19:12:57.006588	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	19:13:03.670751	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	19:13:06.443750	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	19:13:11.981159	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	19:13:15.351570	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	19:13:21.116502	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	19:13:25.143430	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	19:13:29.080123	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	19:13:34.001185	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	19:13:37.340177	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	19:13:41.882512	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	19:13:45.549749	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	19:13:51.134064	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	19:13:53.715223	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	19:14:00.945408	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	19:14:01.725783	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	19:14:09.240033	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	19:14:11.428283	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	19:14:18.183708	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	19:14:20.125427	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	19:14:26.817279	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	19:14:35.204661	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	19:14:43.794273	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	19:14:50.126106	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
> Frame 1971: 1513 bytes on wire (12104 bits), 1513 bytes captured (12104 bits) on interface \Device\NPF_{D6BBE860-9886-4A6C-BDD5-8E2837C66FB0}, id 0 > IEEE 802.3 Ethernet > Destination: DEC-MAP-(or-OSI?)-Intermediate-System-Hello? (09:00:2b:00:00:05) > Source: Cisco_c3:94:84 (a8:4f:b1:c3:94:84) Length: 1499 > Logical-Link Control > ISO 10589 ISIS InTRA Domain Routeing Information Exchange Protocol > ISIS HELLO				

ISIS instabiles Gerät B

Bei den exportierten Erfassungen werden die Hello-Pakete nicht zwischen Peers übertragen. Dieses Problem scheint beim Transport zu liegen.

Informationen zu dieser Übersetzung

Cisco hat dieses Dokument maschinell übersetzen und von einem menschlichen Übersetzer editieren und korrigieren lassen, um unseren Benutzern auf der ganzen Welt Support-Inhalte in ihrer eigenen Sprache zu bieten. Bitte beachten Sie, dass selbst die beste maschinelle Übersetzung nicht so genau ist wie eine von einem professionellen Übersetzer angefertigte. Cisco Systems, Inc. übernimmt keine Haftung für die Richtigkeit dieser Übersetzungen und empfiehlt, immer das englische Originaldokument (siehe bereitgestellter Link) heranzuziehen.