

Configure Cisco Discovery Protocol Settings on Cisco Business 220 Series Switches

Objective

This article provides instructions on how to configure Cisco Discovery Protocol (CDP) settings on your CBS220 switch using the Graphical User Interface (GUI).

Introduction

The Cisco Discovery Protocol (CDP) is a protocol used by Cisco devices to share device information with other connected Cisco devices. This includes the type of device, firmware version, IP address, serial number, and other identifying information. CDP is enabled by default.

CDP settings can be adjusted globally or on an individual port basis. Let's get started!

Applicable Devices | Software Version

- CBS220 series ([Data Sheet](#)) | 2.0.0.17

CDP Properties

Step 1

Log in to the CBS220 switch.



Switch

admin 1

●●●●●●●● 2

English ▼

Log In 3

Step 2

Choose **Administration > Discovery CDP > Properties**.

- Administration** 1
- System Settings
- Console Settings
- User Accounts
- Idle Session Timeout
- ▶ Time Settings
- ▶ System Log
- ▶ File Management
- CBD Settings
- ▶ PnP
- Reboot
- ▶ Diagnostics
- Discover Bonjour
- ▶ Discovery LLDP
- Discovery CDP** 2
- Properties

Step 3

In the *CDP Status* field, check the **Enable** checkbox to activate CDP on the switch.

Properties

Properties

CDP Status: Enable

It is enabled by default.

Step 4

If CDP is not enabled, select a radio button corresponding to the action you want the switch to take when it receives a CDP packet. The options are:

- Bridging - Forwards the packet based on the VLAN.
- Filtering - Deletes the packet.
- Flooding - Forwards all CDP packets to all ports, excluding the port it originated from.

CDP Frames Handling:

Filtering

Bridging

Flooding

Step 5

In the *CDP Voice VLAN Advertisement* field, check the **Enable** checkbox to have the switch advertise the voice VLAN over CDP on all ports that have CDP enabled and are members of the voice VLAN.

CDP Voice VLAN Advertisement: Enable

Step 6

In the *CDP Mandatory TLVs Validation* field, check the **Enable** checkbox to discard incoming CDP packets that do not contain the mandatory TLV (type-length-value).

CDP Mandatory TLVs Validation: Enable

Step 7

In the *CDP Version* field, select a radio button to choose which version of CDP to use (*Version 1* or *Version 2*).

CDP Version: Version 1
 Version 2

Step 8

In the *CDP Hold Time* field, select a radio button to determine the amount of time CDP packets are held before being discarded. Select *Use Default* to use the default amount of time (180 seconds) or *User Defined* to specify a custom amount of time between 10 - 255 seconds.

CDP Hold Time: Use Default
 User Defined sec (Range: 10 - 255, Default: 180)

Step 9

In the *CDP Transmission Rate* field, select a radio button to determine the transmission rate of CDP packets in seconds. Select *Use Default* to use the default amount of time (60 seconds) or *User Defined* to specify a custom amount of time between 5 - 254 seconds.

CDP Transmission Rate: Use Default
 User Defined sec (Range: 5 - 254, Default: 60)

Step 10

In the *Device ID Format* field, select a radio button to determine the format of the device ID.

Device ID Format: MAC Address
 Serial Number
 Hostname

Step 11

In the *Source Interface* field, select a radio button to determine what IP address will be used in the TLV field of outgoing CDP packets. Select *Use Default* to use the IP address of the outgoing interface, or *User Defined* to choose an interface (the selected interface's IP address will be used) from the drop-down menu in the *Interface* field.

Source Interface: Use Default
 User Defined
Interface:

Step 12

In the *Syslog Voice VLAN Mismatch* field, check the **Enable** checkbox to send a syslog message when a voice VLAN mismatch is detected. A VLAN mismatch is when VLAN information in an incoming frame does not match the advertised capabilities of the local device.

Syslog Voice VLAN Mismatch: Enable

Step 13

In the *Syslog Native VLAN Mismatch* field, check the **Enable** checkbox to send a syslog message when a native VLAN mismatch is detected.

Syslog Native VLAN Mismatch: Enable


Step 14

In the *Syslog Duplex Mismatch* field, check the **Enable** checkbox to send a syslog message when a duplex mismatch is detected.

Syslog Duplex Mismatch: Enable

Step 15

Click **Apply**. The CDP properties are defined.

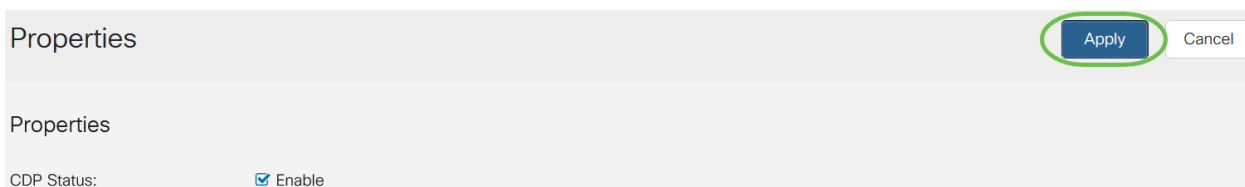

Properties

Properties


CDP Status: Enable

CDP Port Settings

The Port Settings page allows you to enable/disable CDP per port. By setting these properties, it is possible to select the types of information to be provided to devices that support the protocol.

Step 1

Click **Administration > Discovery CDP > Port Settings**.

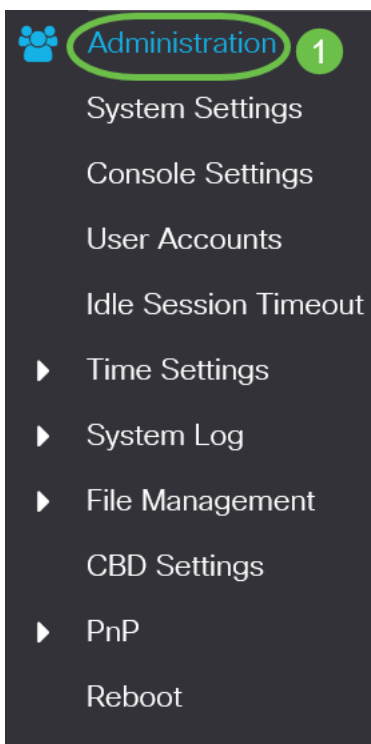

Step 2

Select a port and click **Edit**.

CDP Port Settings Table



CDP Local Information Details | CDP Neighbor Information Details

Reporting Conflicts with CDP Neighbors

Entry No.	Port	CDP Status	Voice VLAN	Native VLAN	Duplex	No. of Neighbors
1	GE1	Enabled	Enabled	Enabled	Enabled	2
2	GE2	Enabled	Enabled	Enabled	Enabled	0

Step 3

The *Interface* field displays the port selected in the *CDP Interface Settings Table*. You can use the Port and LAG drop-down lists to select another port and LAG to configure, respectively.

Edit CDP Interface Settings

Interface: Port GE1 LAG LAG1

Step 4

In the *CDP Status* field, check the **Enable** checkbox to enable CDP on the port specified.

Interface: Port GE1 LAG LAG1

CDP Status: Enable

Step 5

In the *Syslog Voice VLAN Mismatch* field, check the **Enable** checkbox to send a syslog message when a voice VLAN mismatch is detected on the port specified. A VLAN mismatch is when VLAN information in an incoming frame does not match the advertised capabilities of the local device.

Interface: Port GE1 LAG LAG1

CDP Status: Enable

Syslog Voice VLAN Mismatch: Enable

Step 6

In the *Syslog Native VLAN Mismatch* field, check the **Enable** checkbox to send a

syslog message when a native VLAN mismatch is detected on the port specified.

Interface: Port GE1 LAG LAG1

CDP Status: Enable

Syslog Voice VLAN Mismatch: Enable

Syslog Native VLAN Mismatch: Enable

Step 7

In the *Syslog Duplex Mismatch* field, check the **Enable** checkbox to send a syslog message when a duplex mismatch is detected on the port specified.

Interface: Port GE1 LAG LAG1

CDP Status: Enable

Syslog Voice VLAN Mismatch: Enable

Syslog Native VLAN Mismatch: Enable

Syslog Duplex Mismatch: Enable

Step 8

Click **Apply**. The changes will be applied to the port specified.

Edit CDP Interface Settings ✕

Interface: Port GE1 LAG LAG1

CDP Status: Enable

Syslog Voice VLAN Mismatch: Enable

Syslog Native VLAN Mismatch: Enable

Syslog Duplex Mismatch: Enable

Step 9

To quickly copy a port's settings to another port or ports, select its radio button and click the **Copy Settings** icon. The *Copy Settings* window opens.

CDP Port Settings Table

2

CDP Local Information Details CDP Neighbor Information Details

Reporting Conflicts with CDP Neighbors

1

Entry No.	Port	CDP Status	Voice VLAN	Native VLAN	Duplex	No. of Neighbors
1	GE1	Enabled	Enabled	Enabled	Enabled	2

Step 10

In the text field, enter the port or ports (separated by commas) that you want to copy the specified port's settings to. You can also enter a range of ports. Click **Apply**.

Copy Settings



Copy configuration from entry 1 (GE1)

1 to: (Example: 1,3,5-10 or: GE1,GE3-GE5)

2

Apply

Close

Conclusion

That's it! You have successfully configured CDP settings either globally or on individual ports on your CBS220 switch.

For more configurations, refer to the [Cisco Business 220 Series Switches Administration Guide](#).